



US010128890B2

(12) **United States Patent**
Thomas et al.

(10) **Patent No.:** **US 10,128,890 B2**

(45) **Date of Patent:** **Nov. 13, 2018**

(54) **PRIVACY AND SECURITY SYSTEMS AND METHODS OF USE**

(65) **Prior Publication Data**

US 2016/0233912 A1 Aug. 11, 2016

Related U.S. Application Data

(71) Applicant: **PPIP LLC**, Tempe, AZ (US)

(60) Provisional application No. 62/048,173, filed on Sep. 9, 2014, provisional application No. 62/100,462, filed (Continued)

(72) Inventors: **Teddy David Thomas**, Bedford, NH (US); **Harald Quintus-Bosz**, Sudbury, MA (US); **Manas Chandran Menon**, Boston, MA (US); **Anthony Clegg Parker**, Arlington, MA (US); **Klaus Heribert Renner**, Hollis, NH (US); **Julien Prosper Marc Aknin**, Somerville, MA (US); **Christopher O. Evans**, Amherst, NH (US); **Bing Xu**, Austin, TX (US); **Huyen NguyenNgoc Cam Le**, Portola Valley, CA (US); **Fa Dai**, Auburn, AL (US); **John Stadille**, Frederick, CO (US); **Michael Fong**, Chandler, AZ (US); **John Kinnard**, San Tan Valley, AZ (US); **Craig Ovans**, Chandler, AZ (US); **Andres Parada**, Chicago, IL (US); **John Deros**, Phoenix, AZ (US); **Andrew Goodfellow**, Scottsdale, AZ (US); **Justin David Cumming**, Boston, MA (US); **Gregg Robert Draudt**, Boston, MA (US); **Eric Smallwood**, Boston, MA (US); **Piotr Diduch**, Billerica, MA (US); **Christopher R. McCaslin**, Alameda, CA (US); **Elias R. Samia**, Berkeley, CA (US); **Evan Hutker**, Boston, MA (US); **Robert Francis Hartmann**, Westford, MA (US); **Stuart Eric Schechter**, Newton, MA (US)

(51) **Int. Cl.**
H04B 1/3888 (2015.01)
H04B 1/3827 (2015.01)
(Continued)

(52) **U.S. Cl.**
CPC **H04B 1/3888** (2013.01); **H04B 1/3838** (2013.01); **H04M 1/0202** (2013.01);
(Continued)

(58) **Field of Classification Search**
CPC .. H04B 1/3888; H04B 1/3838; H05K 9/0015; H05K 5/0226; H05K 5/0239;
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,552,245 B2 6/2009 Sherman et al.
7,795,842 B2 9/2010 Sherman et al.
(Continued)

OTHER PUBLICATIONS

Dong Yun Lee, International Search Report, dated Jan. 13, 2016, PCT/US2015/050054, Korean Intellectual Property Office.
(Continued)

Primary Examiner — Charles Appiah
Assistant Examiner — Margaret G Mastrodonato
(74) *Attorney, Agent, or Firm* — Fernando & Partners, LLP; Ronald Fernando


(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **14/849,505**

(22) Filed: **Sep. 9, 2015**

(57) **ABSTRACT**

Some embodiments include a privacy/security apparatus for a portable communication device that includes a housing
(Continued)

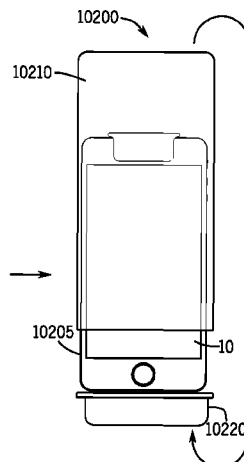

assembly configured to at least partially attenuate at least one of sound energy, acoustic energy, and electromagnetic energy including light, optical, and IR energy and RF radiation from passing through the housing assembly. The housing assembly includes a Faraday cage with two or more portions, and at least one protective shell coupled to or forming at least one aperture. The at least one aperture is configured and arranged to at least partially enclose the portable communication device so that at least a portion of the portable communication device is positioned within at least one portion of the Faraday cage, and the at least one seal coupled or integrated with the protective shell. The housing assembly can be an articulating assembly, a sliding assembly, and can include an active acoustic jamming or passive acoustic attenuation element.

30 Claims, 274 Drawing Sheets

Related U.S. Application Data

on Jan. 6, 2015, provisional application No. 62/161,759, filed on May 14, 2015, provisional application No. 62/195,903, filed on Jul. 23, 2015, provisional application No. 62/198,635, filed on Jul. 29, 2015, provisional application No. 62/209,249, filed on Aug. 24, 2015.

- (51) **Int. Cl.**
H04M 1/02 (2006.01)
H04M 1/03 (2006.01)
H04M 1/18 (2006.01)
H05K 9/00 (2006.01)
- (52) **U.S. Cl.**
 CPC **H04M 1/035** (2013.01); **H05K 9/0069**
 (2013.01); **H04M 1/185** (2013.01)
- (58) **Field of Classification Search**
 CPC .. H05K 5/0243; H04M 1/0202; H04M 1/035;
 H04M 1/185
 See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

7,812,640 B2 10/2010 Sherman
 7,863,856 B2 1/2011 Sherman et al.
 7,899,946 B2 3/2011 Ohshima
 7,966,355 B2 6/2011 Sherman et al.
 7,970,433 B2 6/2011 Sherman et al.
 8,032,259 B2 10/2011 Sherman et al.
 8,069,282 B2 11/2011 Sherman et al.
 8,078,204 B2 12/2011 Bychkov et al.
 8,078,978 B2 12/2011 Perry et al.
 8,091,772 B2 1/2012 Sherman et al.

8,101,872 B2 1/2012 Malone
 8,180,395 B2 5/2012 Moran et al.
 8,265,689 B2 9/2012 Ron
 8,340,795 B2 12/2012 Sherman
 8,342,394 B2 1/2013 Sherman et al.
 8,352,802 B2 1/2013 Katz et al.
 8,517,255 B2 8/2013 Sherman et al.
 8,560,014 B1 10/2013 Hu et al.
 8,618,426 B2 12/2013 Malone
 8,675,850 B2 3/2014 Bychkov et al.
 8,866,642 B2 10/2014 Ron et al.
 8,971,865 B2 3/2015 Bychkov et al.
 8,994,230 B2 3/2015 Sherman et al.
 2004/0100359 A1* 5/2004 Reade G06K 7/0008
 340/5.2

2007/0259704 A1 11/2007 Jung
 2008/0195797 A1 8/2008 Sherman et al.
 2008/0235441 A1 9/2008 Sherman et al.
 2008/0243279 A1 10/2008 Sherman et al.
 2008/0305833 A1 12/2008 Sherman et al.
 2008/0307142 A1 12/2008 Sherman et al.
 2009/0045779 A1 2/2009 Sherman et al.
 2009/0049203 A1 2/2009 Sherman et al.
 2009/0049343 A1 2/2009 Katz et al.
 2009/0078760 A1 3/2009 Sherman et al.
 2009/0083000 A1 3/2009 Sherman et al.
 2009/0083060 A1 3/2009 Sherman et al.
 2009/0106695 A1 4/2009 Perry et al.
 2009/0124269 A1 5/2009 Bychkov et al.
 2009/0133067 A1 5/2009 Sherman et al.
 2009/0135030 A1 5/2009 Ron et al.
 2009/0146862 A1 6/2009 Malone
 2009/0156188 A1 6/2009 Bychkov et al.
 2009/0179612 A1 7/2009 Sherman et al.
 2009/0179668 A1 7/2009 Sherman
 2009/0182908 A1 7/2009 Sherman et al.
 2009/0185667 A1 7/2009 Bychkov et al.
 2009/0199025 A1 8/2009 Sherman et al.
 2009/0254690 A1 10/2009 Sherman et al.
 2009/0289662 A1 11/2009 Sherman
 2010/0004025 A1 1/2010 Ron
 2010/0093401 A1 4/2010 Moran et al.
 2011/0014951 A1 1/2011 Sherman et al.
 2012/0062043 A1 3/2012 Sherman et al.
 2012/0085576 A1 4/2012 Malone
 2012/0120994 A1 5/2012 Sherman et al.
 2012/0308064 A1 12/2012 Matthews
 2013/0045776 A1 2/2013 Sherman et al.
 2013/0206470 A1 8/2013 Davis
 2014/0159980 A1 6/2014 Finegold
 2014/0190841 A1 7/2014 Nash
 2014/0284095 A1 9/2014 Behuniak et al.
 2014/0292593 A1* 10/2014 Thiam H01Q 1/3275
 343/713

OTHER PUBLICATIONS

International Search Report, dated Feb. 19, 2016, PCT/US2015/050055, Korean Intellectual Property Office.
 Written Opinion of the International Searching Authority, dated Feb. 19, 2016, PCT/US2015/050055, Korean Intellectual Property Office.

* cited by examiner

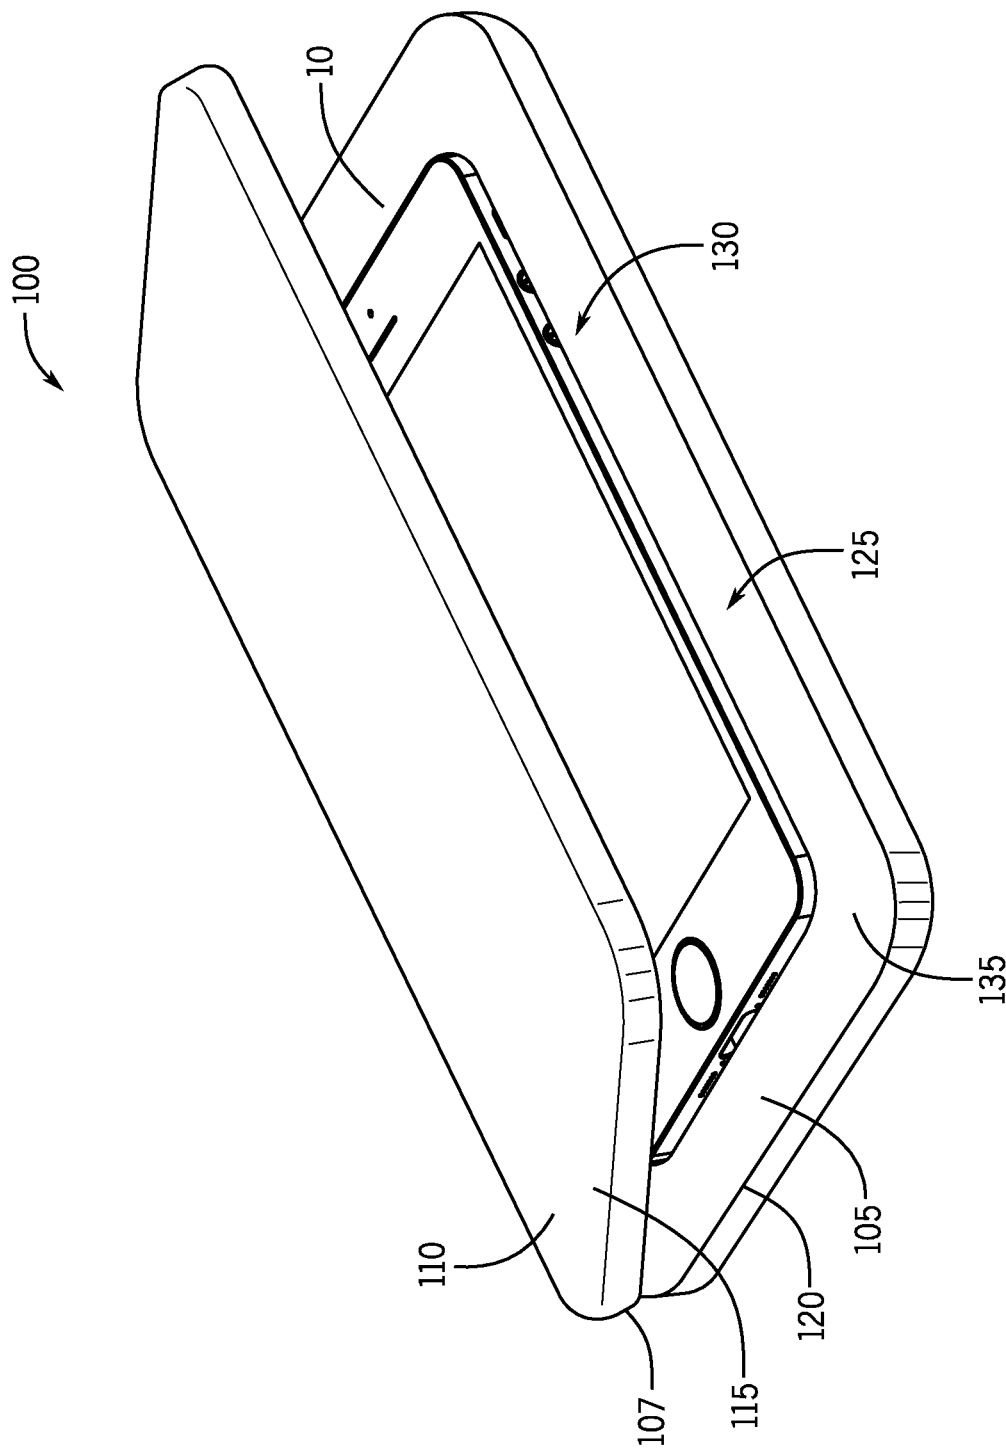
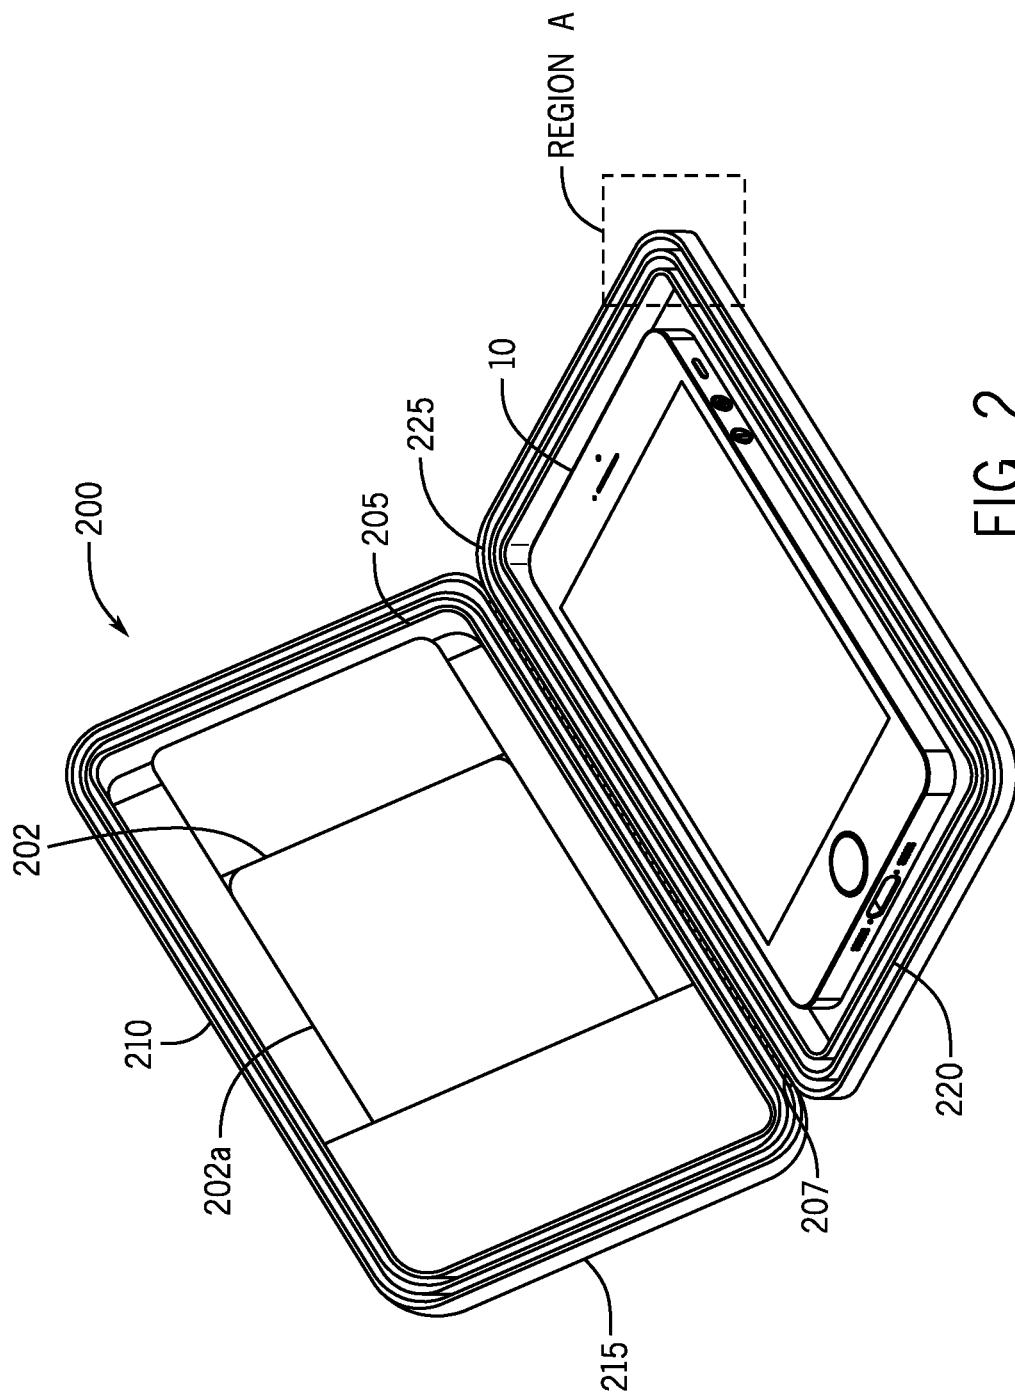


FIG. 1



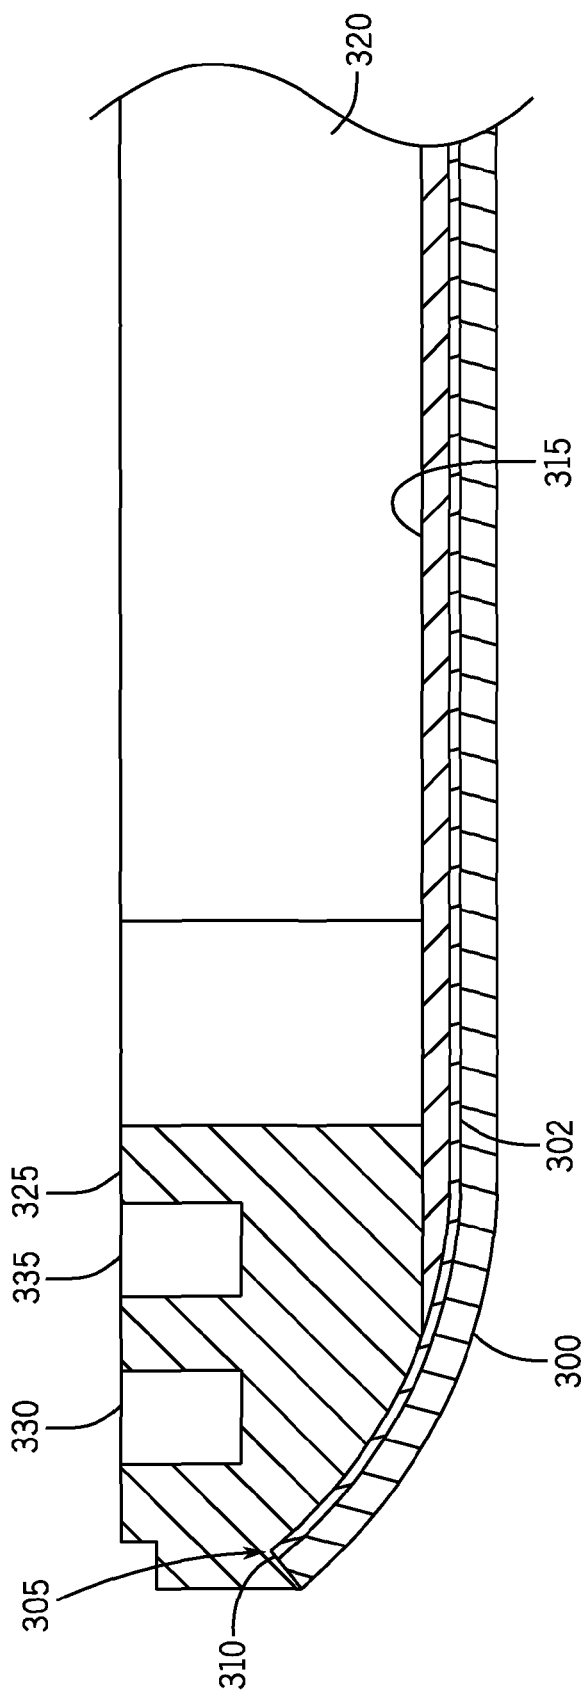


FIG. 3

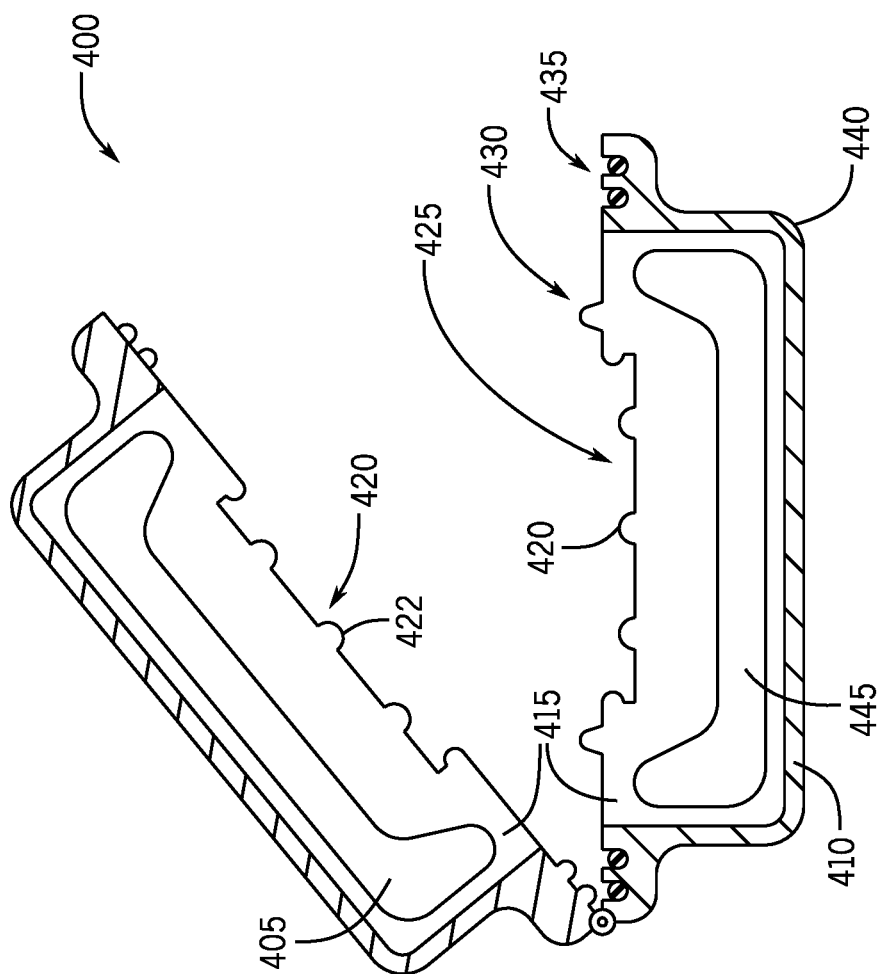
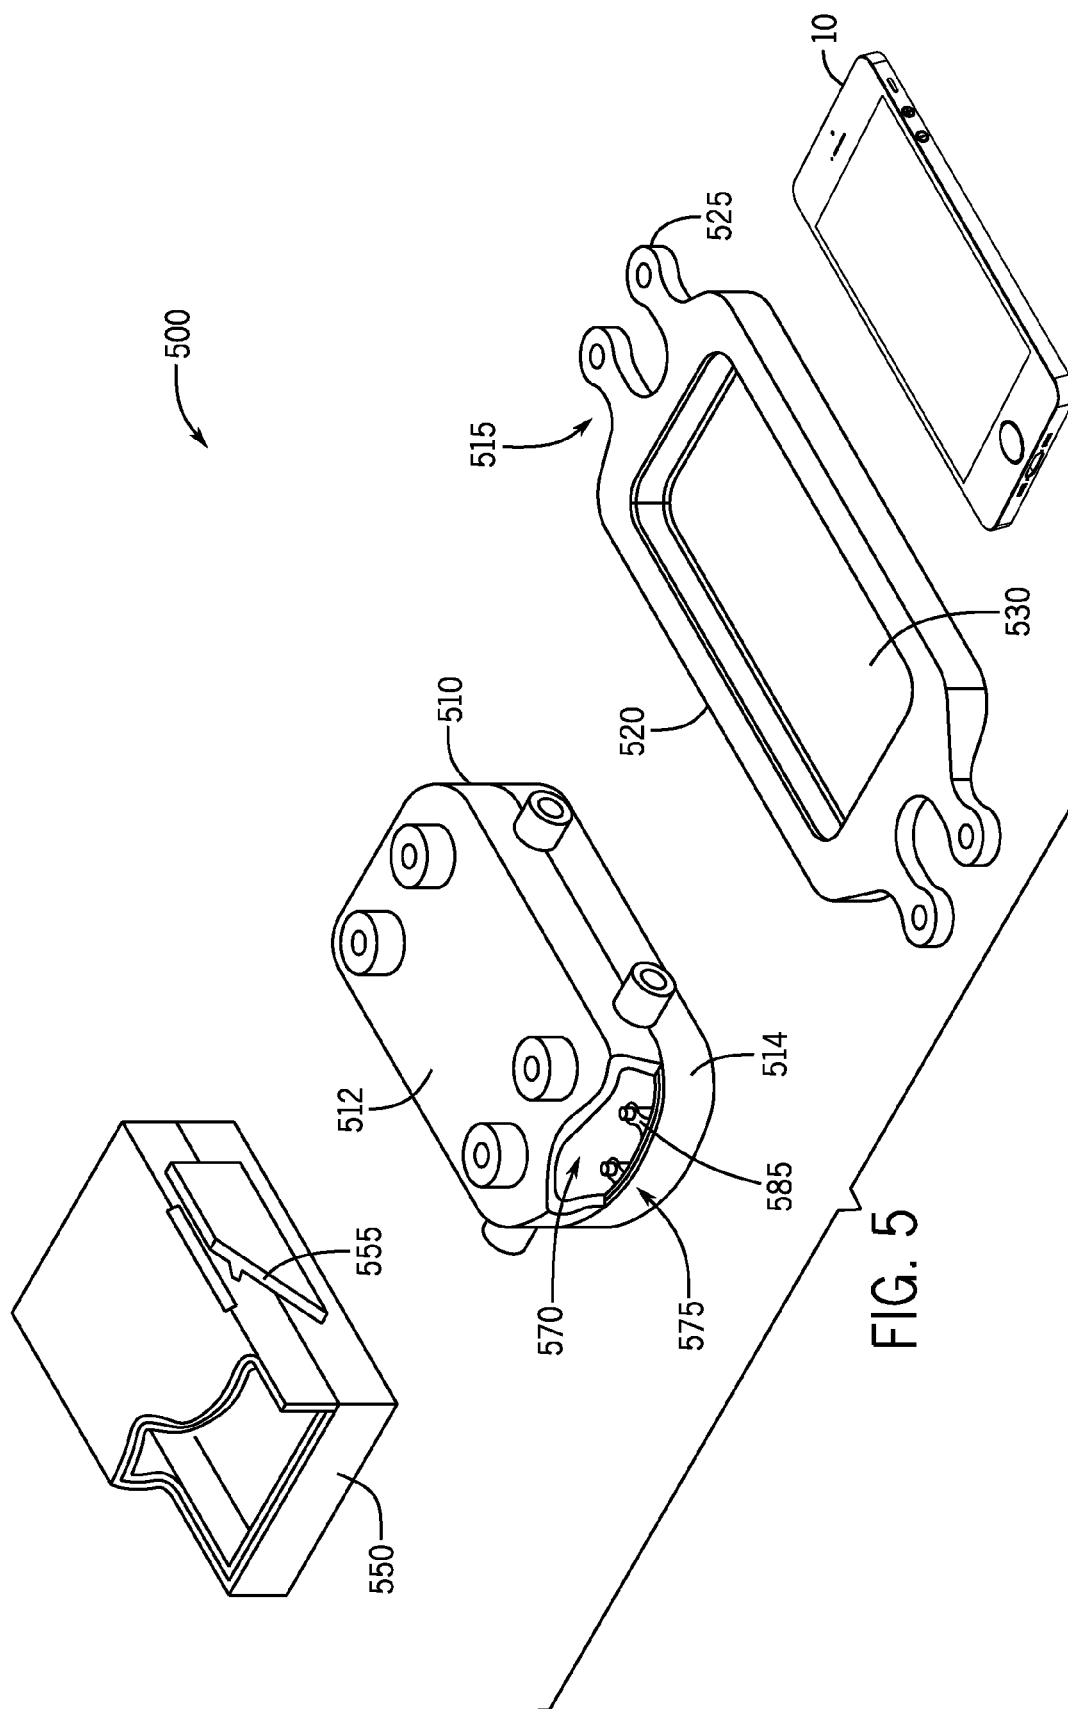


FIG. 4



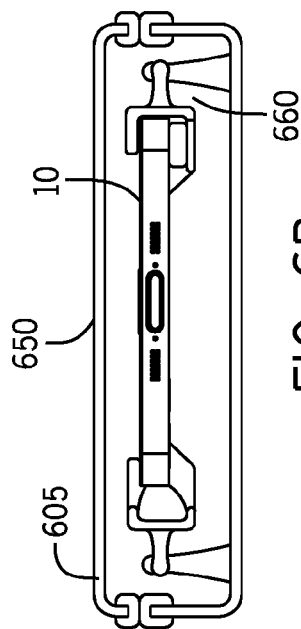


FIG. 6B

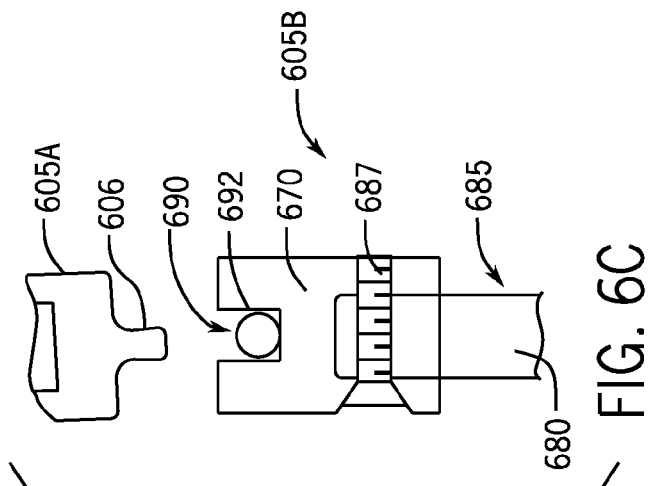


FIG. 6C

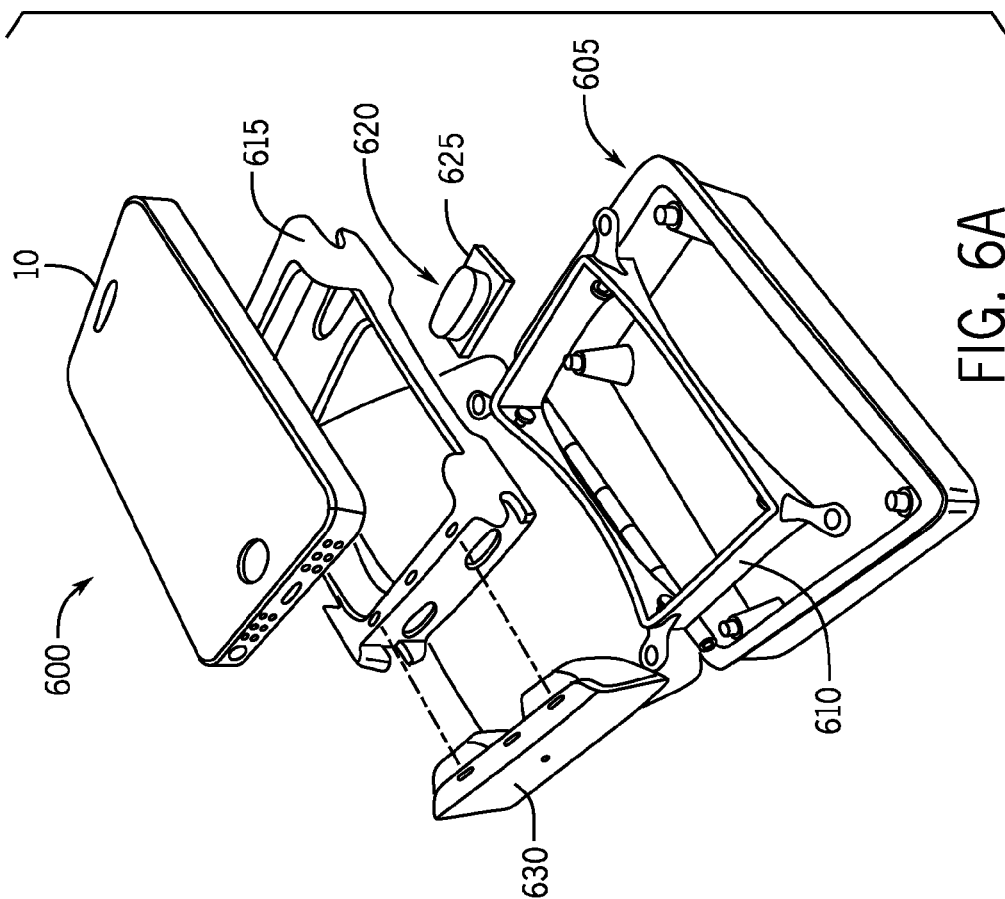
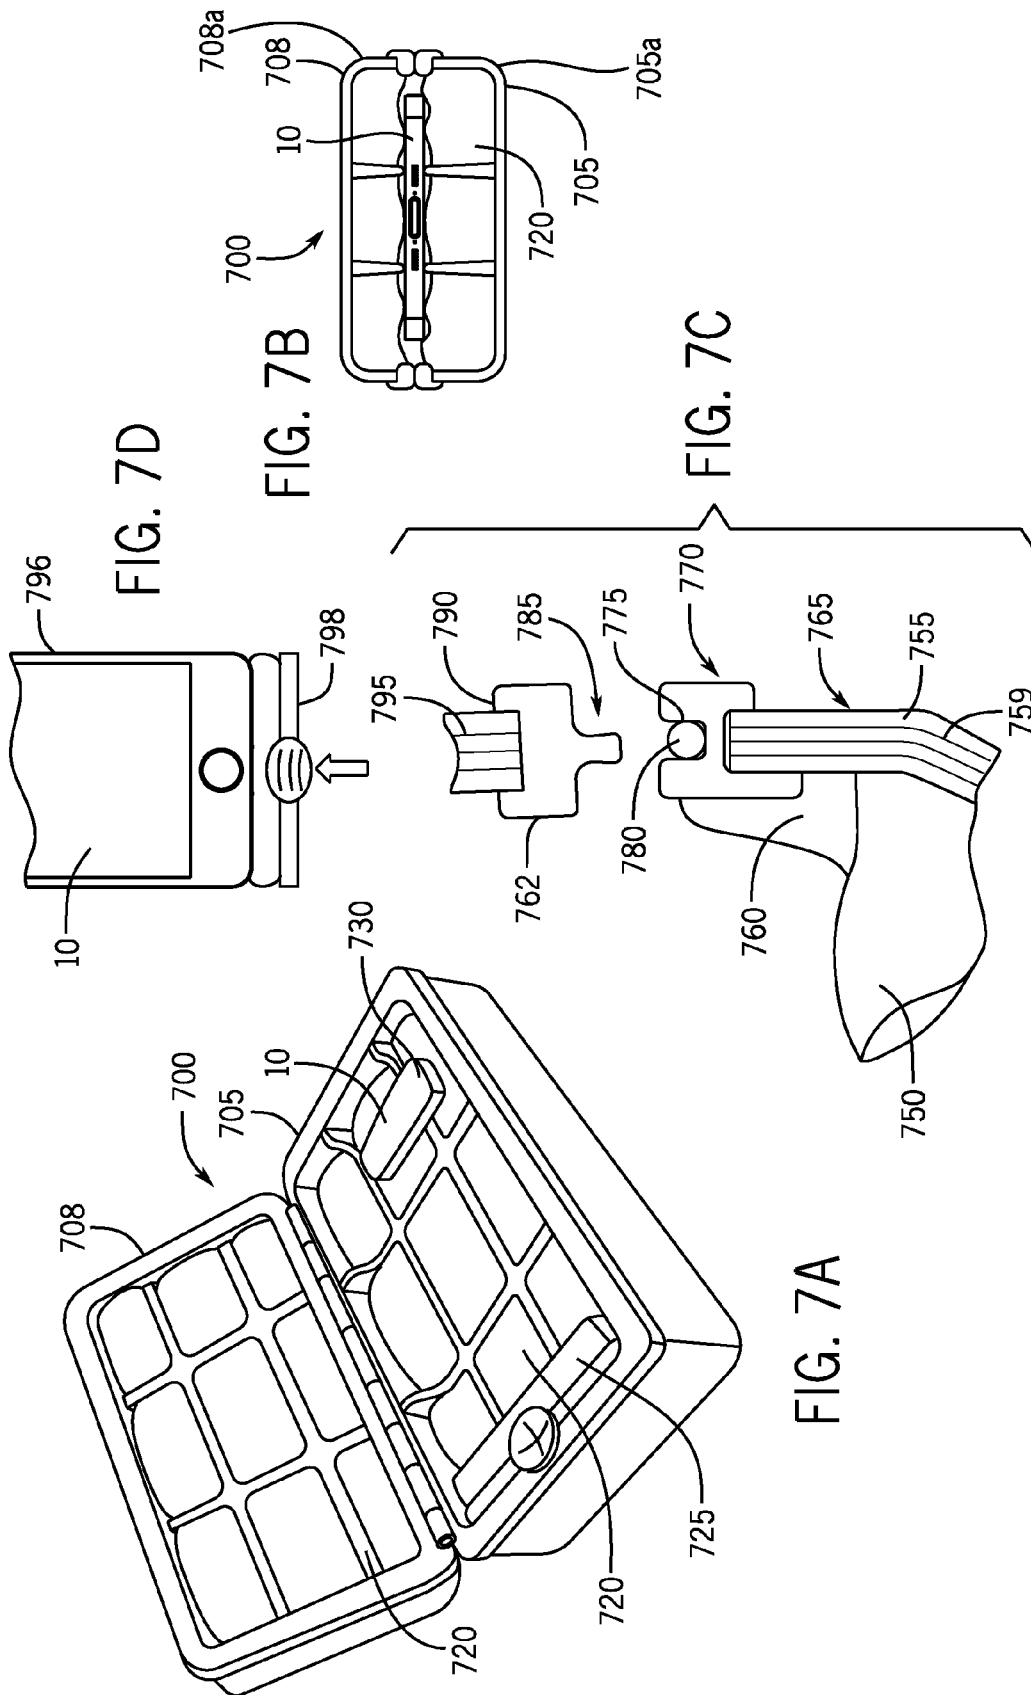
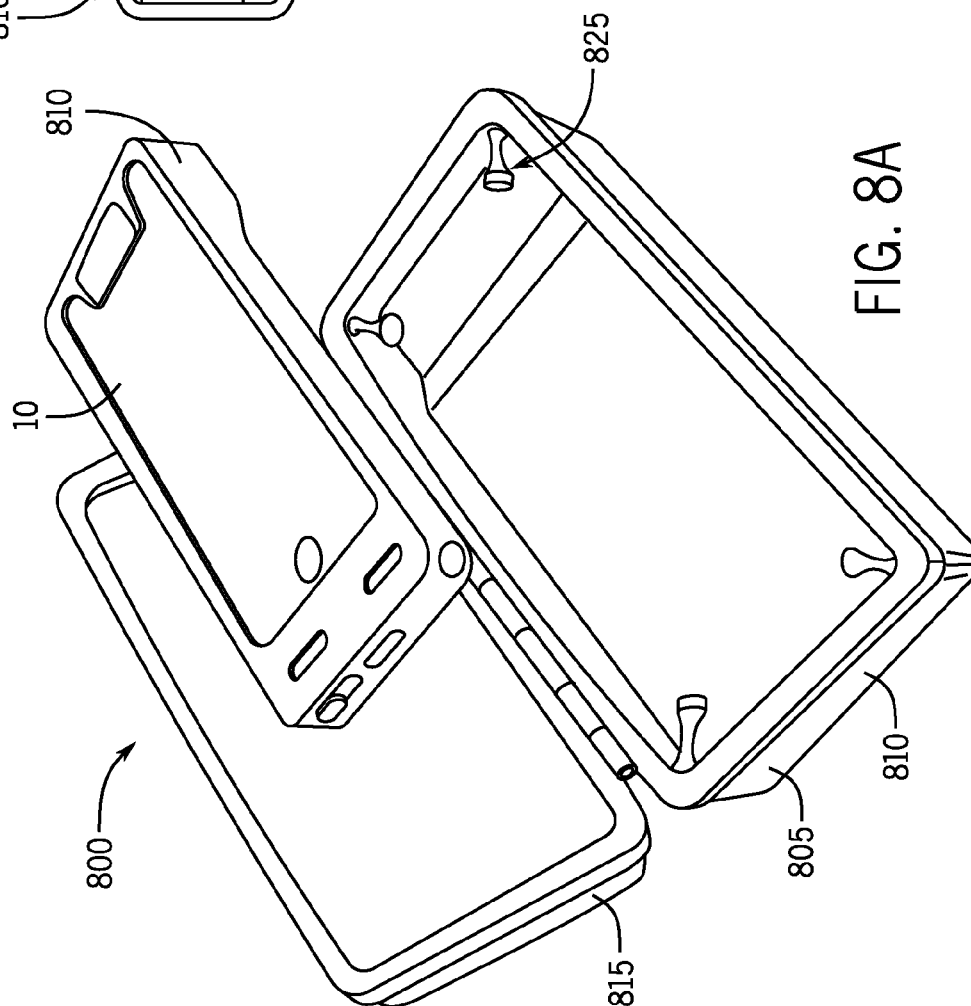
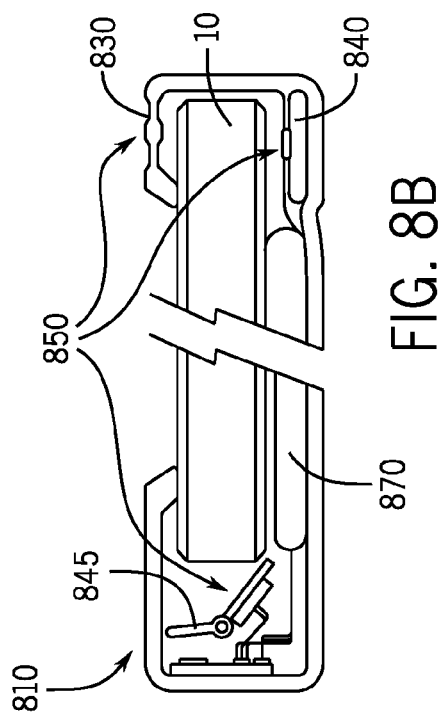


FIG. 6A





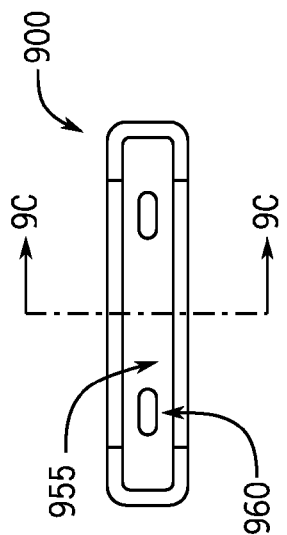
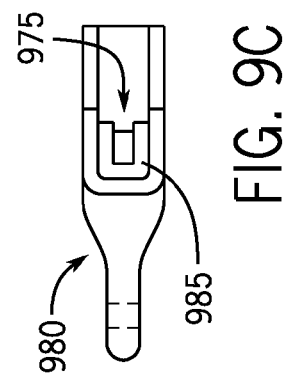
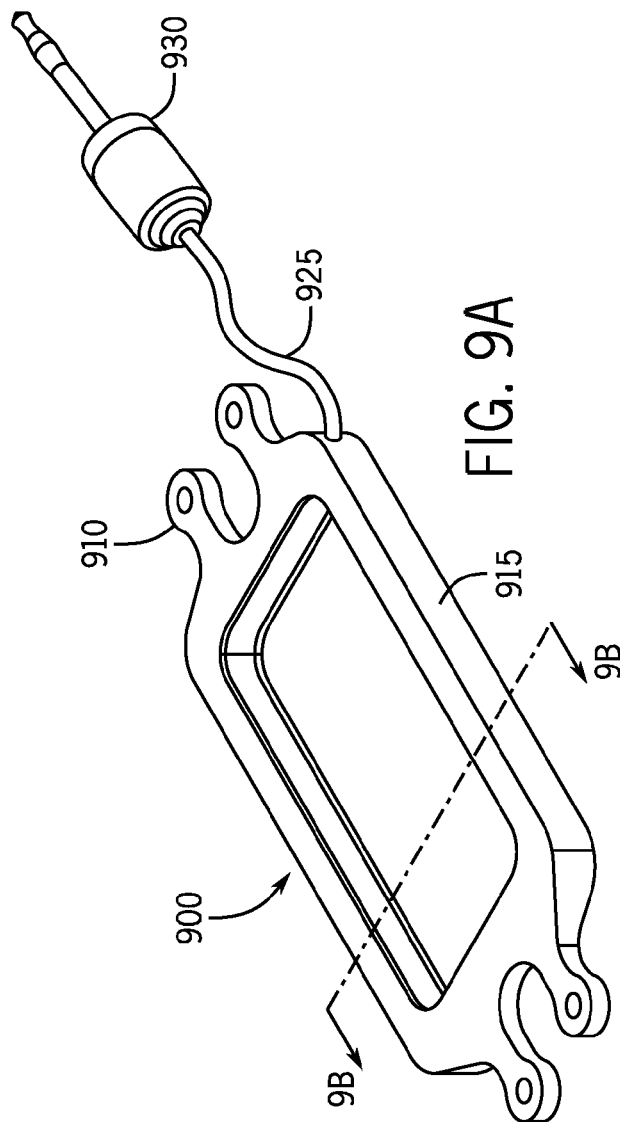


FIG. 9B

FIG. 9C

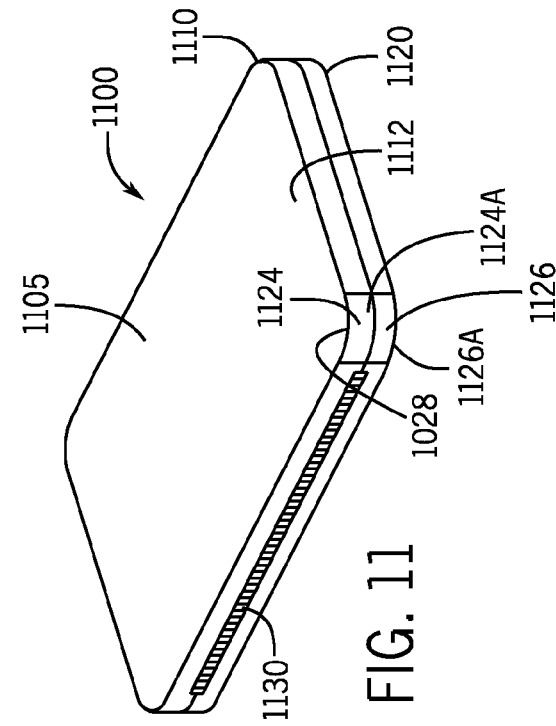


FIG. 10

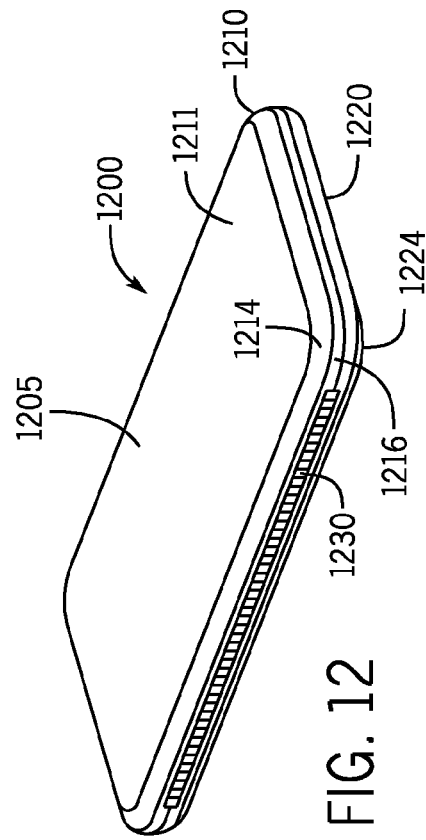


FIG. 11

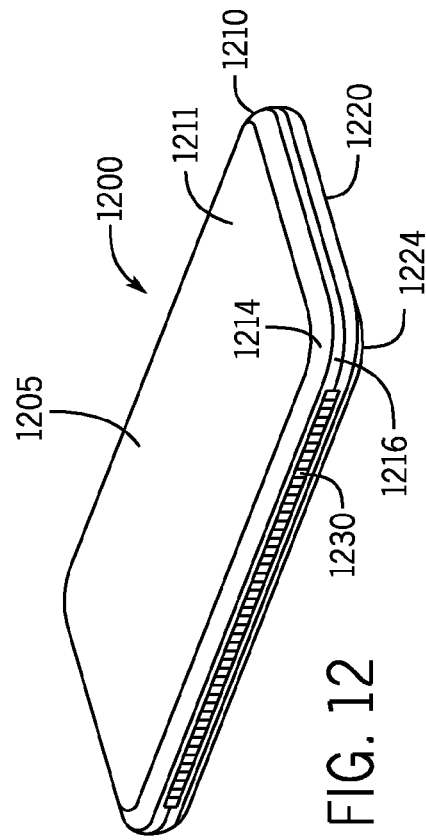


FIG. 12

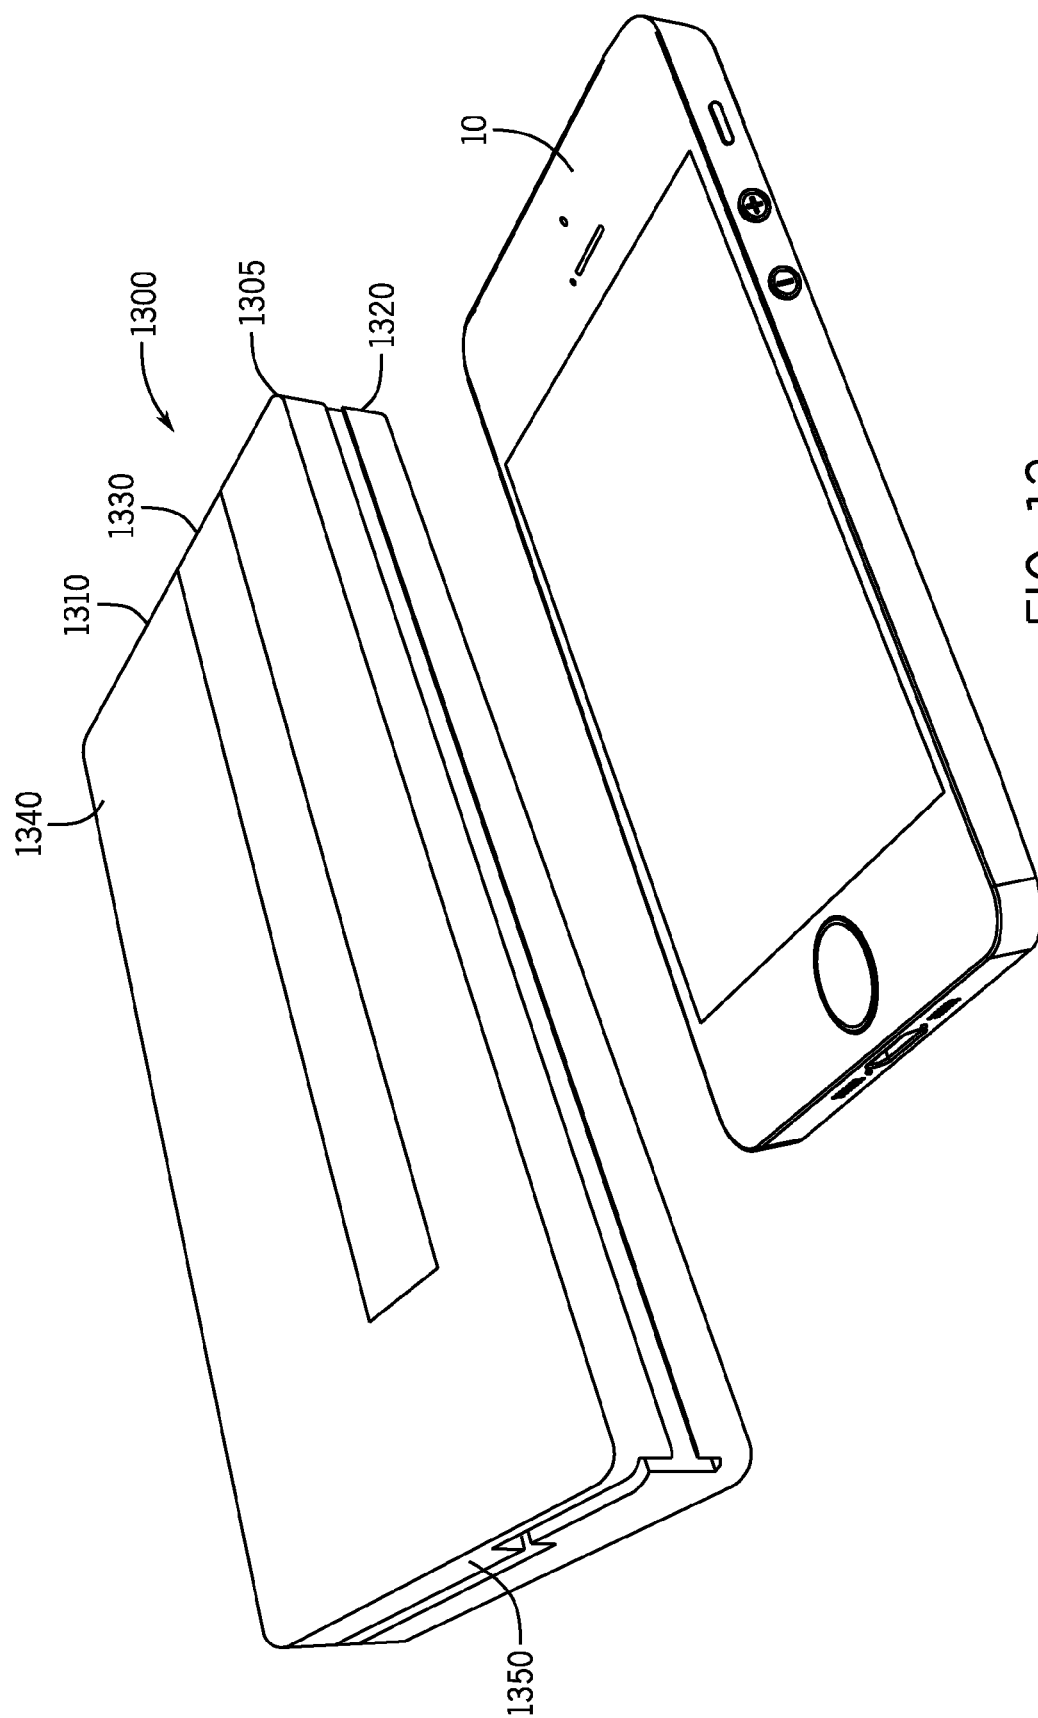


FIG. 13

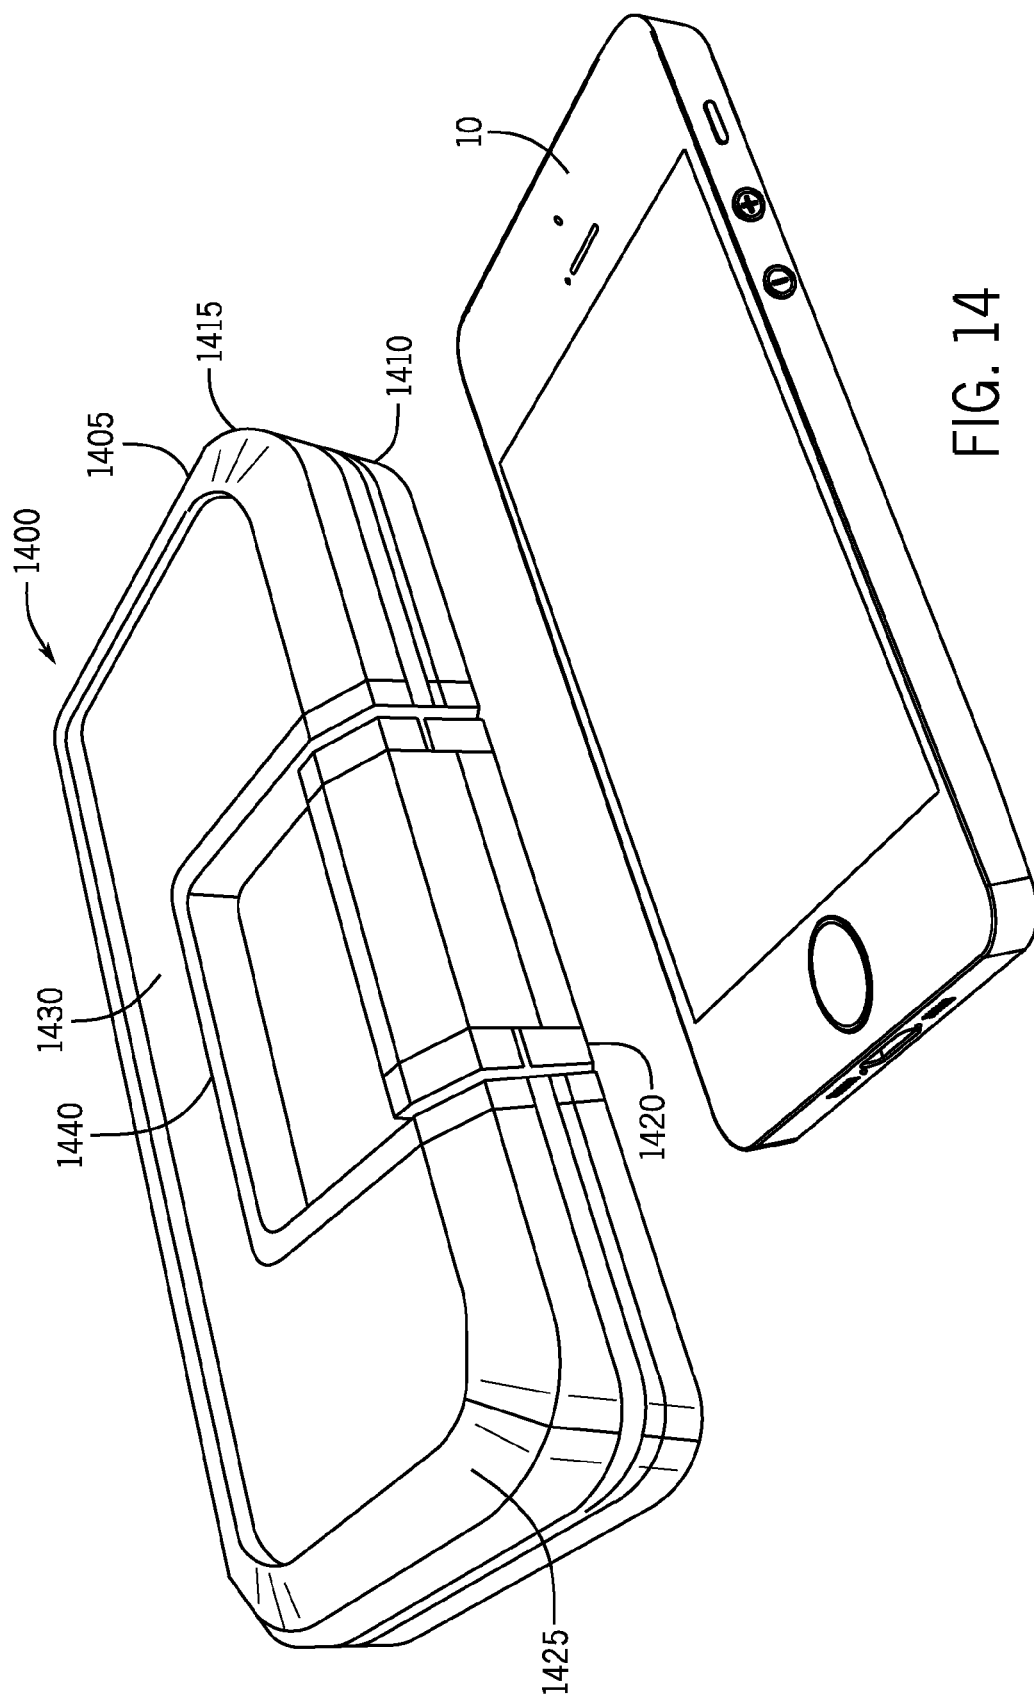
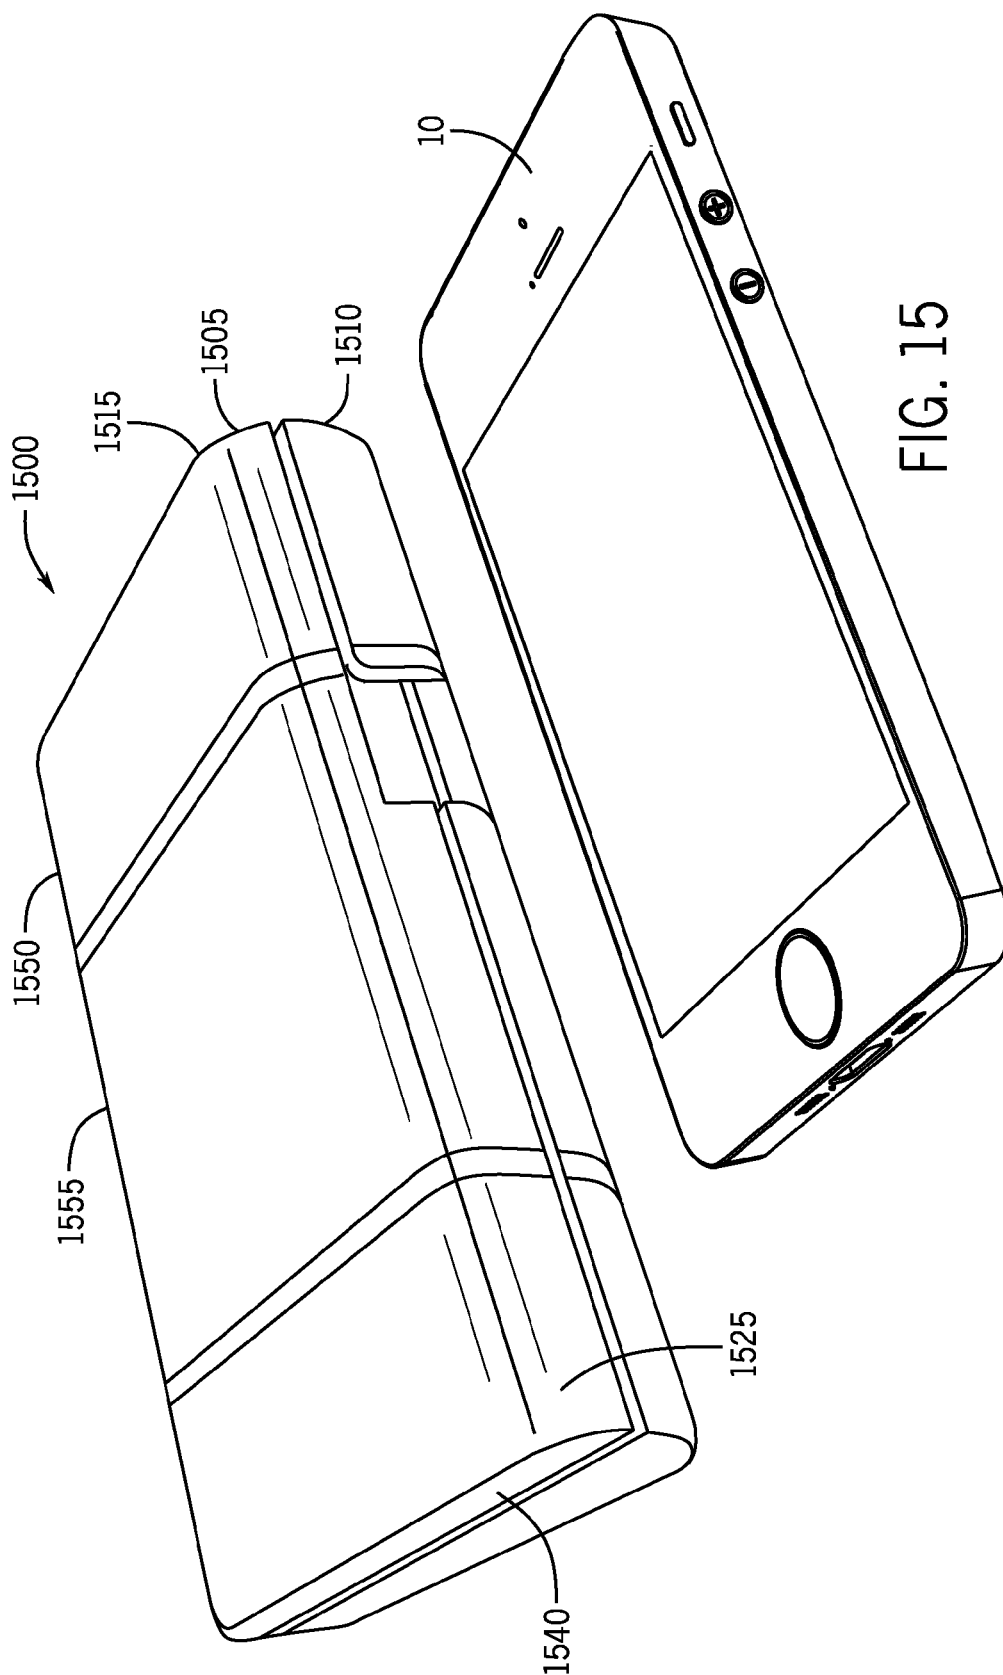
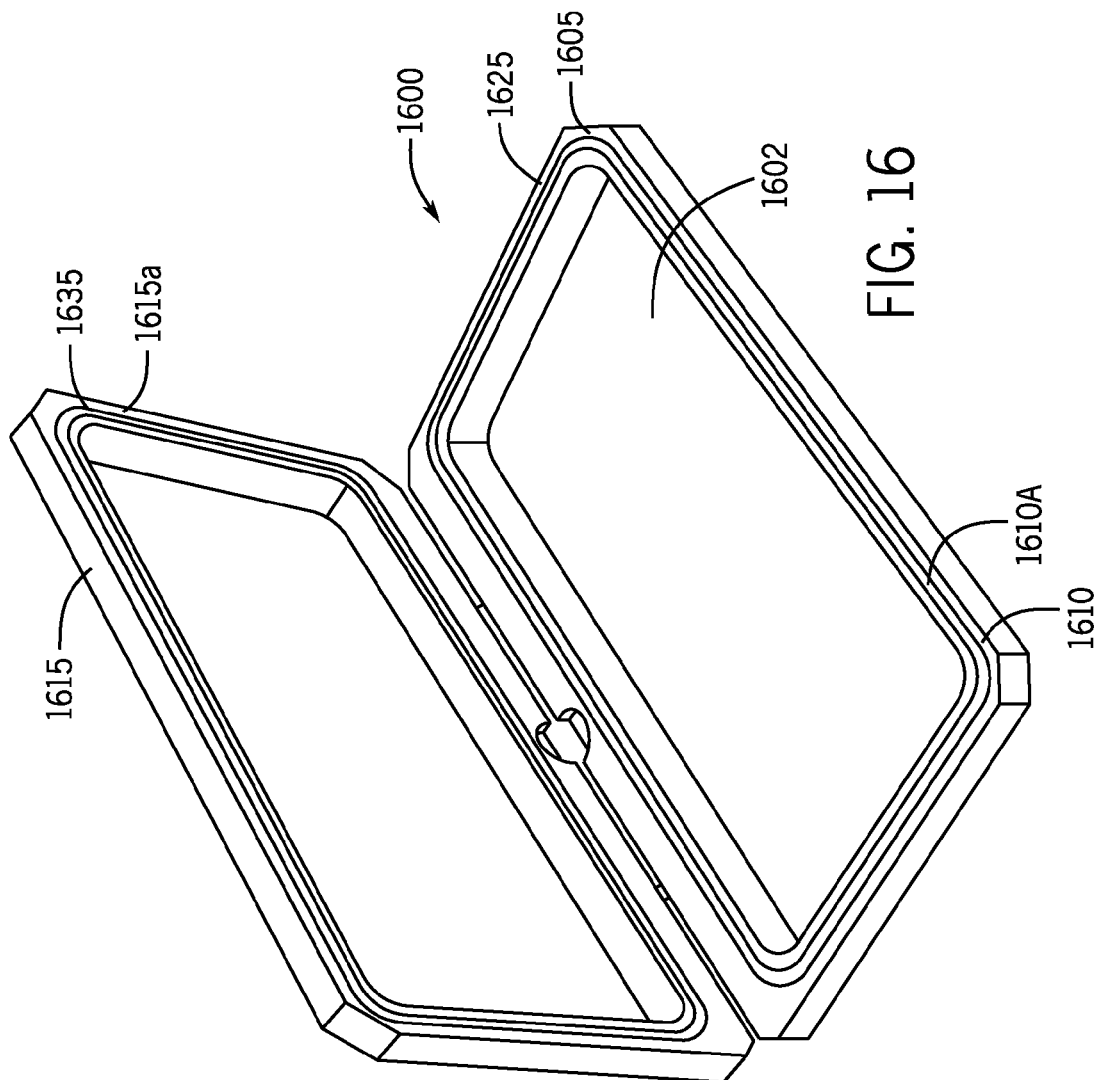


FIG. 14





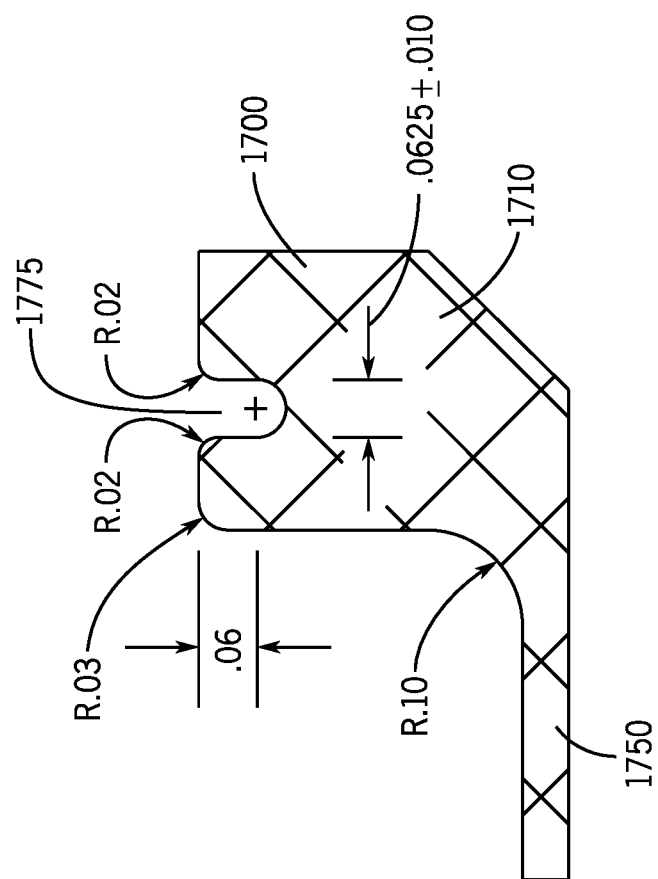
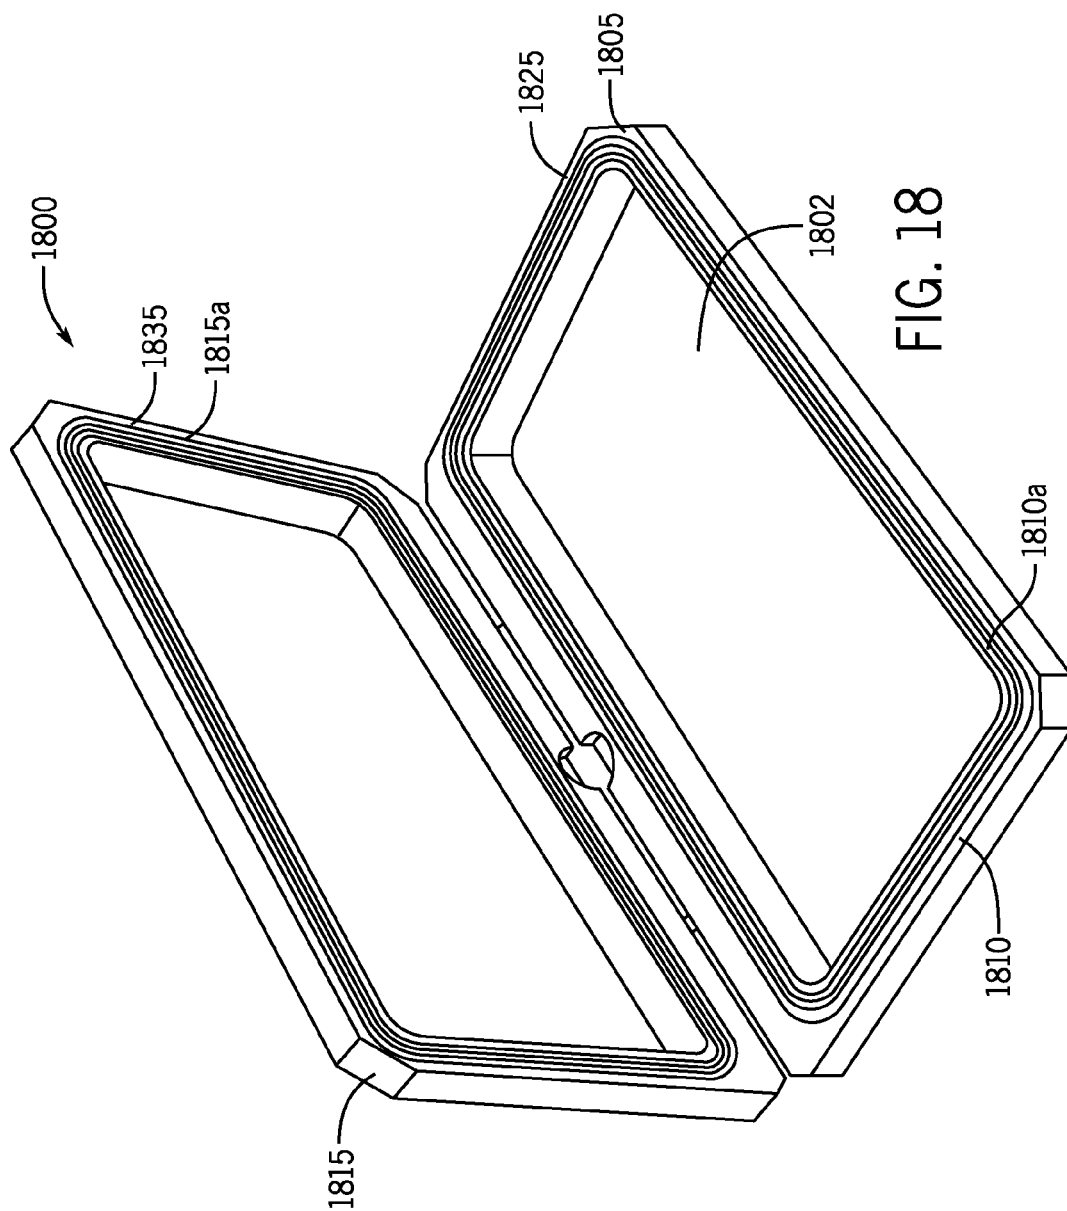


FIG. 17



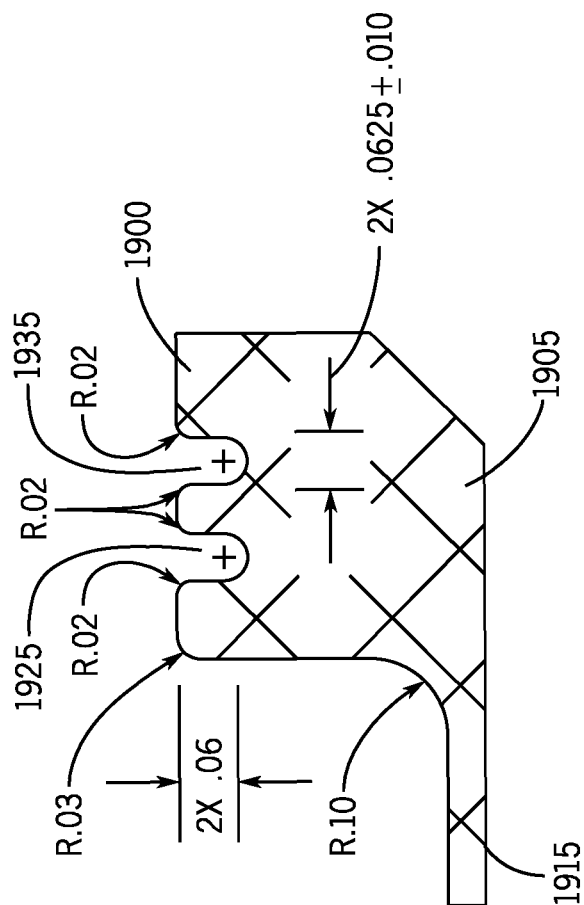


FIG. 19

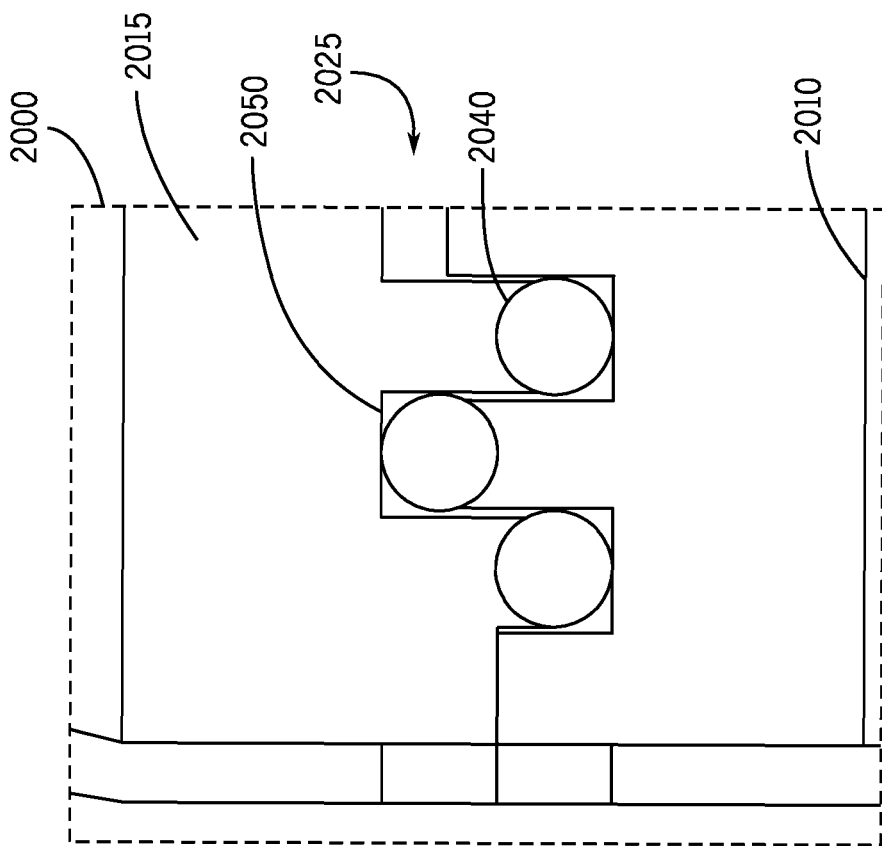


FIG. 20A

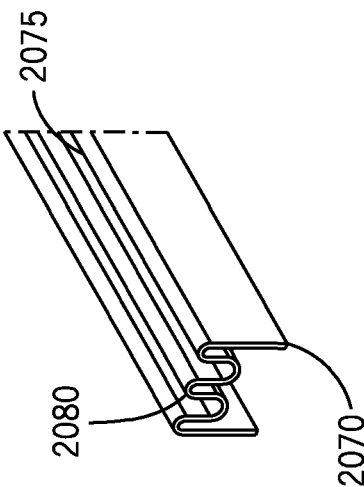
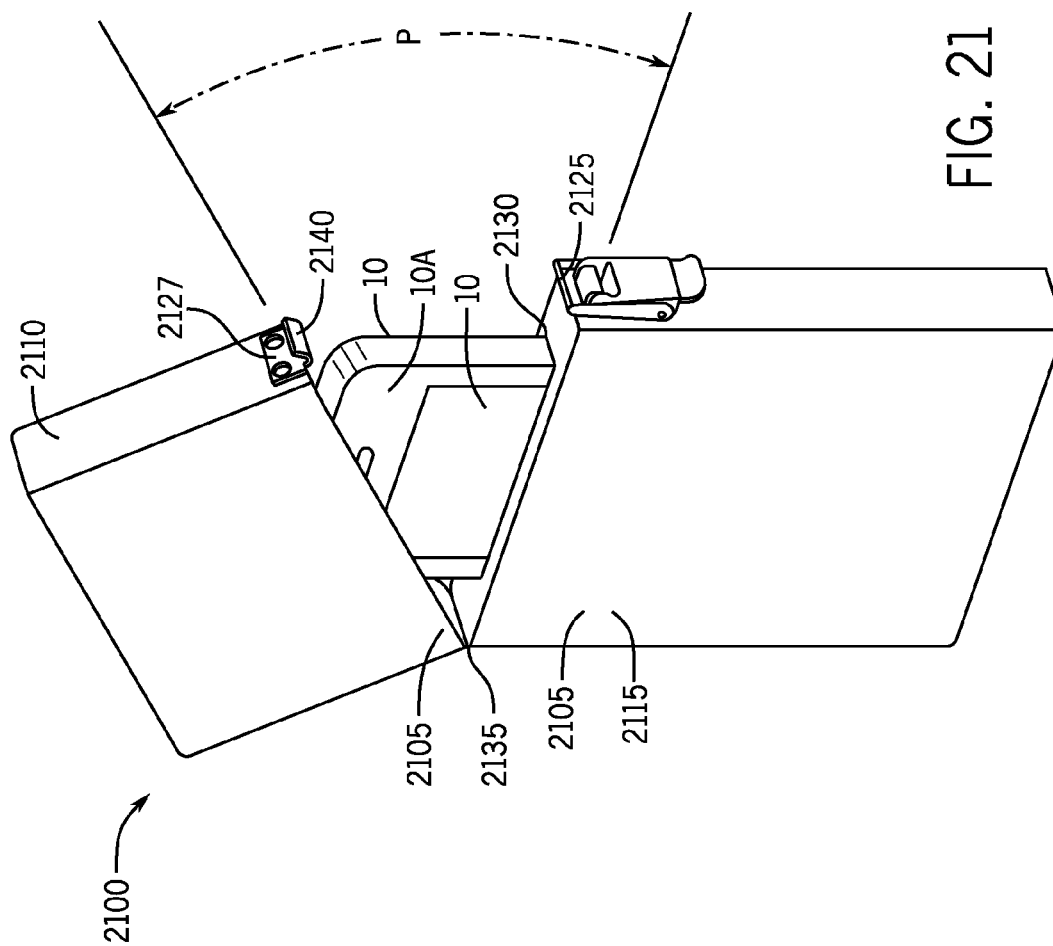
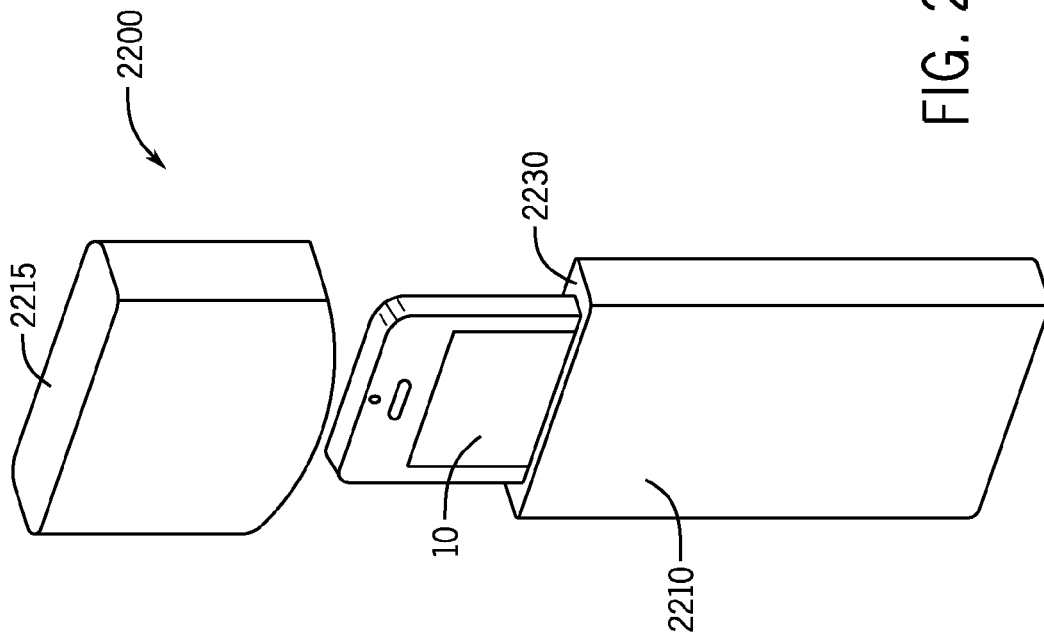


FIG. 20B





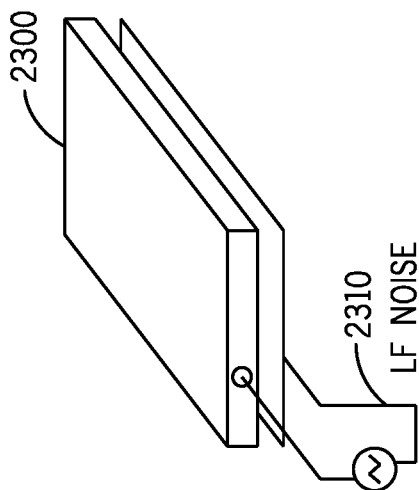


FIG. 23A

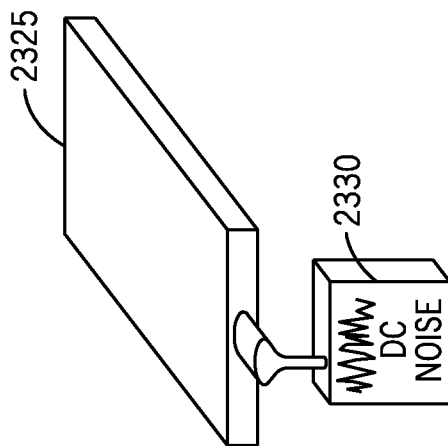


FIG. 23B

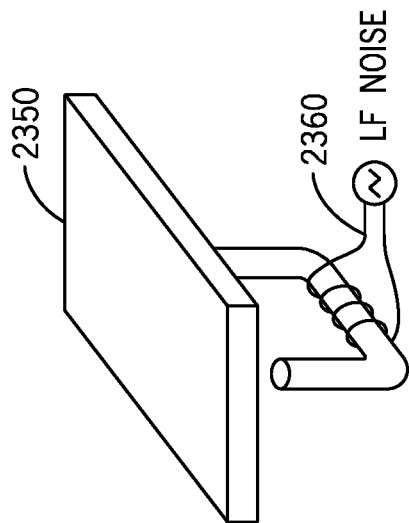


FIG. 23C

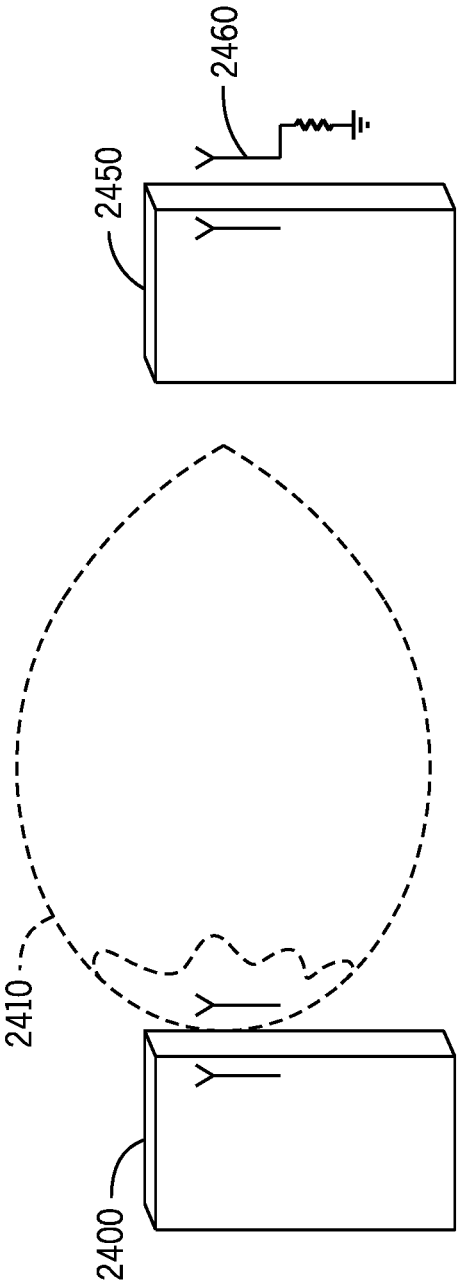


FIG. 24B

FIG. 24A

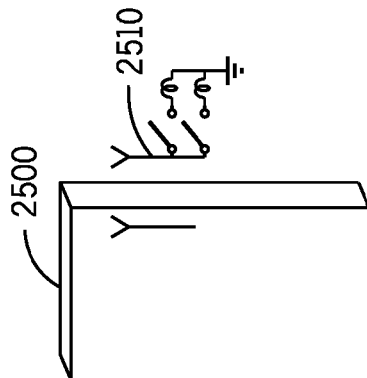


FIG. 25A

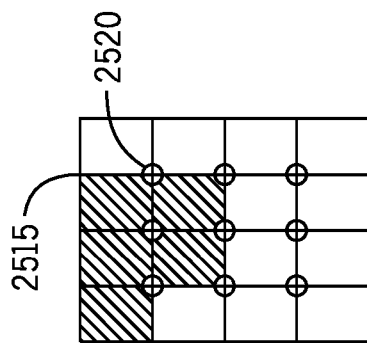


FIG. 25B

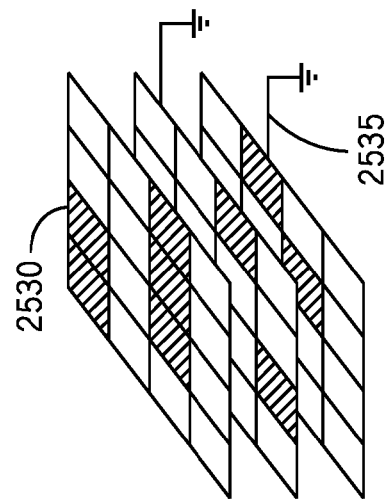


FIG. 25C

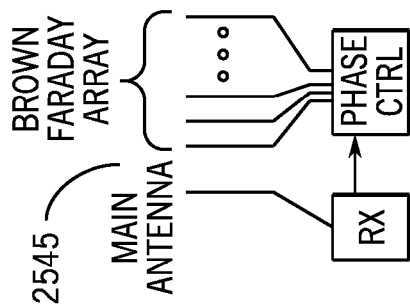


FIG. 25D

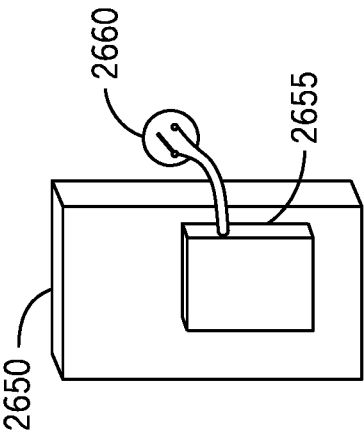


FIG. 26A

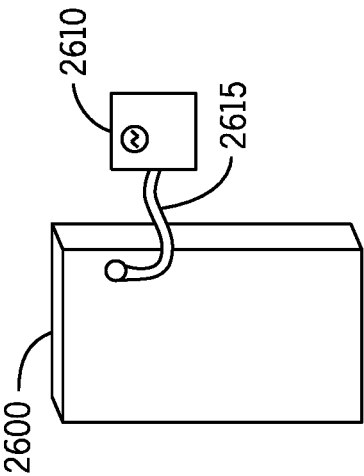


FIG. 26B

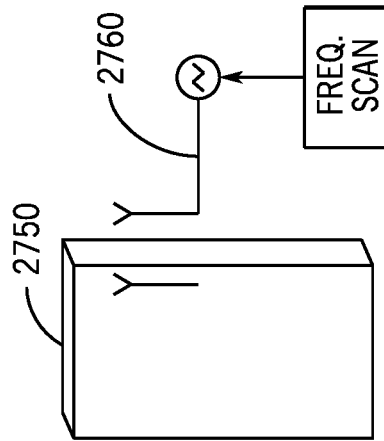


FIG. 27B

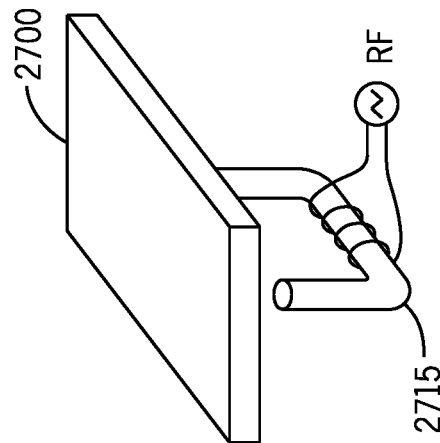


FIG. 27A

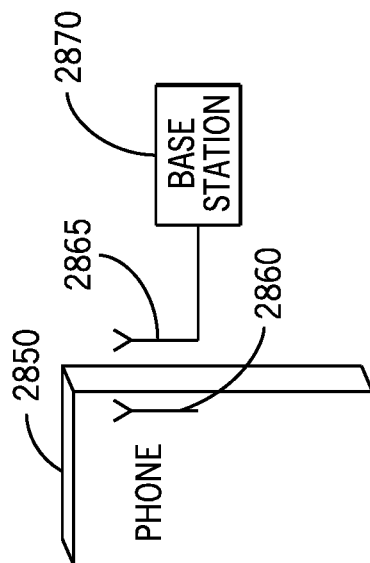


FIG. 28B

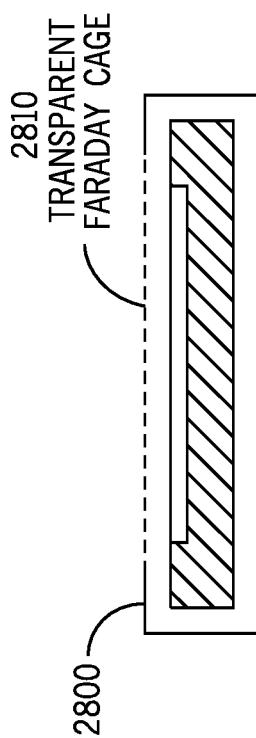


FIG. 28A

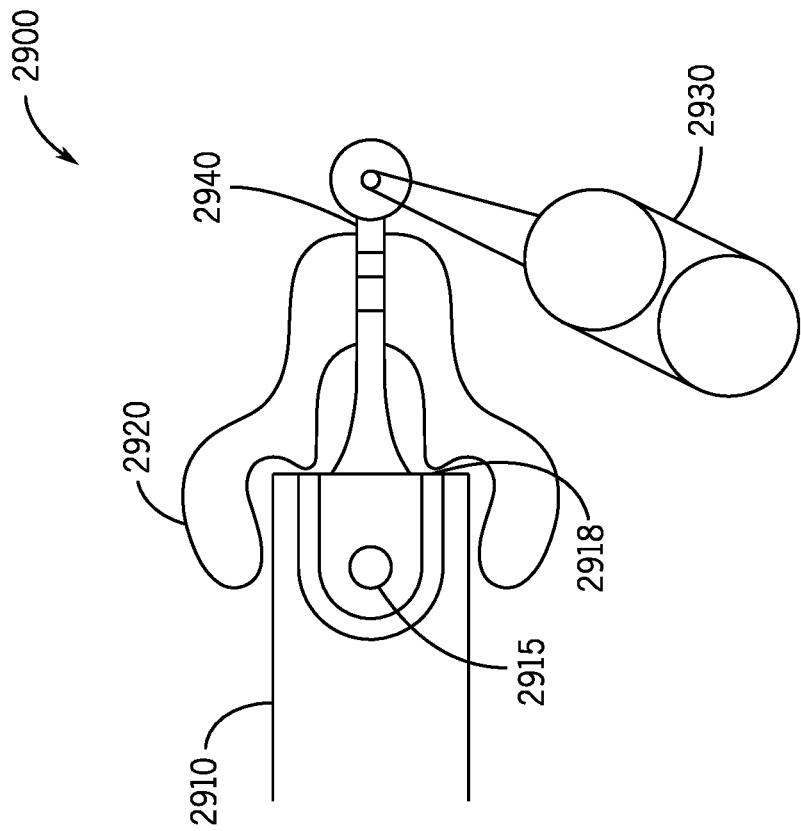


FIG. 29

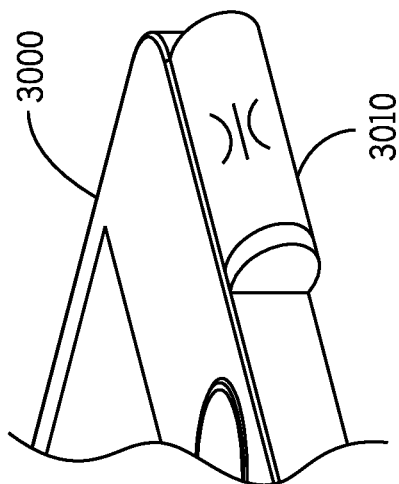


FIG. 30A

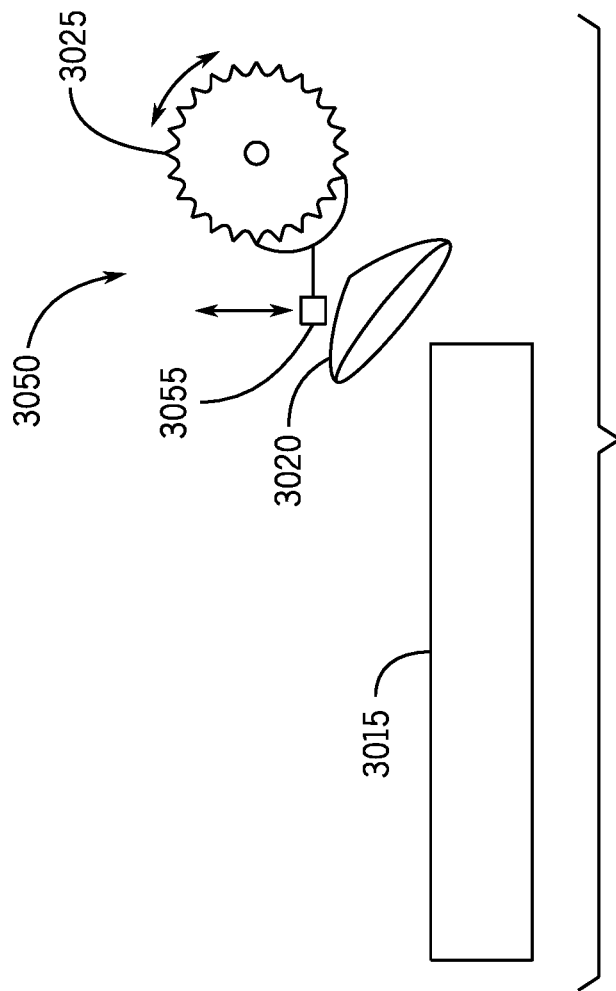


FIG. 30B

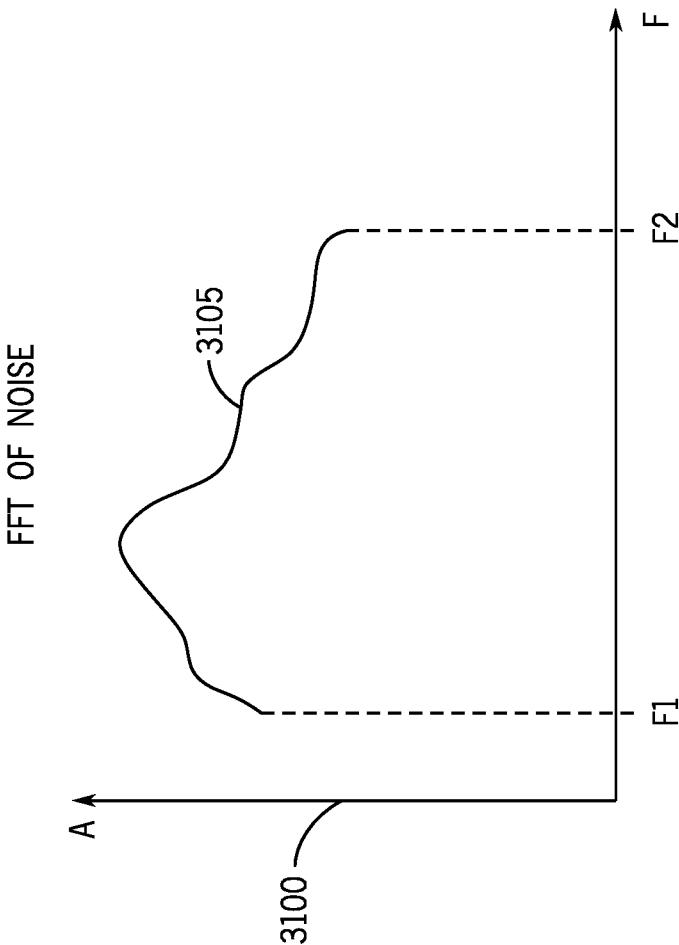


FIG. 31

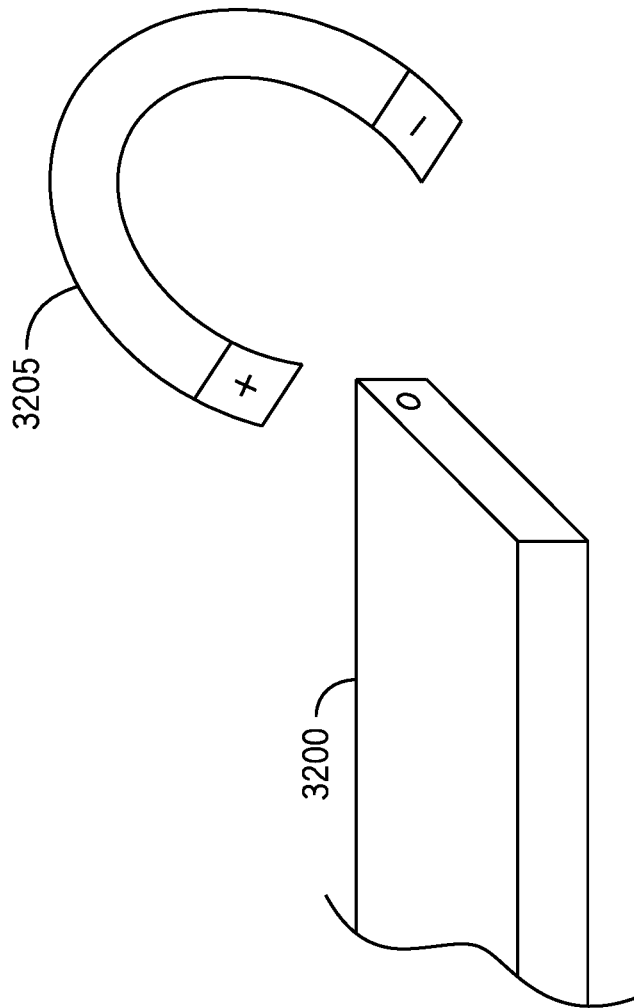


FIG. 32

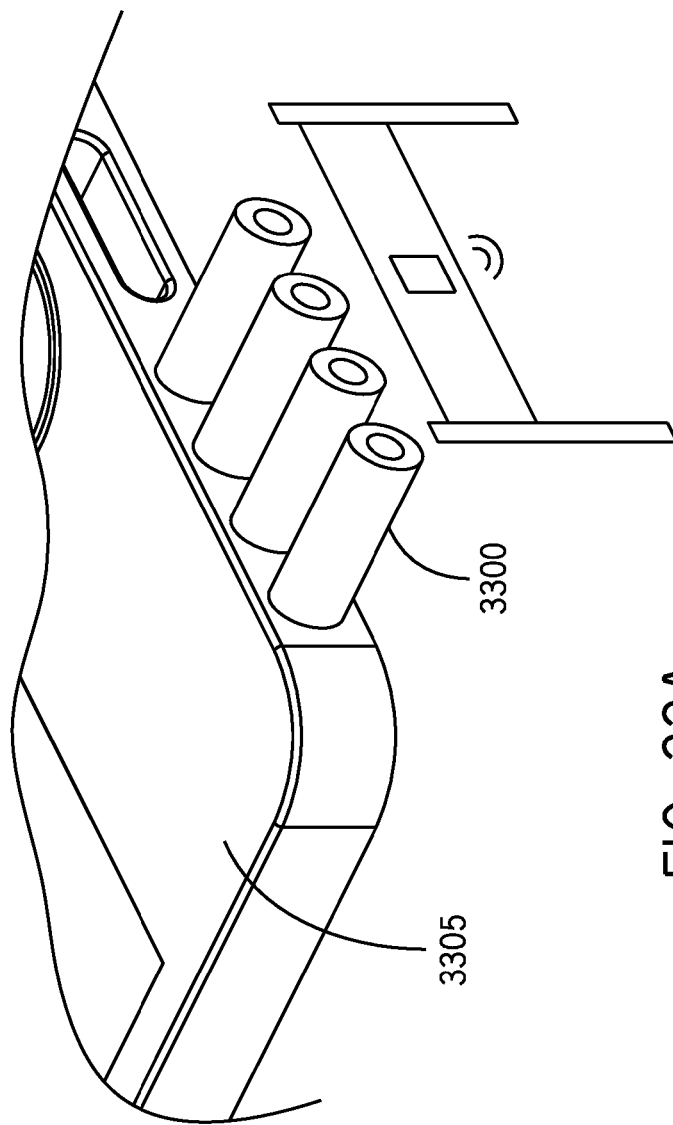


FIG. 33A

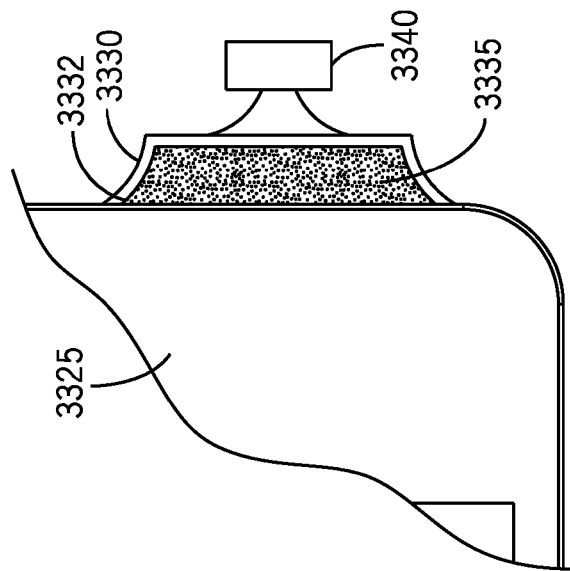


FIG. 33B

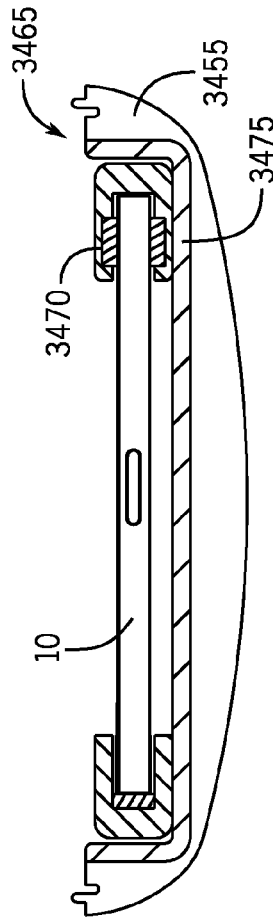


FIG. 34C

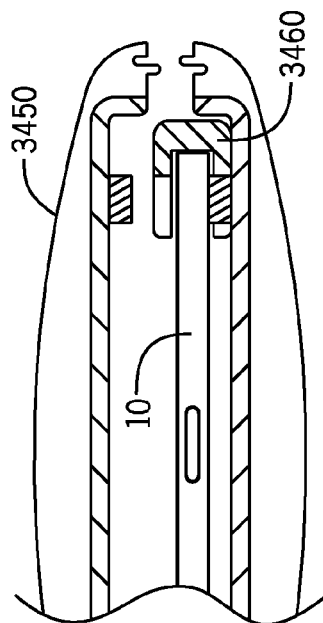


FIG. 34B

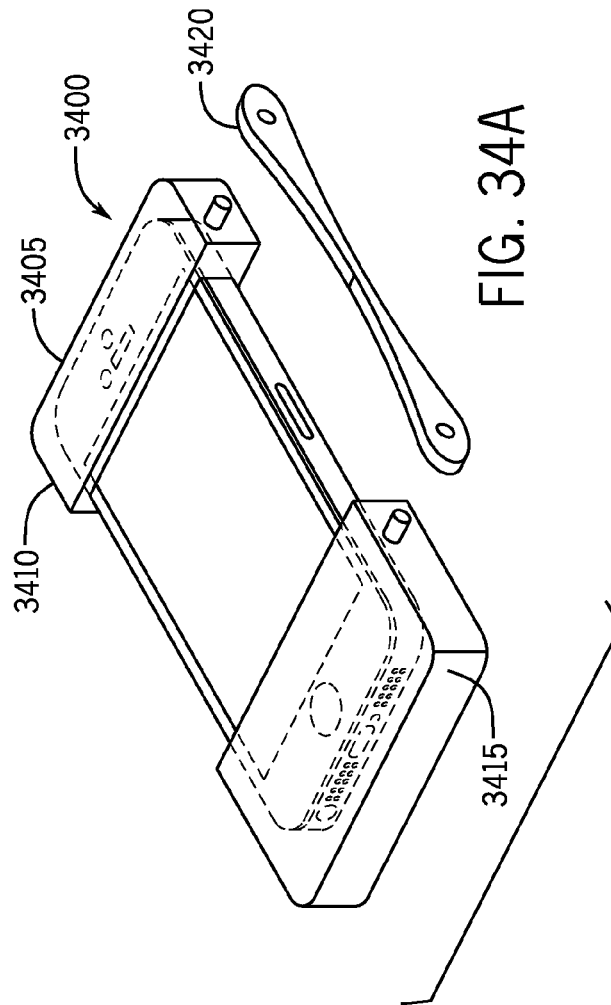


FIG. 34A

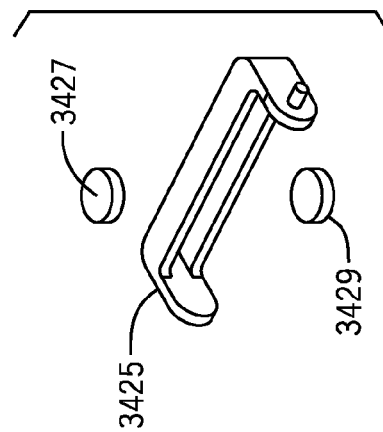
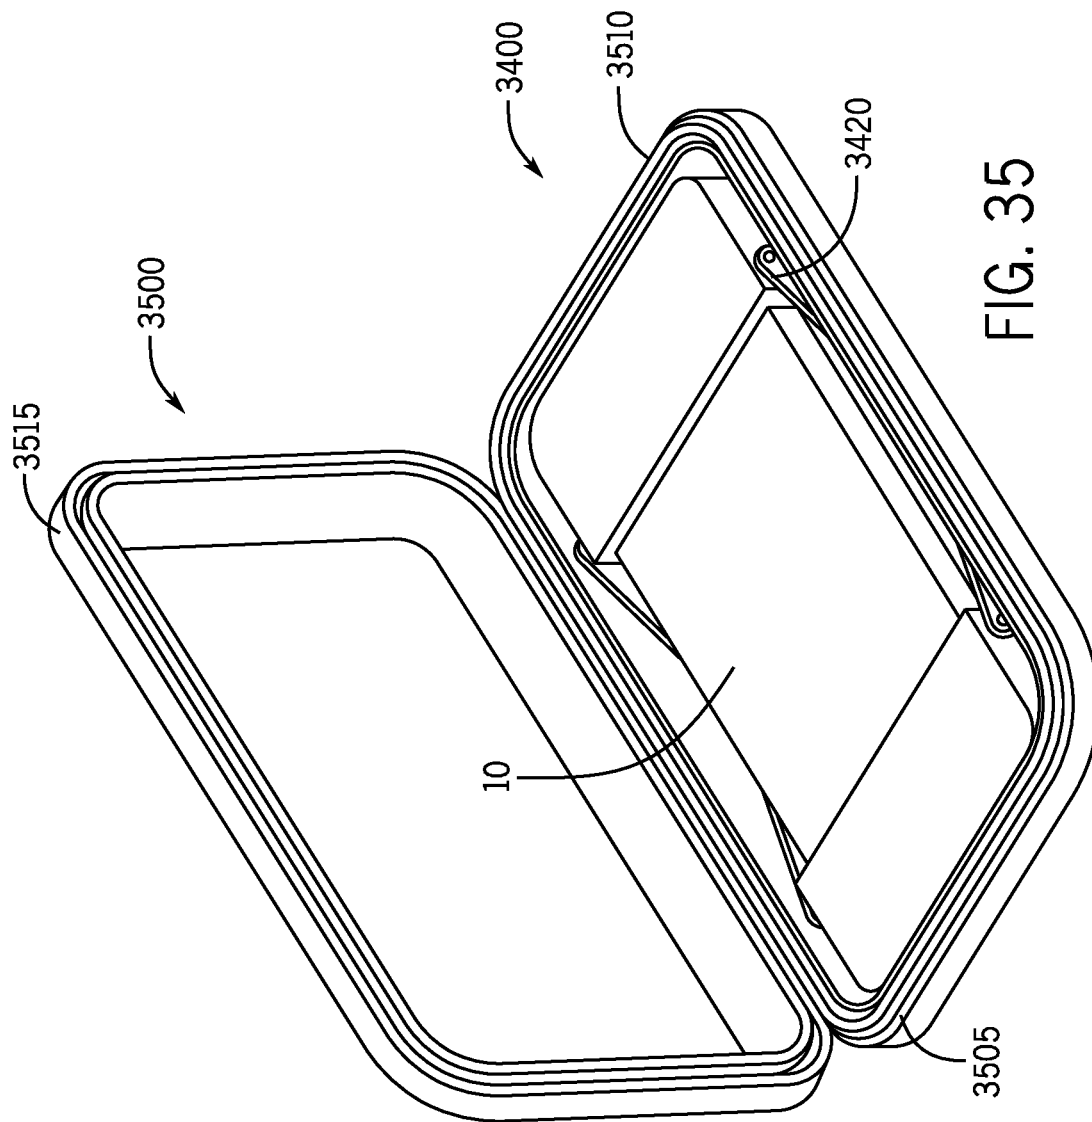
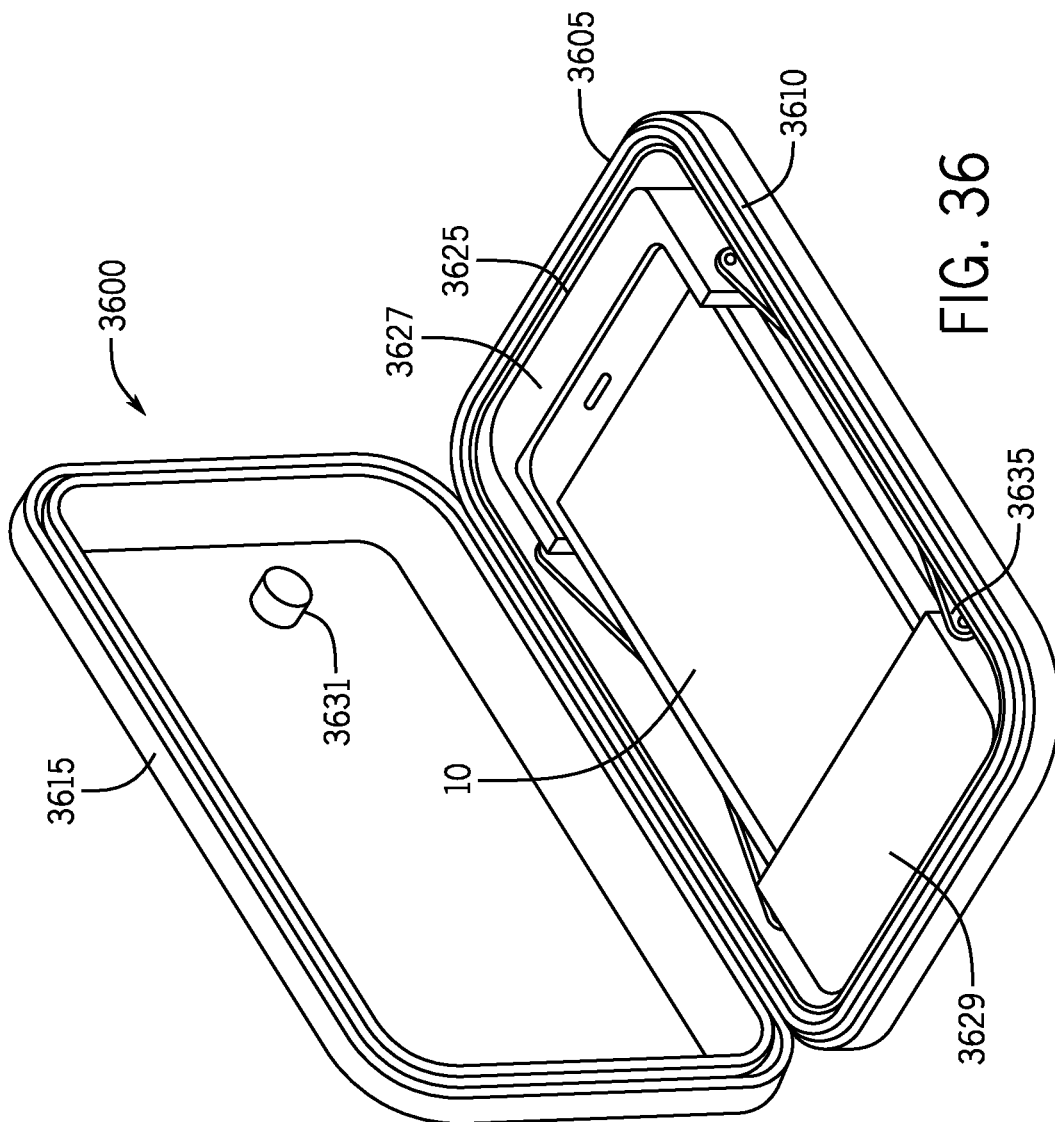


FIG. 34D





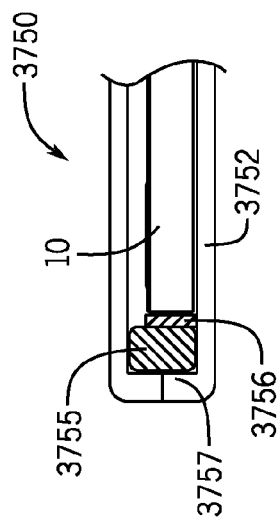


FIG. 37A

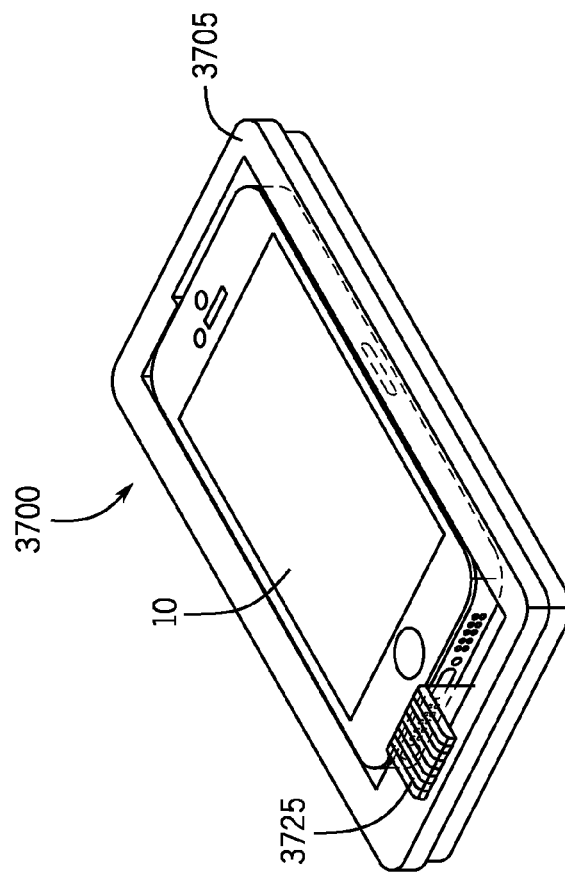


FIG. 37B

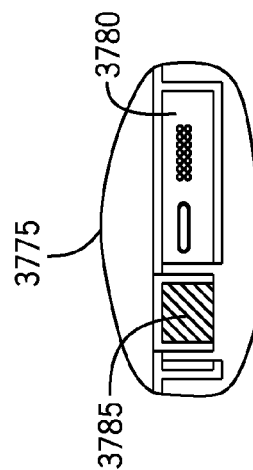


FIG. 37C

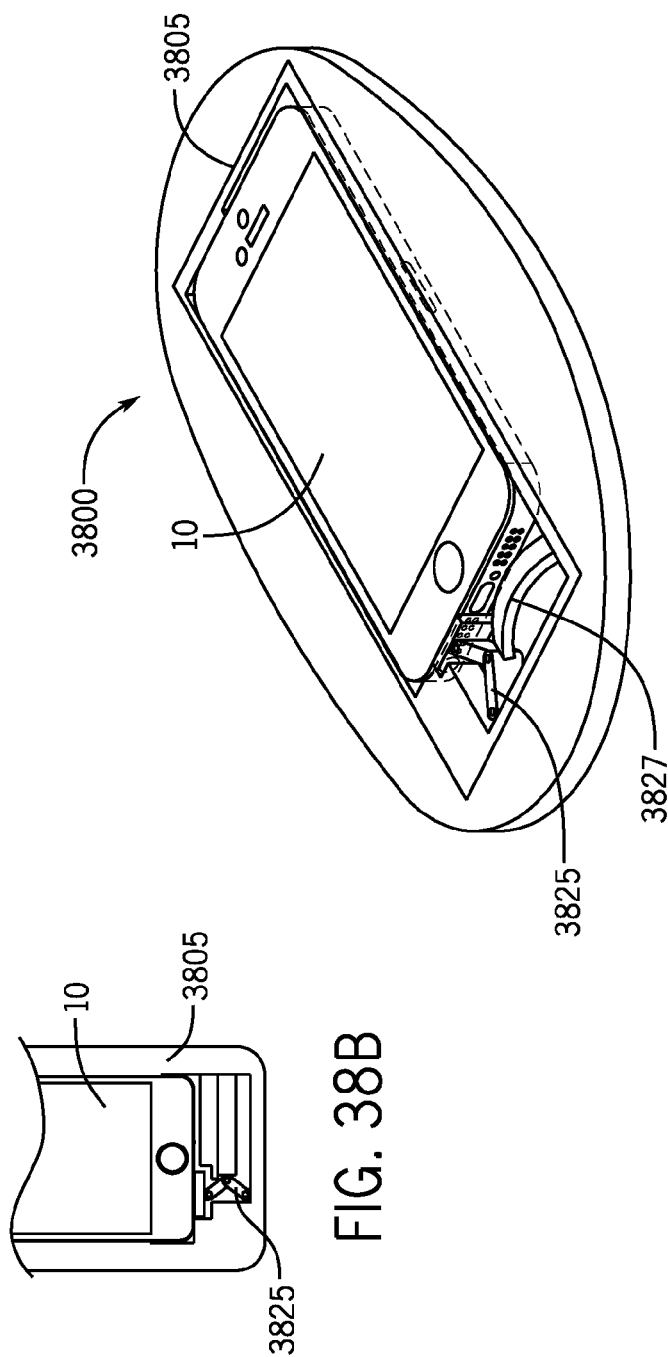


FIG. 38B

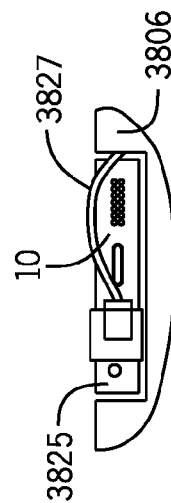
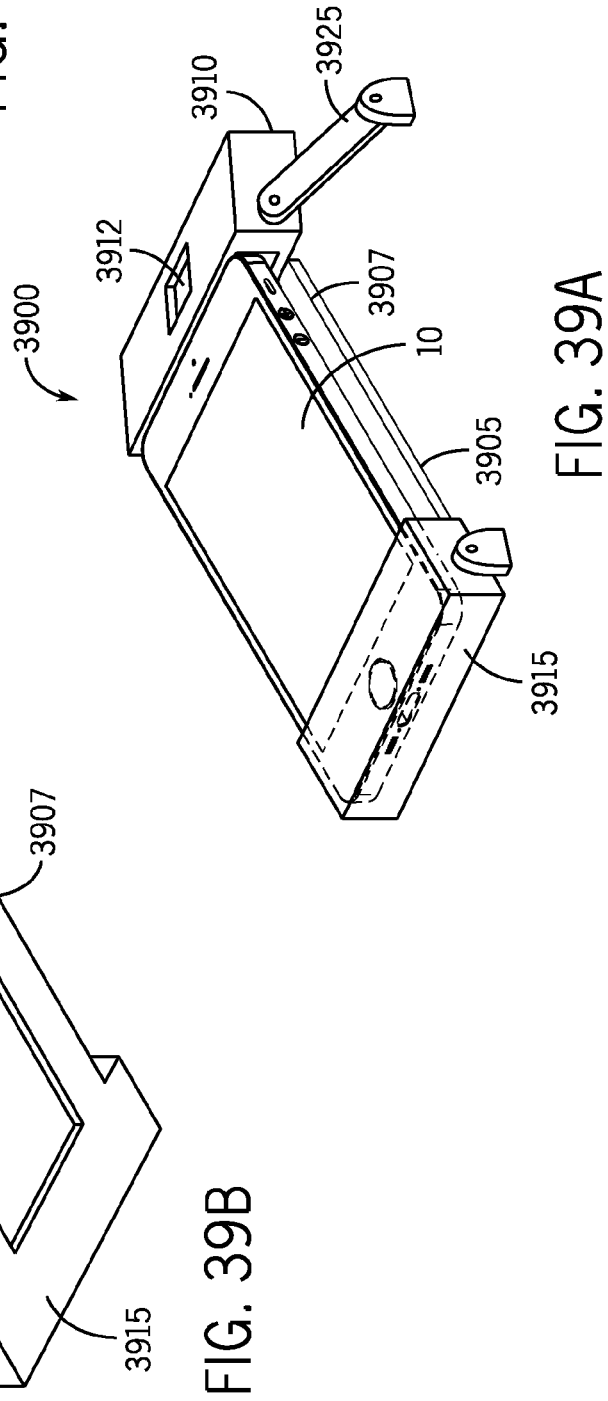
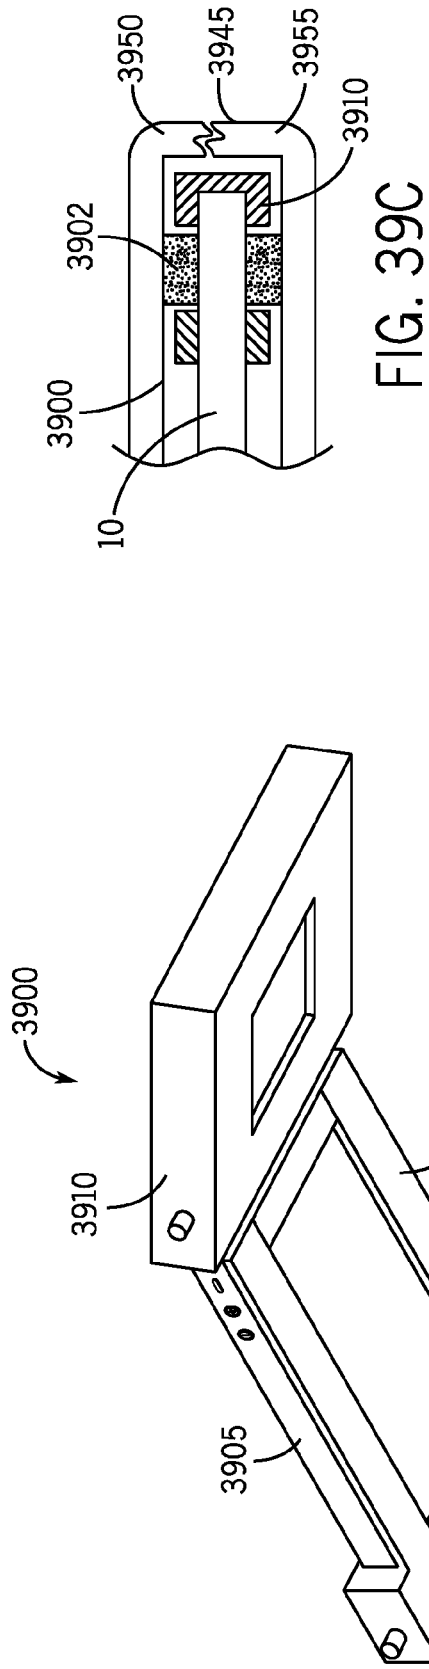


FIG. 38C

FIG. 38A



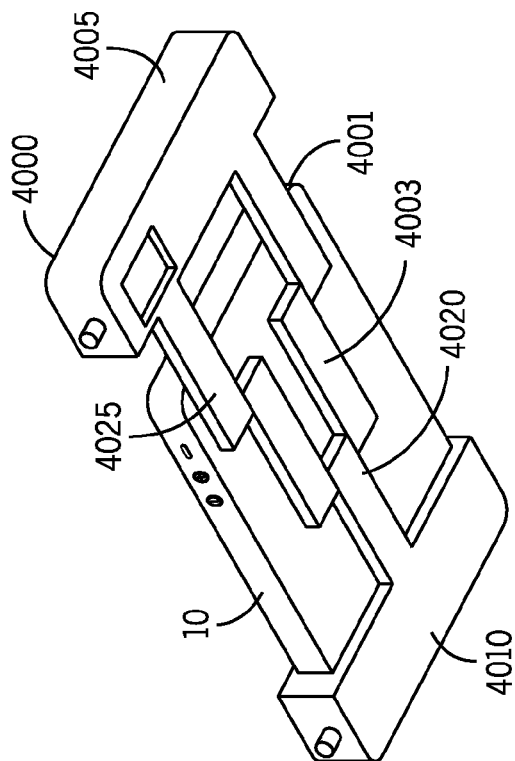


FIG. 40B

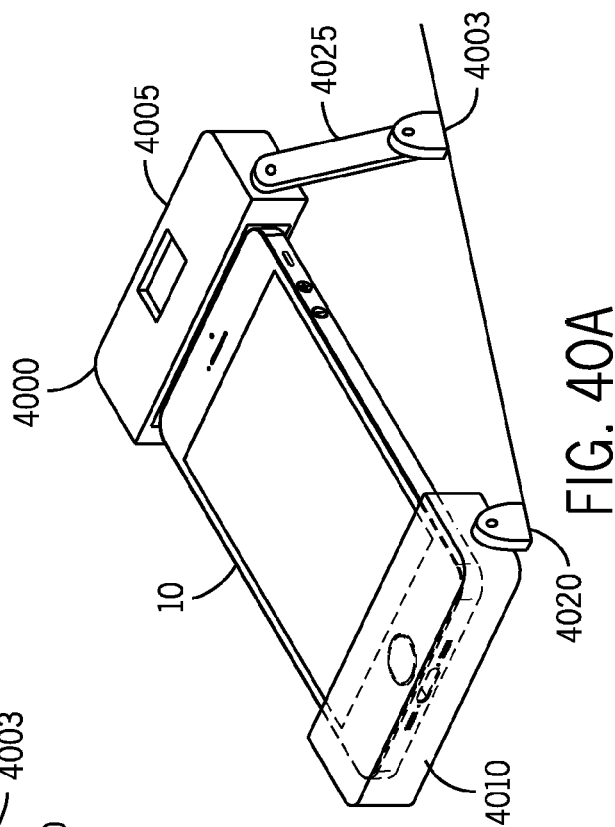


FIG. 40A

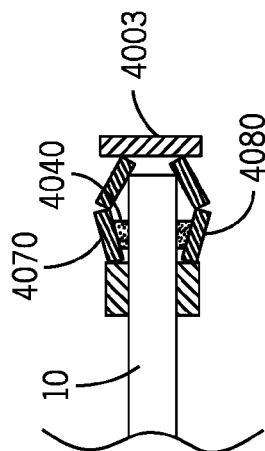


FIG. 40C

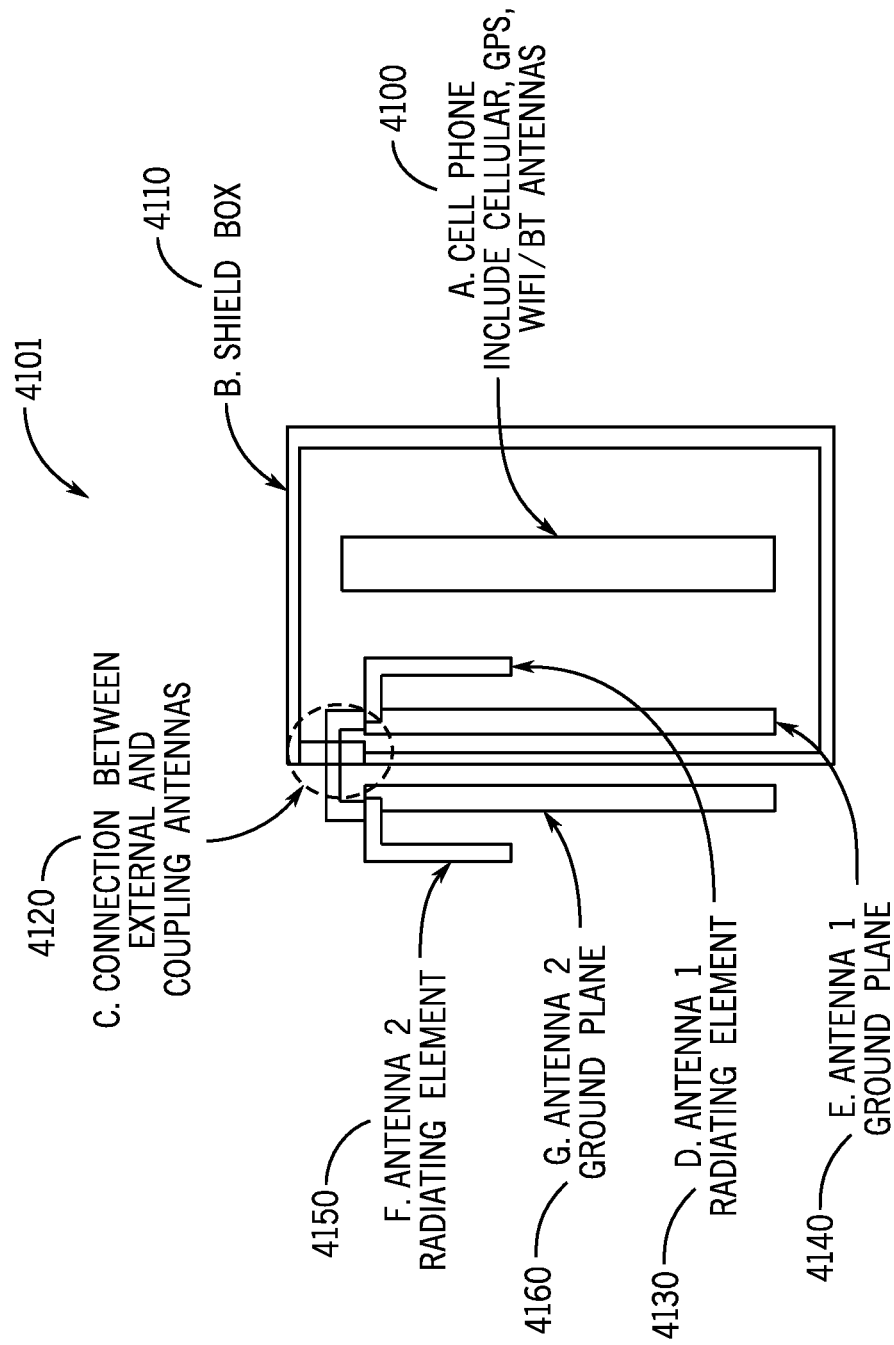


FIG. 41

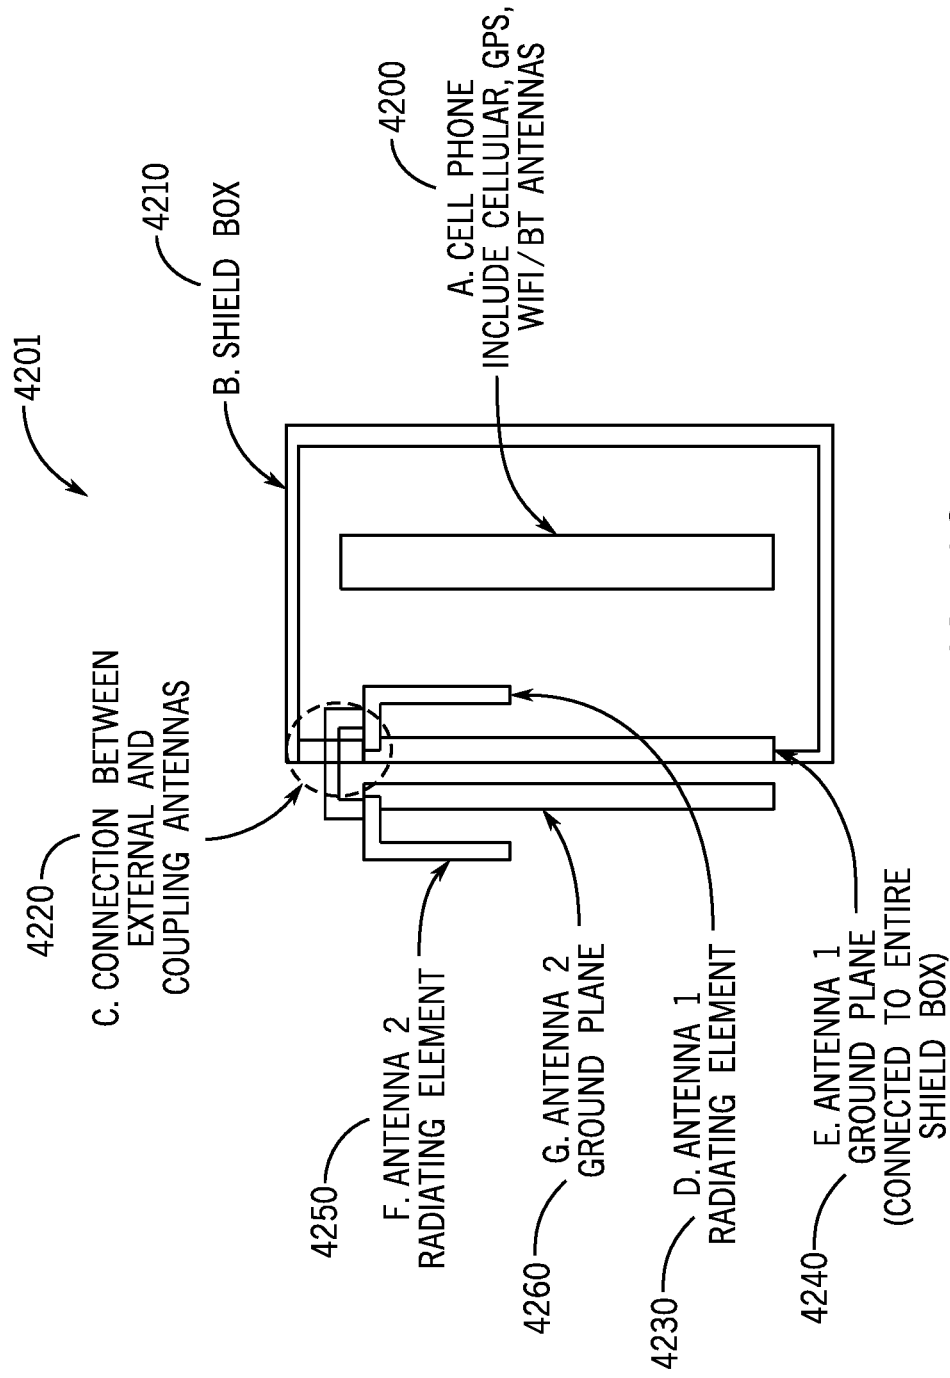


FIG. 42

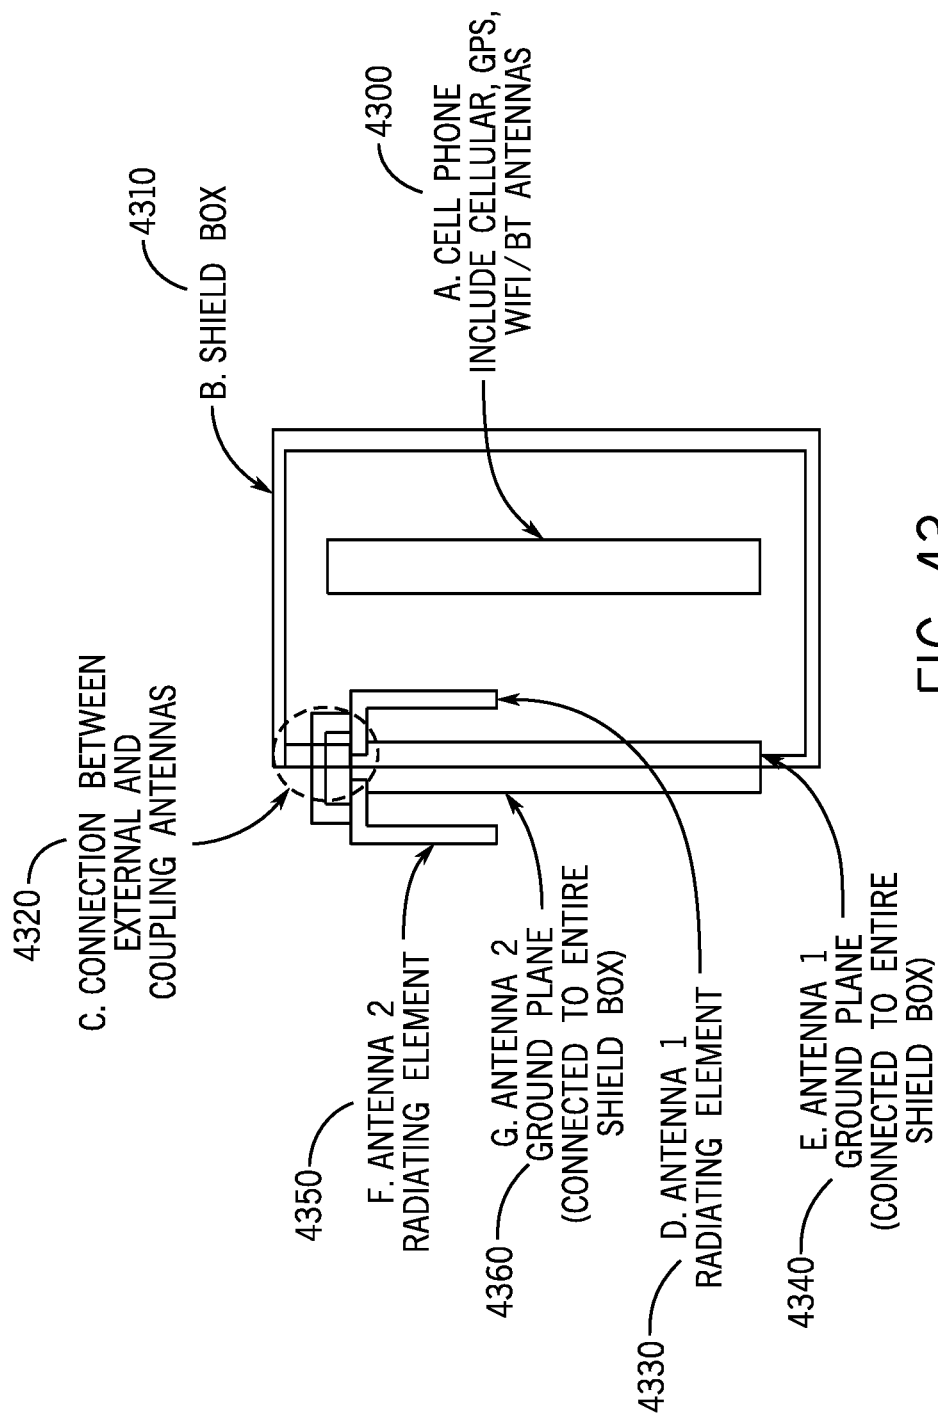
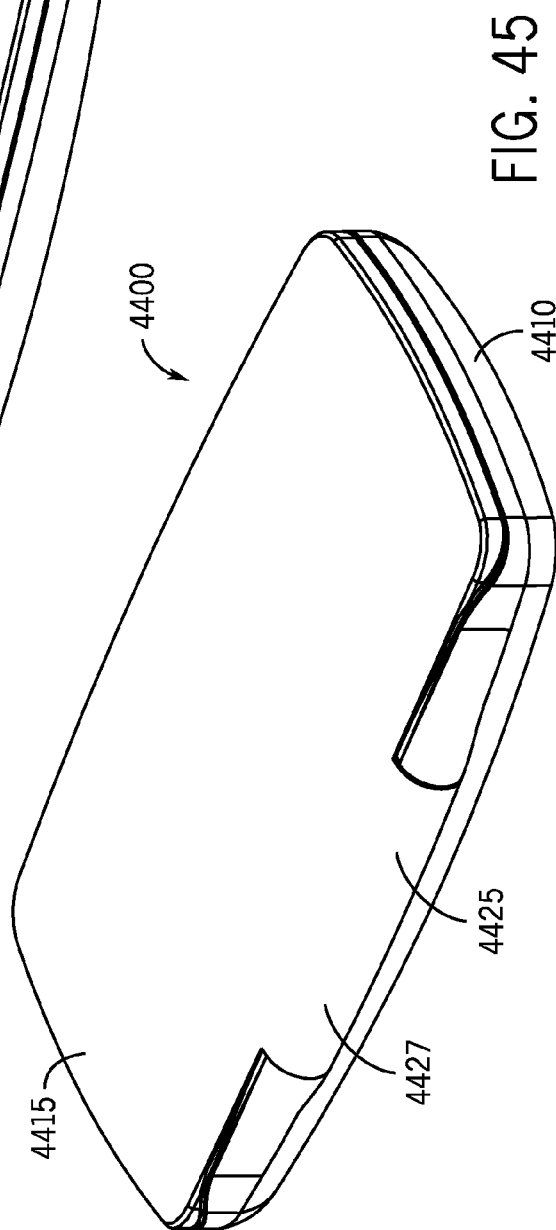
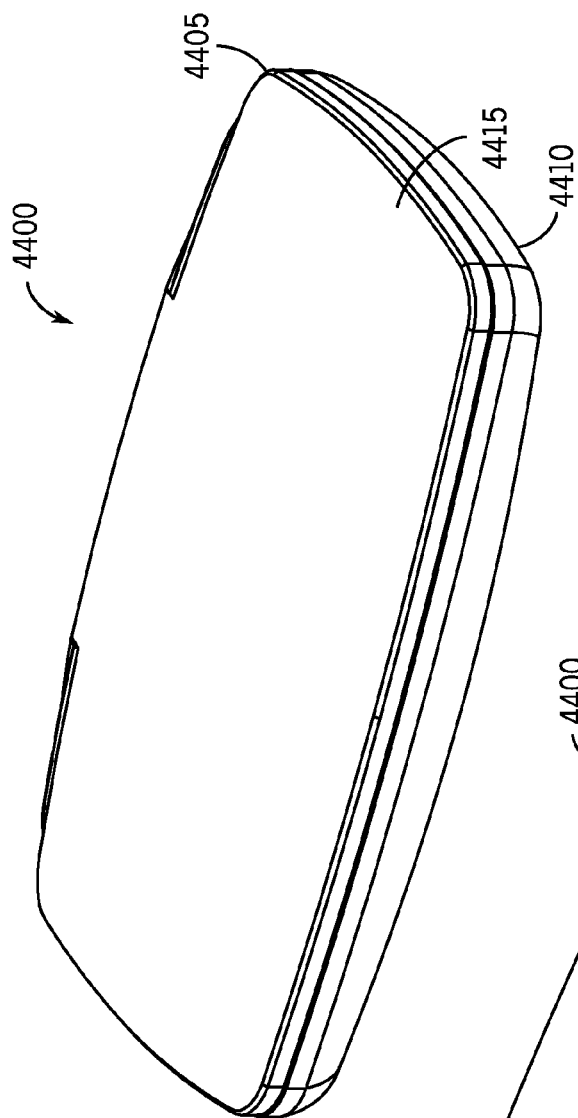
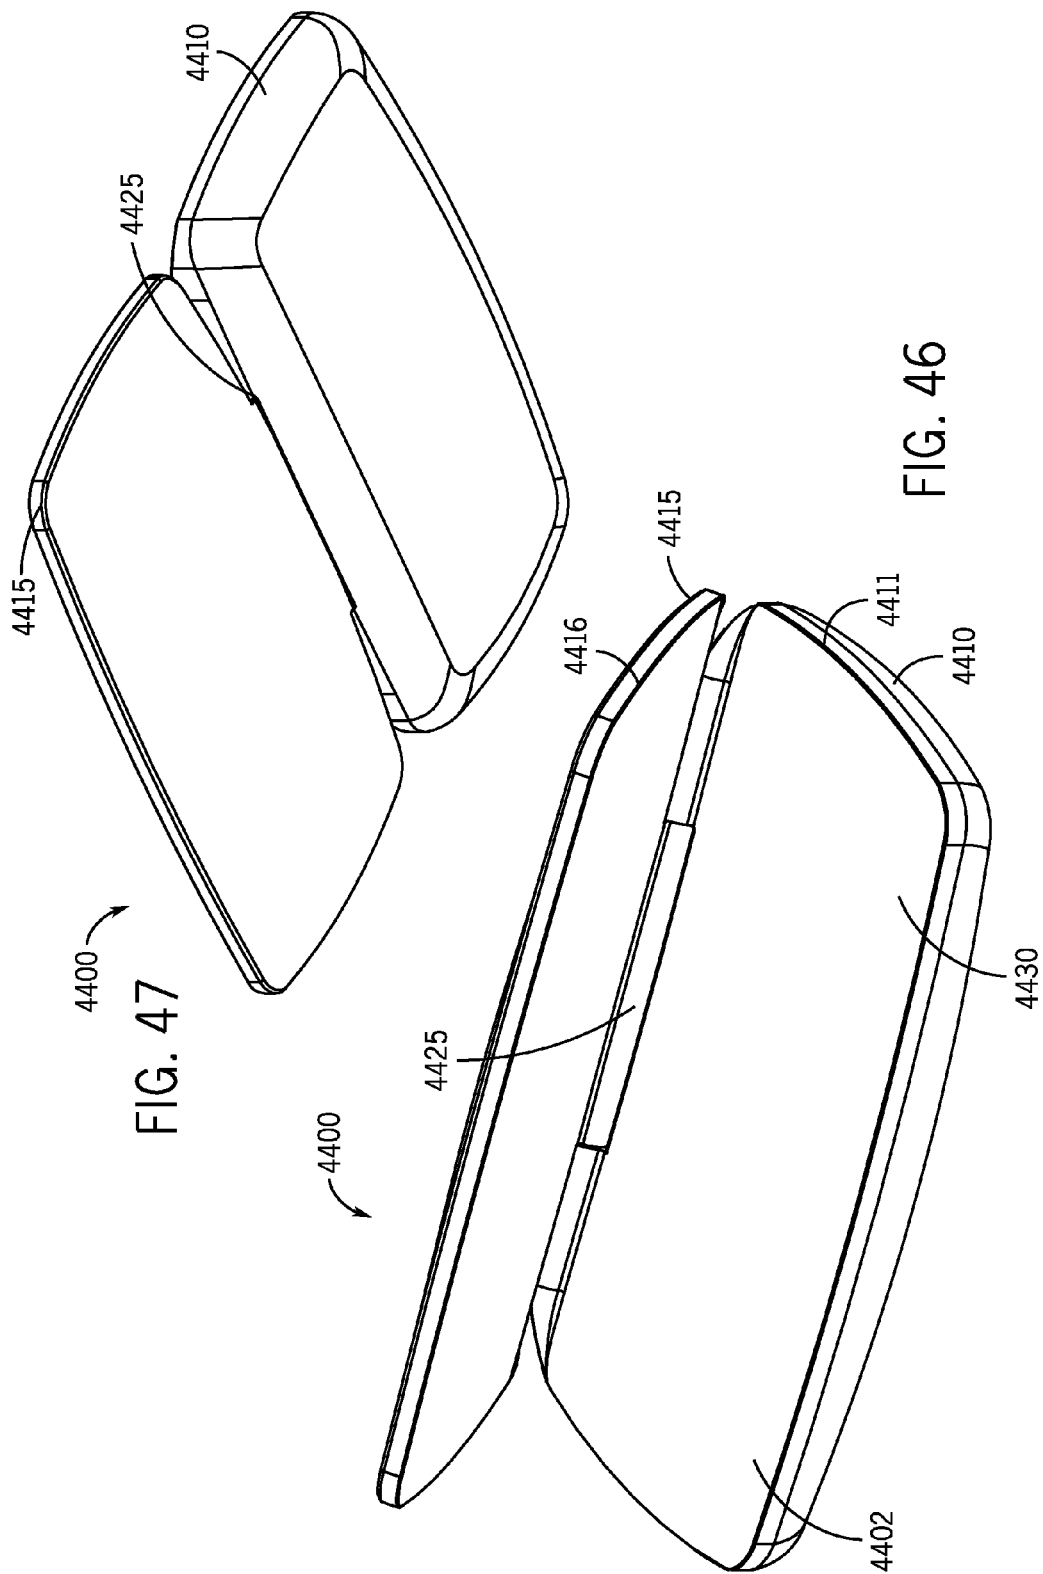
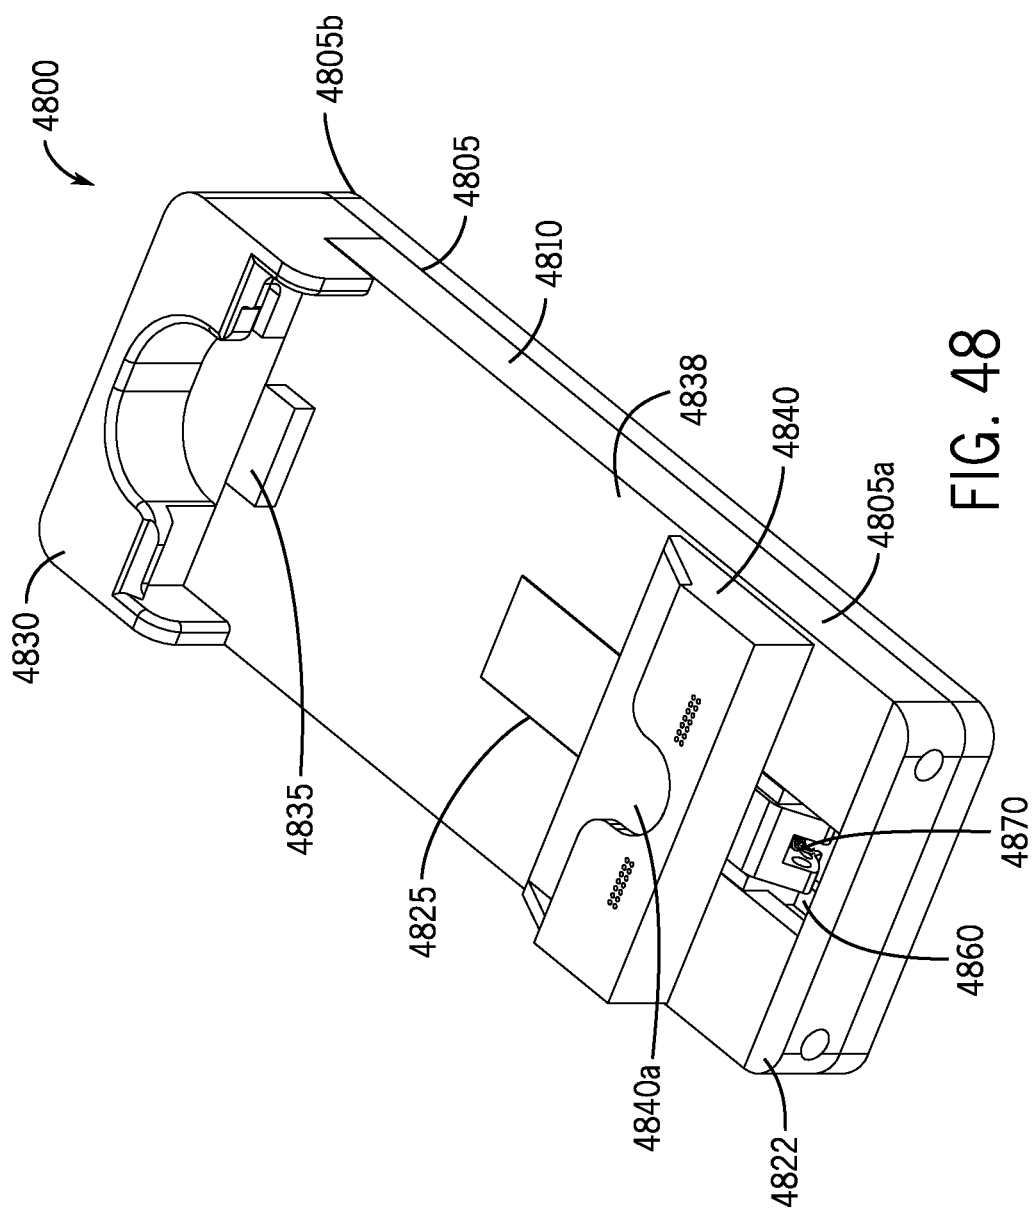
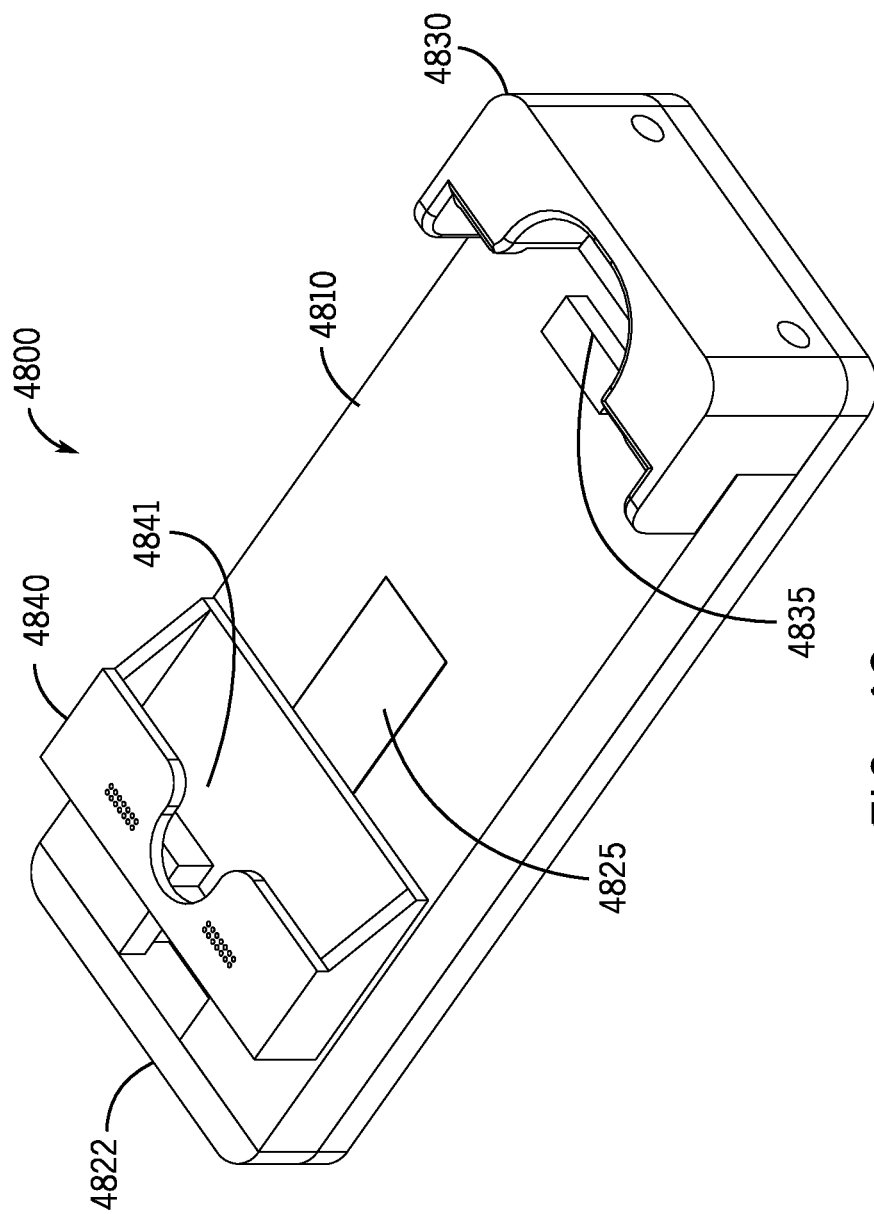


FIG. 43









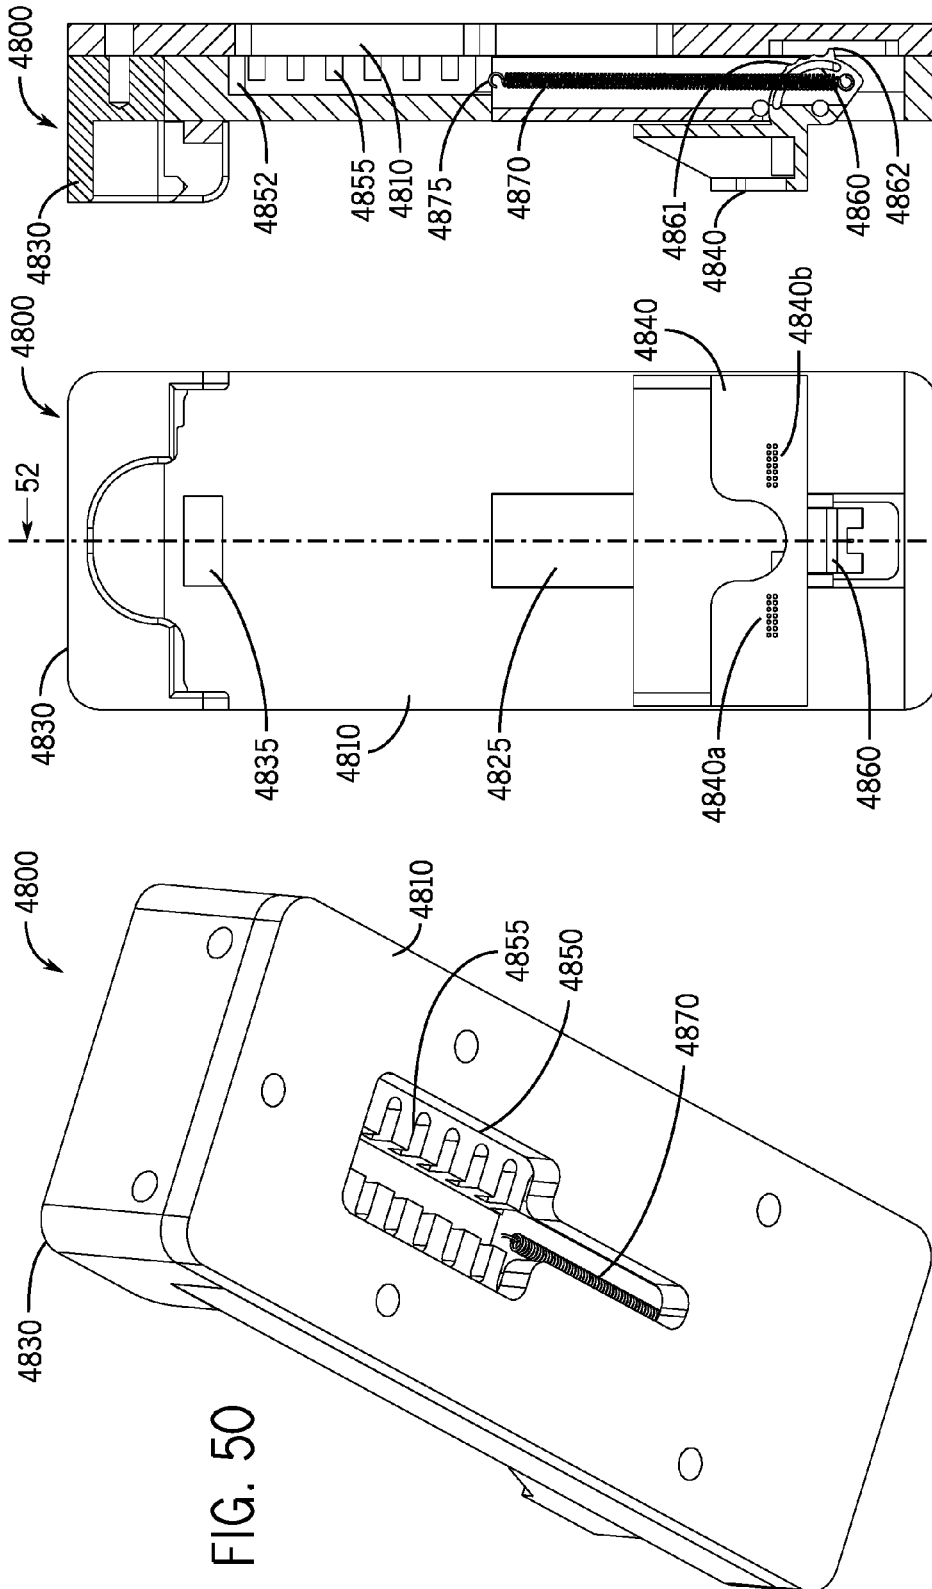


FIG. 50

FIG. 51

FIG. 52

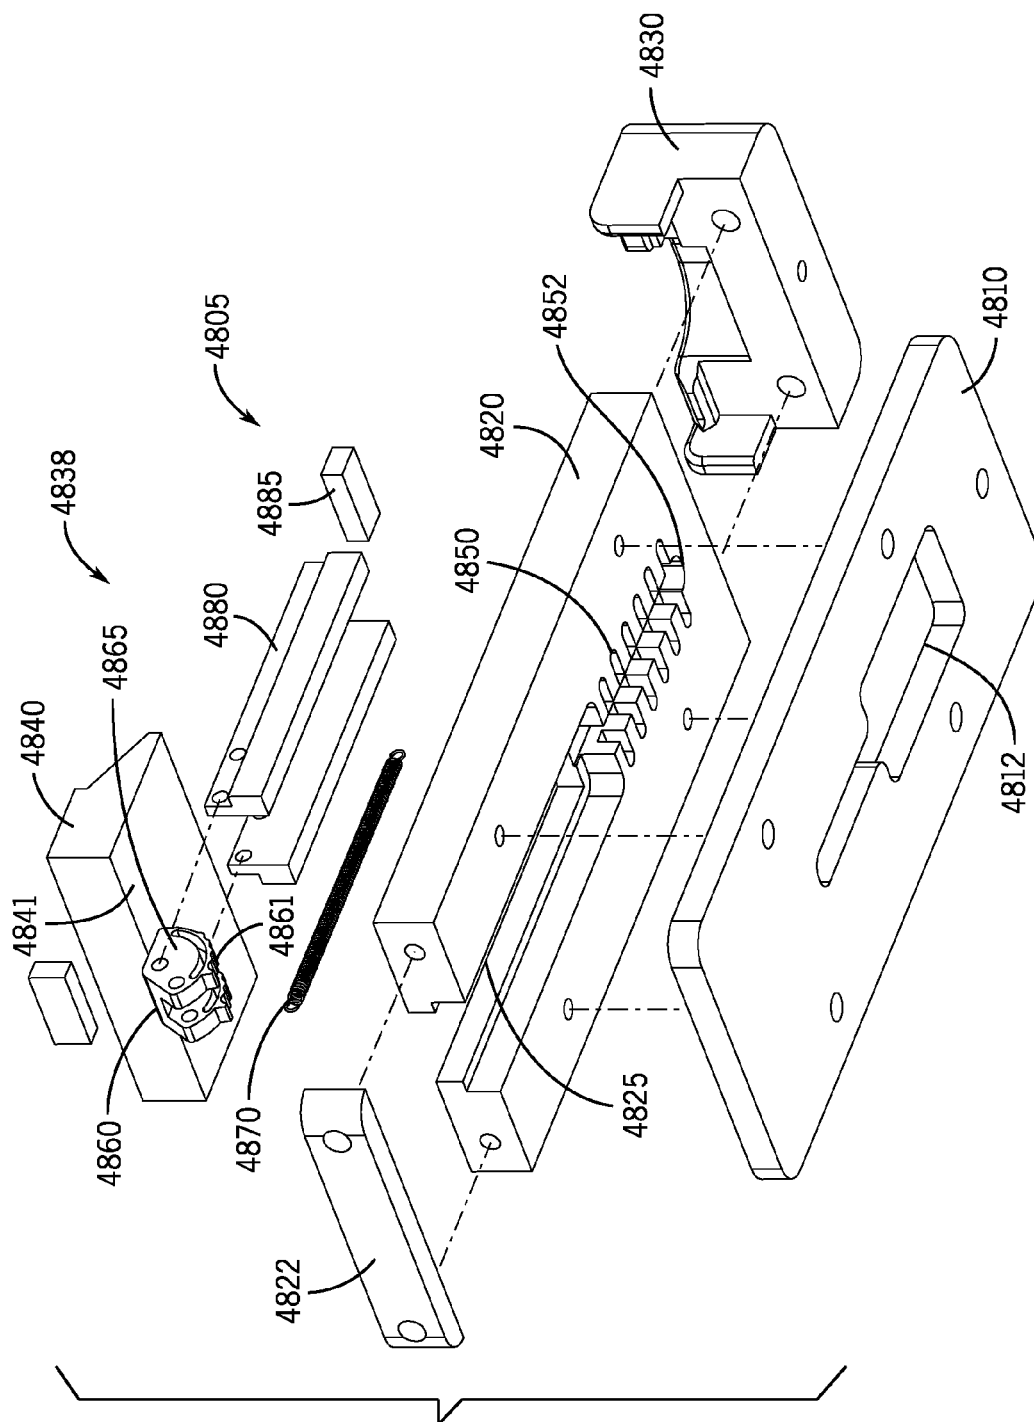


FIG. 53

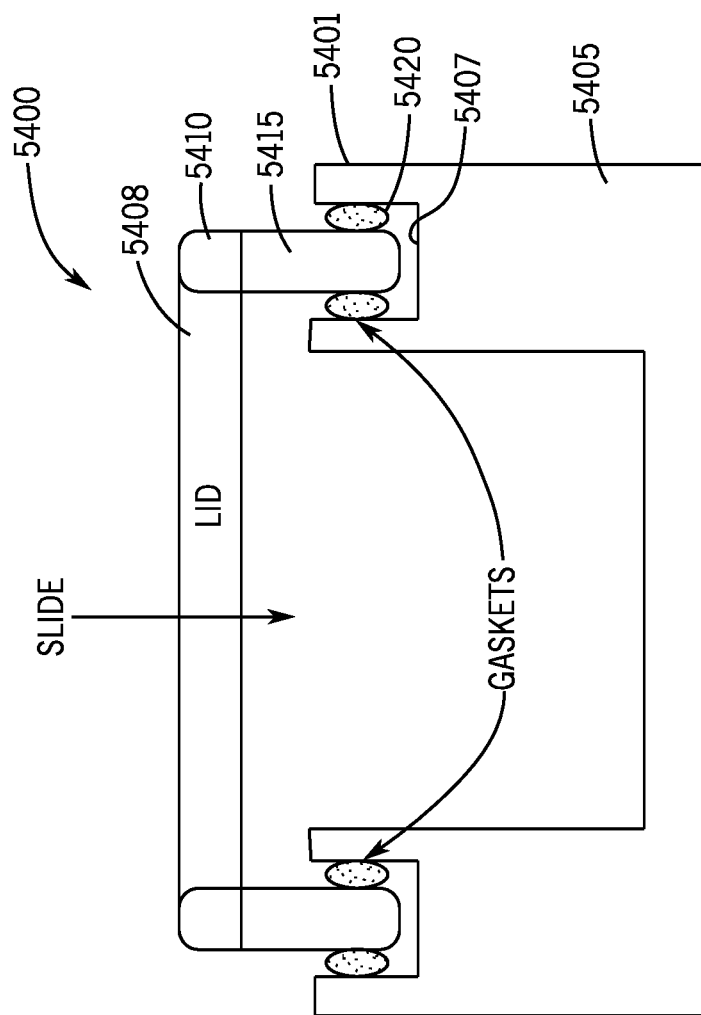
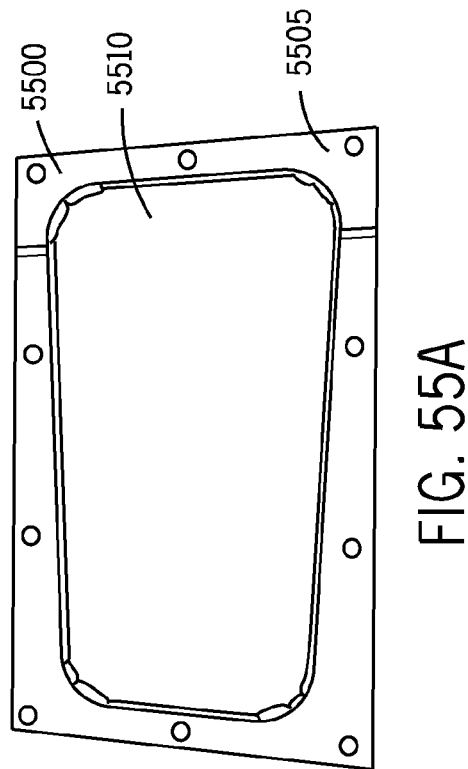
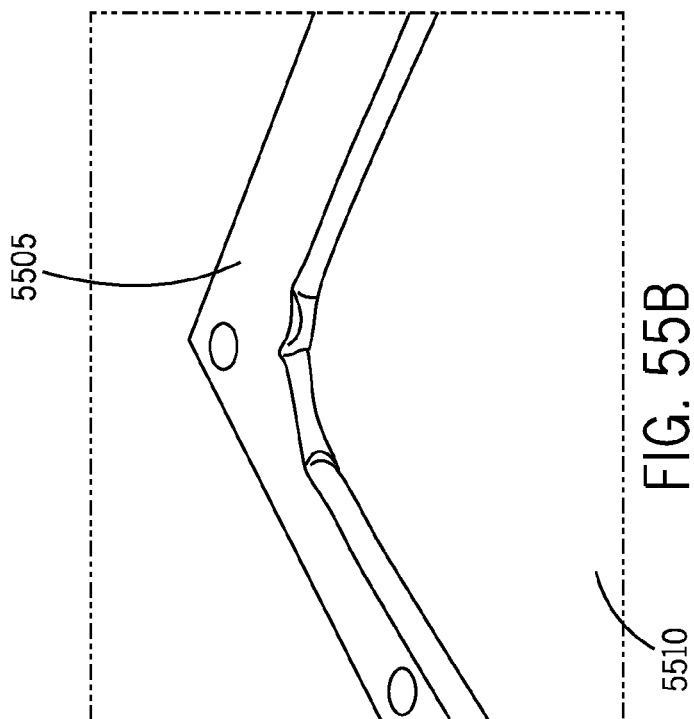
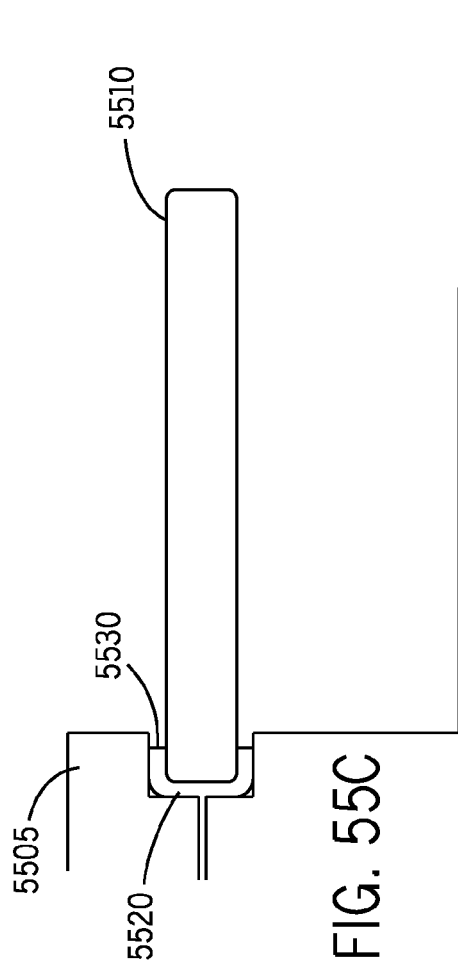


FIG. 54



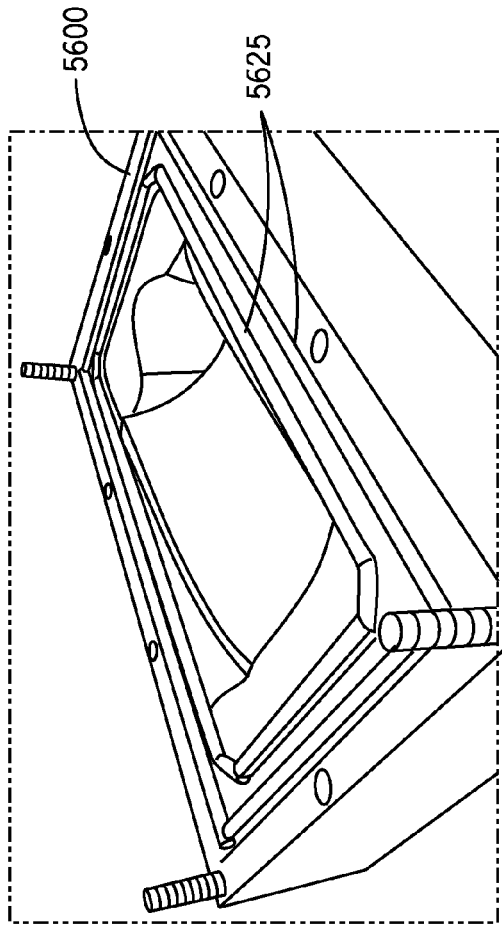


FIG. 56

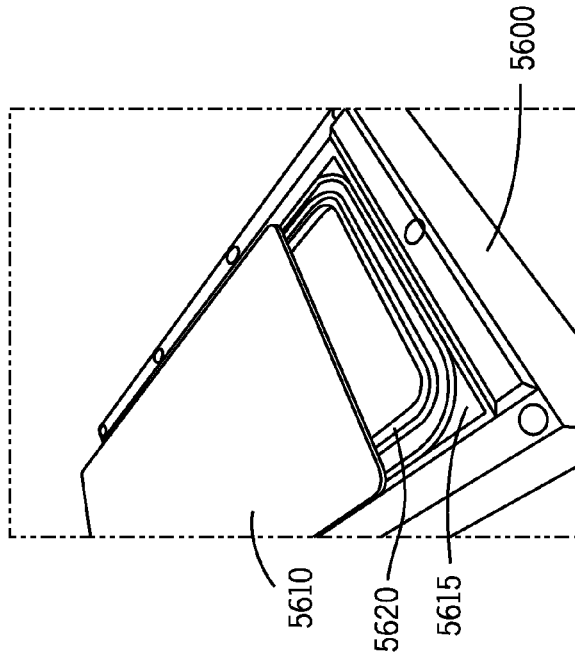


FIG. 57A

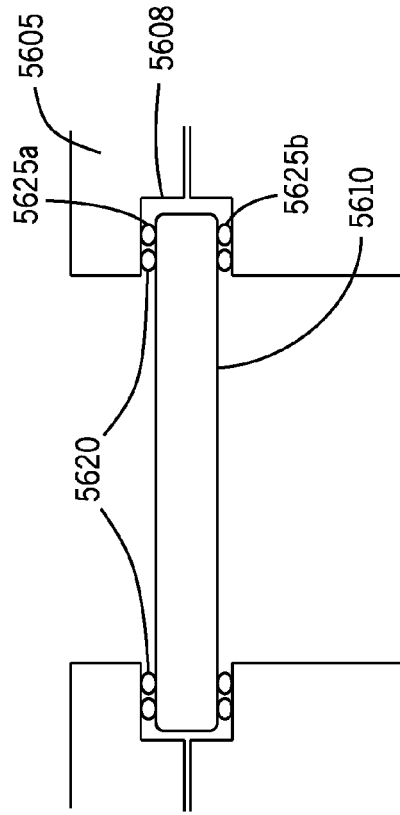


FIG. 57B

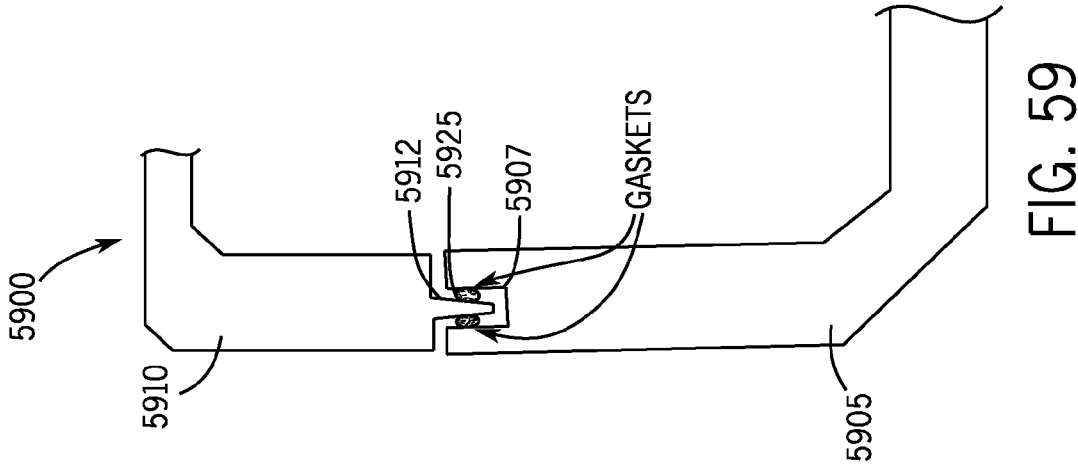


FIG. 58

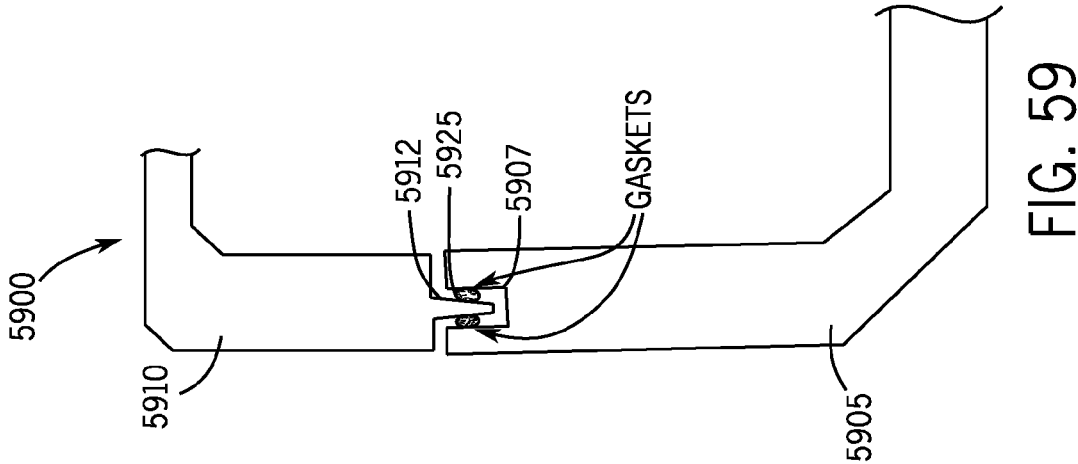


FIG. 59

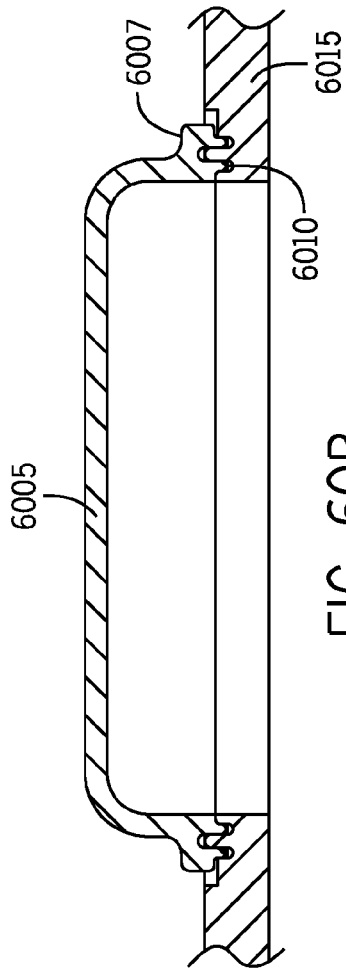


FIG. 60B

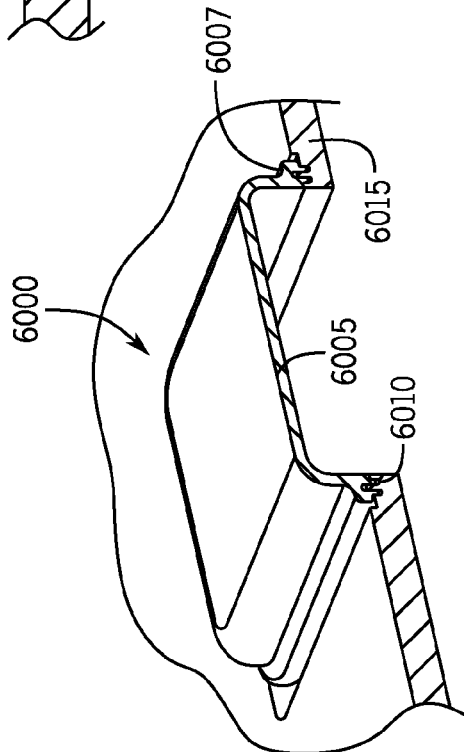


FIG. 60A

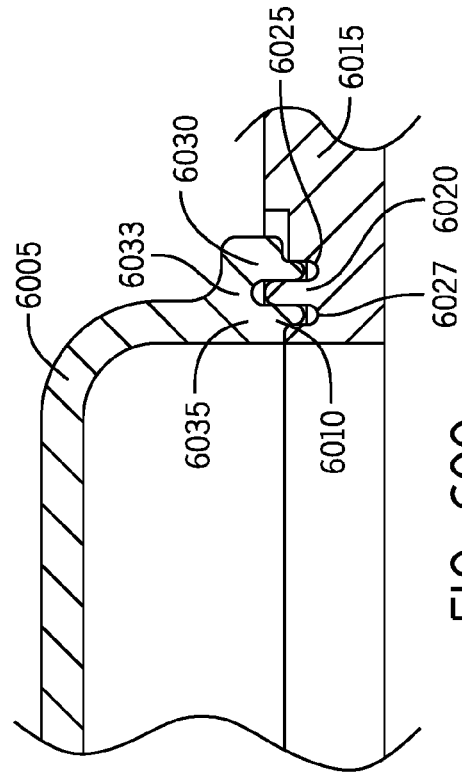


FIG. 60C

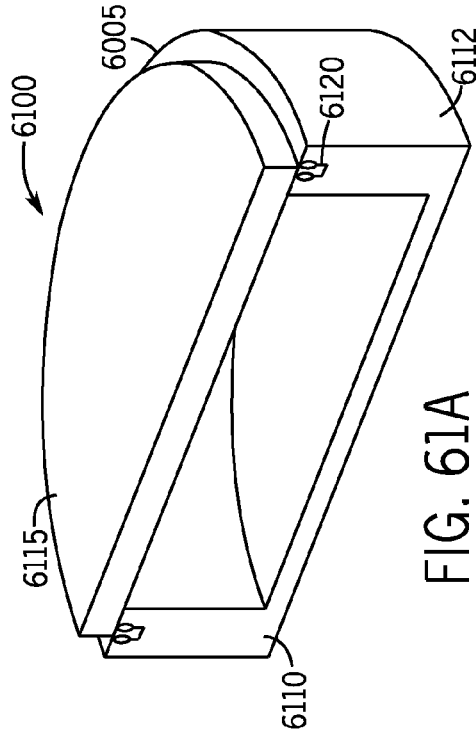


FIG. 61A

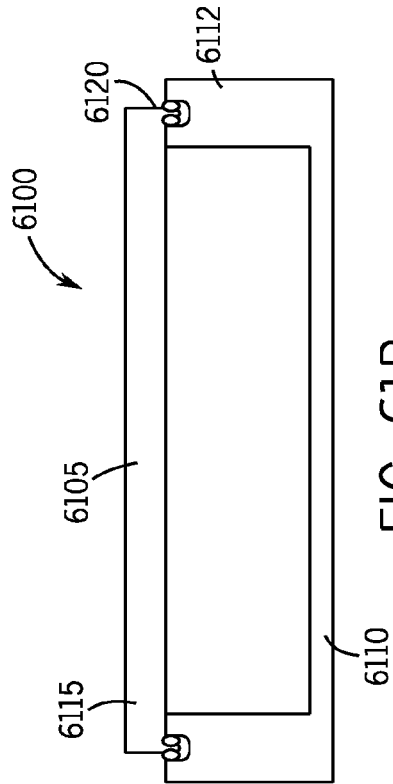


FIG. 61B

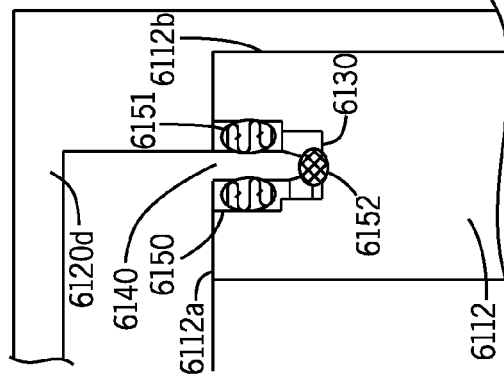


FIG. 61F

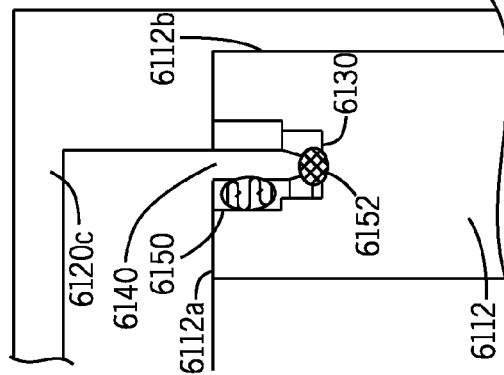


FIG. 61E

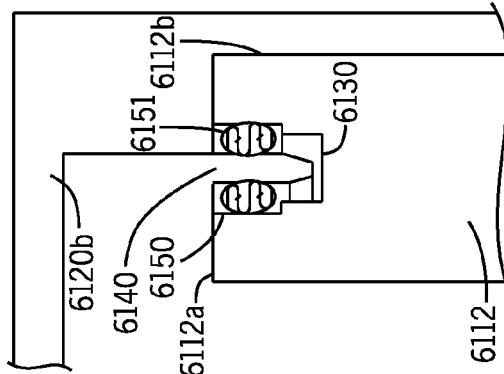


FIG. 61D

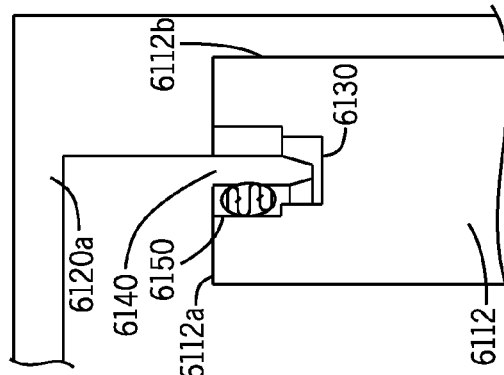
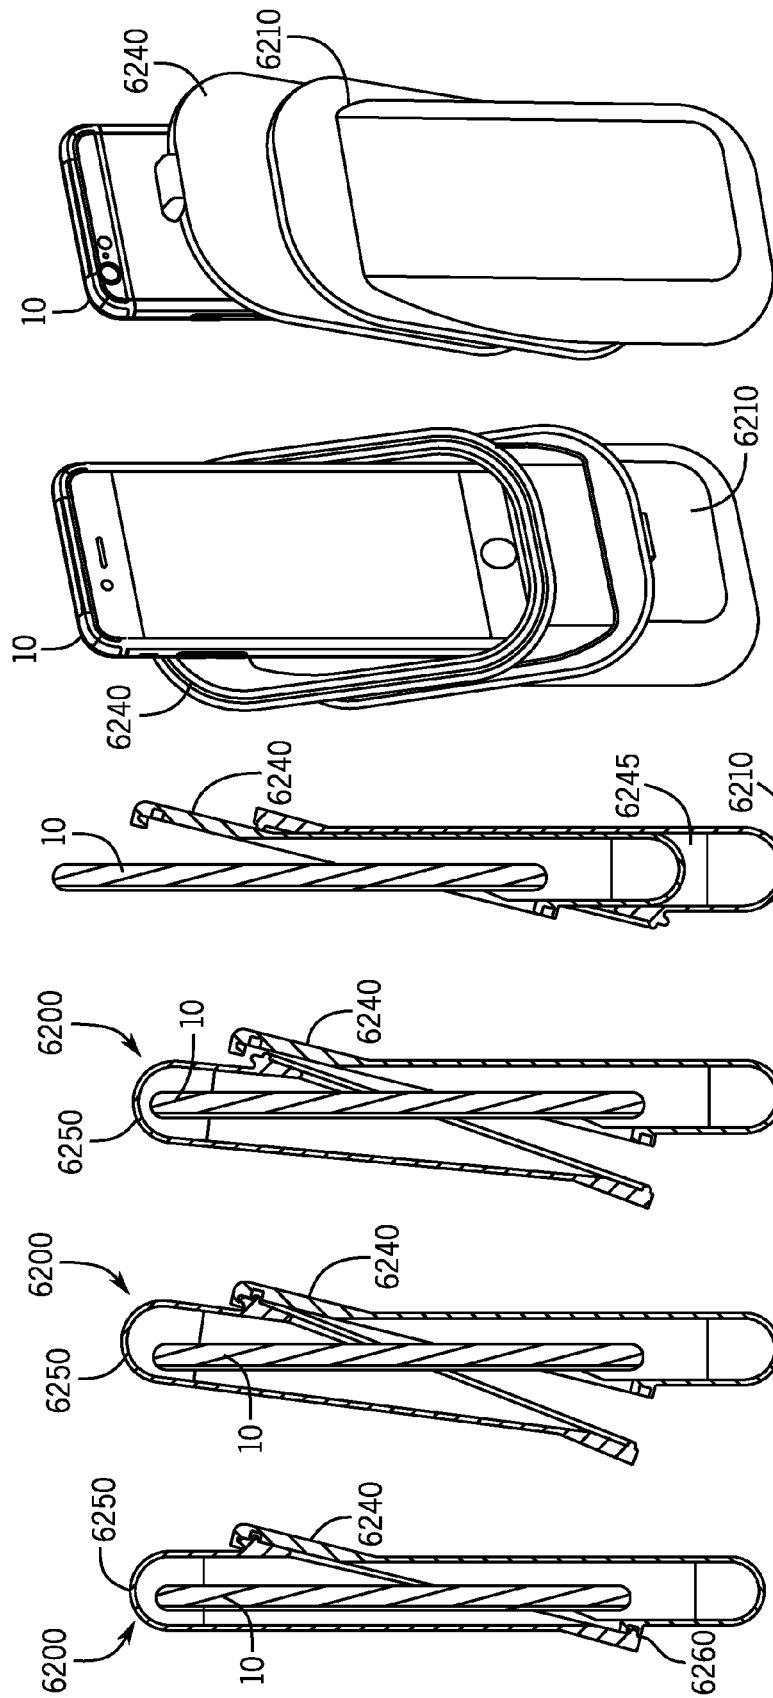
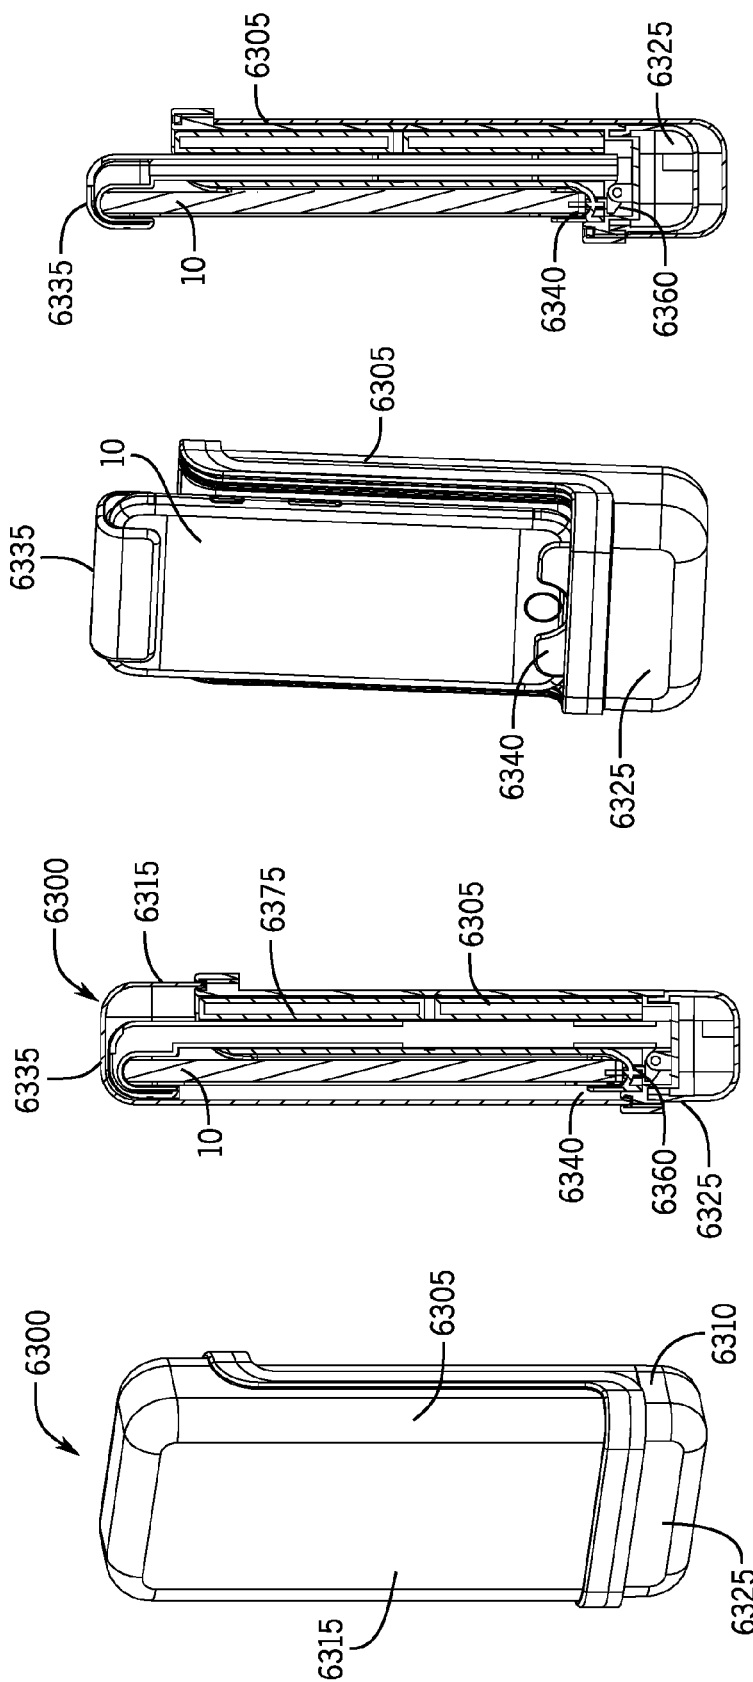


FIG. 61C





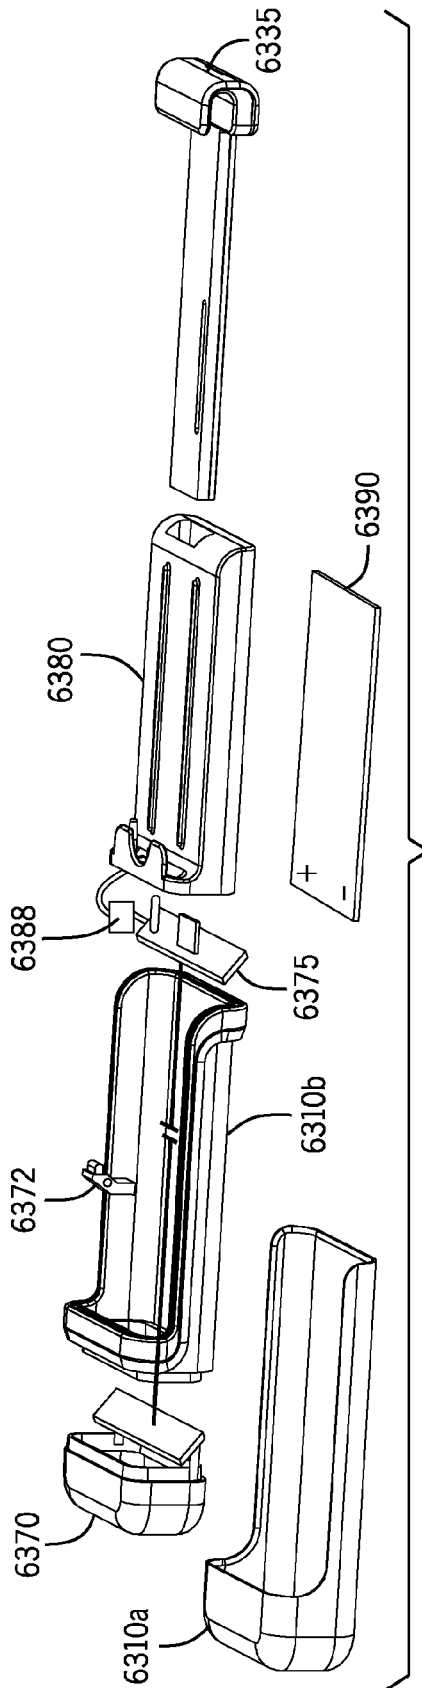


FIG. 64A

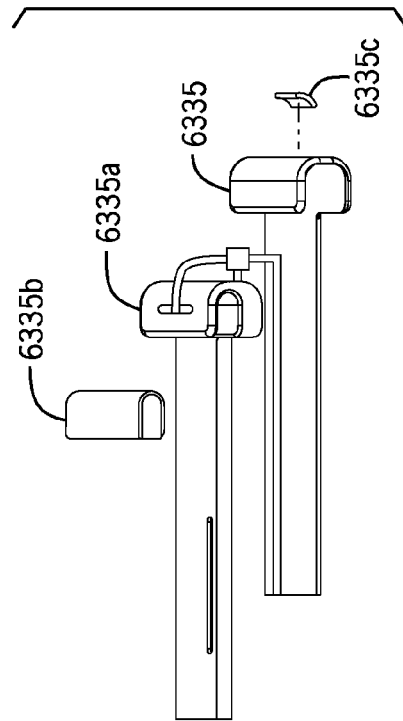


FIG. 64C

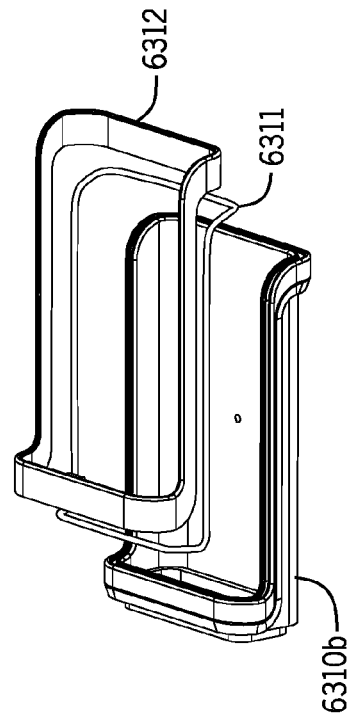


FIG. 64B

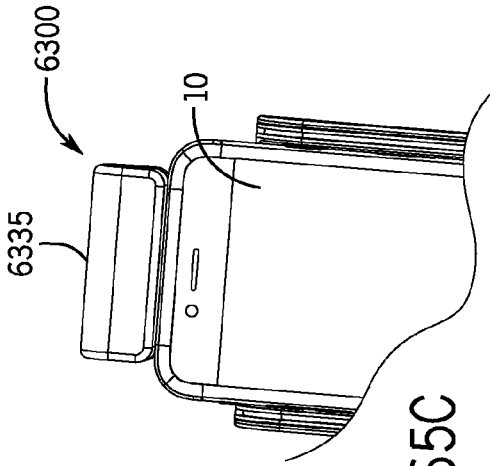


FIG. 65C

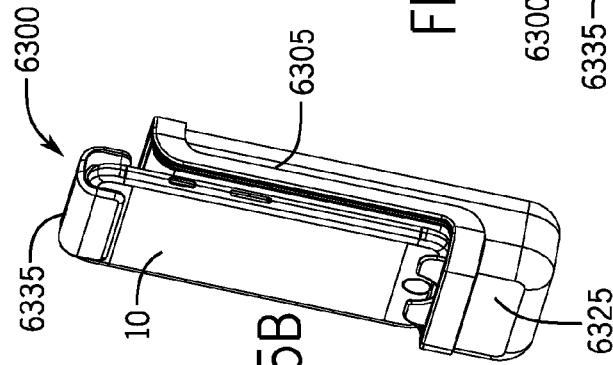


FIG. 65B

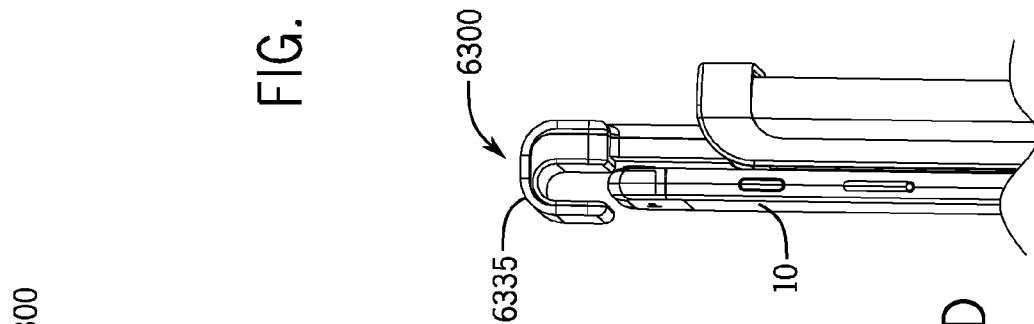


FIG. 65D

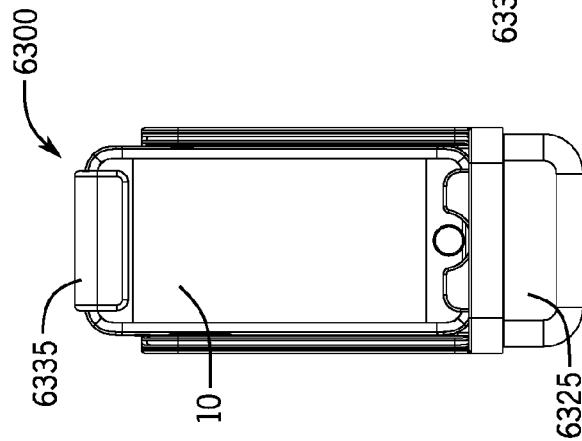


FIG. 65A

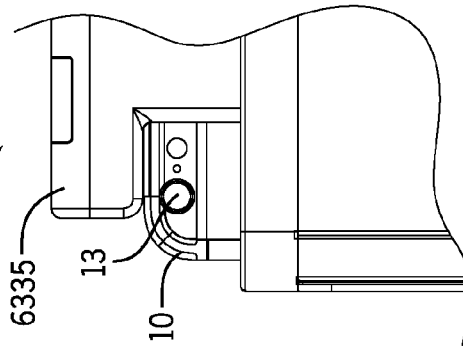


FIG. 65E

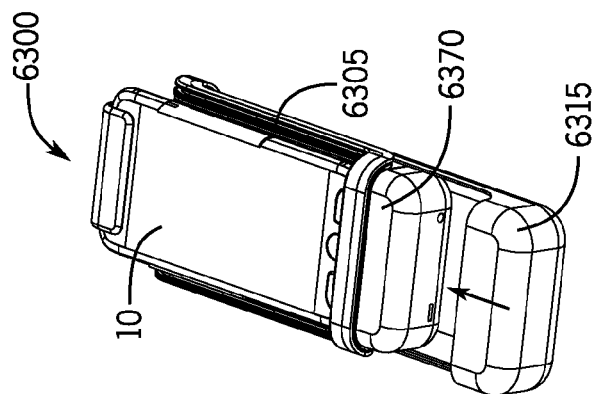


FIG. 66C

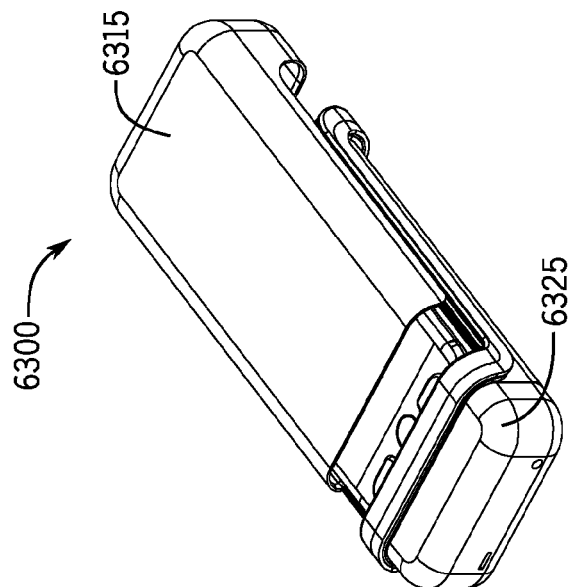


FIG. 66B

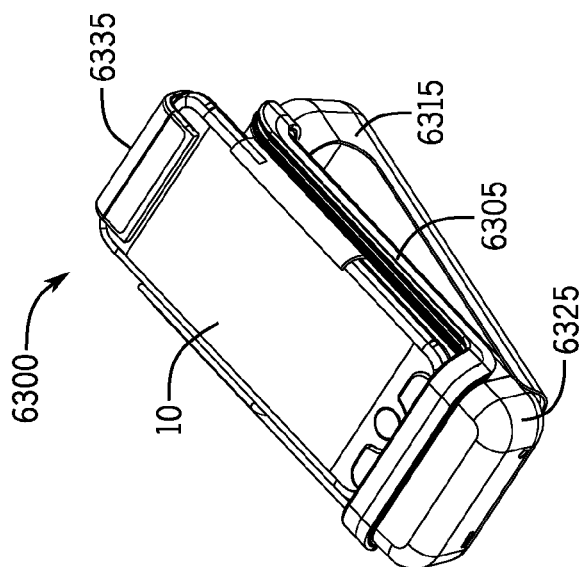


FIG. 66A

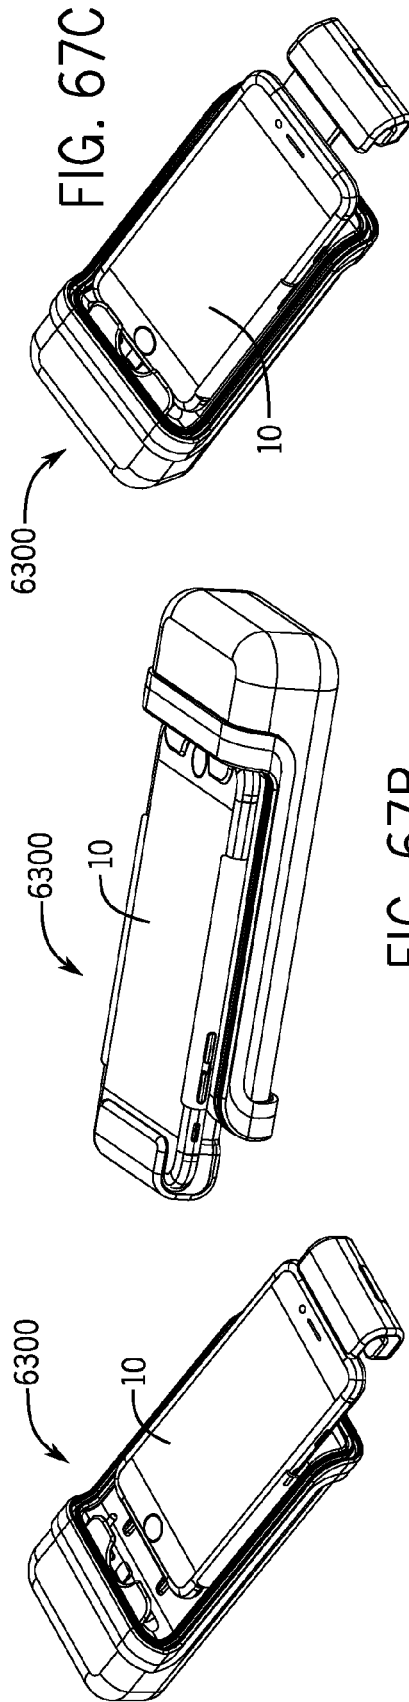


FIG. 67B

FIG. 67A

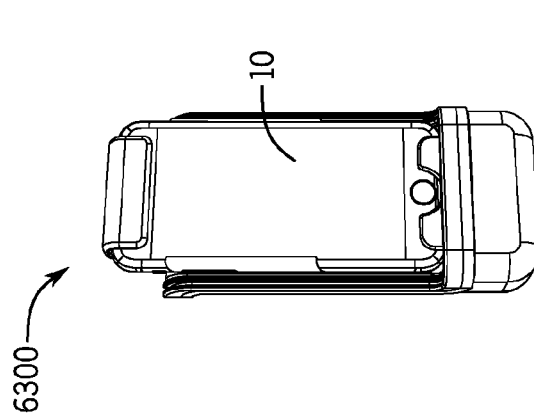


FIG. 67E

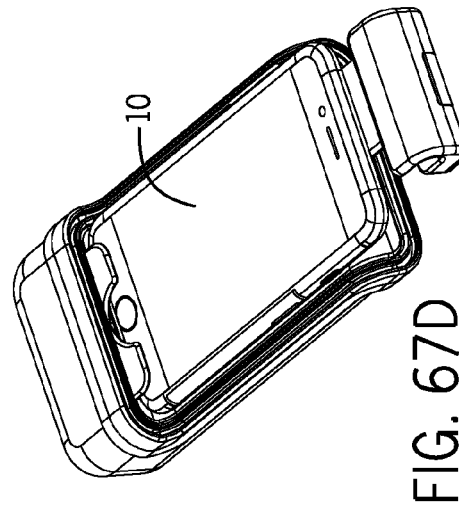


FIG. 67F

FIG. 67D

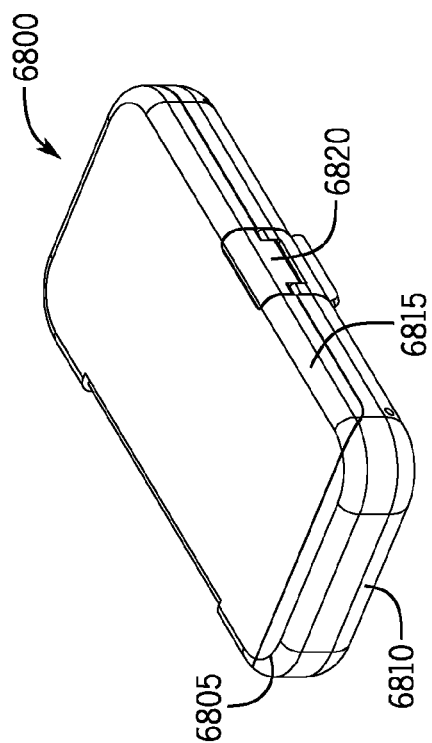


FIG. 68

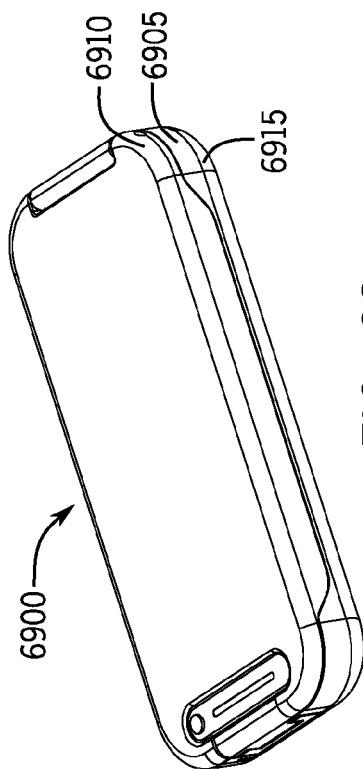


FIG. 69

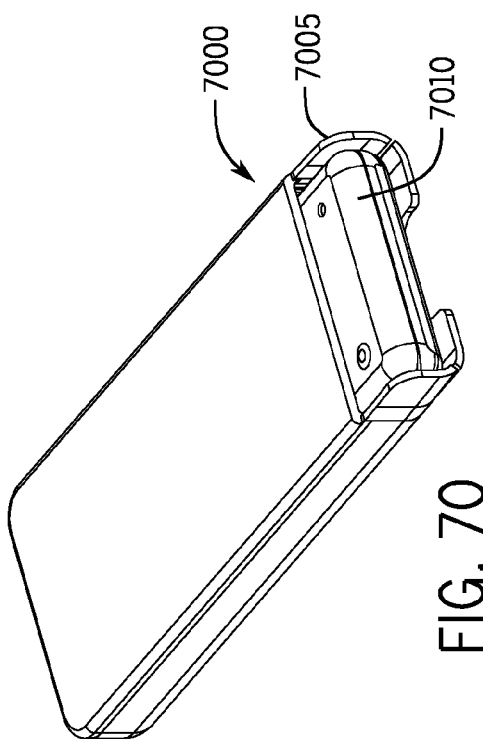


FIG. 70

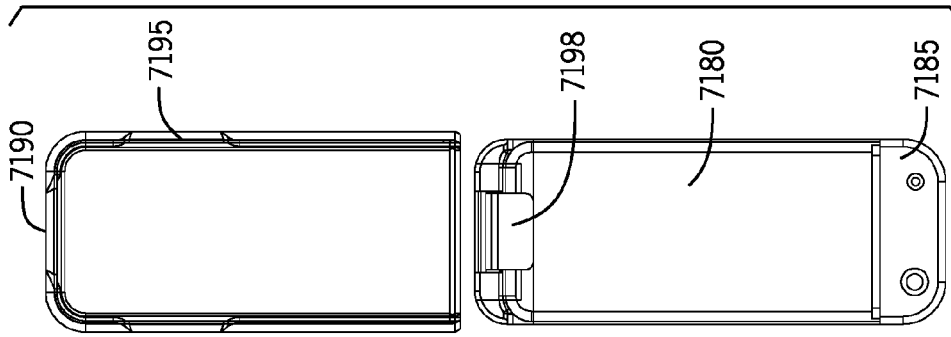


FIG. 71D

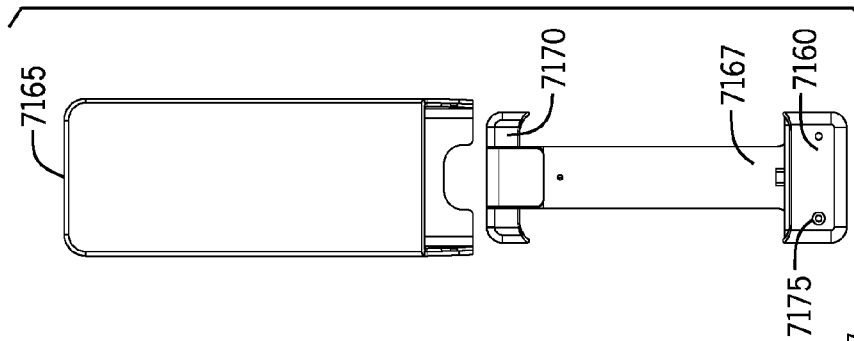


FIG. 71C

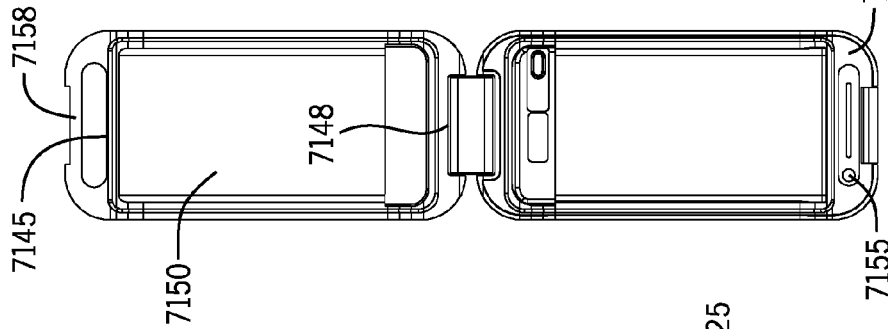


FIG. 71B

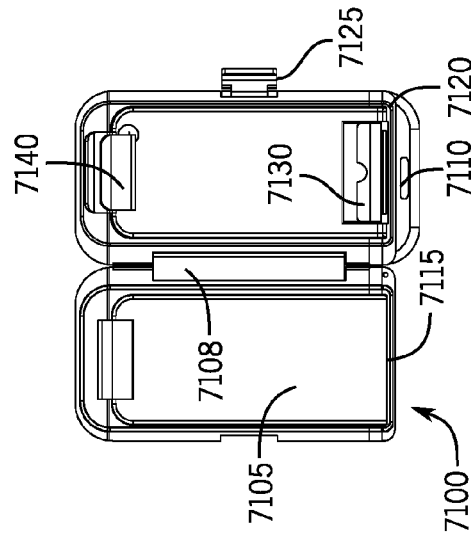


FIG. 71A

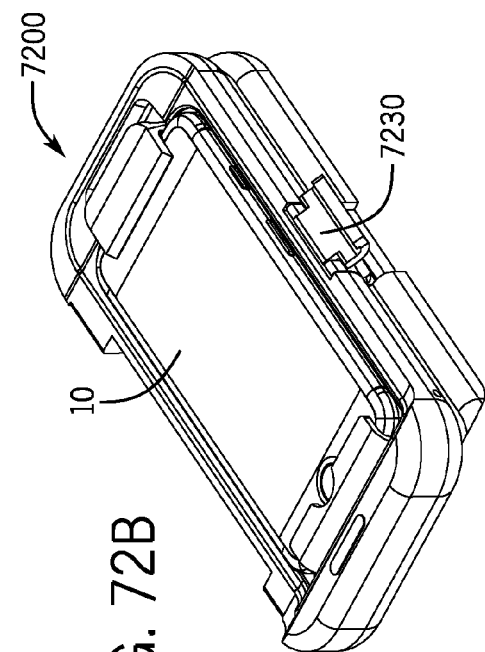


FIG. 72B

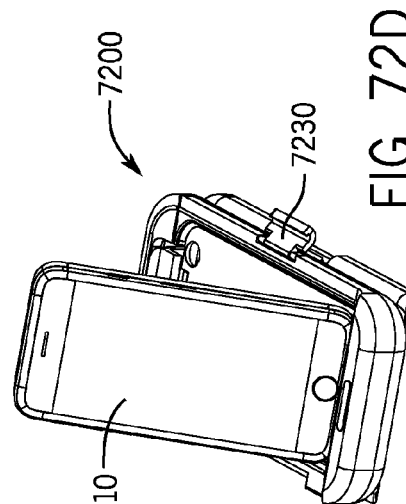


FIG. 72D

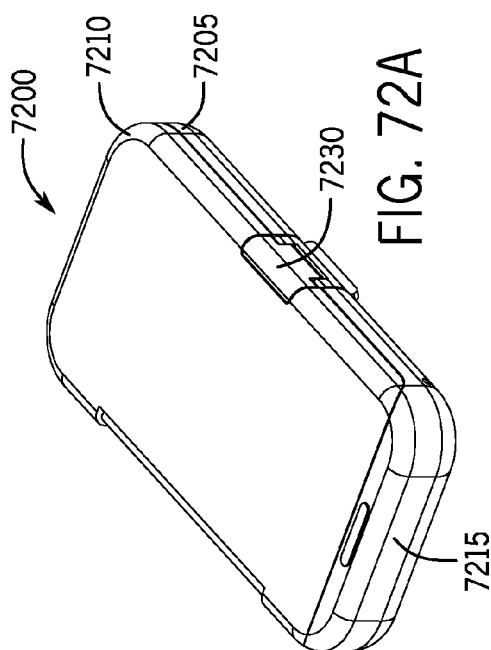


FIG. 72A

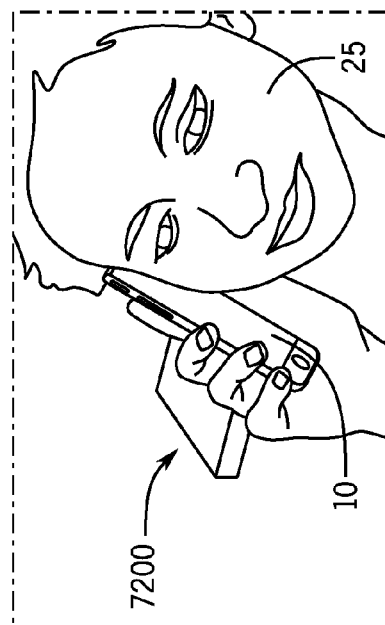
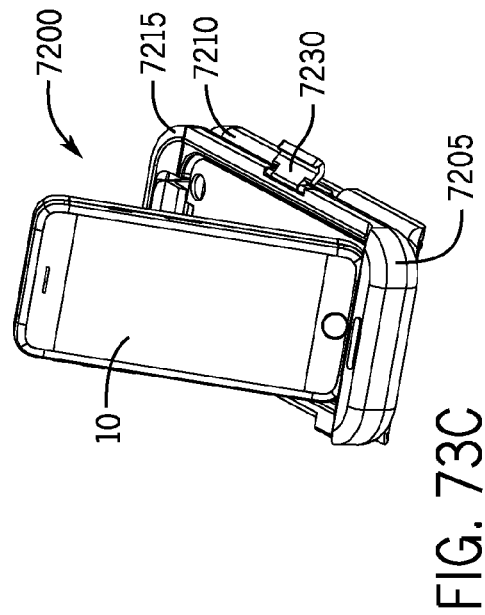
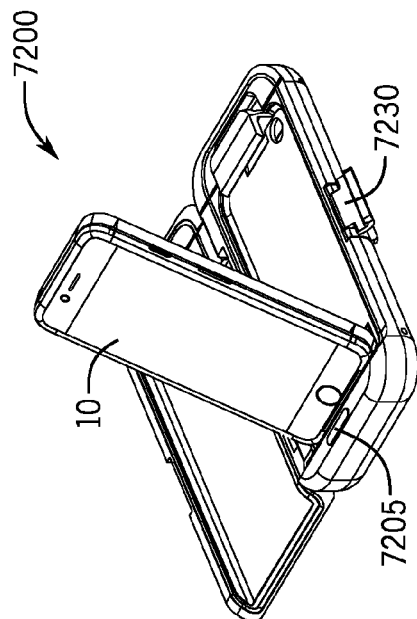
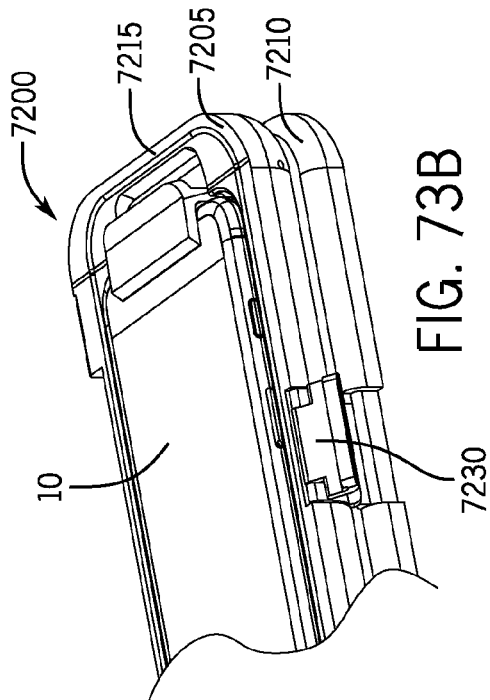


FIG. 72C



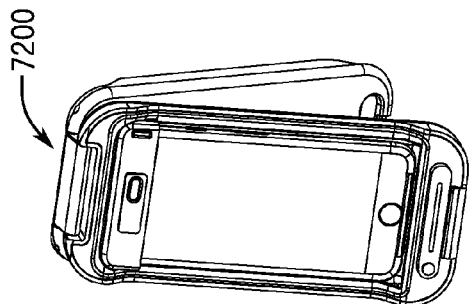


FIG. 74B

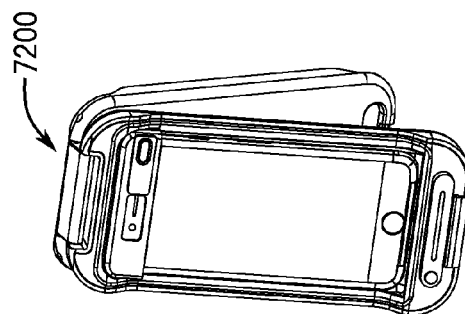


FIG. 74D

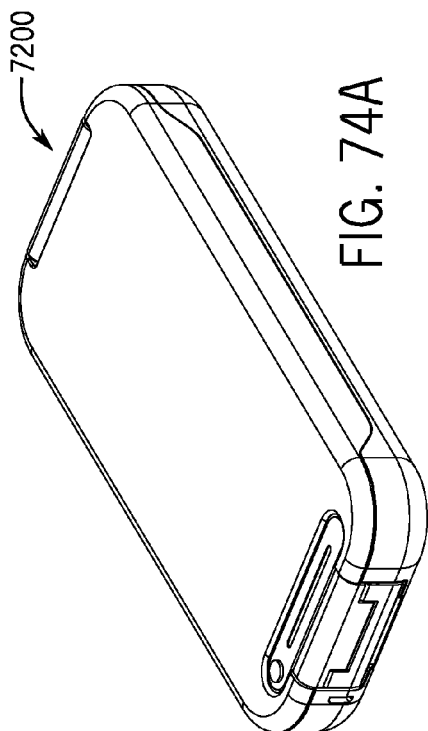


FIG. 74A

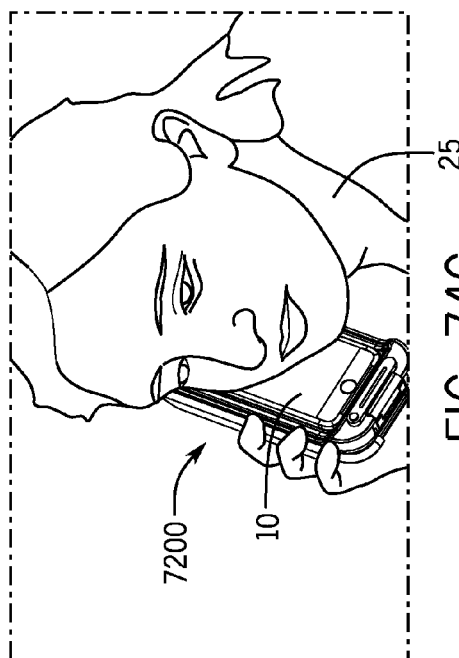


FIG. 74C

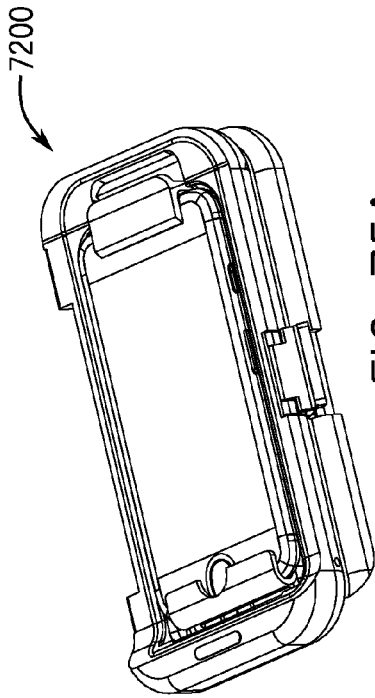


FIG. 75A




FIG. 75B




FIG. 75C

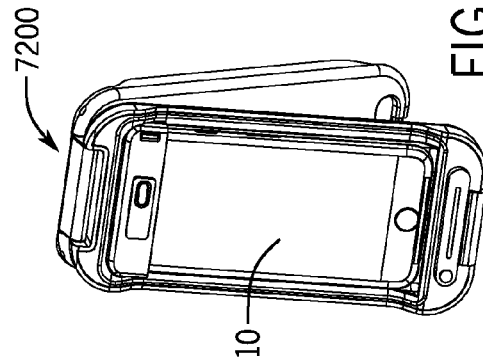


FIG. 75D

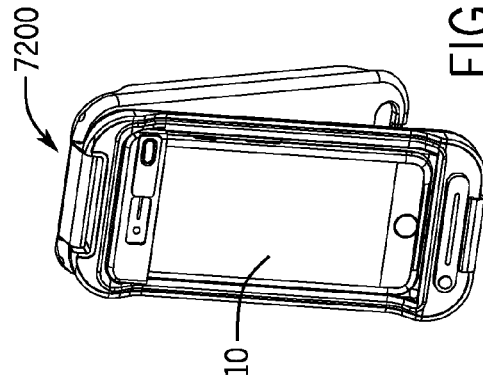


FIG. 75E

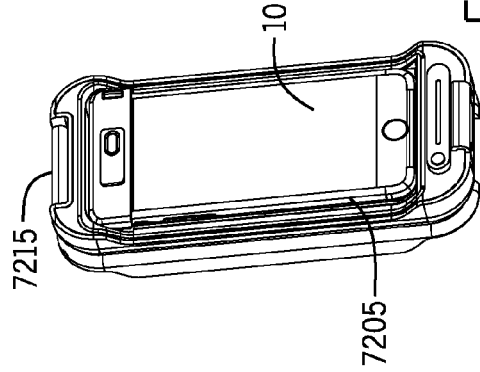
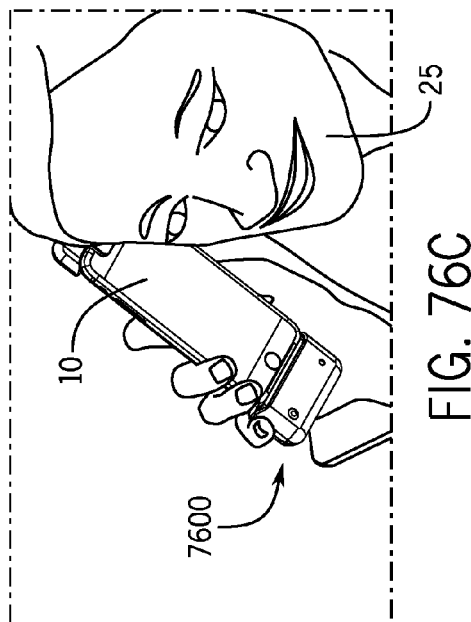
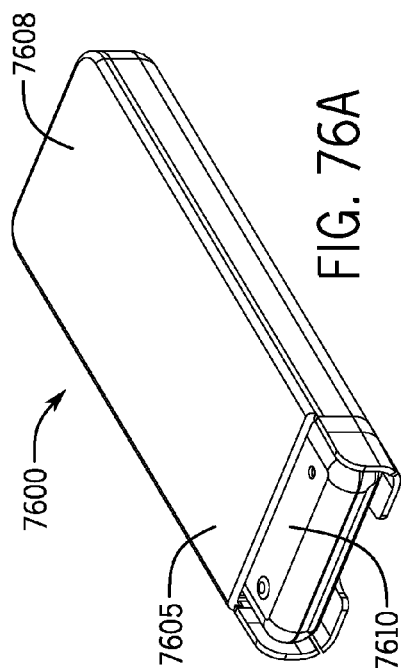
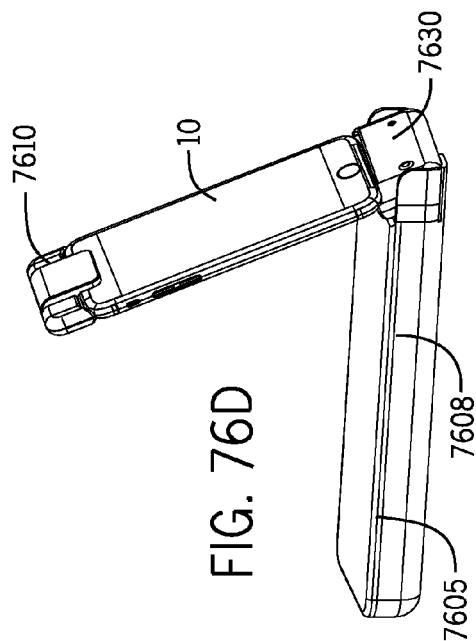
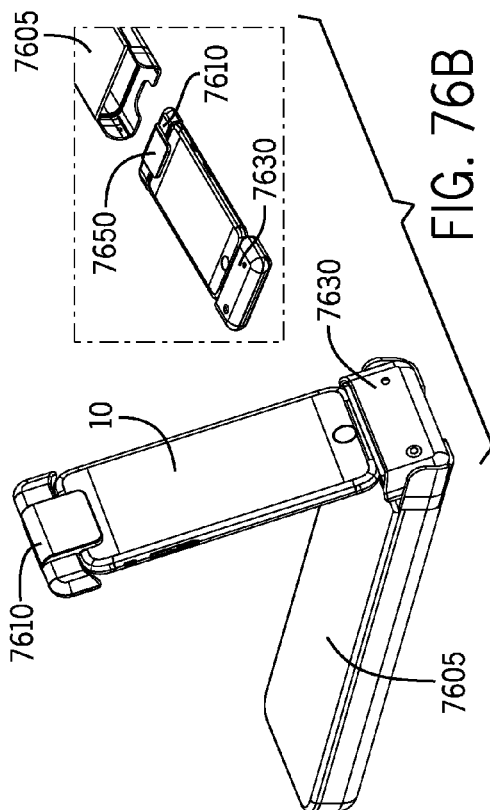
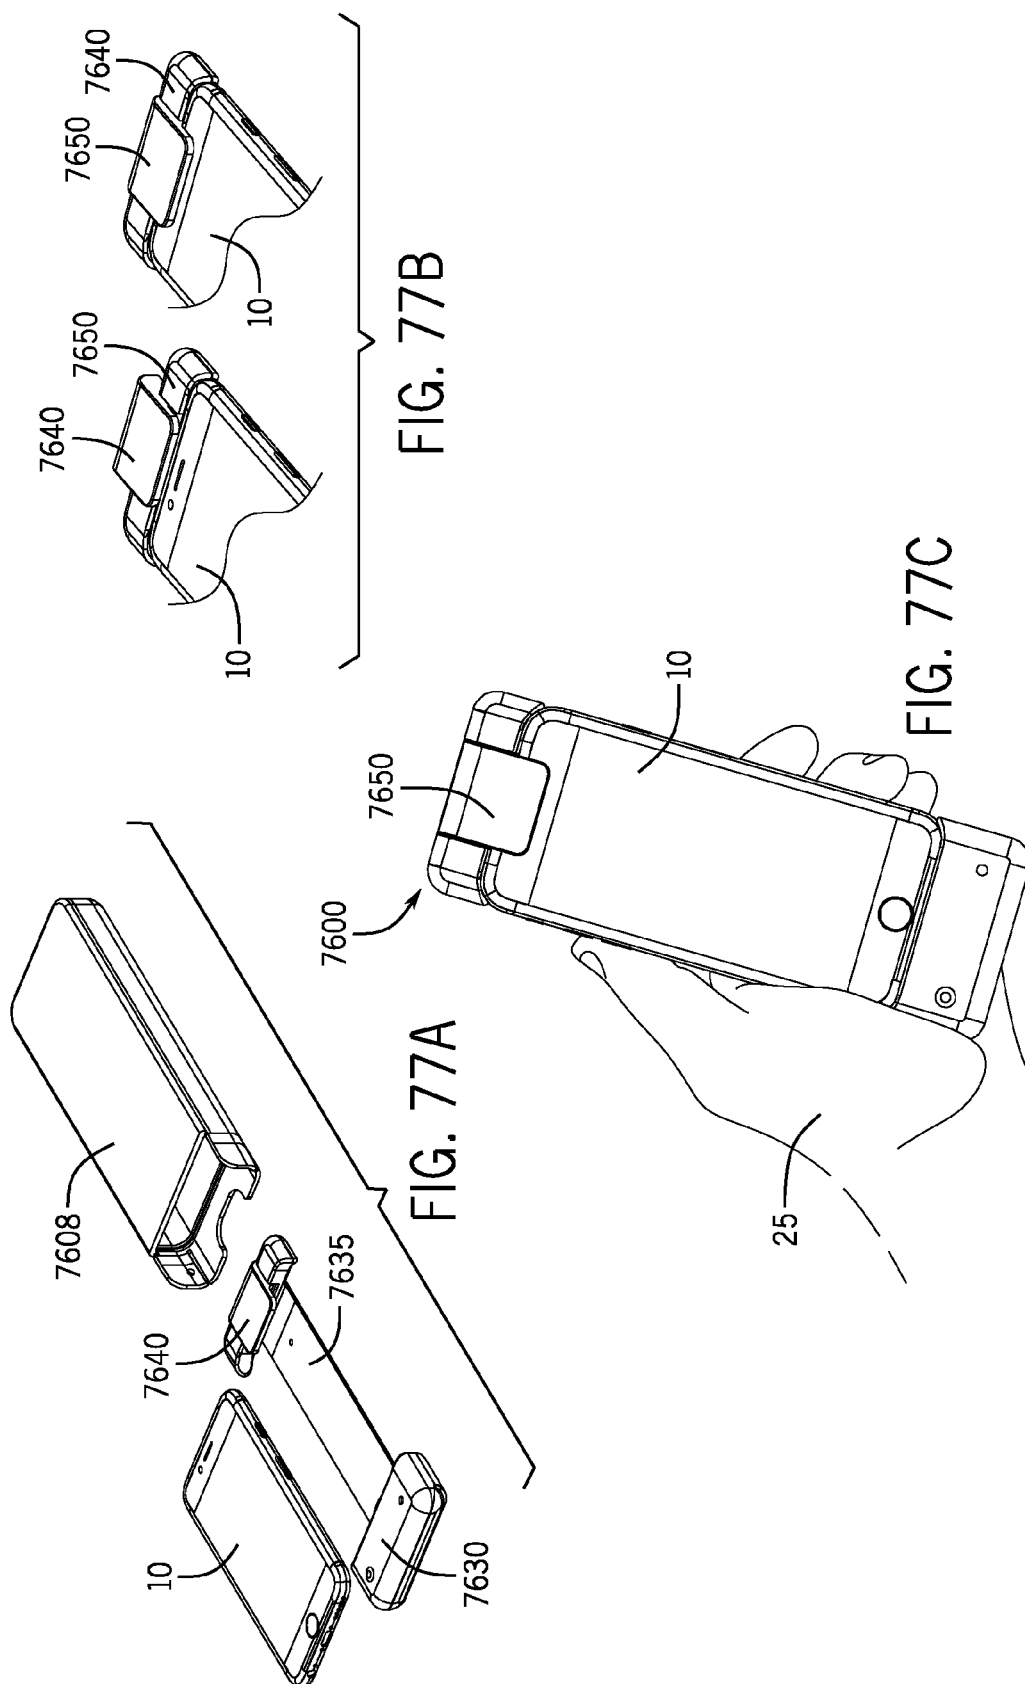


FIG. 75F





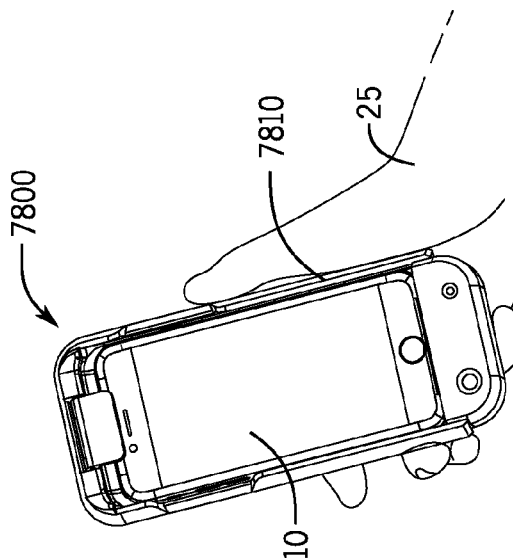


FIG. 78B

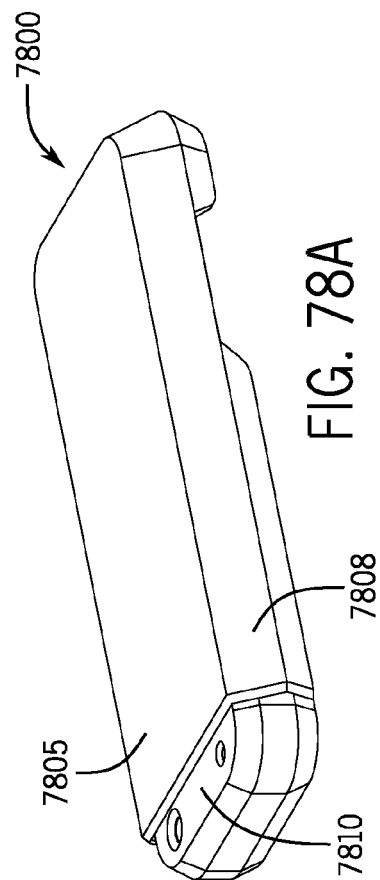


FIG. 78A

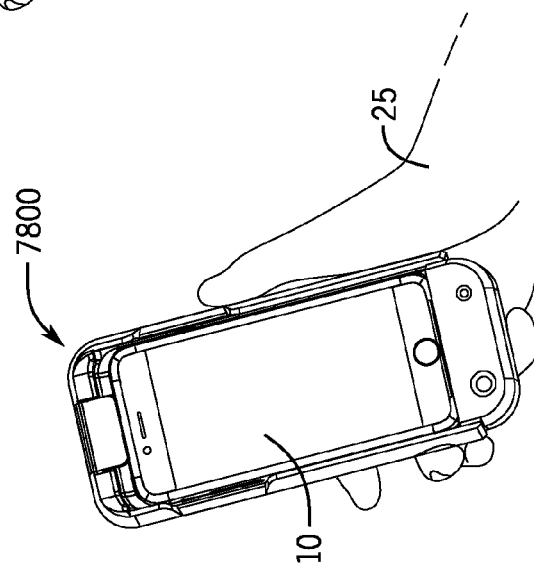


FIG. 78C

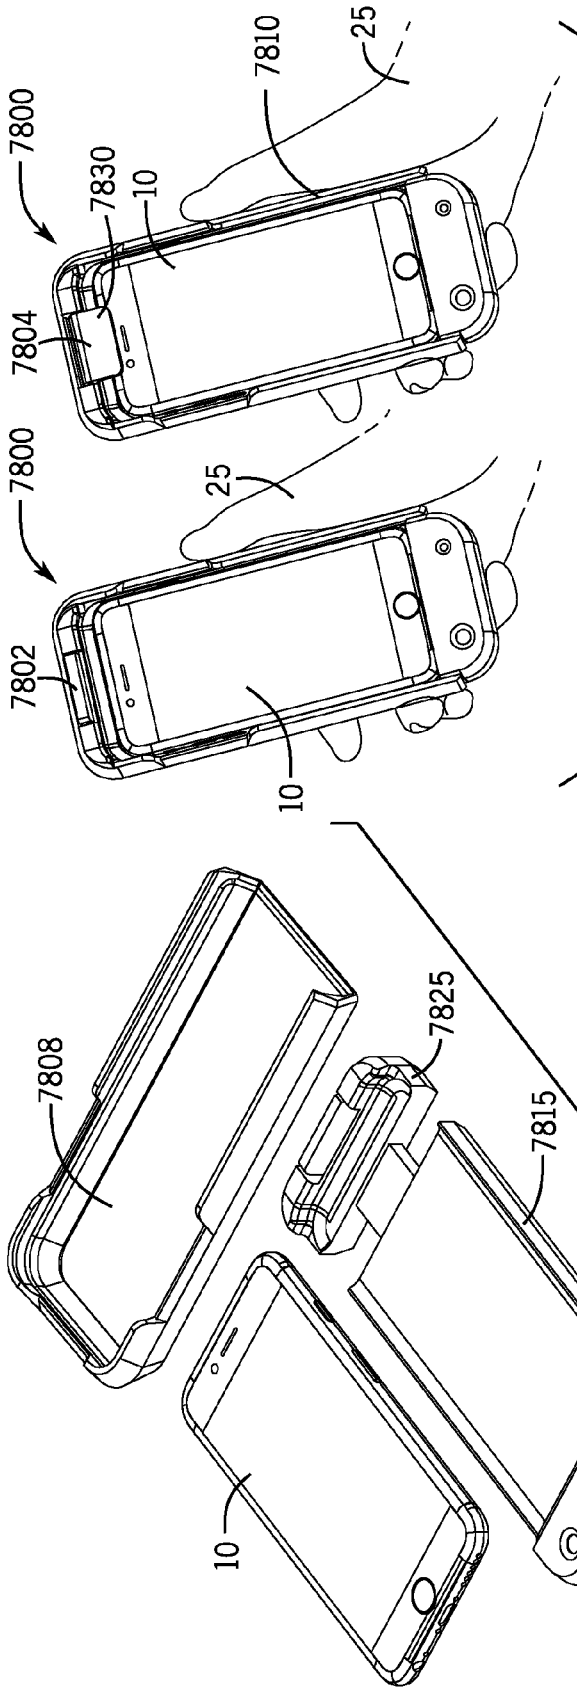


FIG. 79B

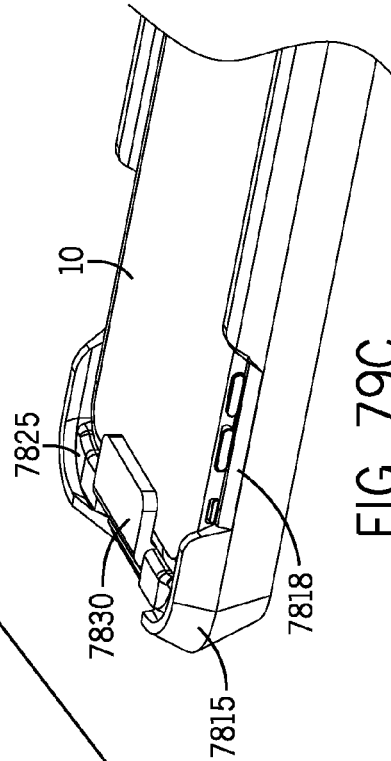
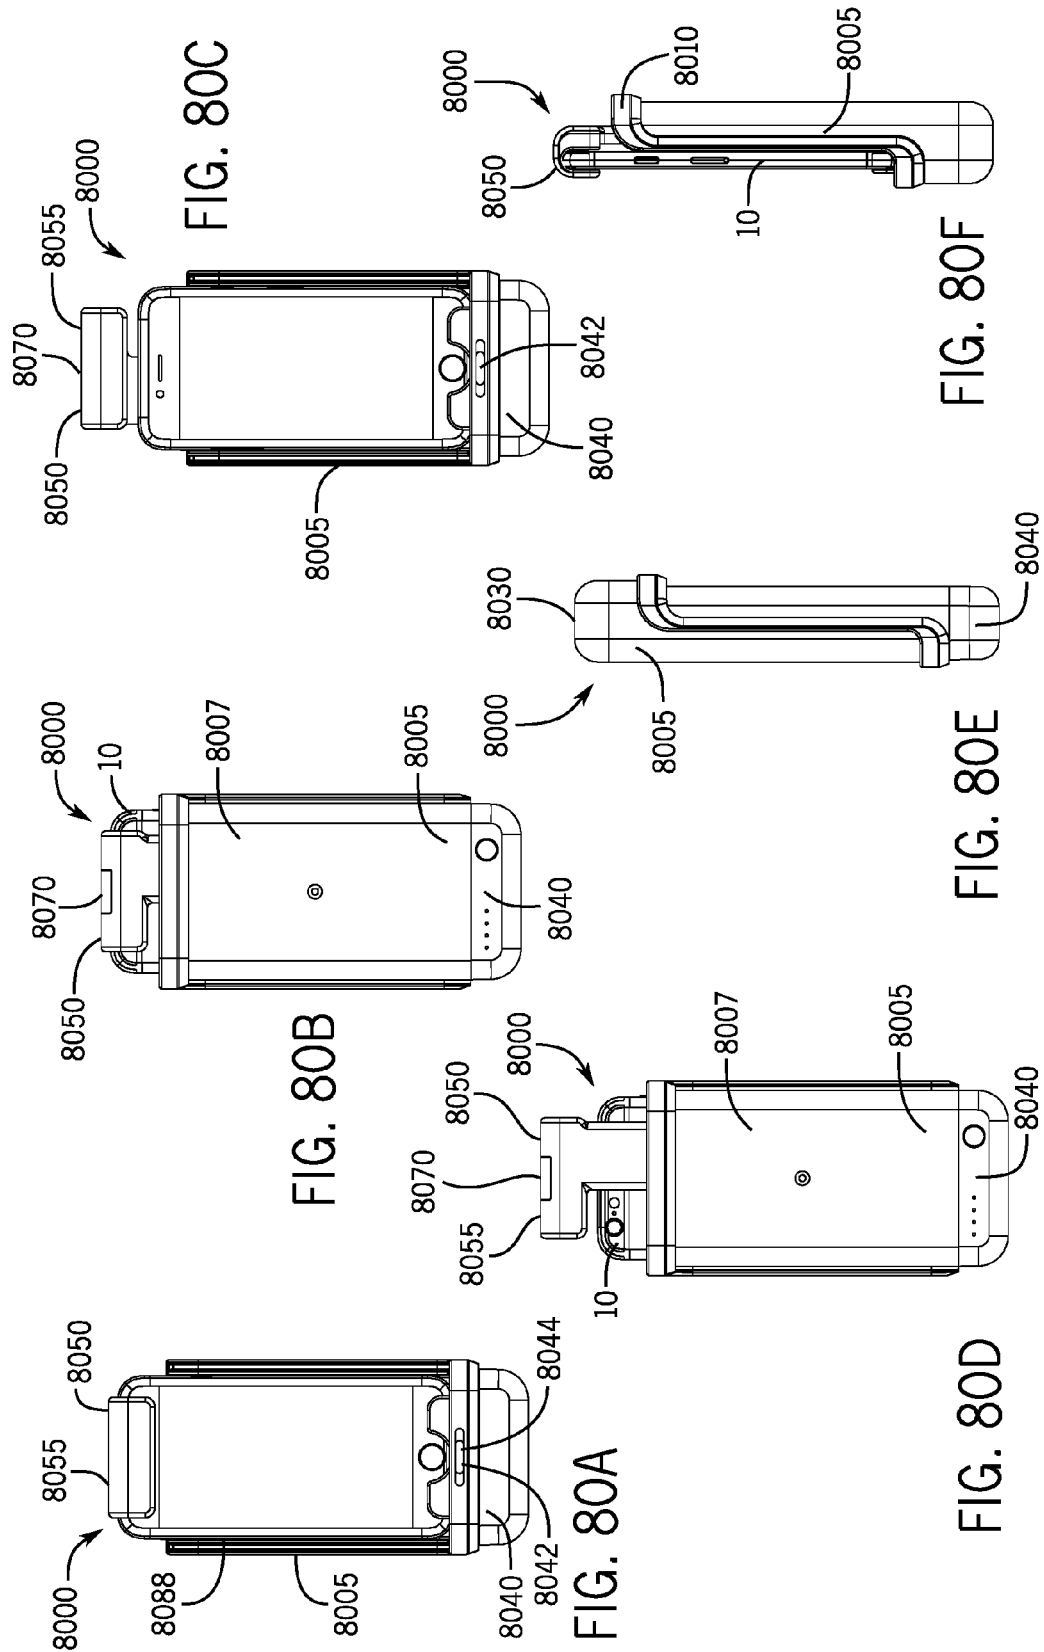
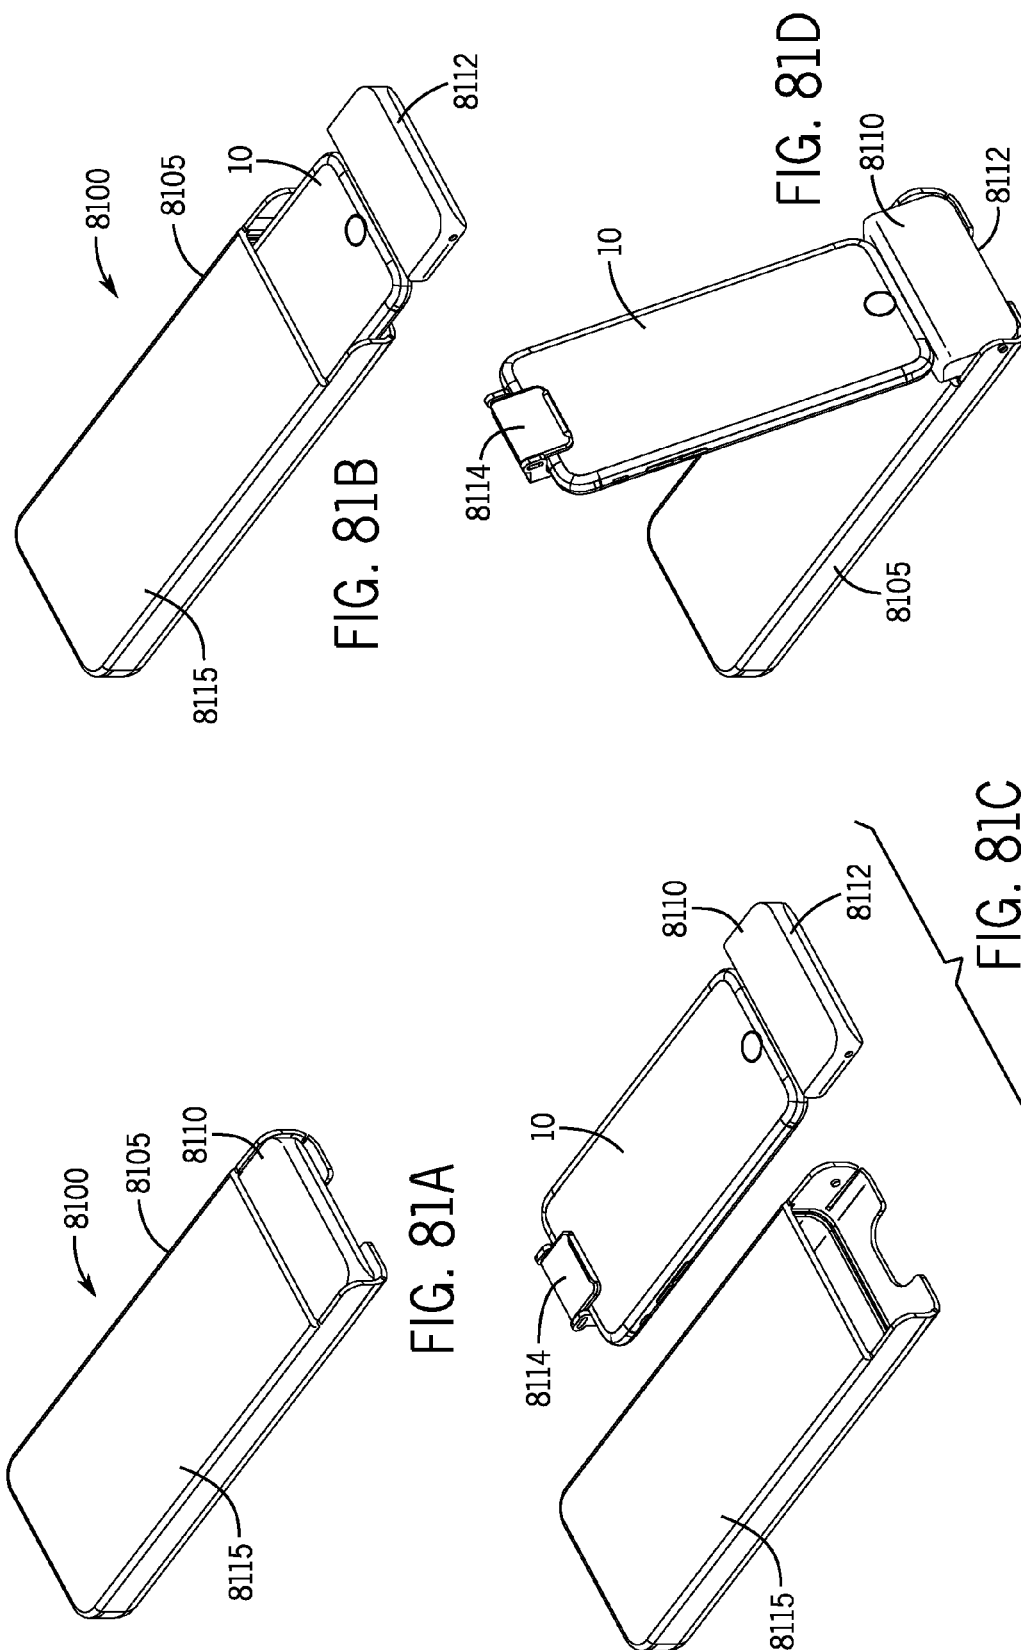


FIG. 79C

FIG. 79A





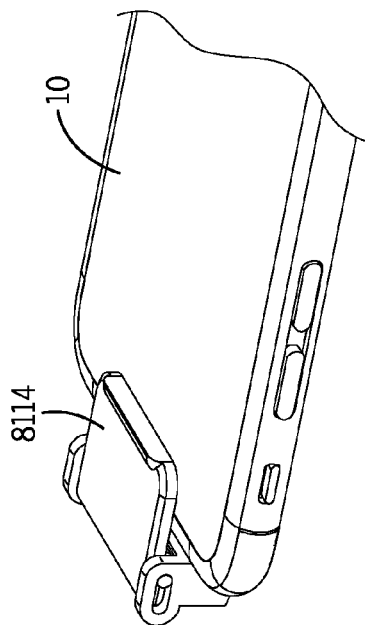


FIG. 82A

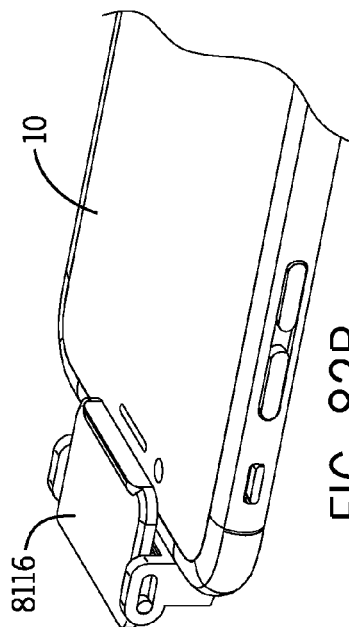


FIG. 82B

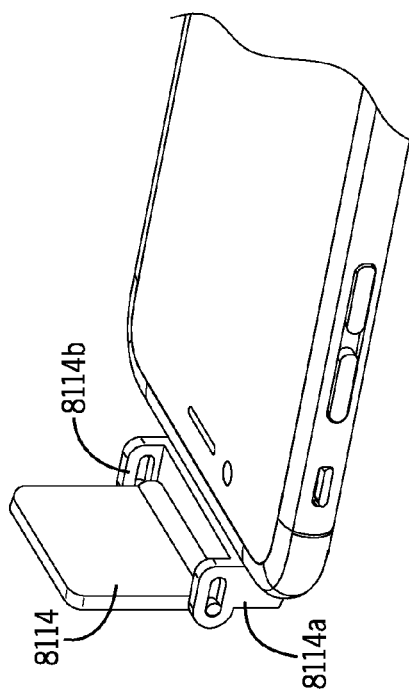


FIG. 82C

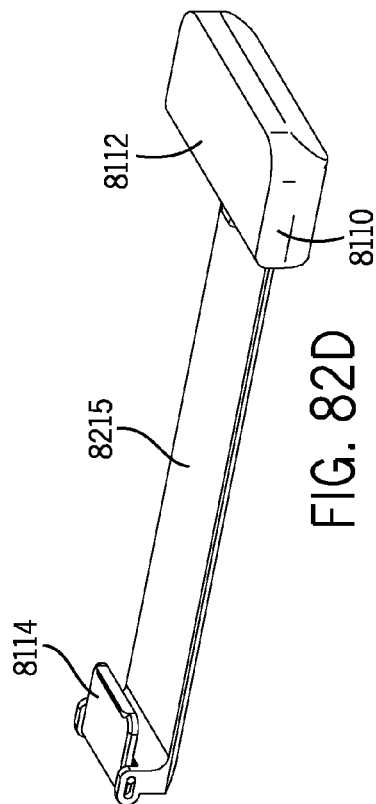


FIG. 82D

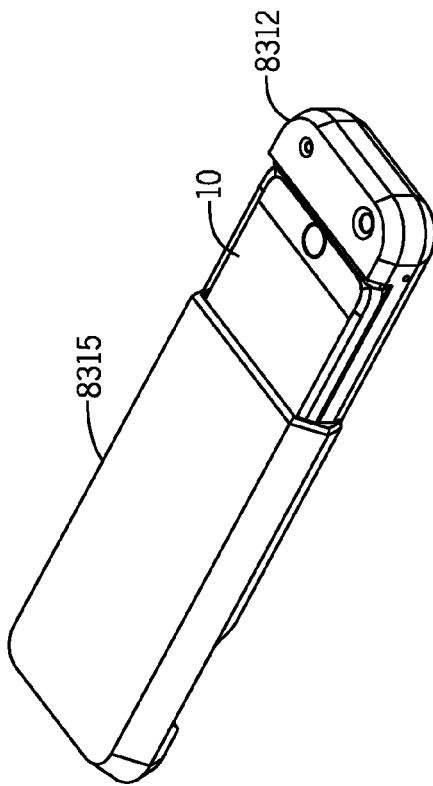


FIG. 83B

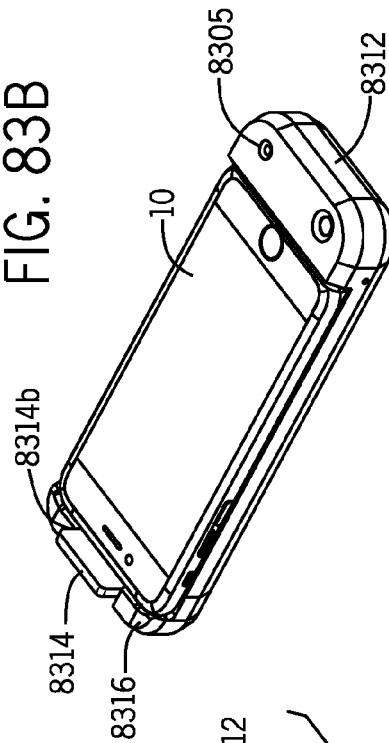


FIG. 83D

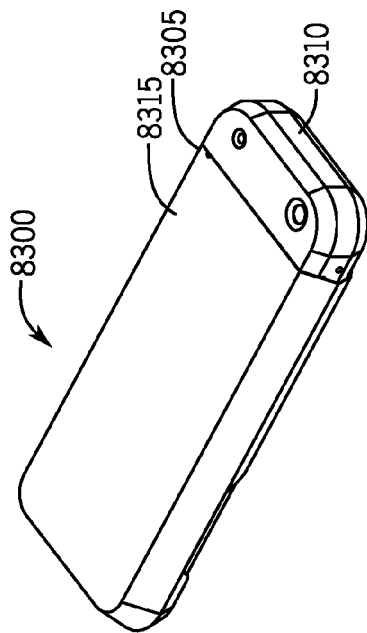


FIG. 83A

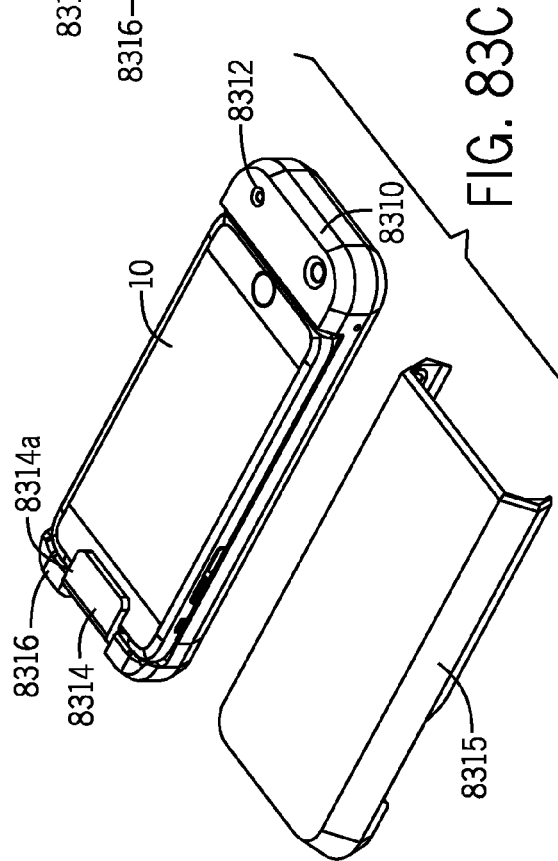


FIG. 83C

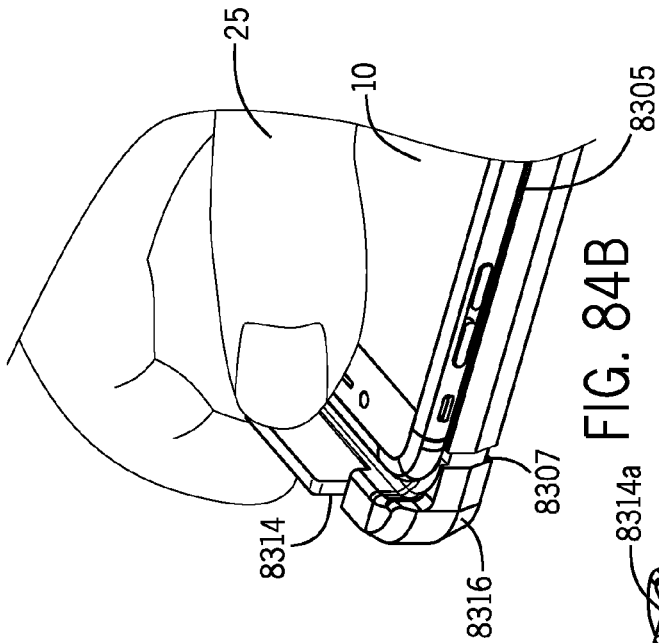


FIG. 84B

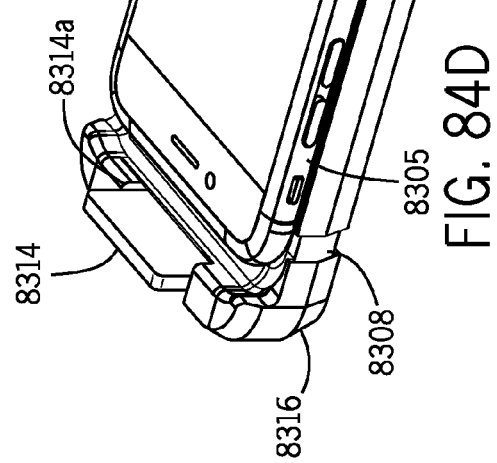


FIG. 84D

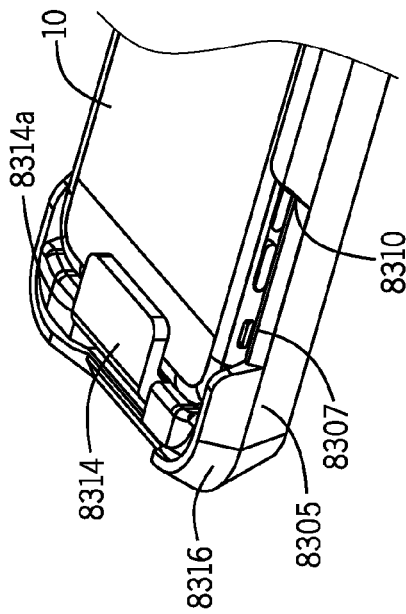


FIG. 84A

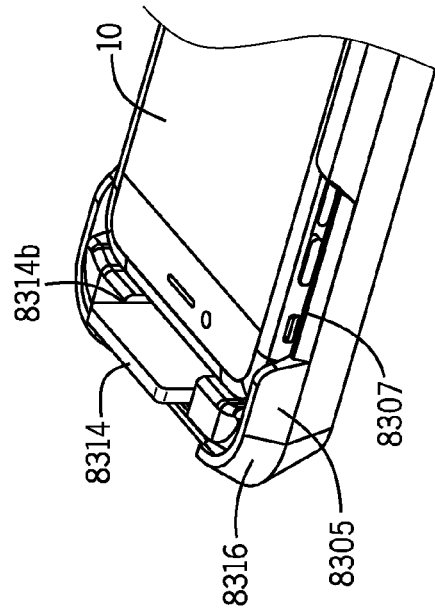


FIG. 84C

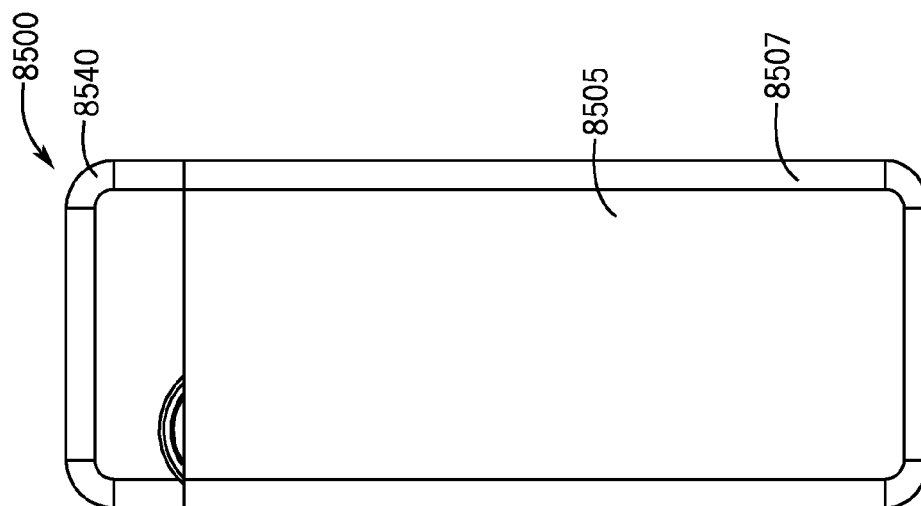


FIG. 85C

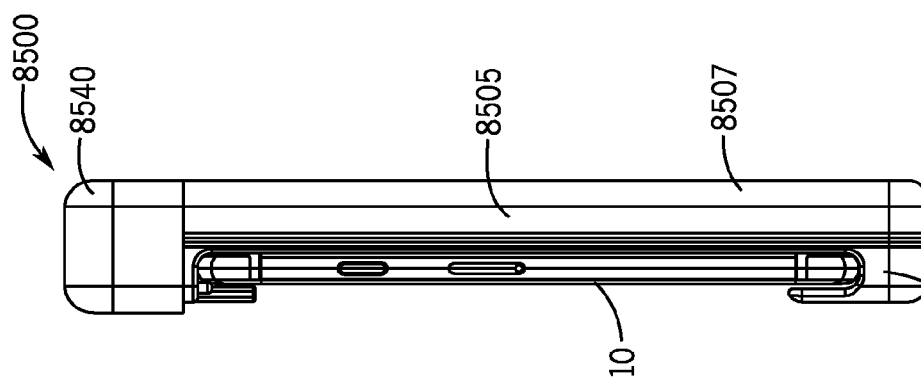


FIG. 85B

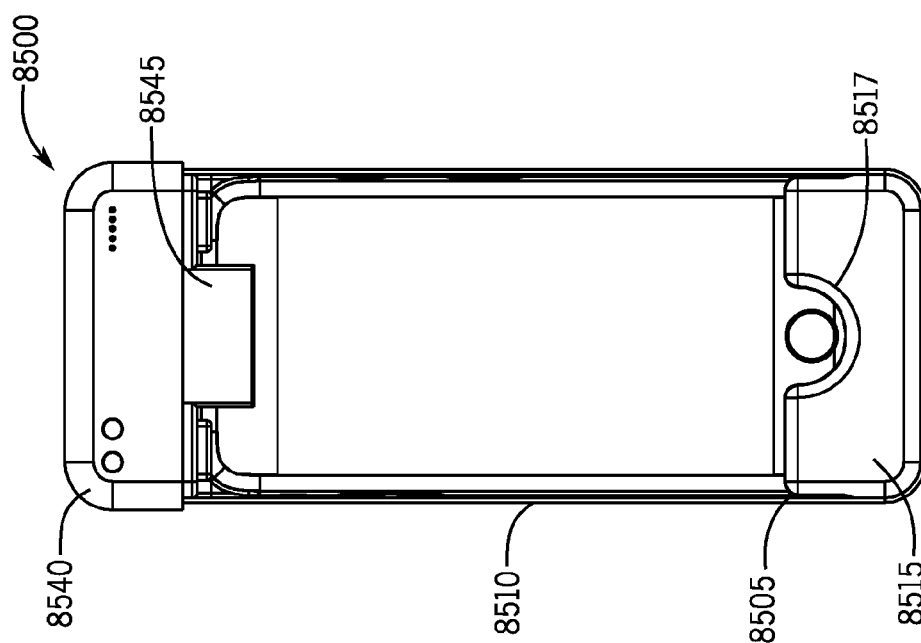


FIG. 85A

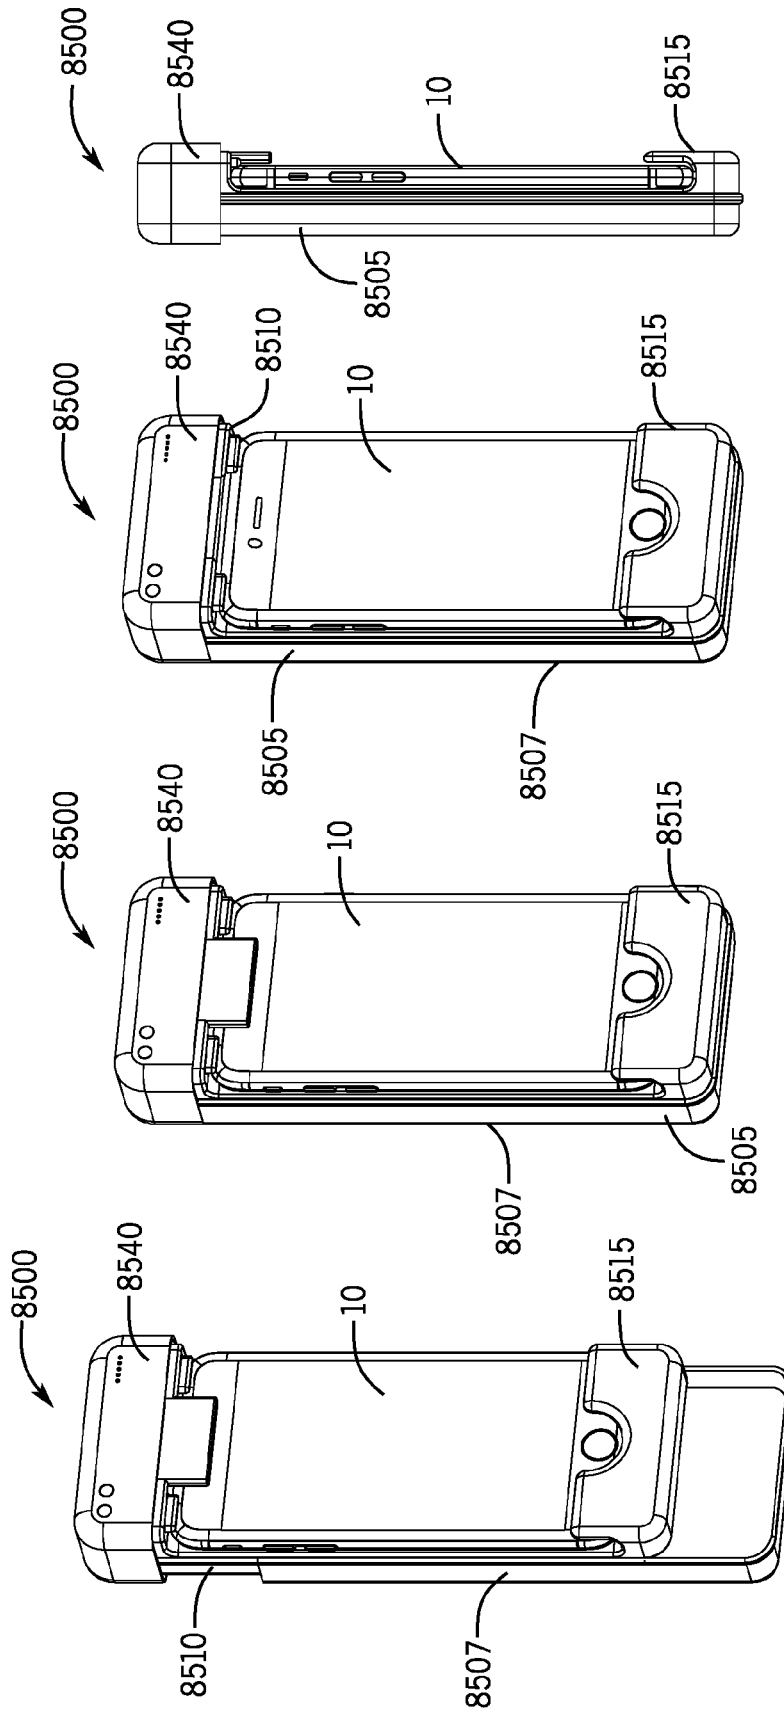
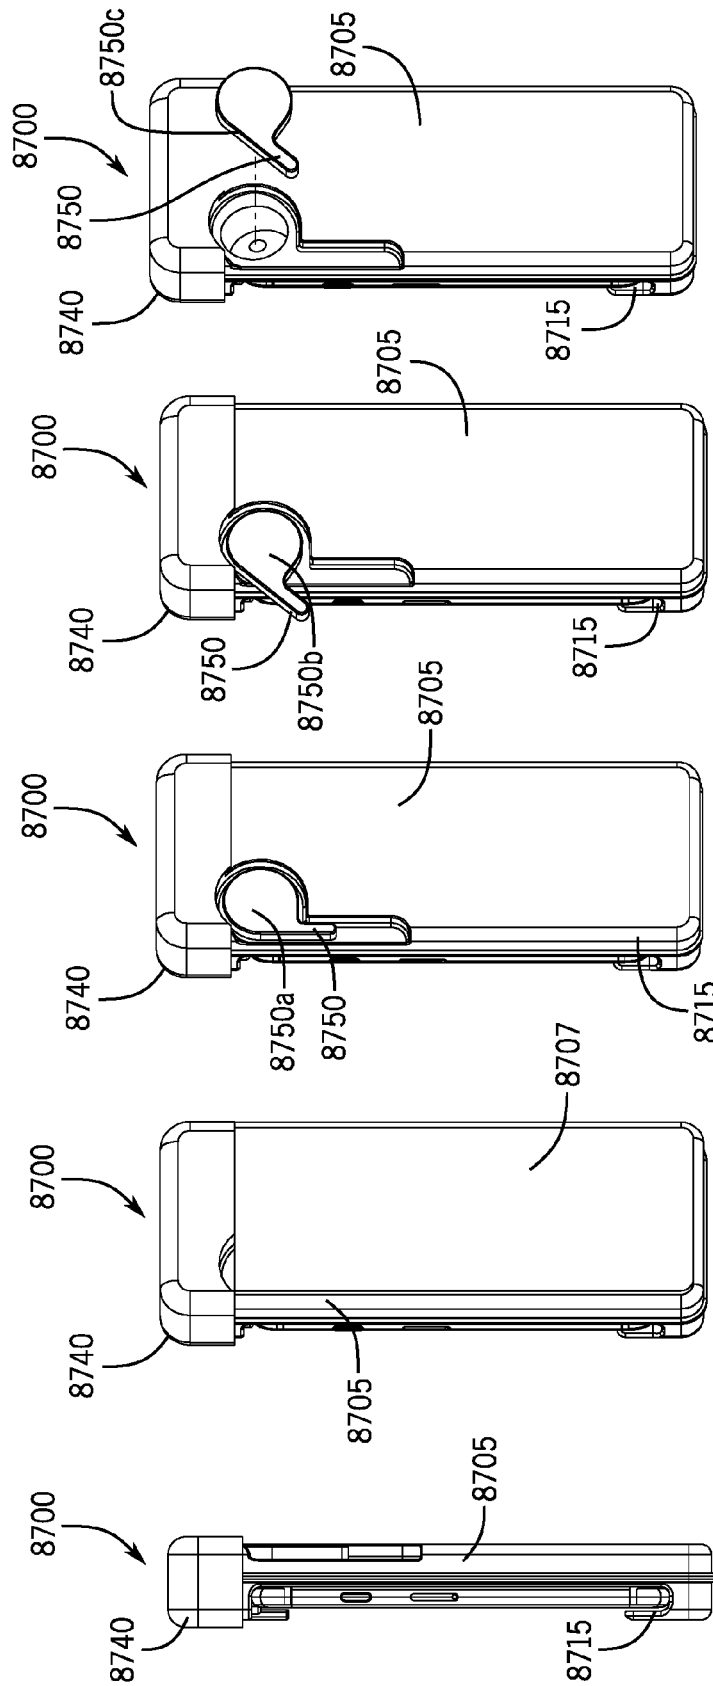


FIG. 86D

FIG. 86C

FIG. 86B

FIG. 86A



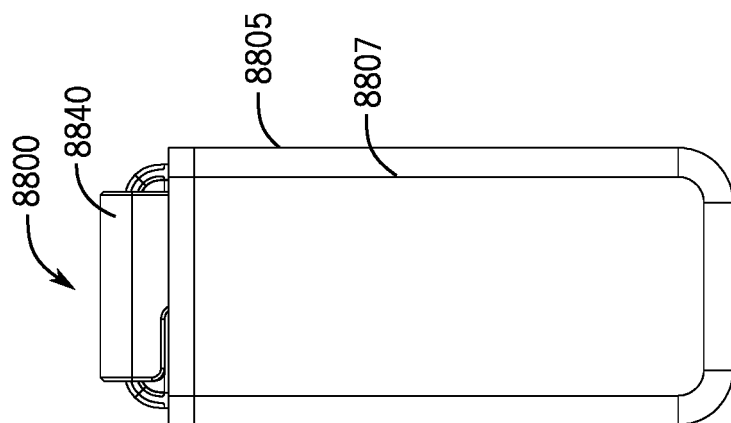


FIG. 88C

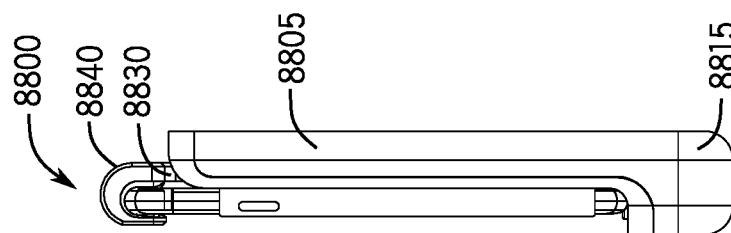


FIG. 88B

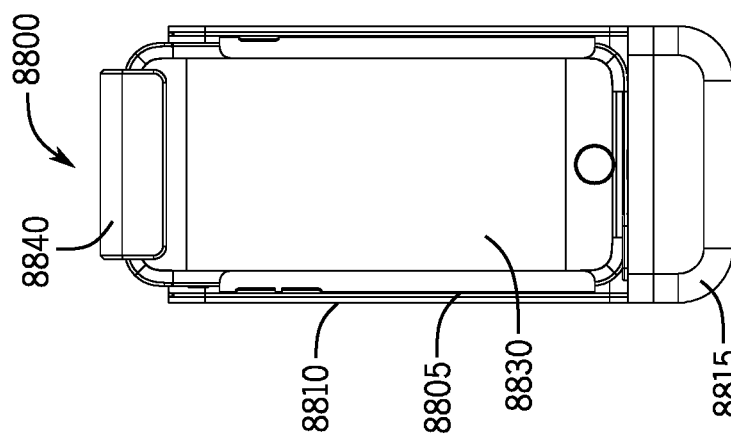
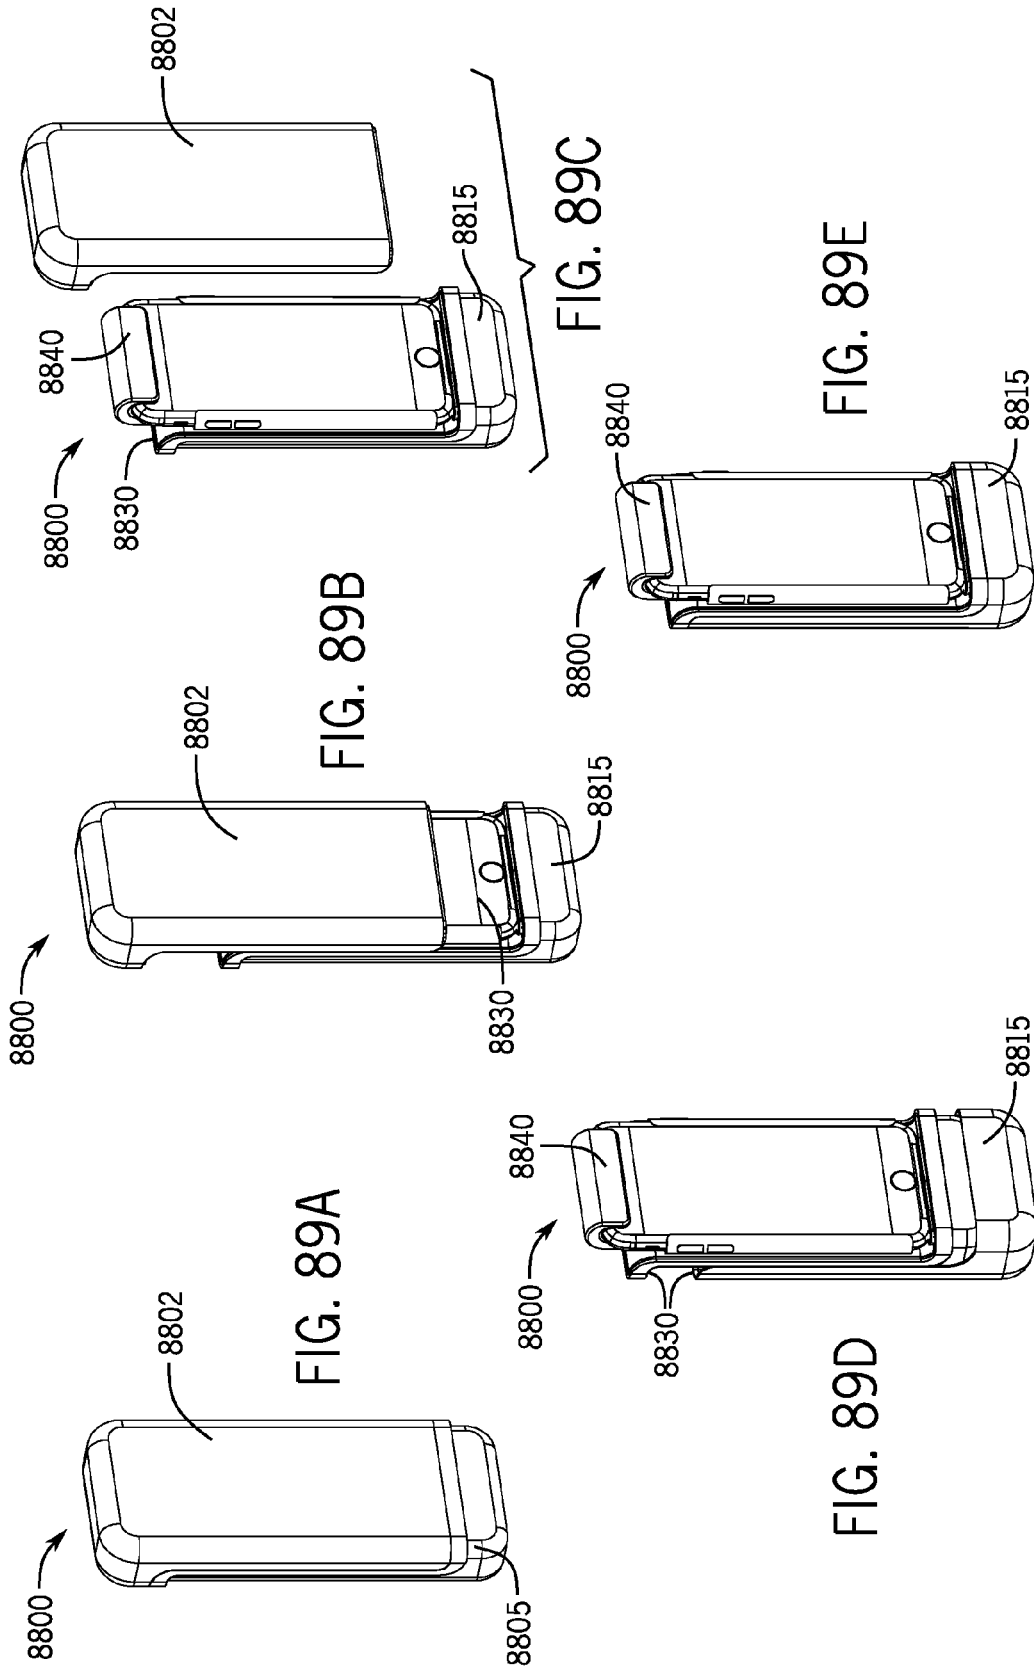


FIG. 88A



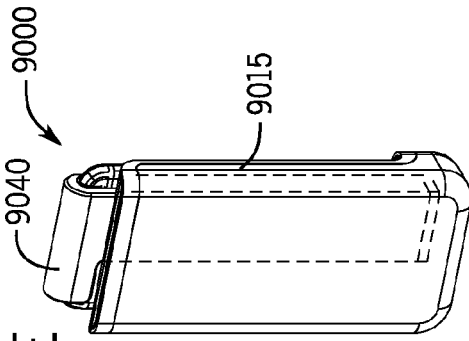


FIG. 90E

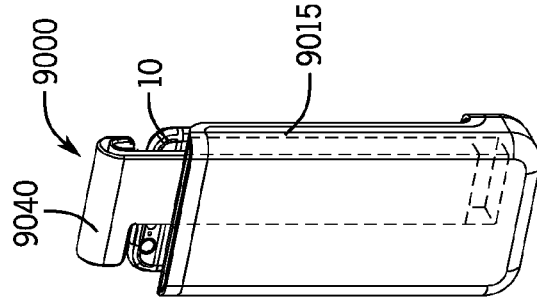


FIG. 90F

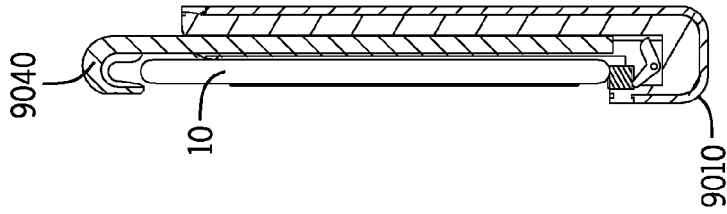


FIG. 90D

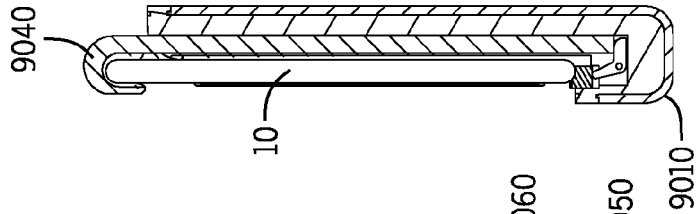


FIG. 90C

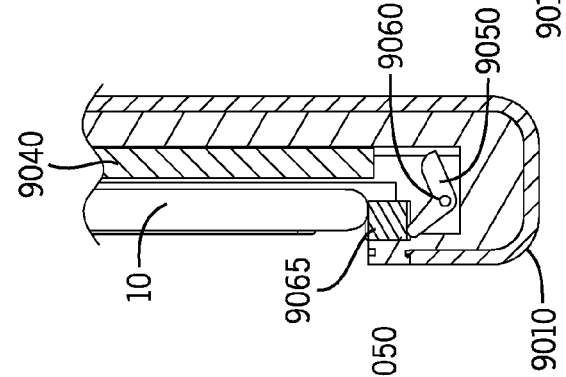


FIG. 90B

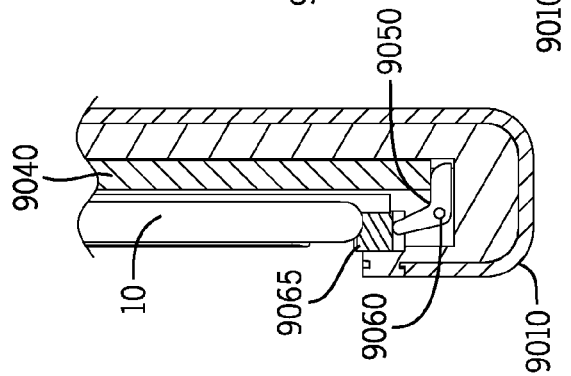


FIG. 90A

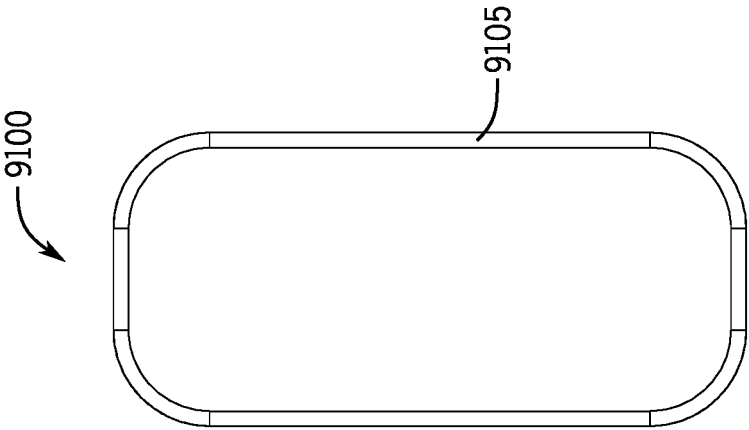


FIG. 91C

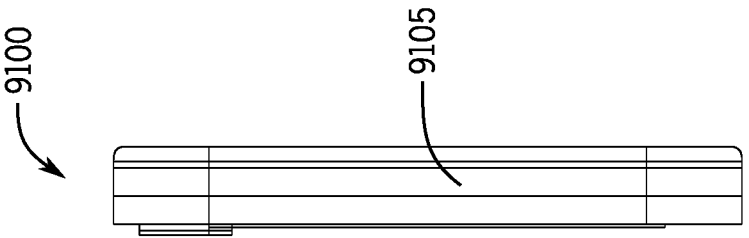


FIG. 91B

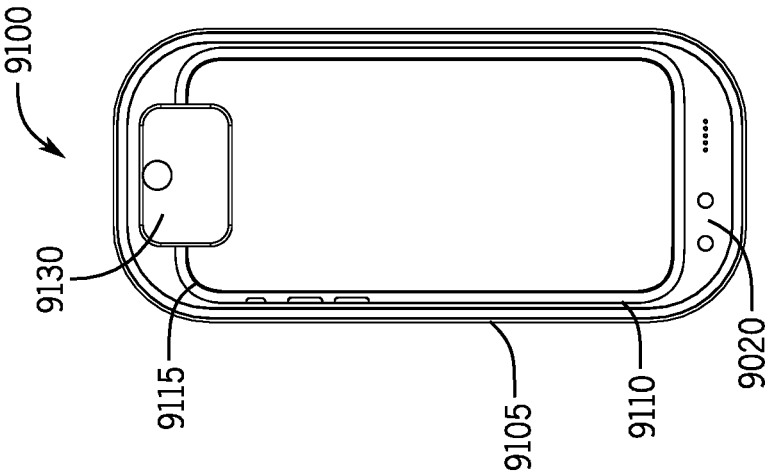


FIG. 91A

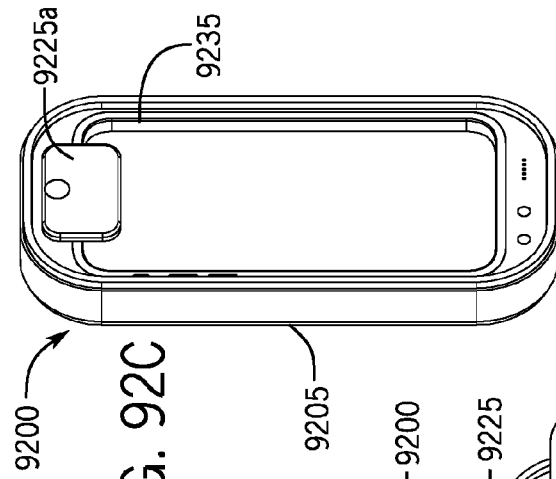


FIG. 92C

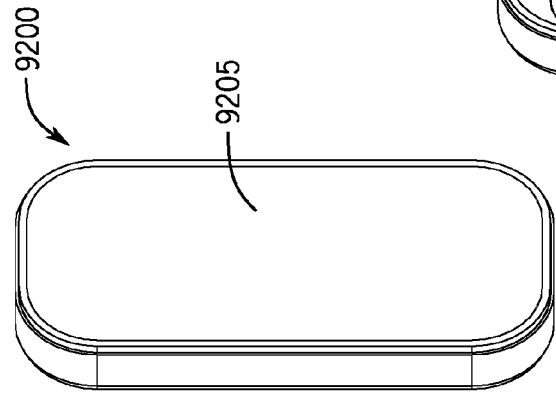


FIG. 92B

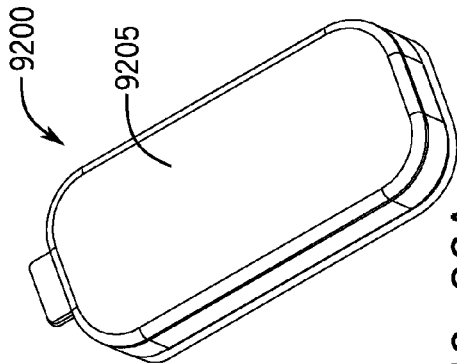


FIG. 92A

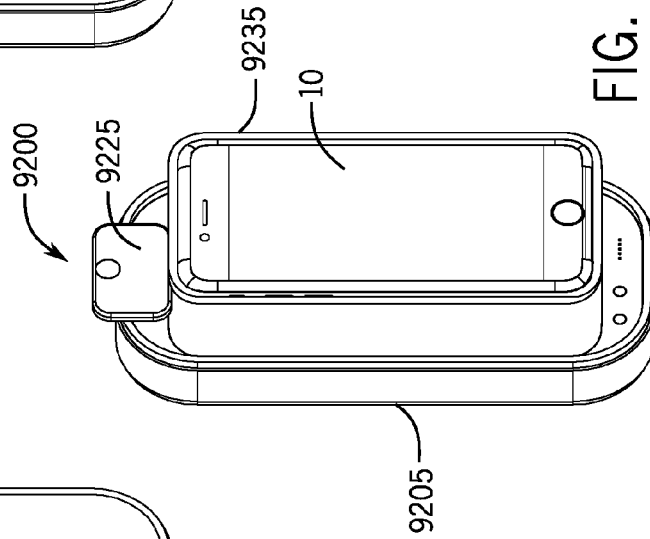


FIG. 92E

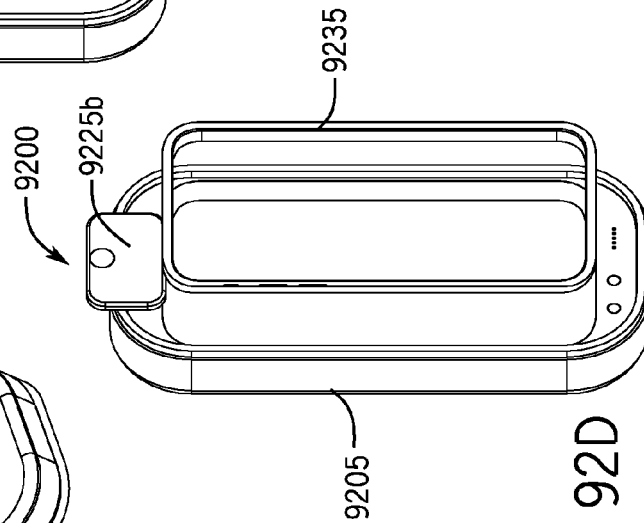


FIG. 92D

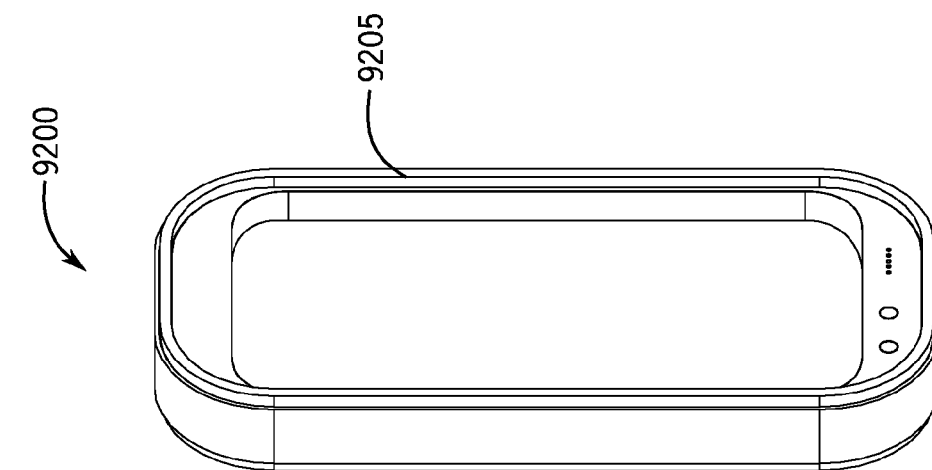


FIG. 93C

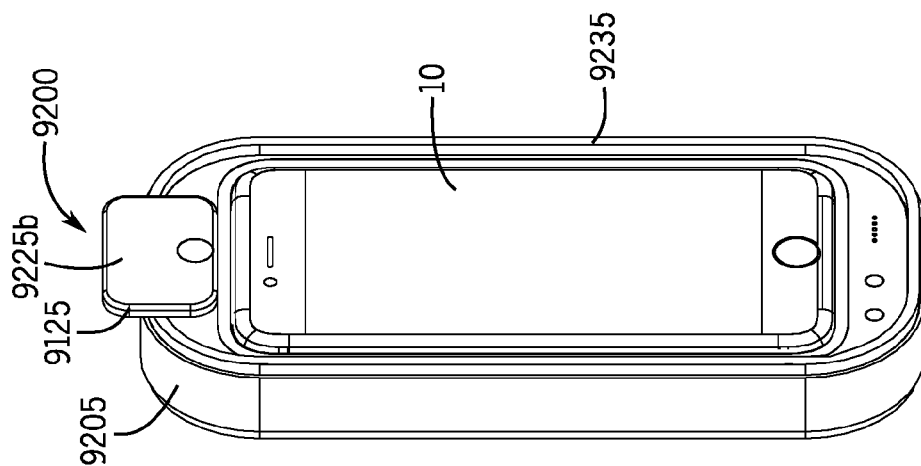


FIG. 93B

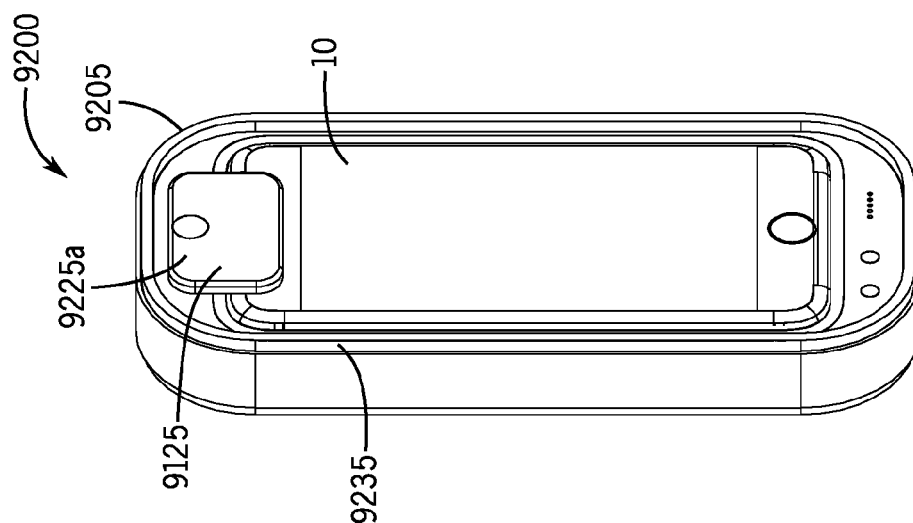


FIG. 93A

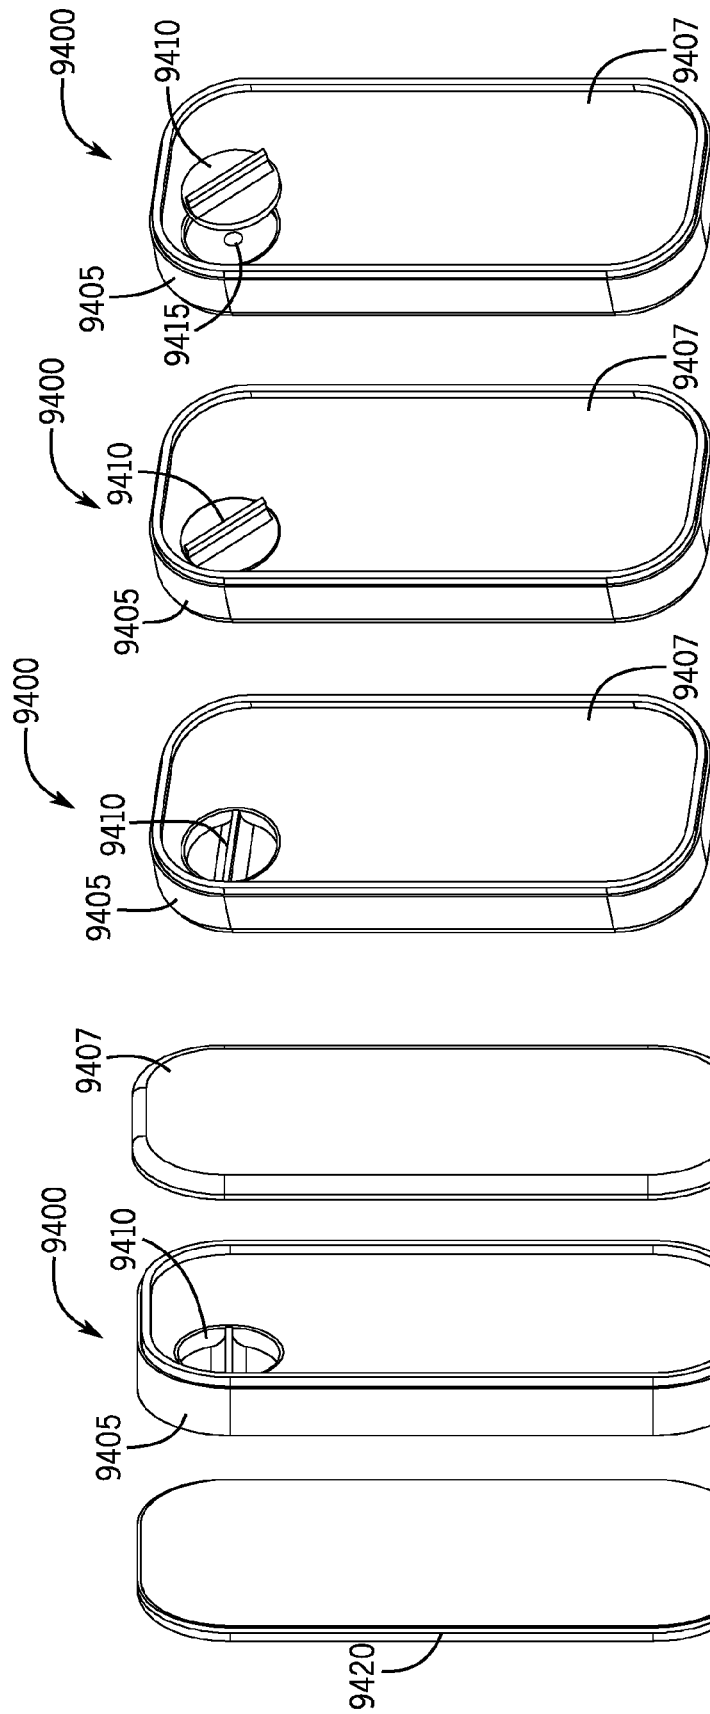


FIG. 94D

FIG. 94C

FIG. 94B

FIG. 94A

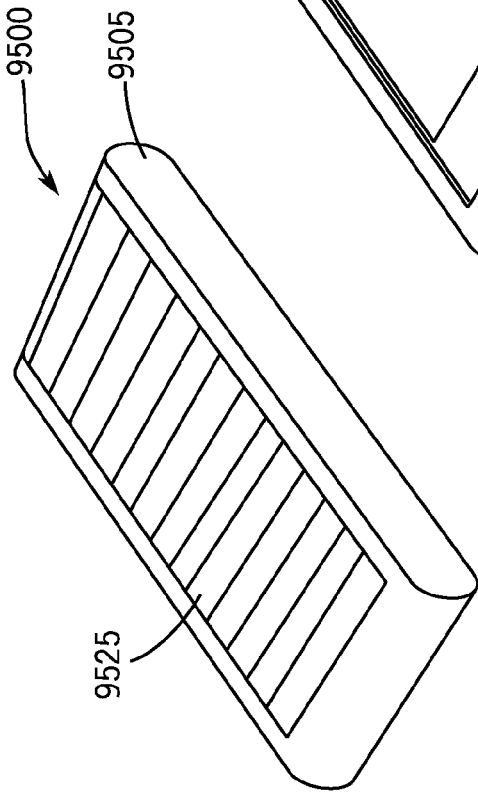


FIG. 95A

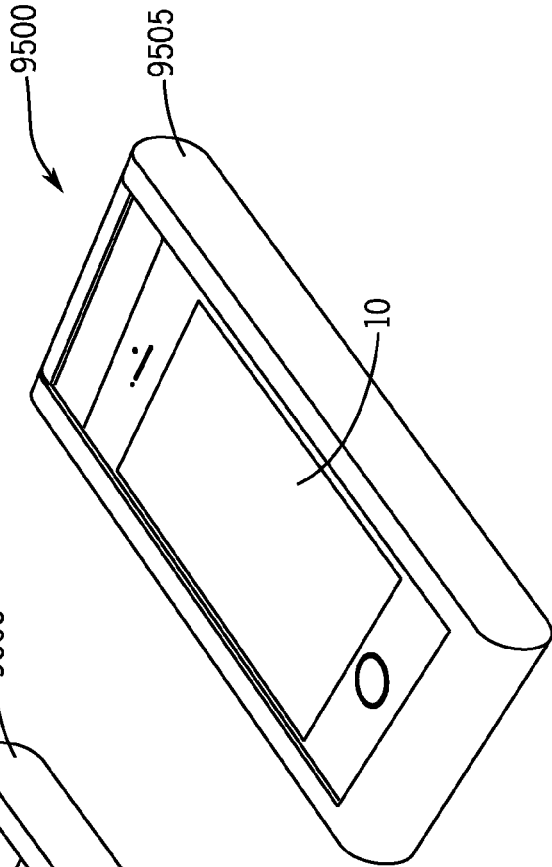


FIG. 95B

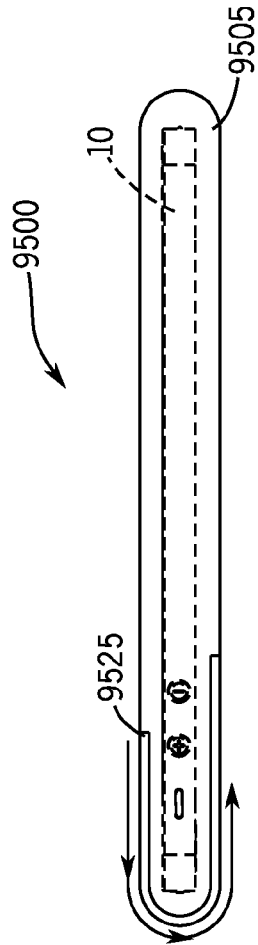
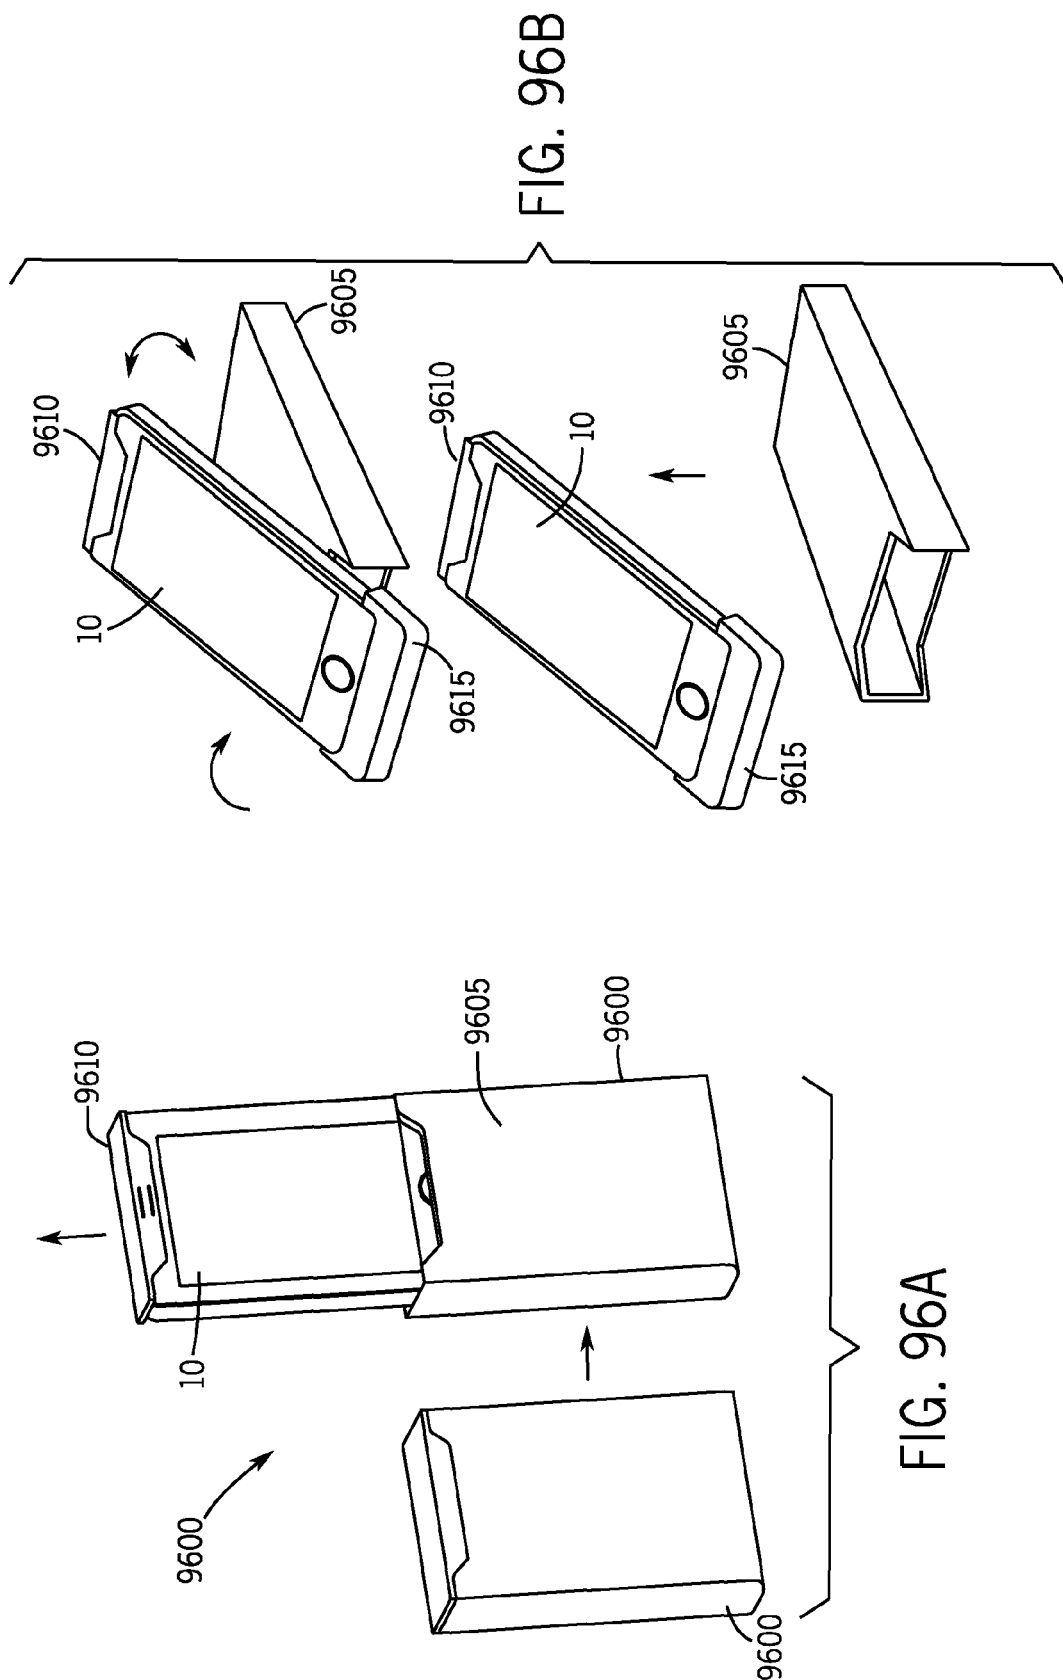
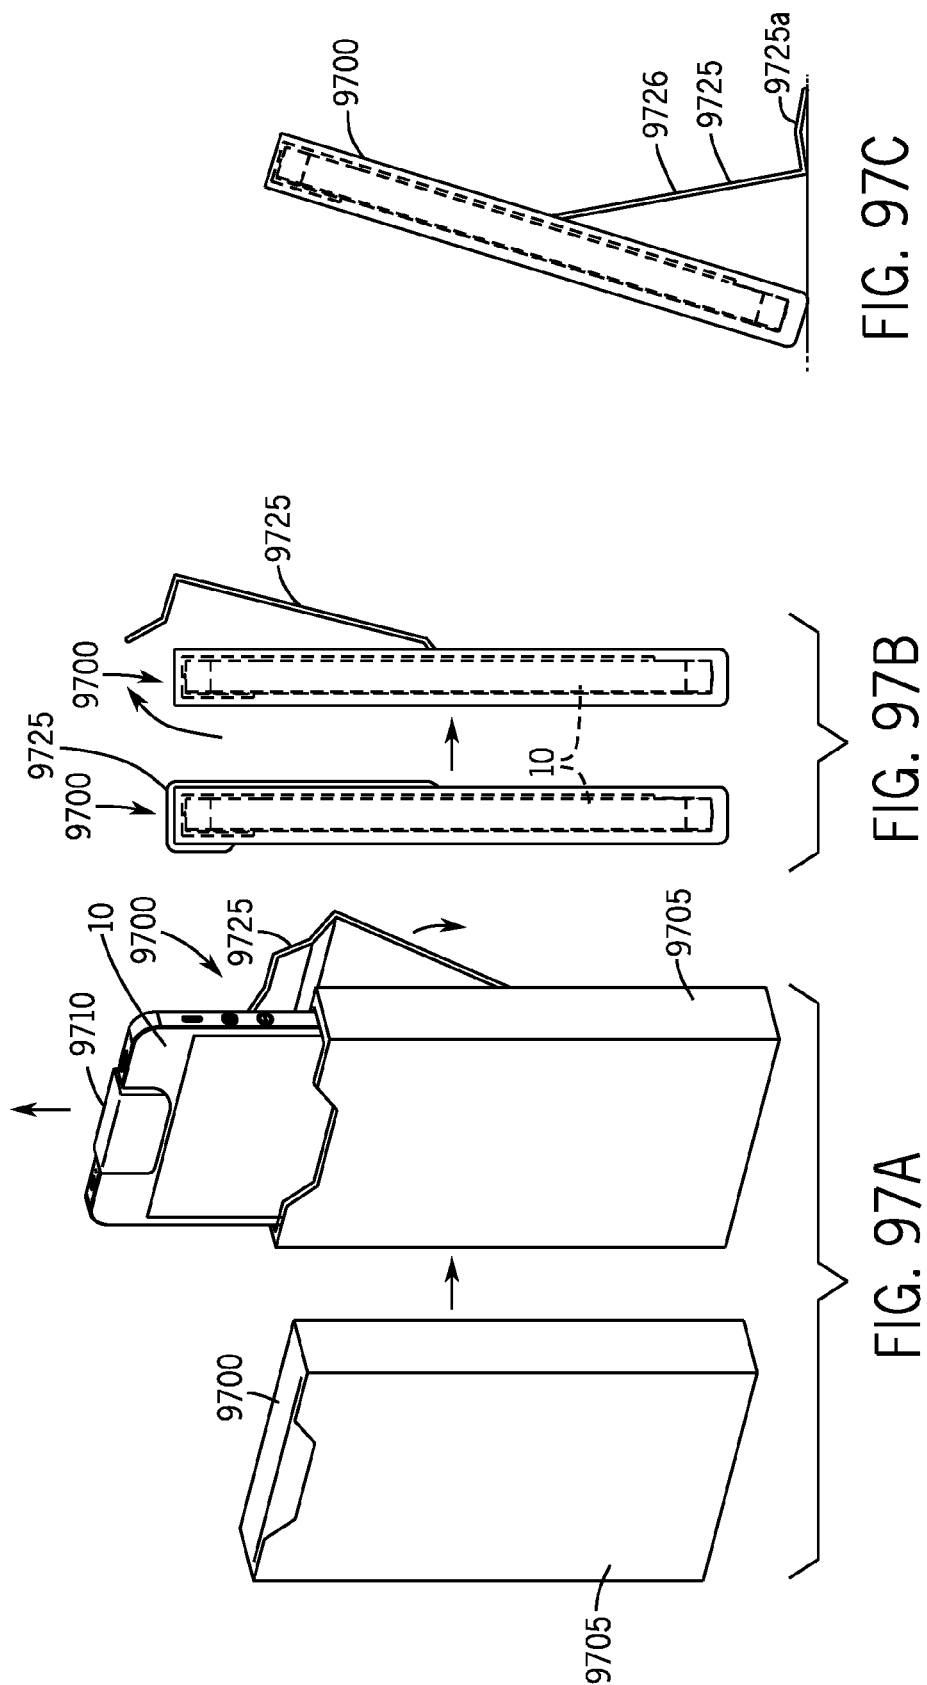


FIG. 95C





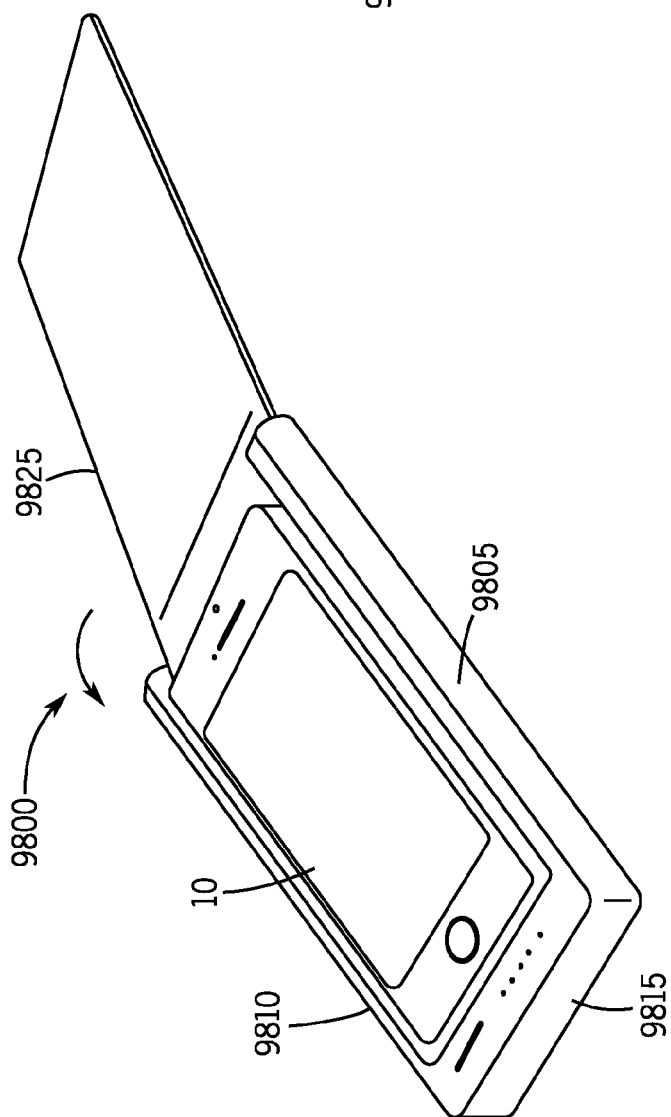


FIG. 98A

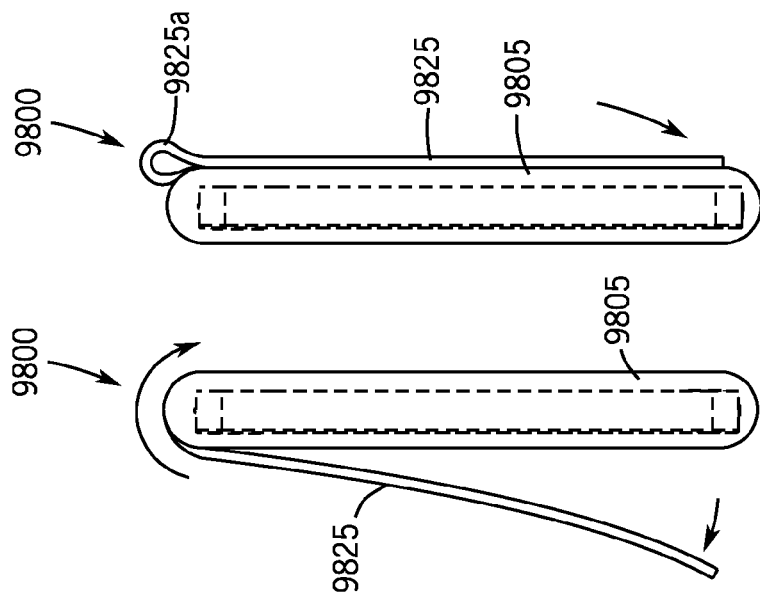


FIG. 98B FIG. 98C

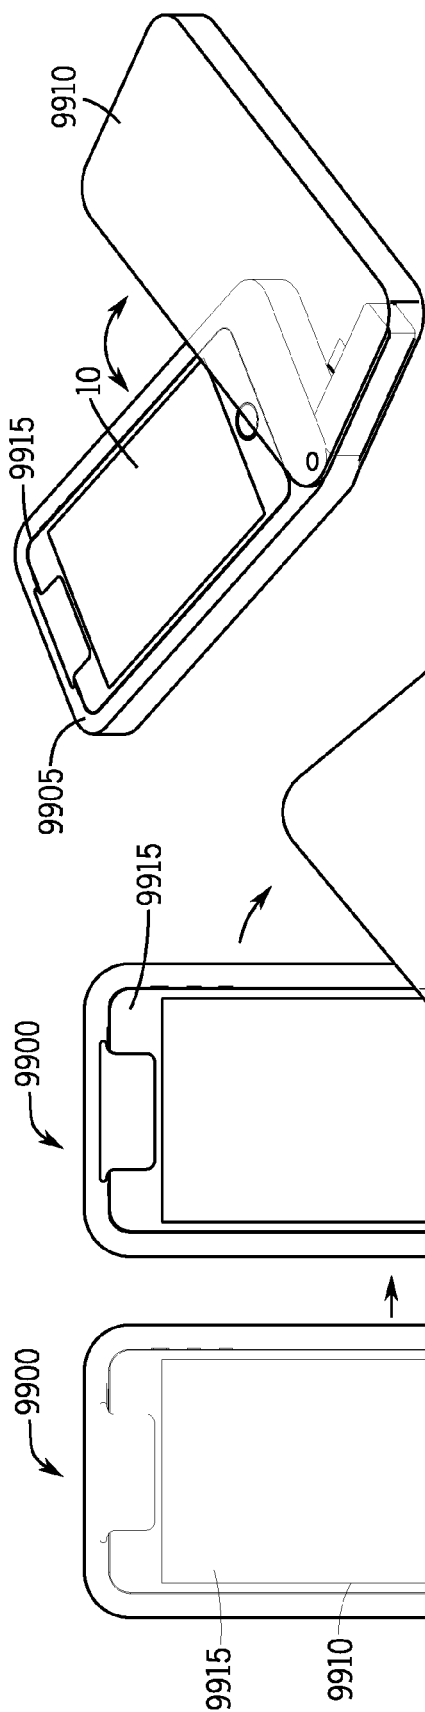


FIG. 99B

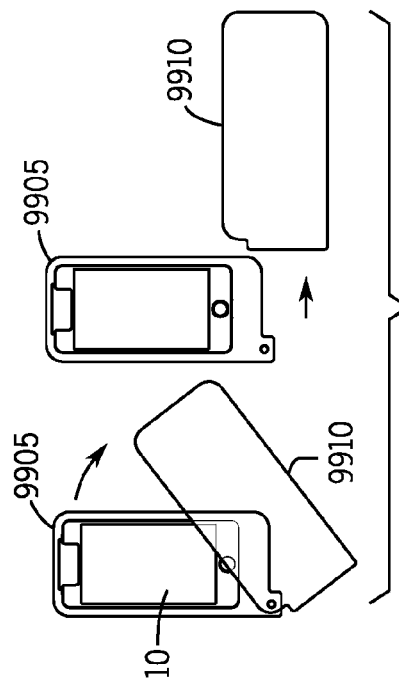


FIG. 99C

FIG. 99A

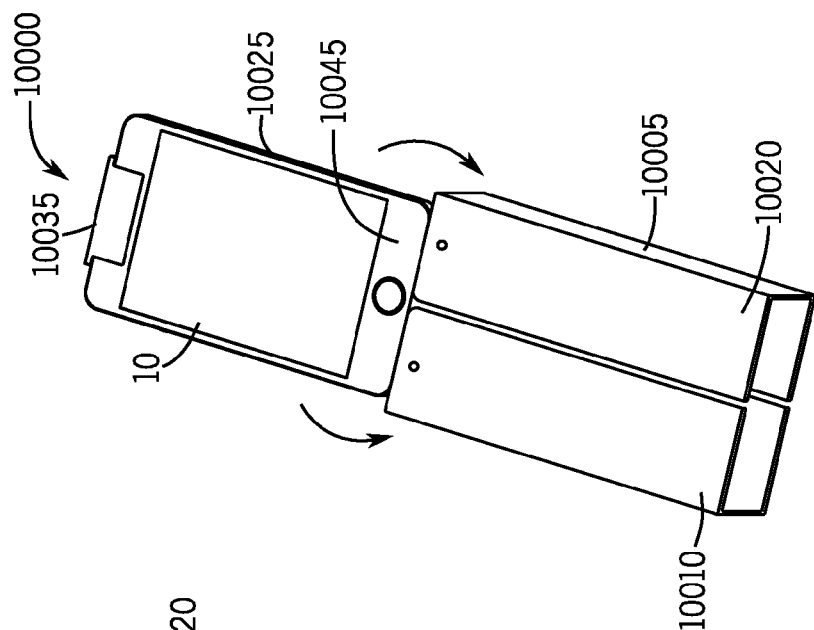


FIG. 100C

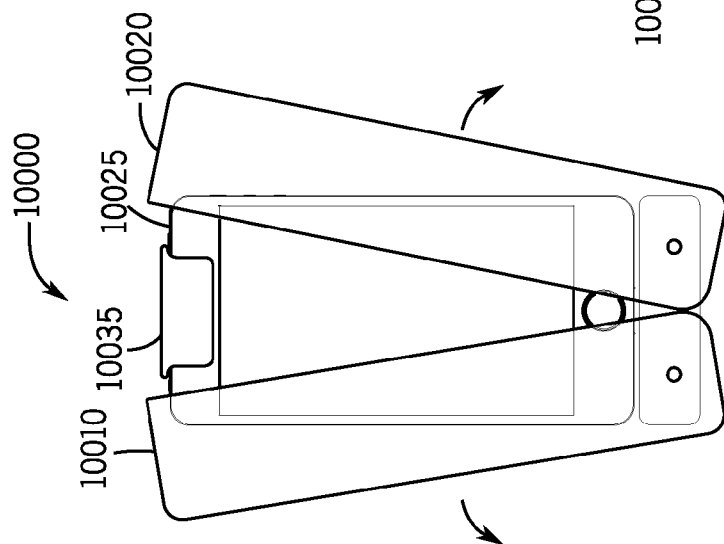


FIG. 100B

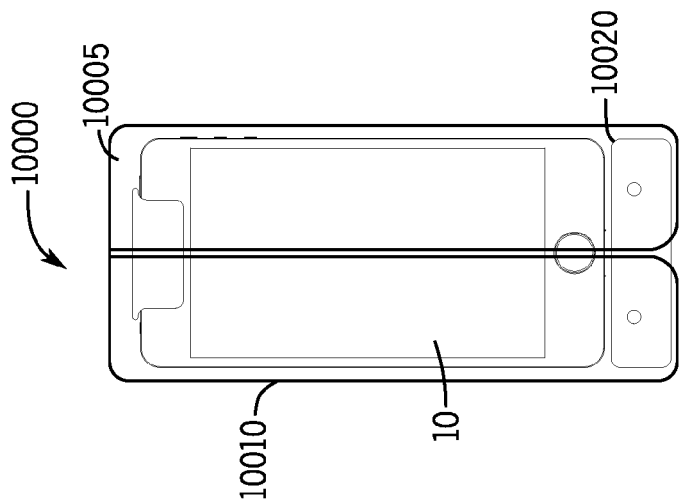


FIG. 100A

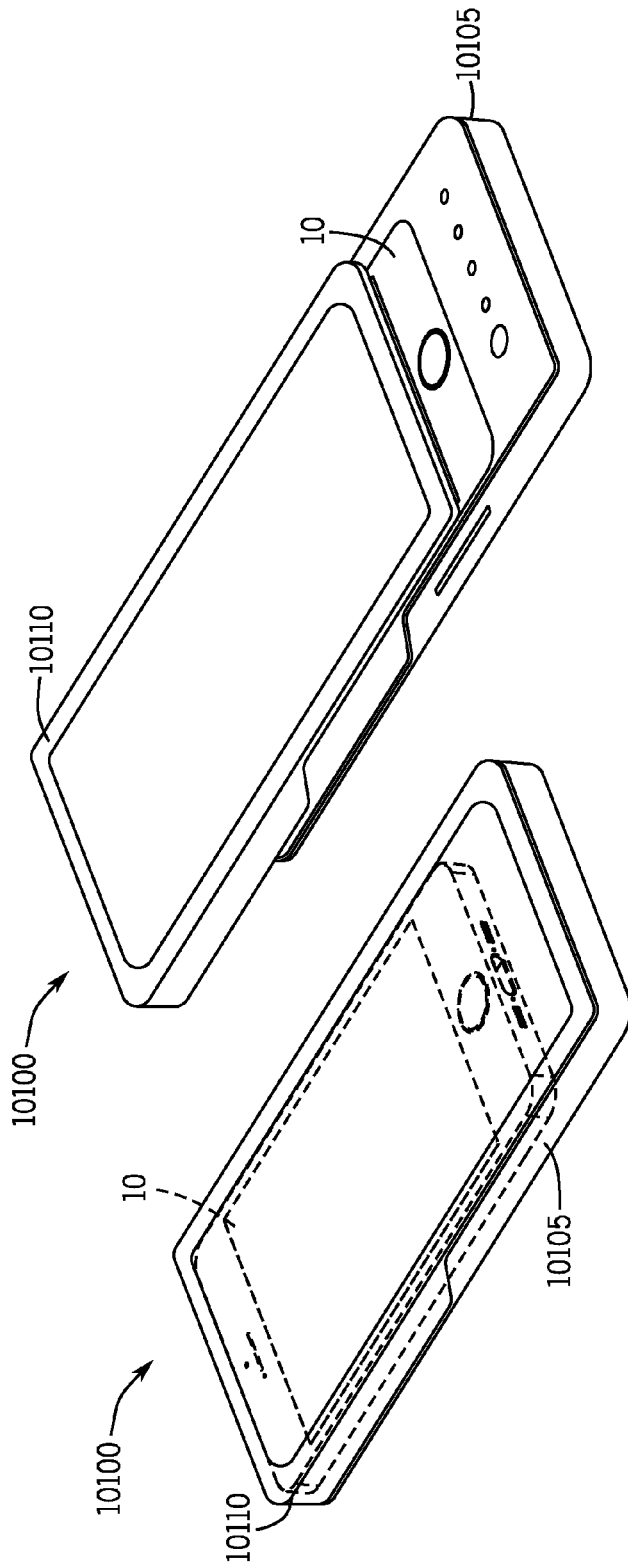


FIG. 101B

FIG. 101A

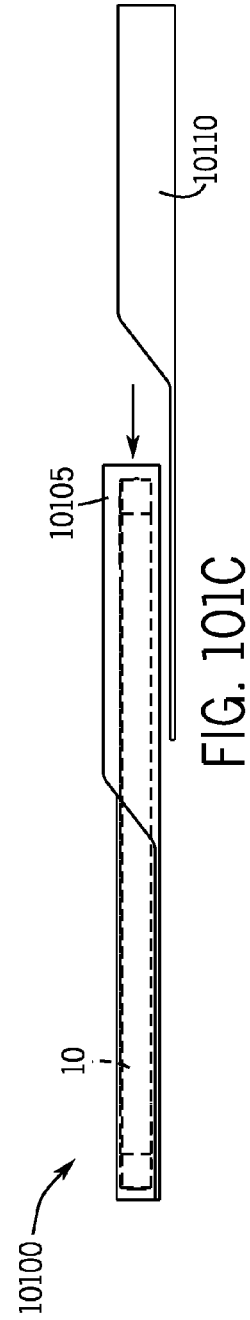
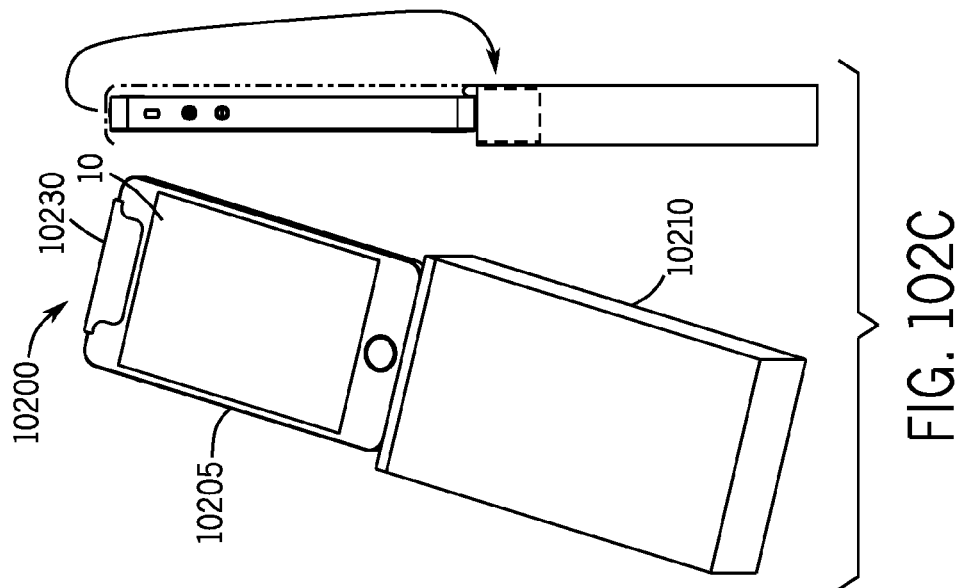
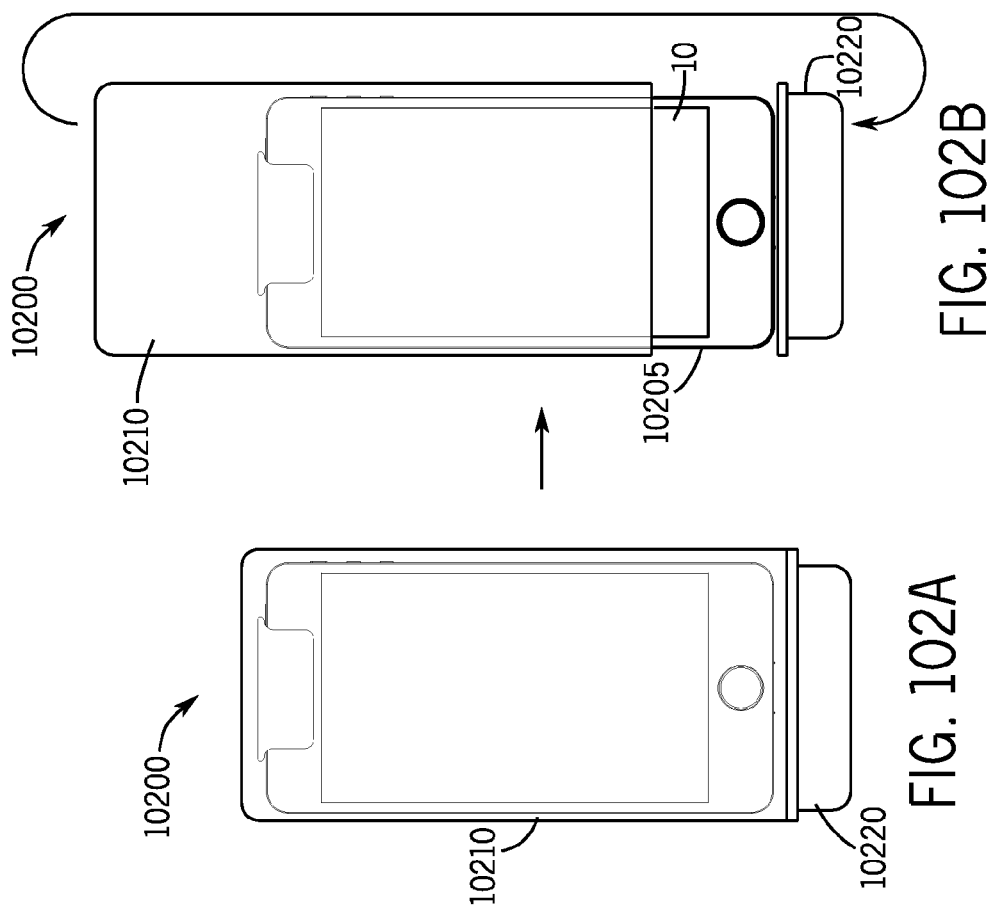


FIG. 101C



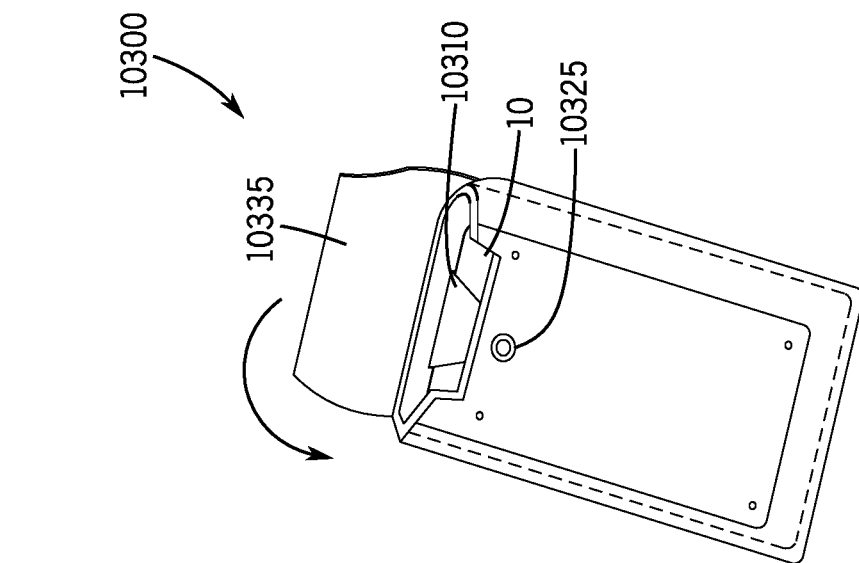


FIG. 103B

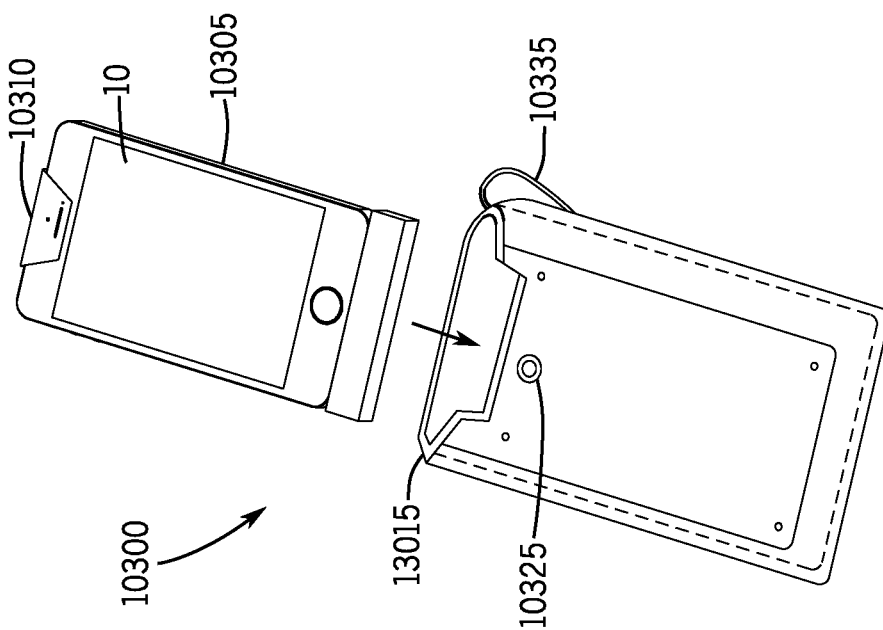


FIG. 103A

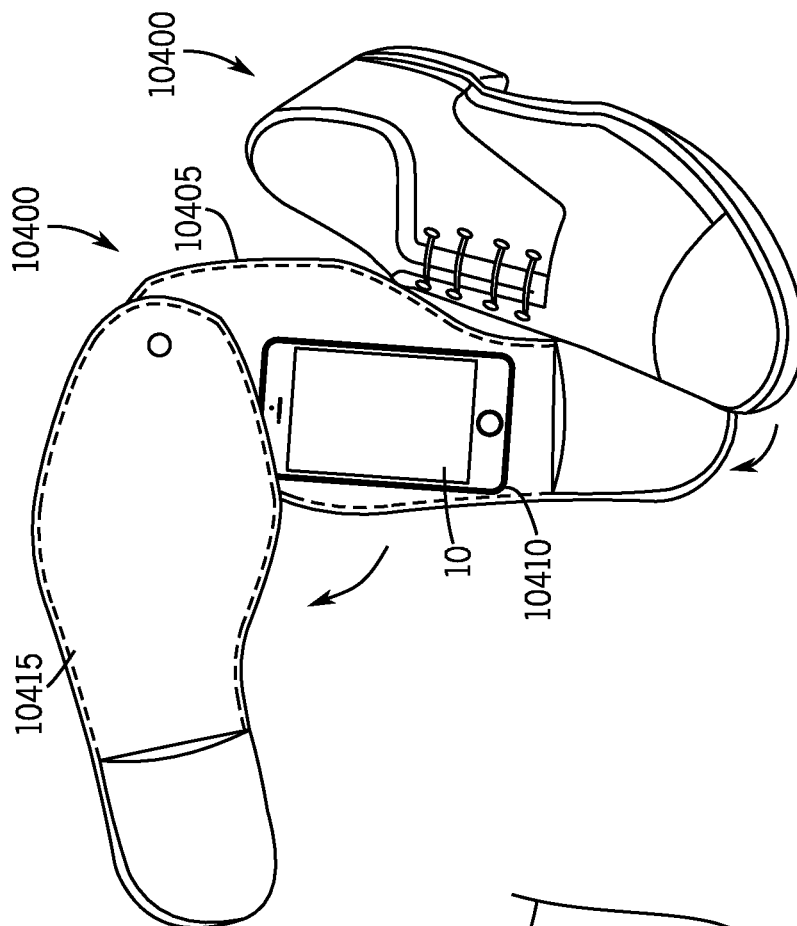


FIG. 104A

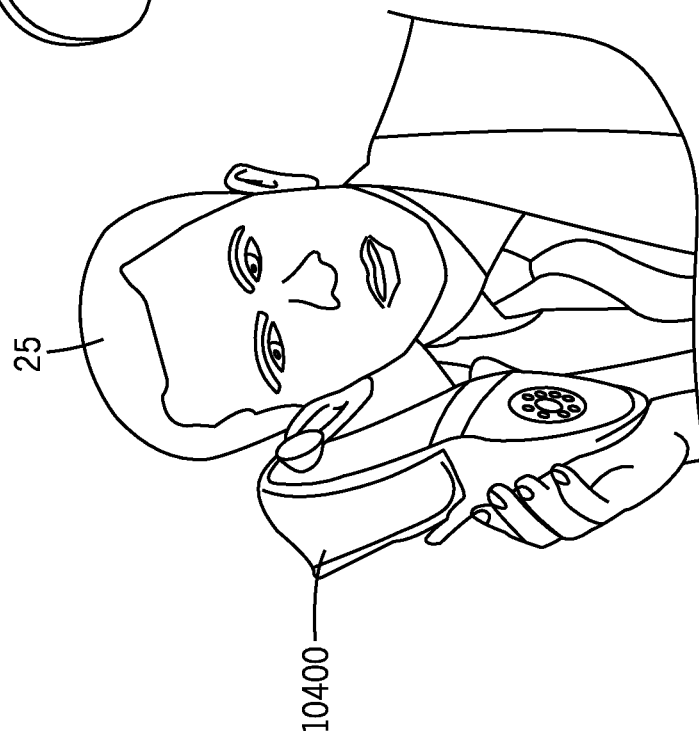
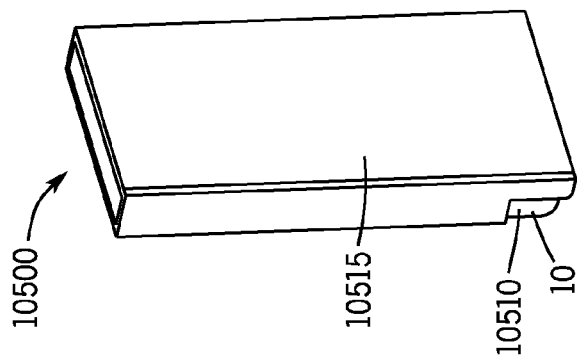
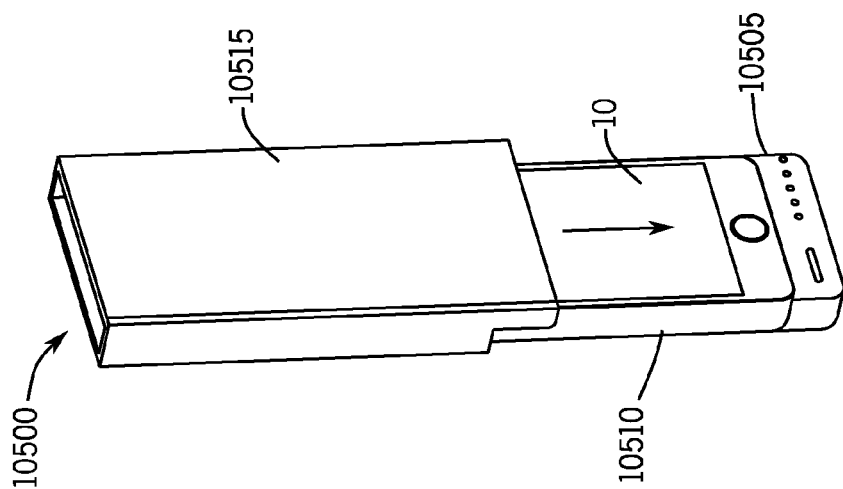
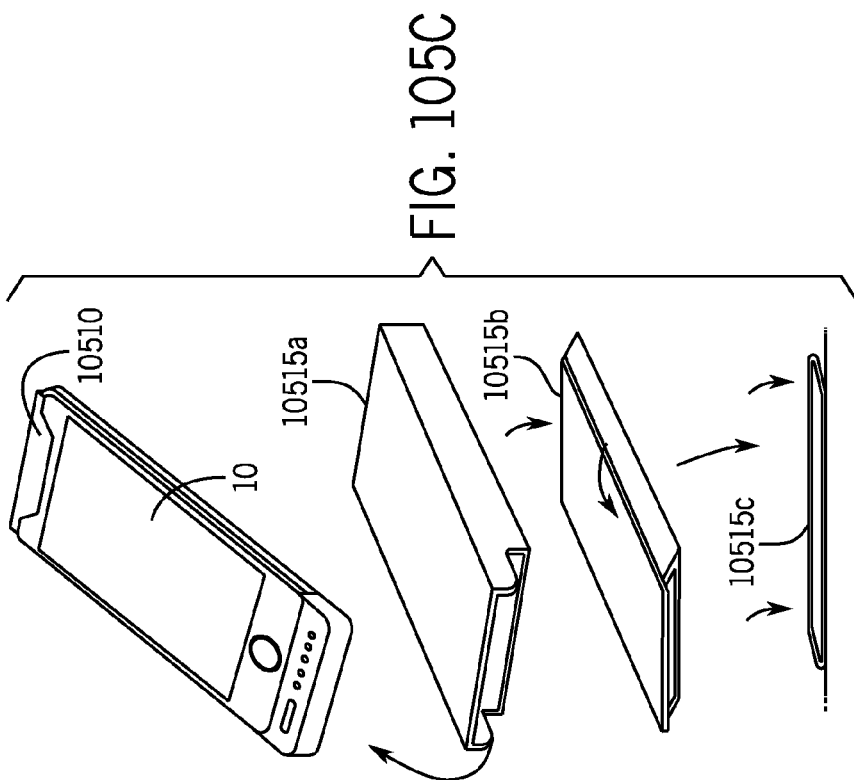
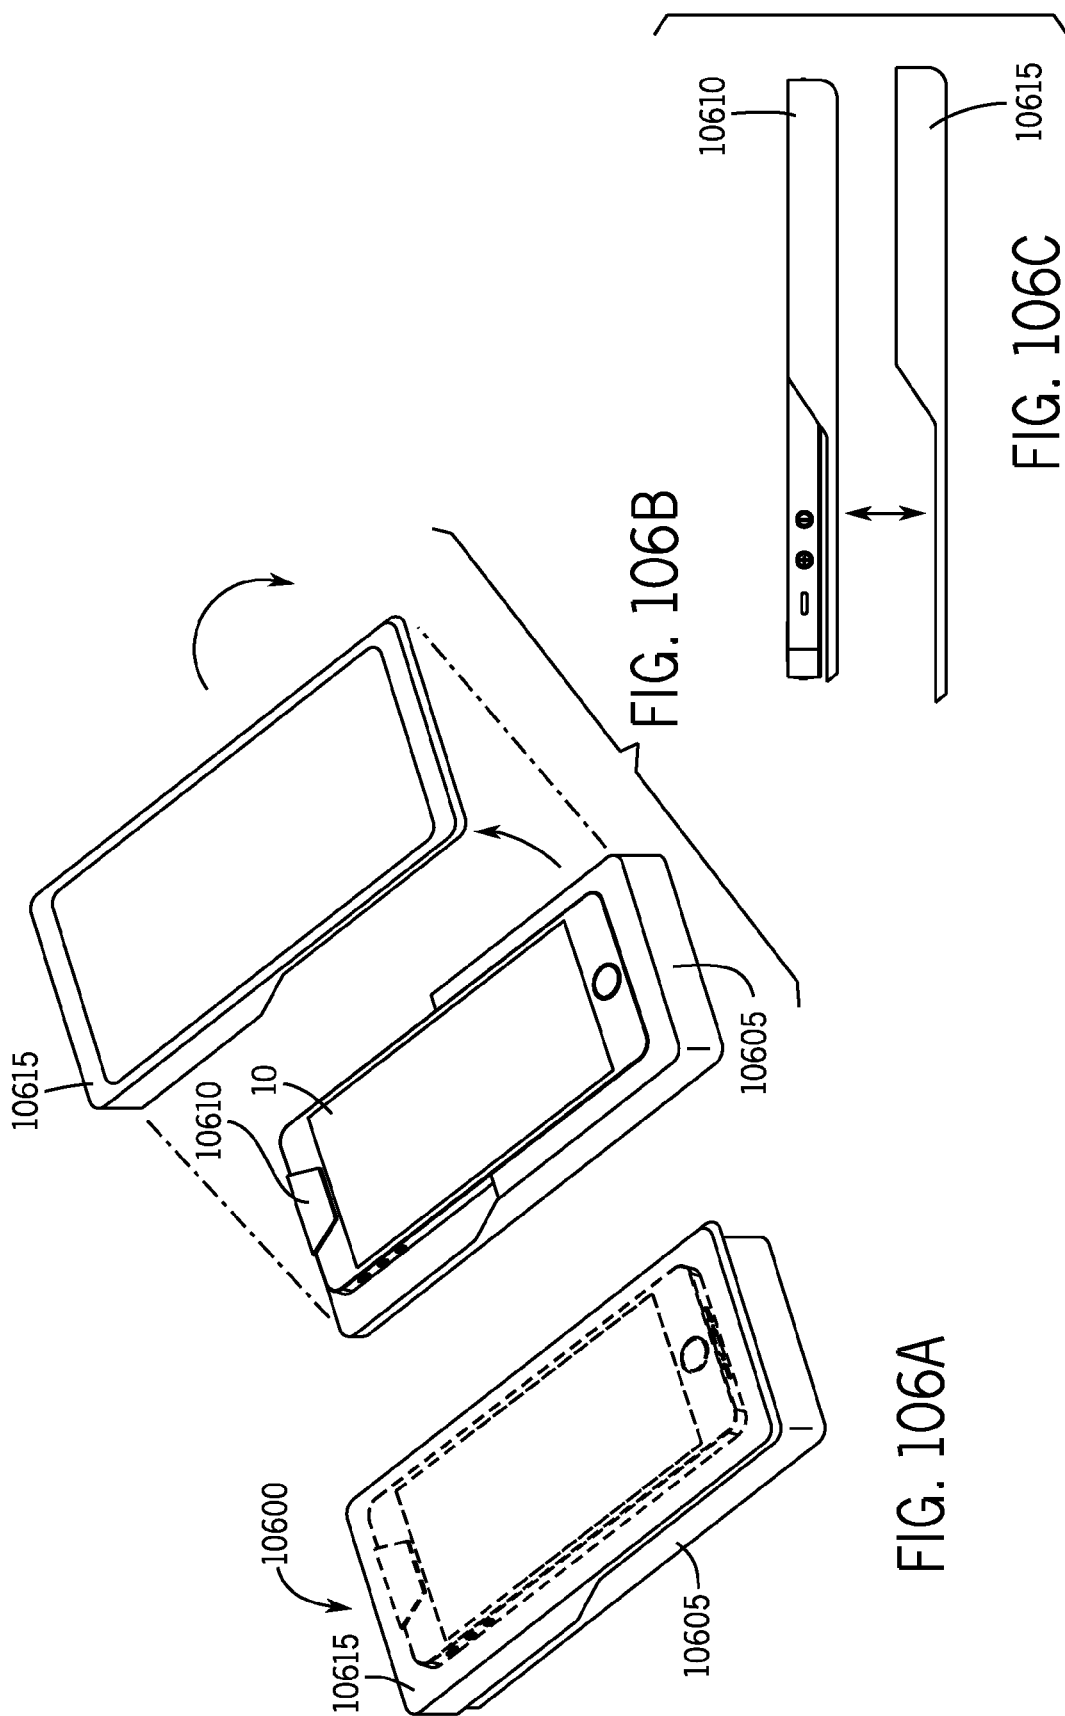


FIG. 104B





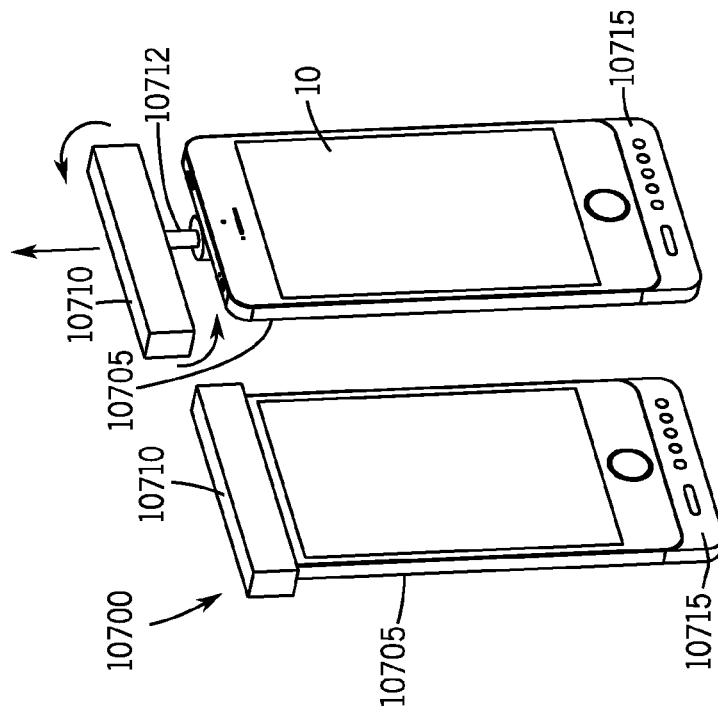


FIG. 107A

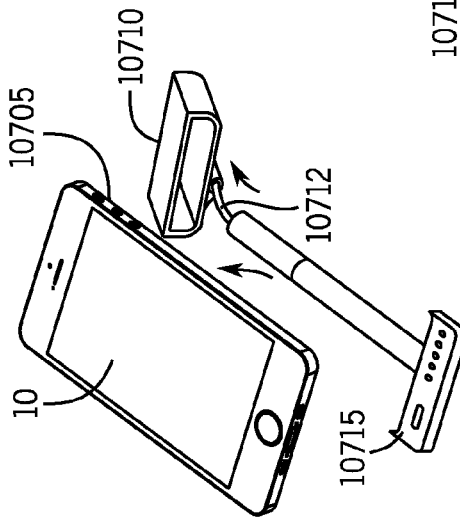


FIG. 107C

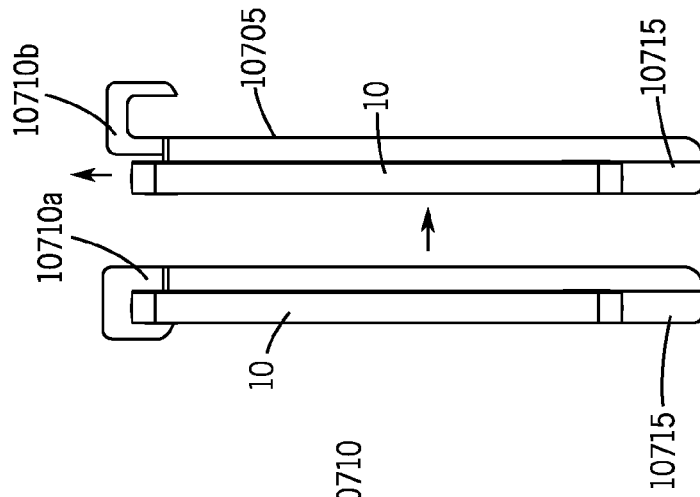


FIG. 107D

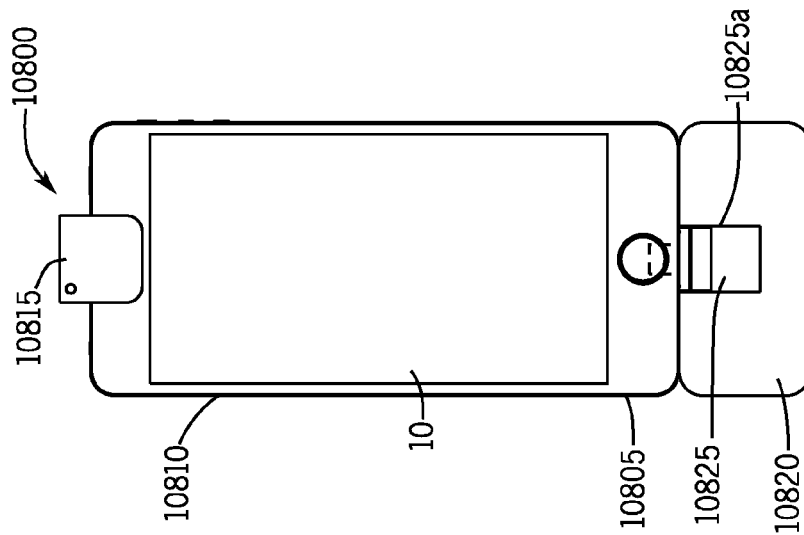


FIG. 108A

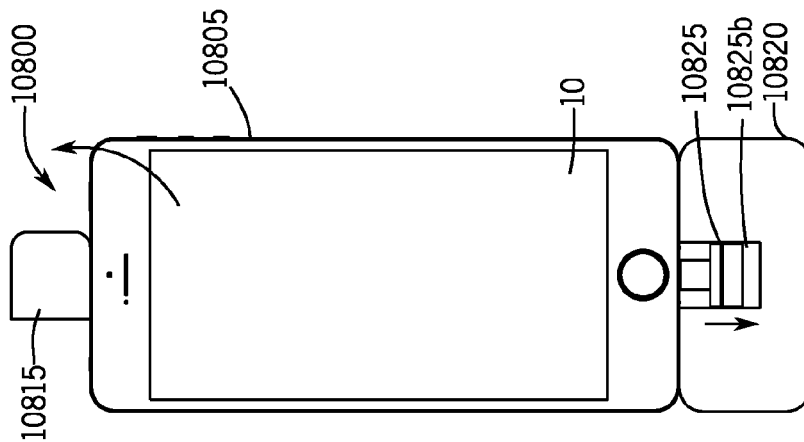


FIG. 108B

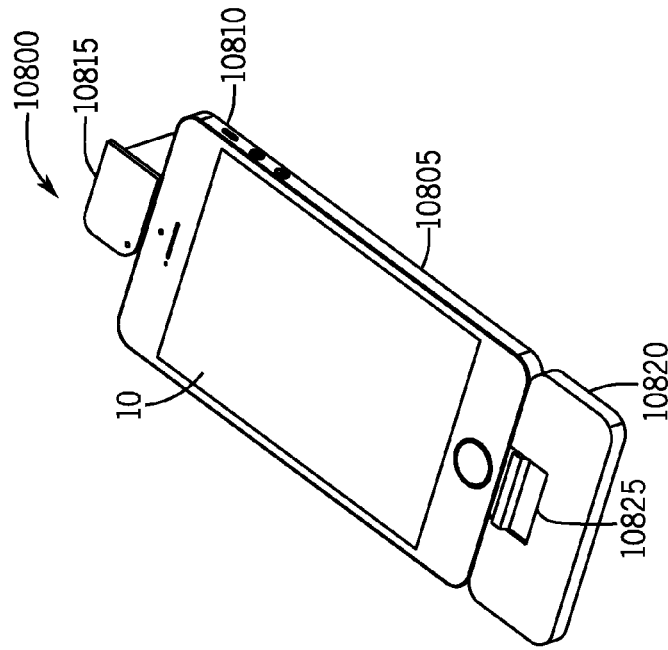


FIG. 108C

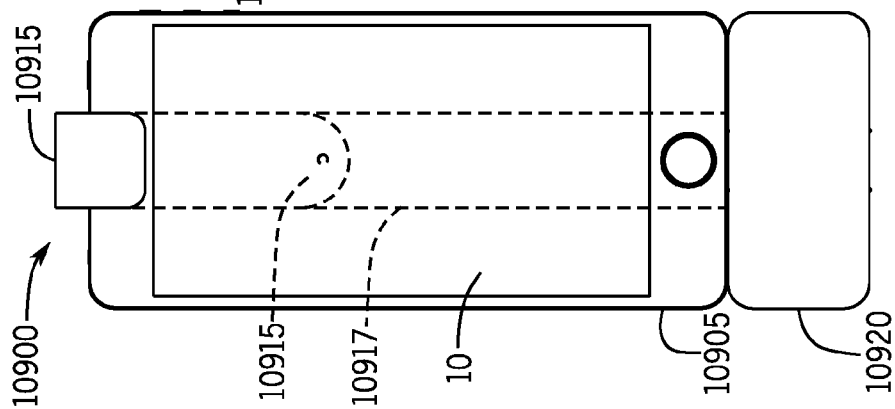


FIG. 109A

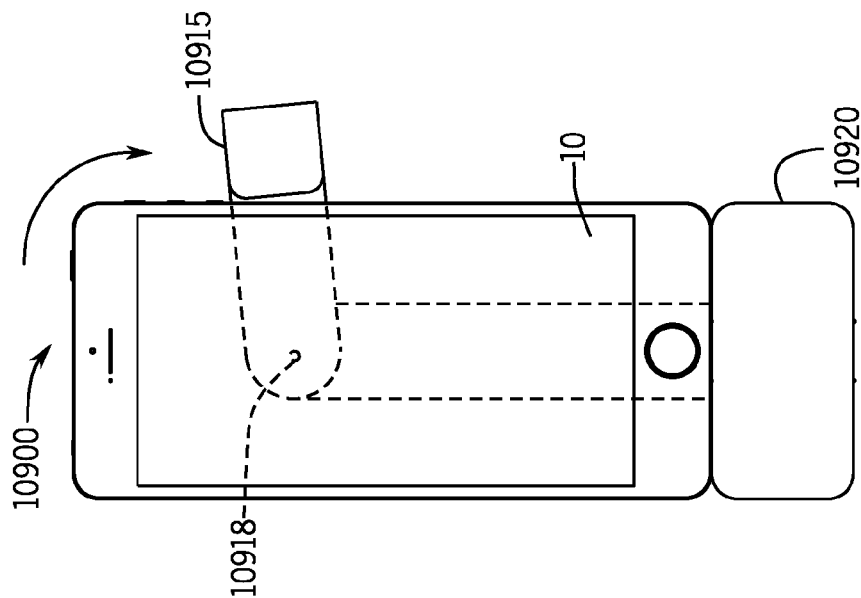


FIG. 109B

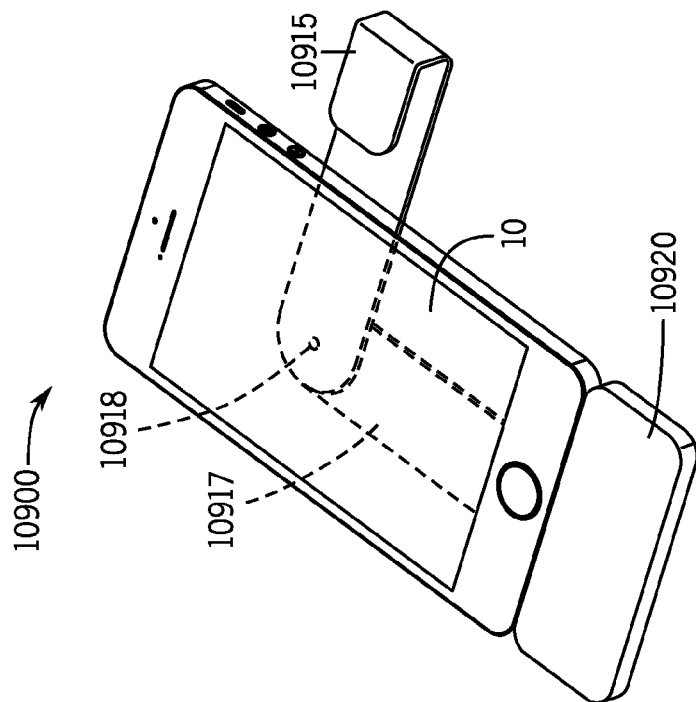


FIG. 109C

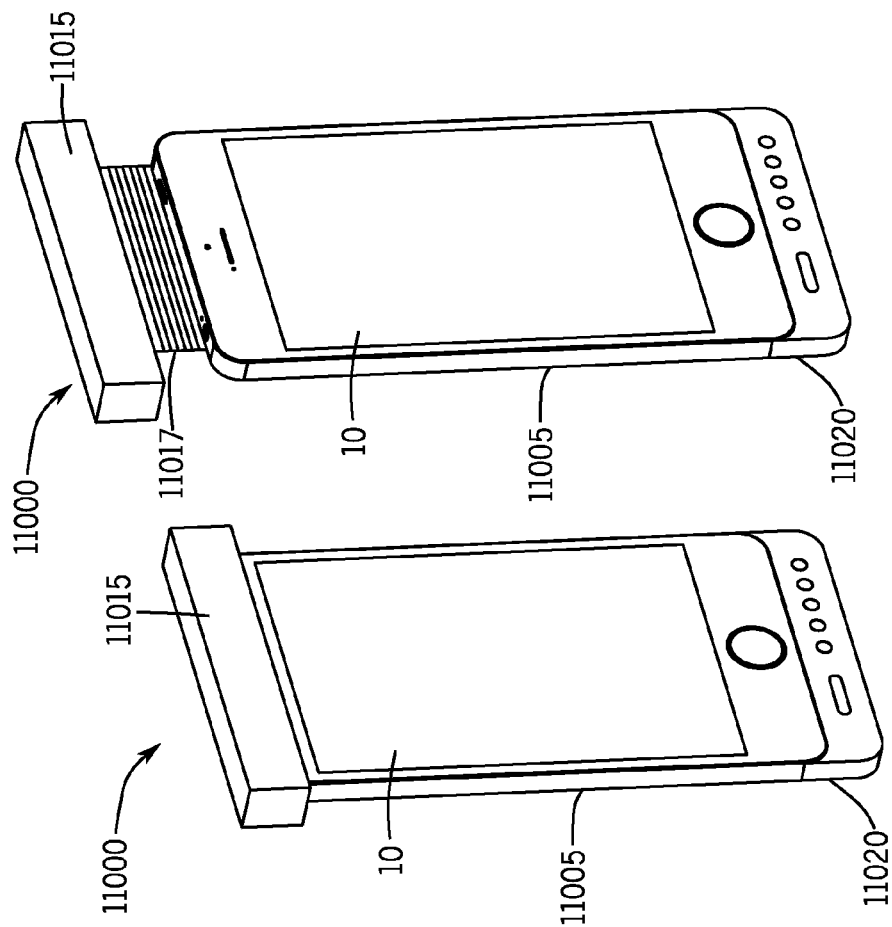


FIG. 110B

FIG. 110A

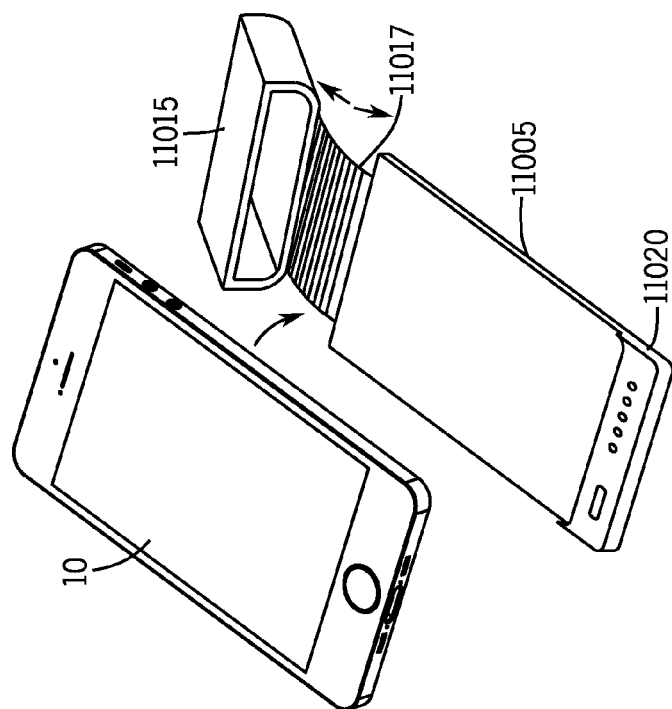
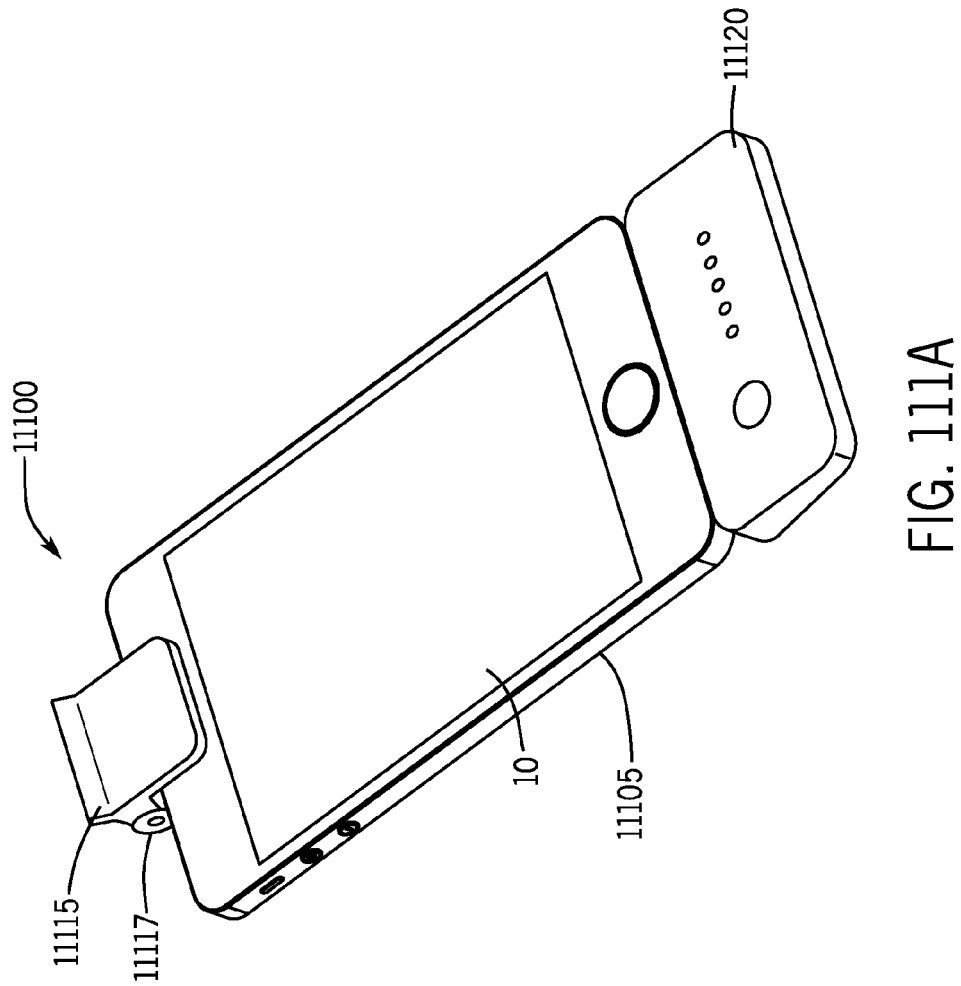
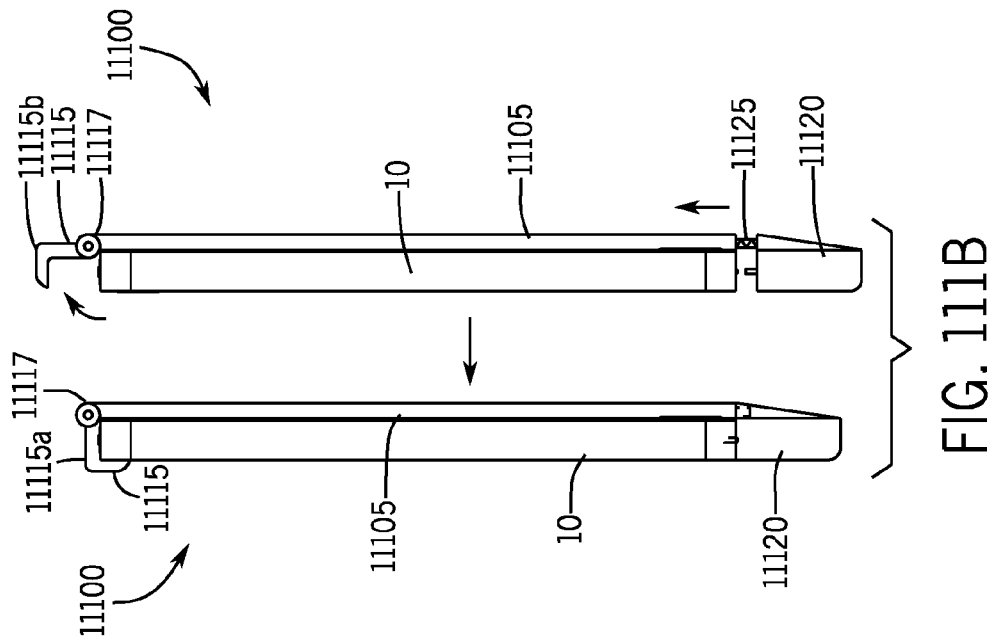


FIG. 110C



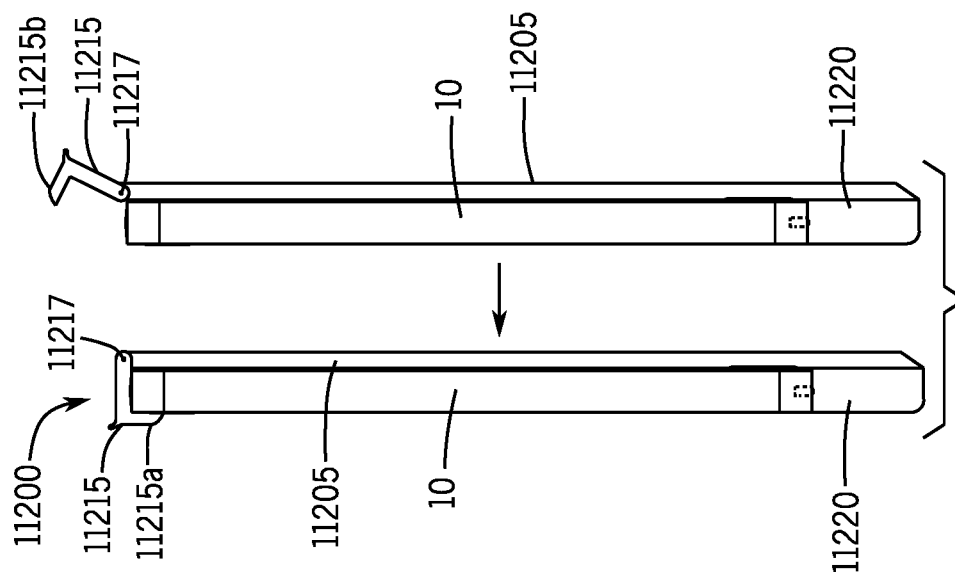


FIG. 112B

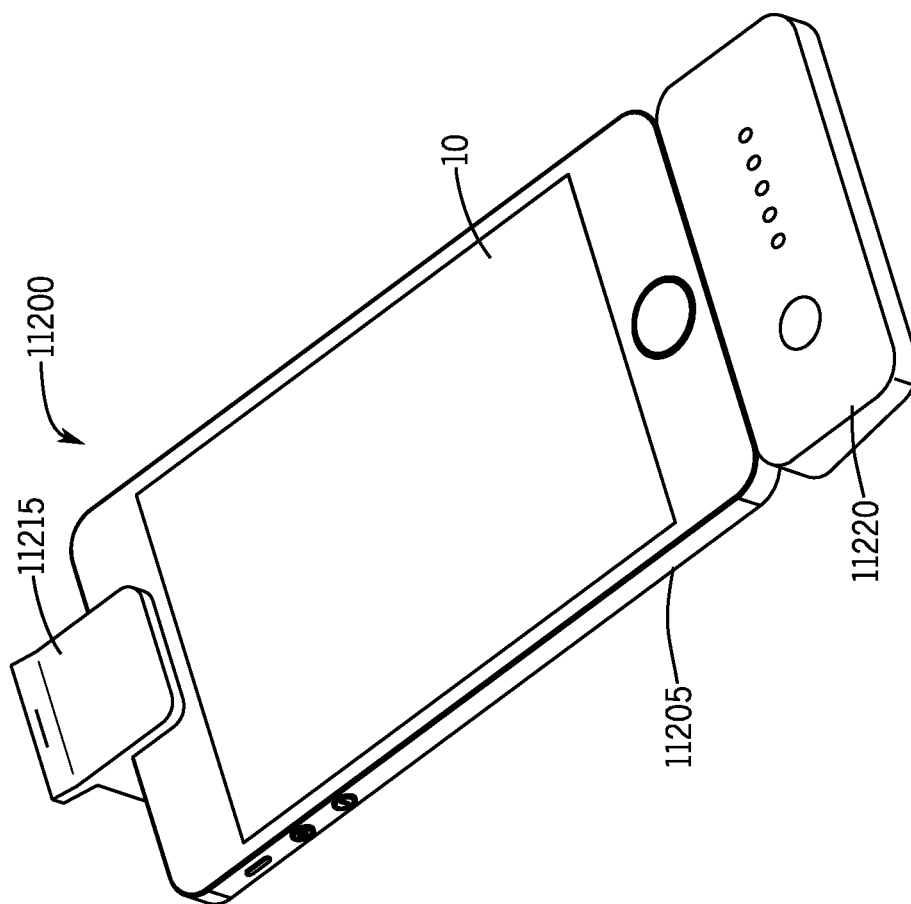
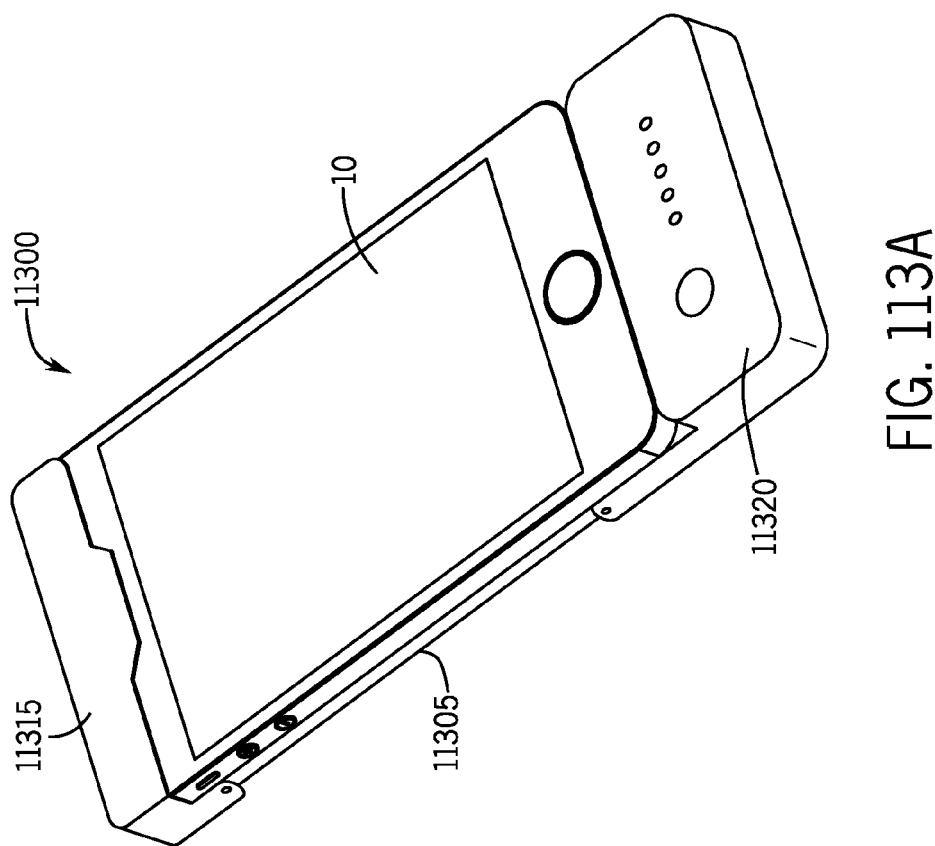
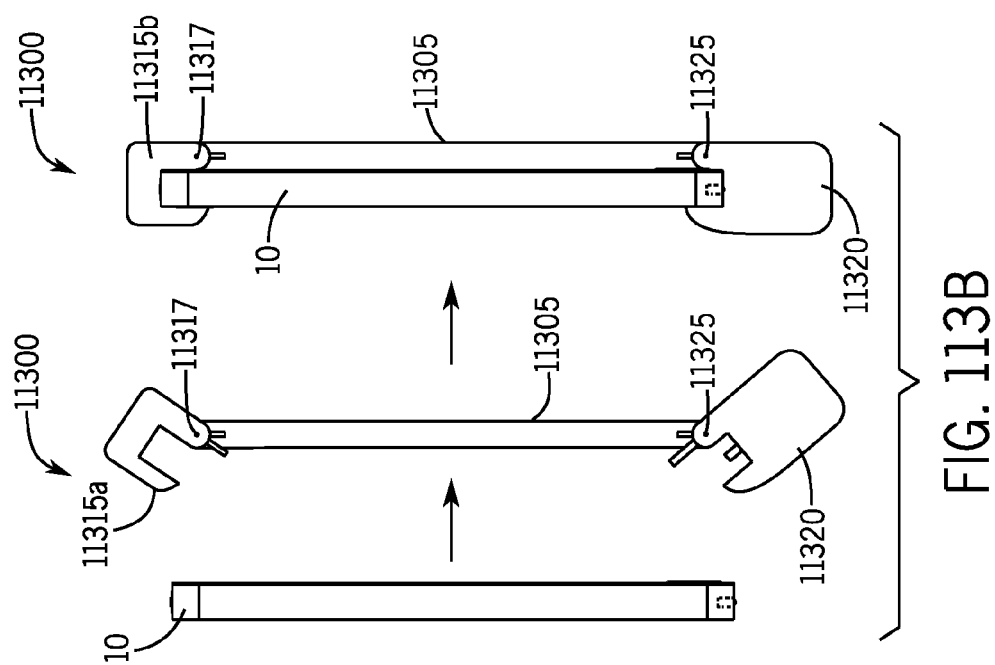
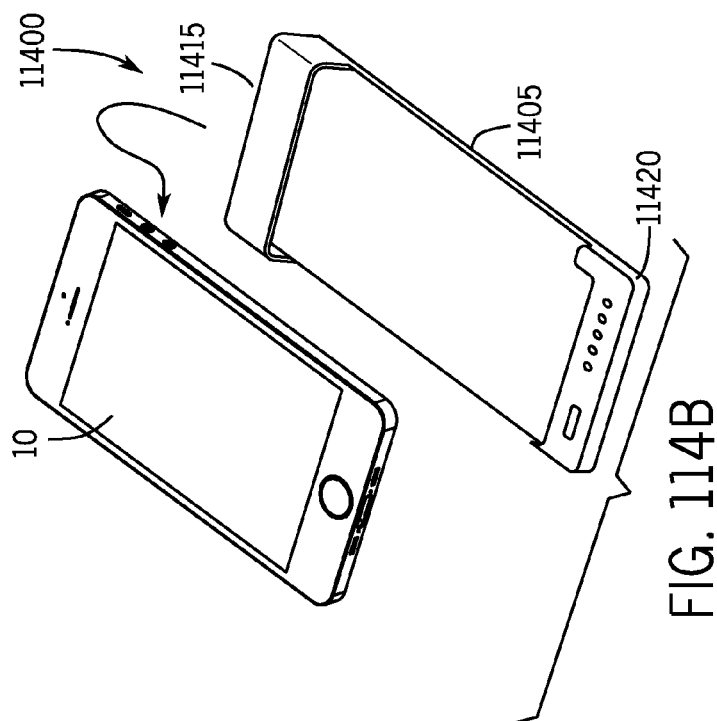
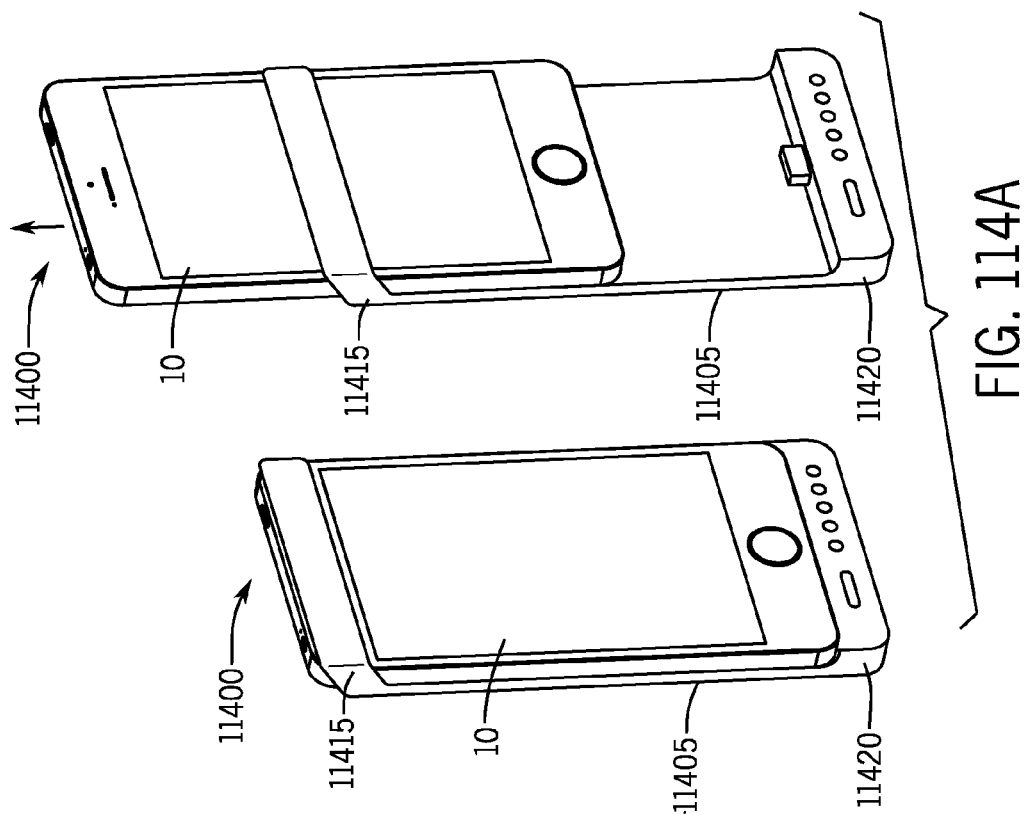
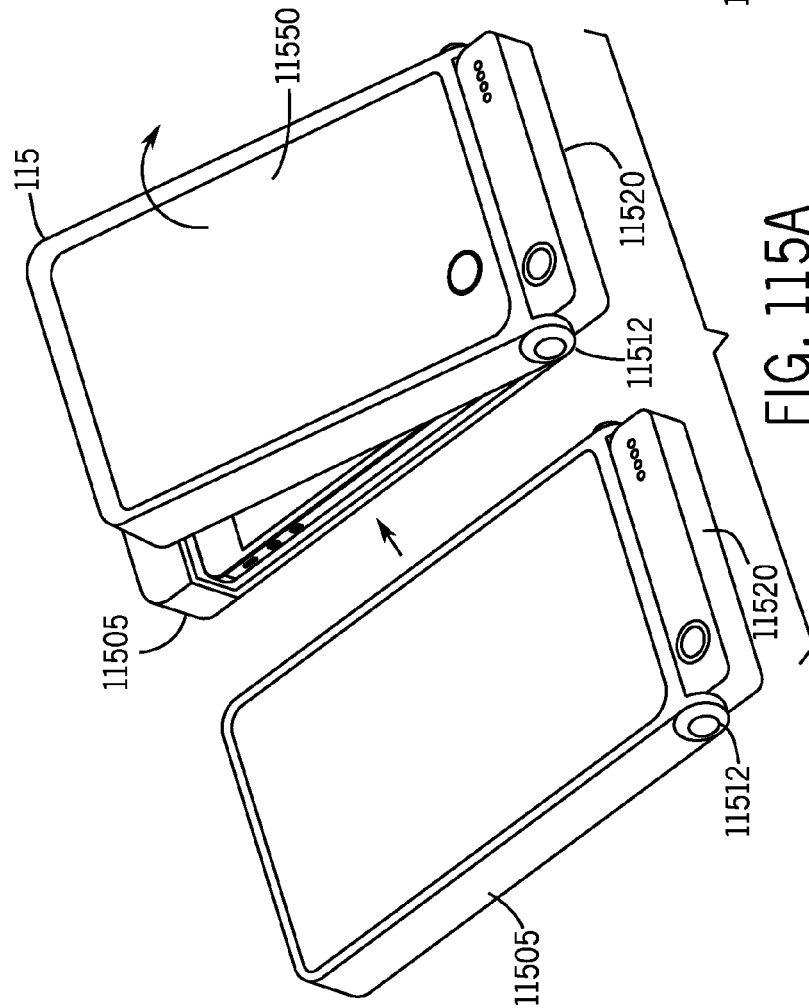
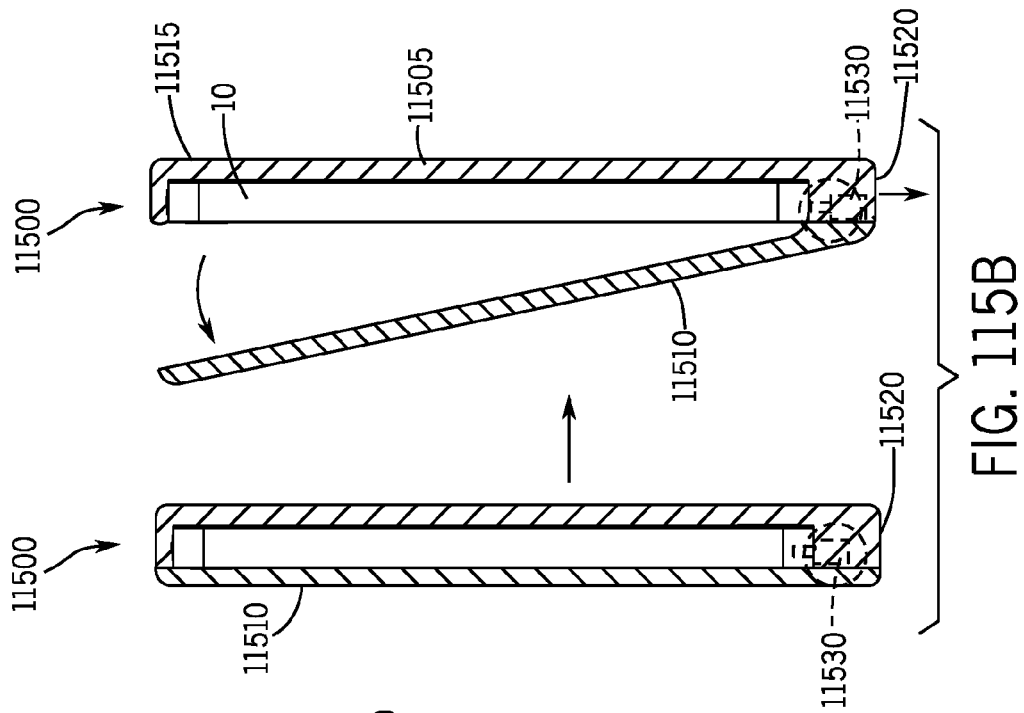
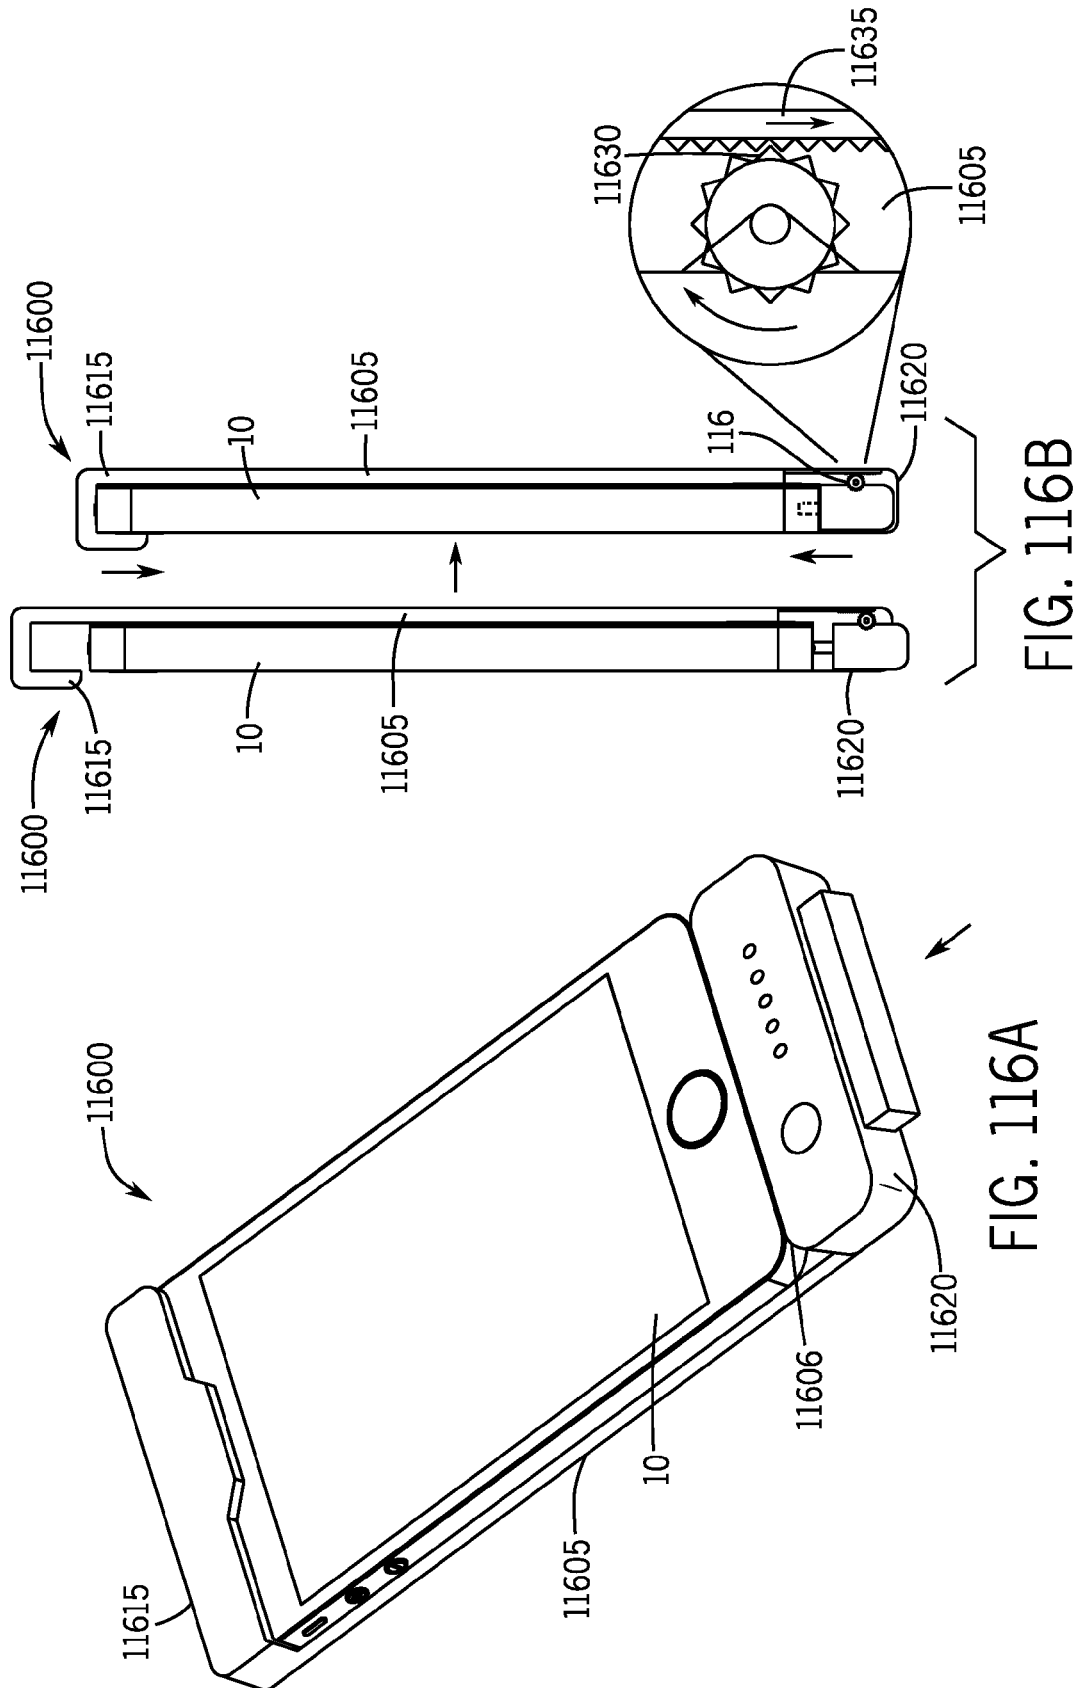




FIG. 112A









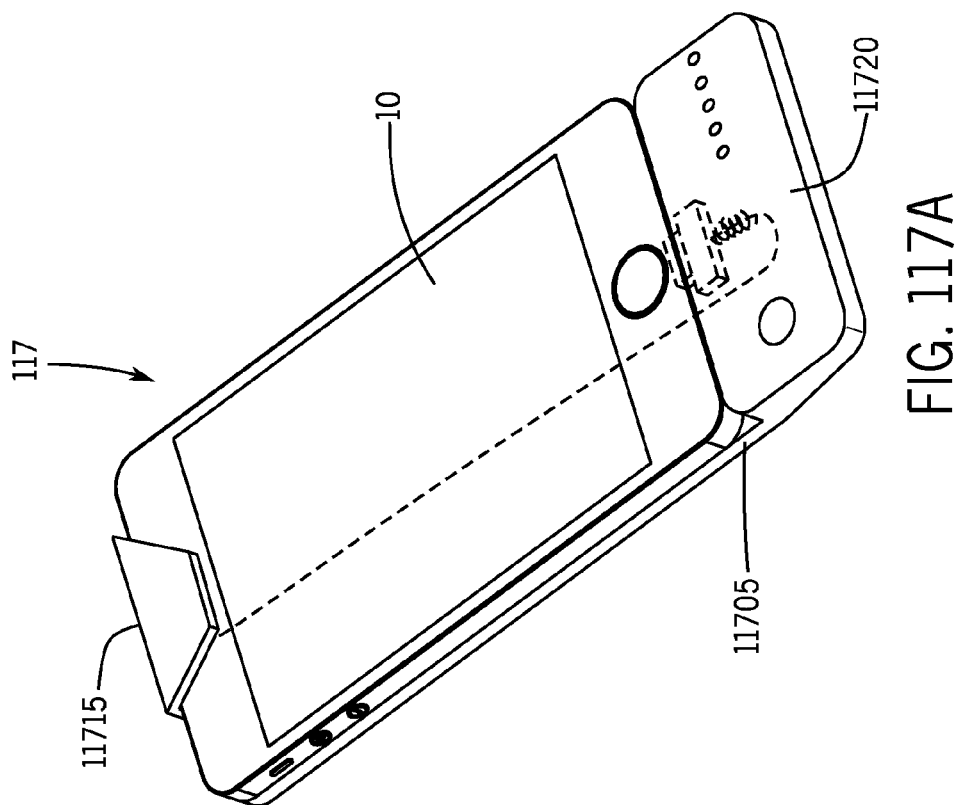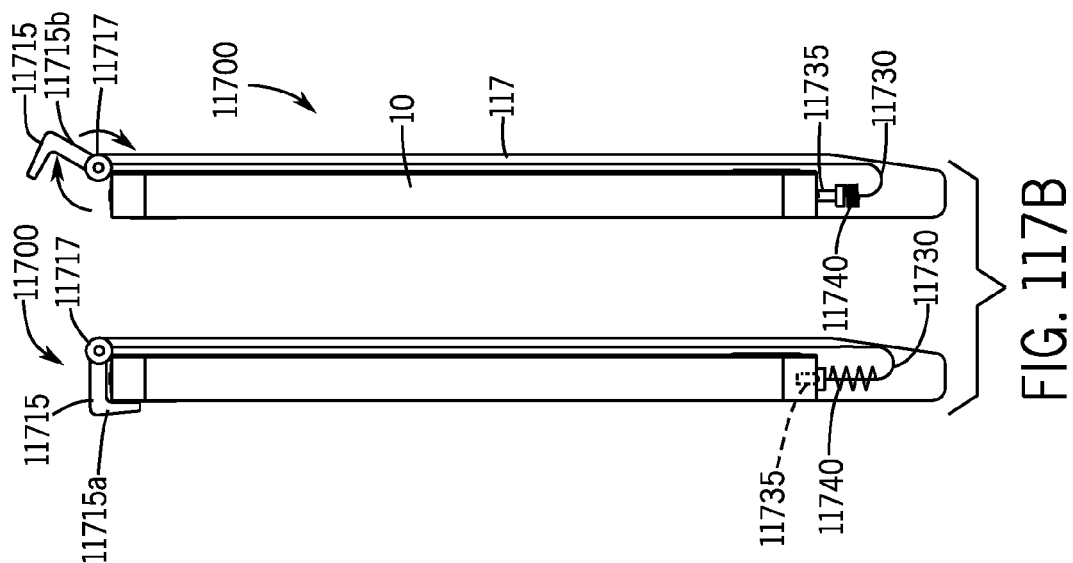

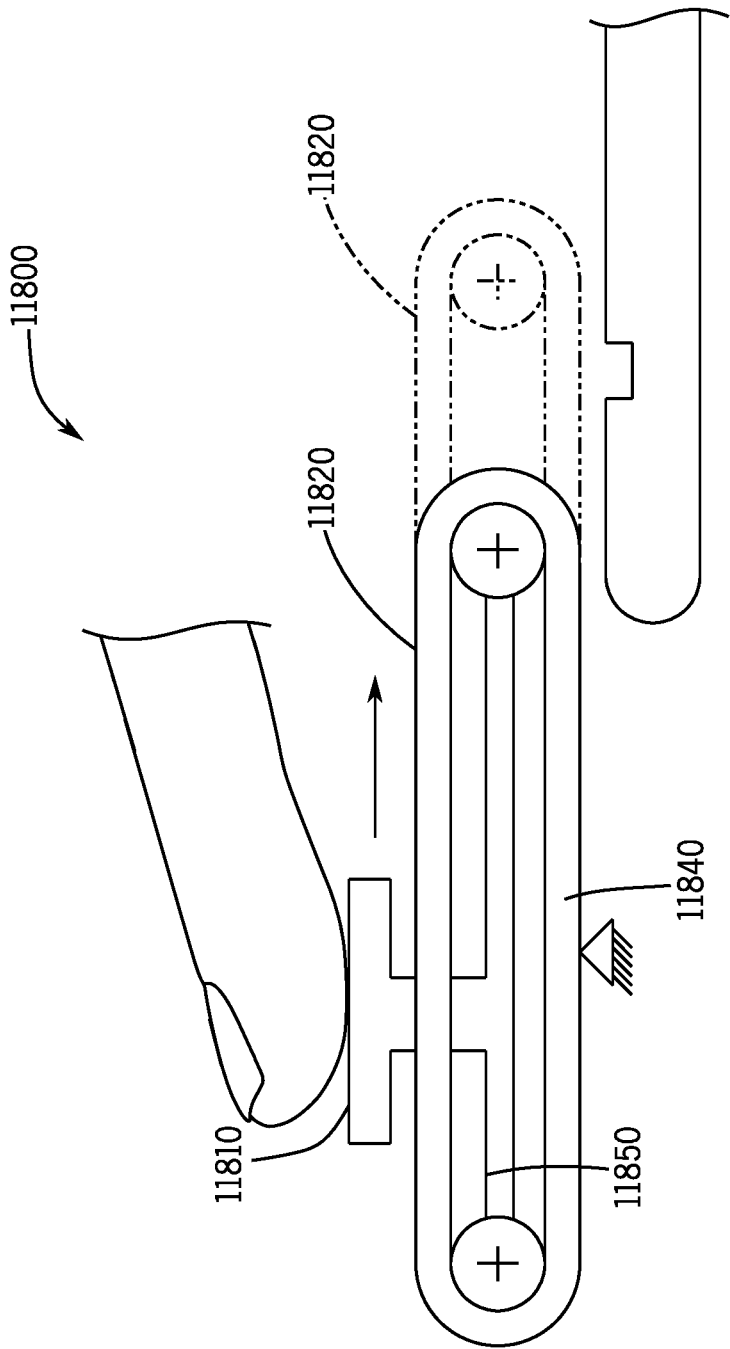
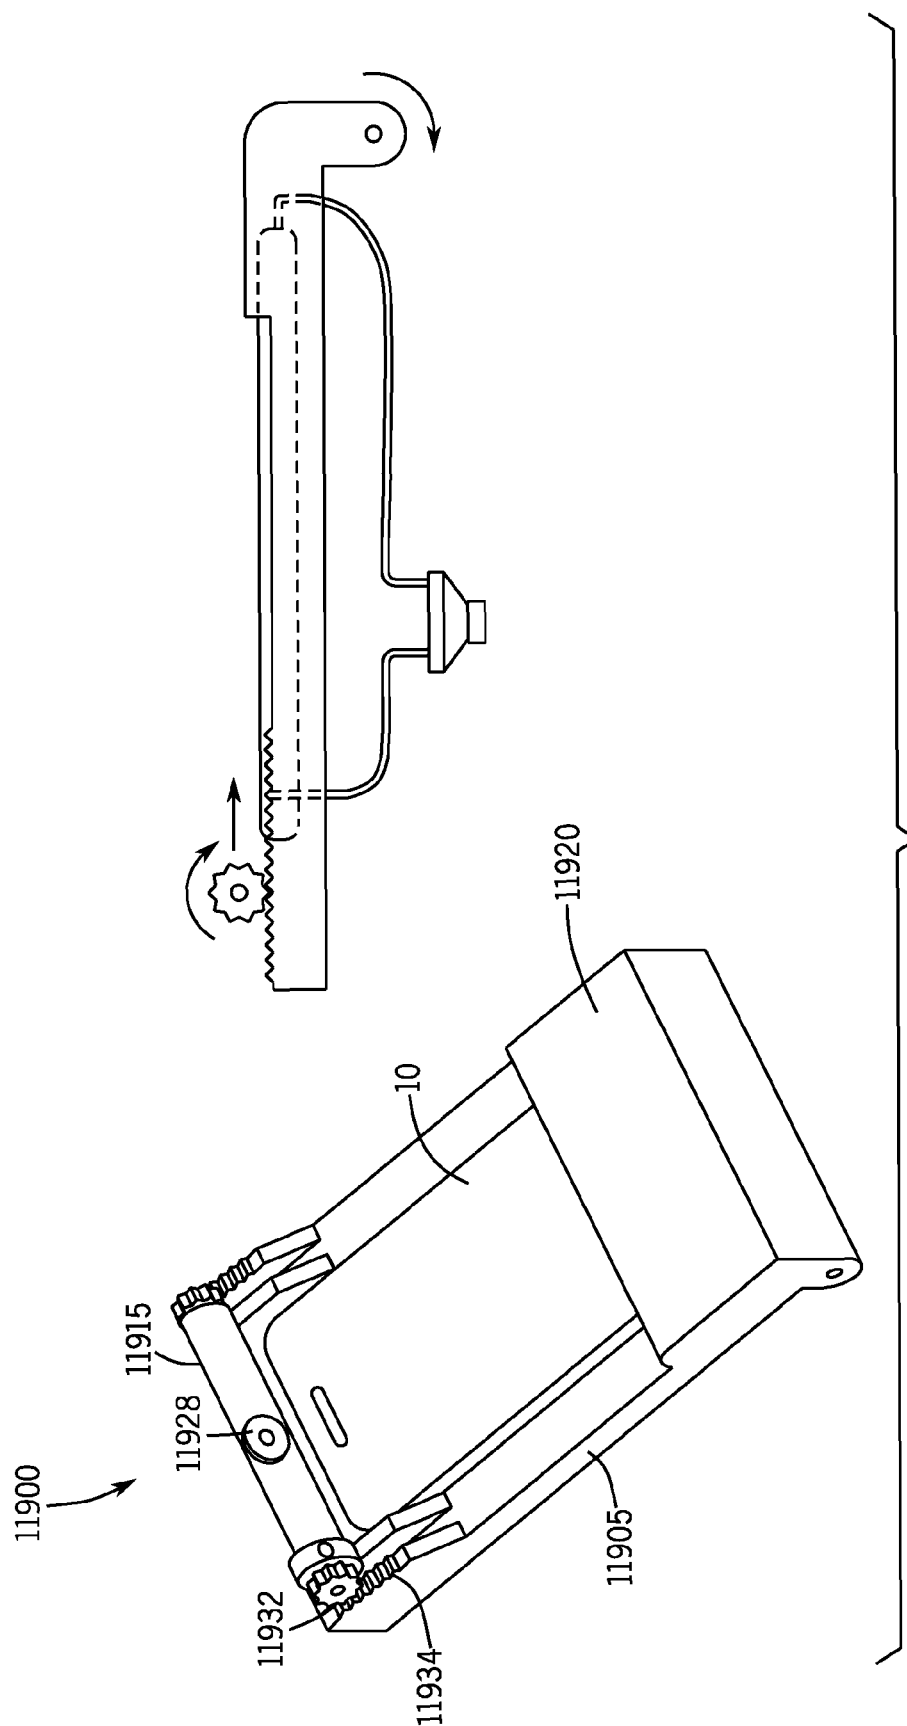


FIG. 118



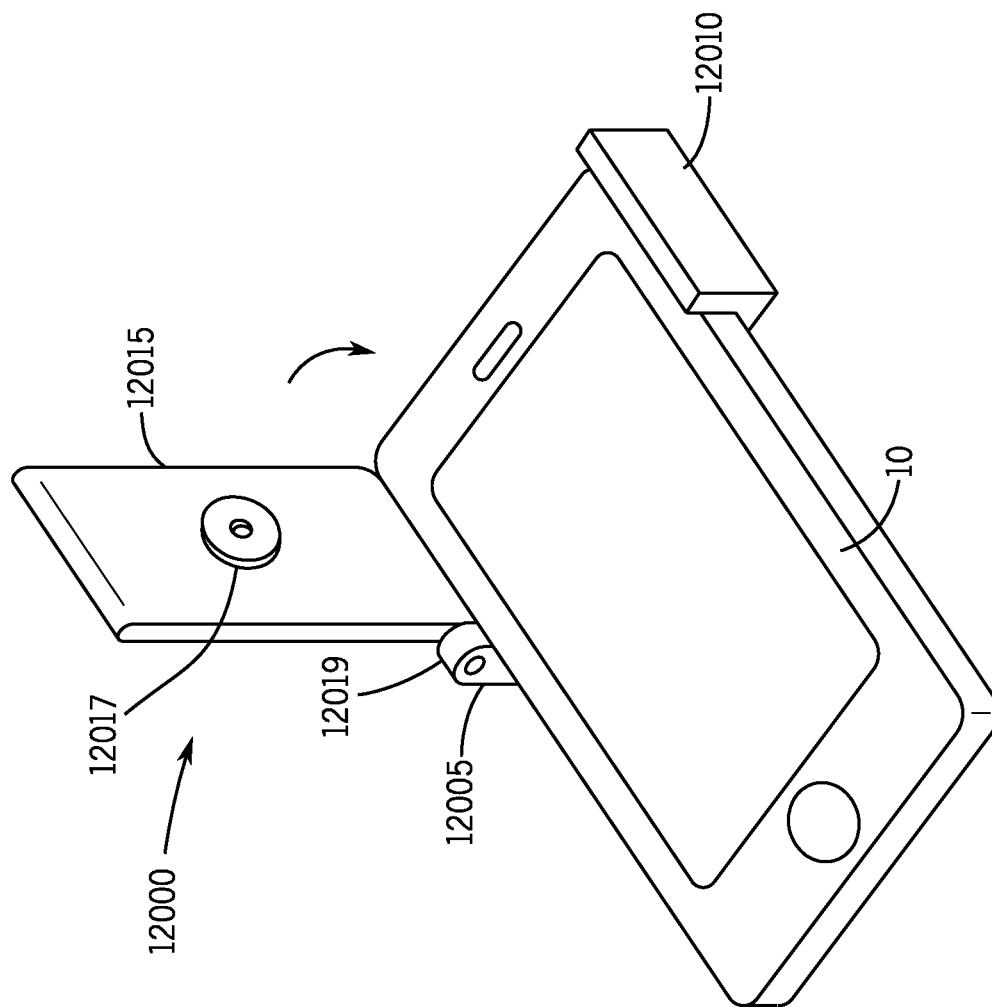


FIG. 120

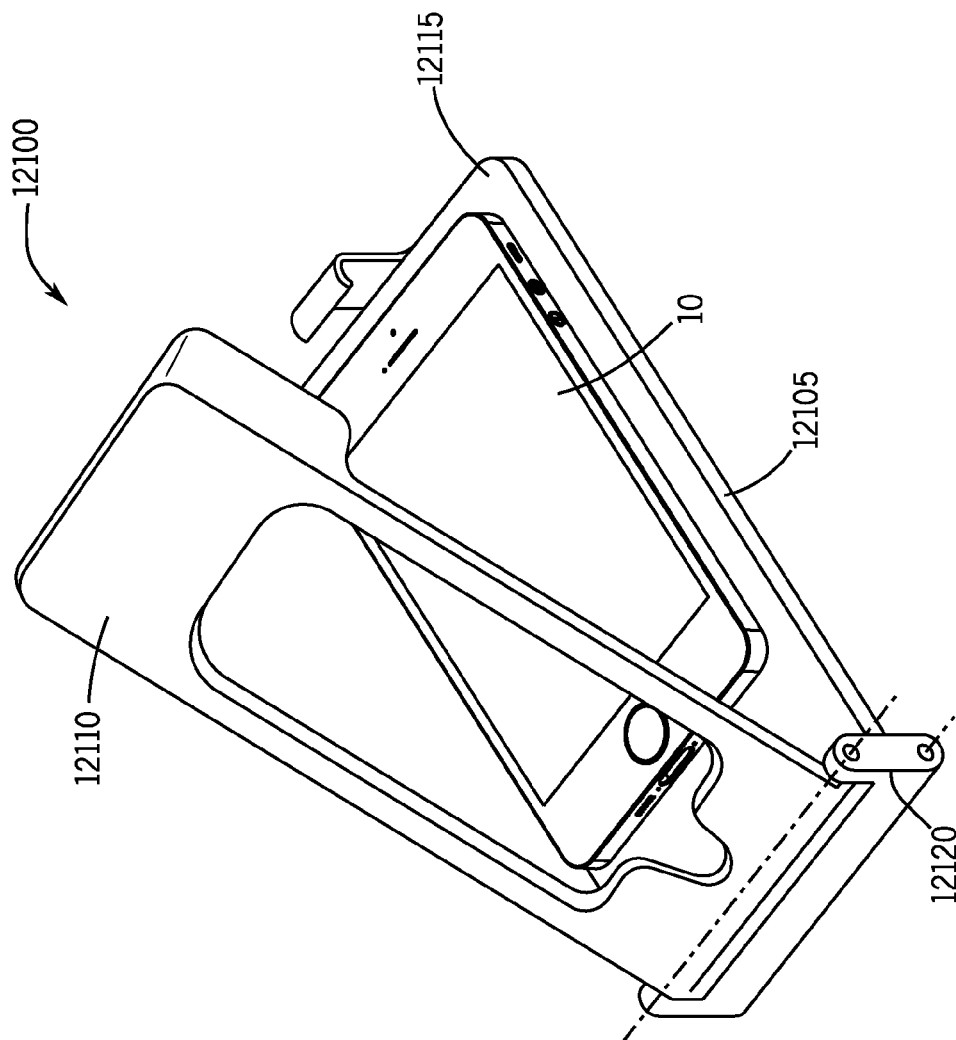


FIG. 121

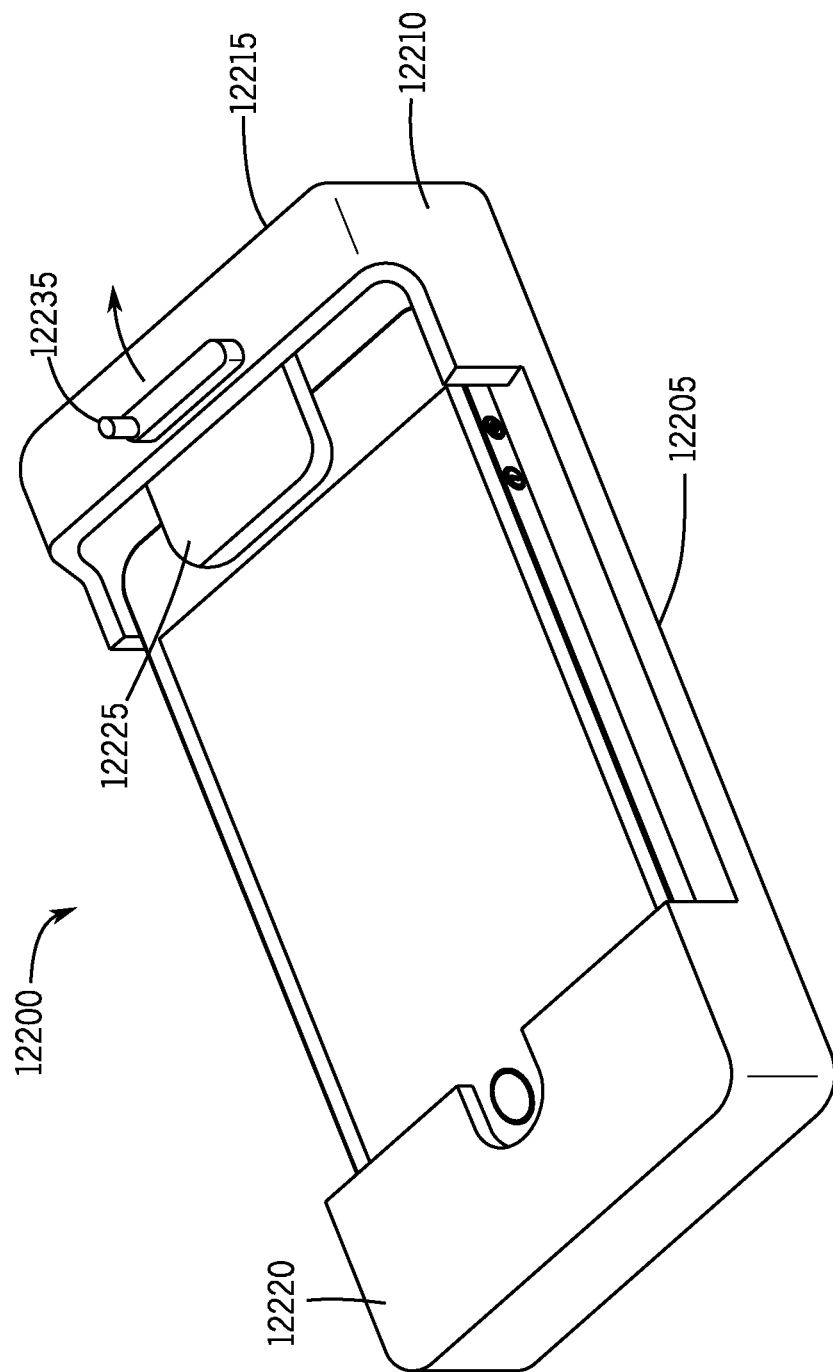
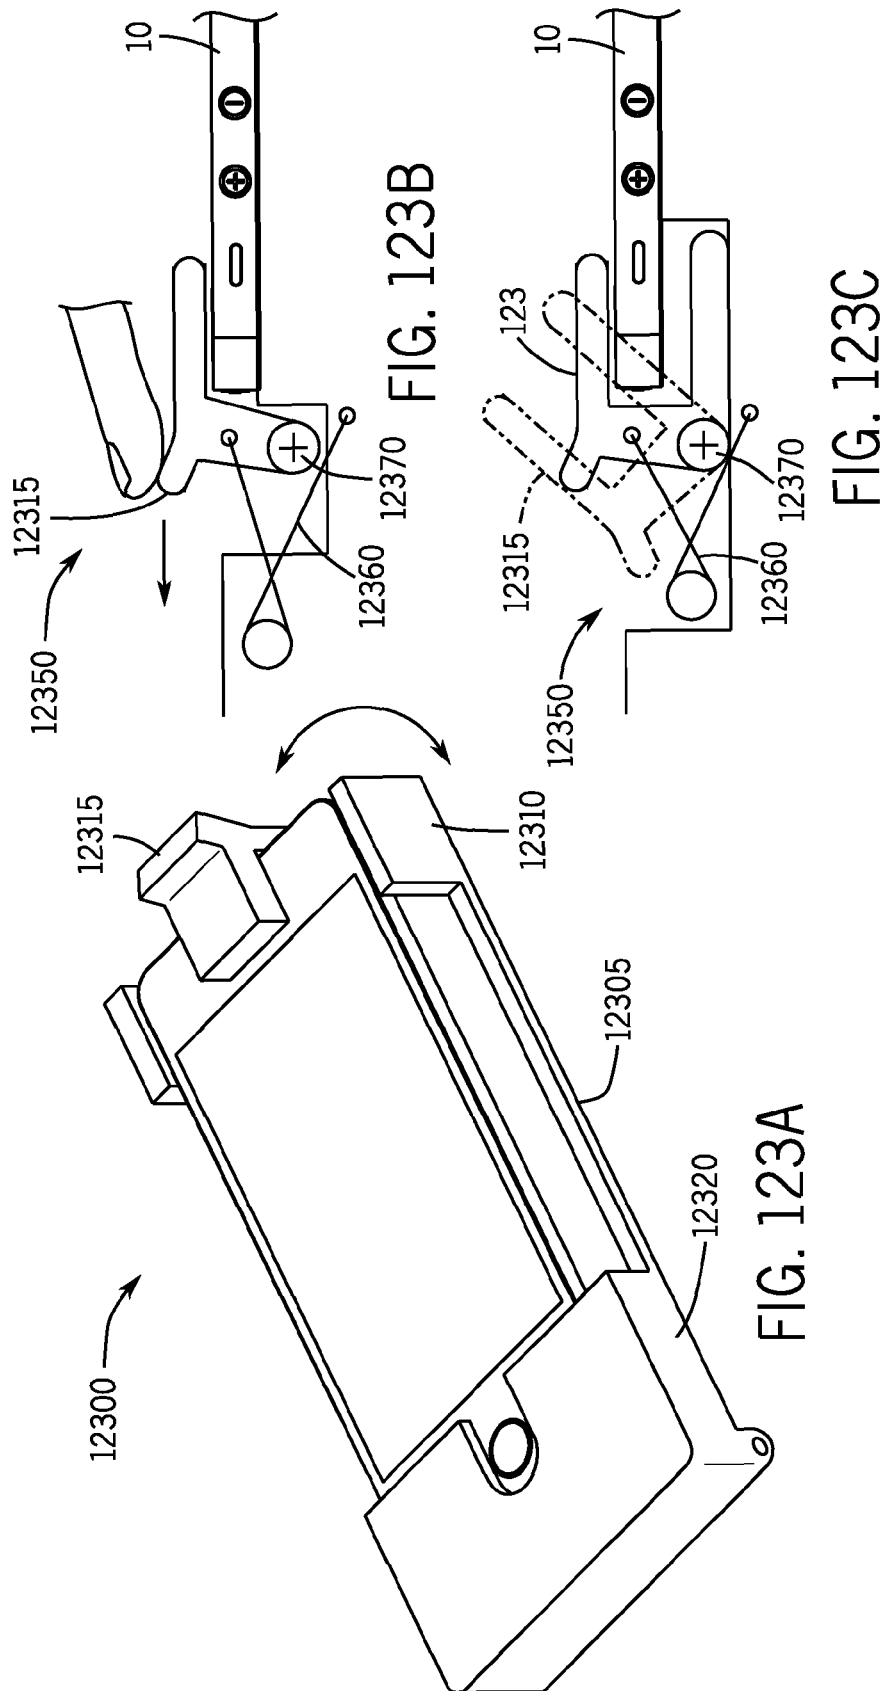


FIG. 122



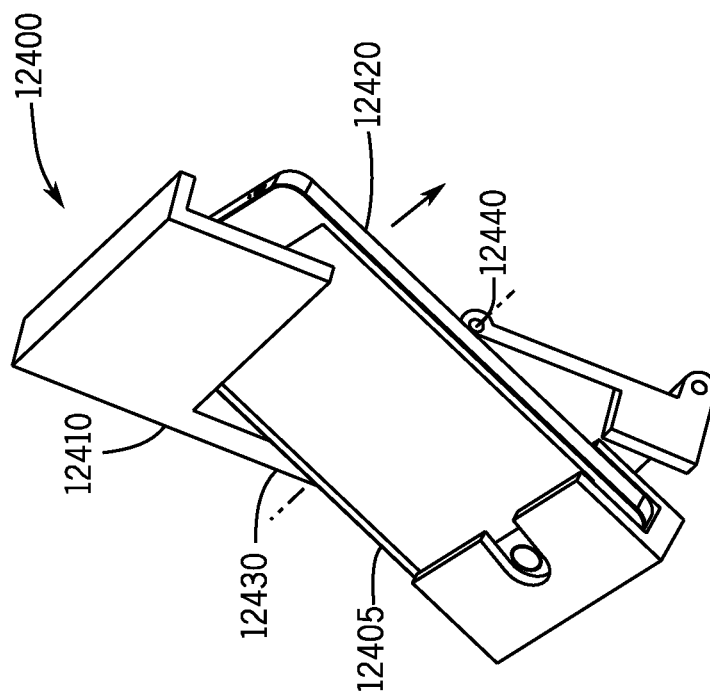


FIG. 124A

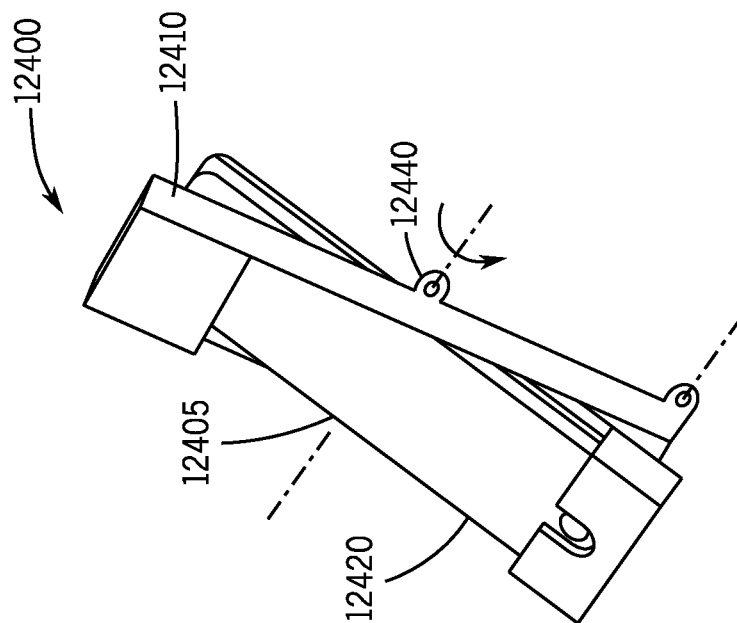


FIG. 124B




FIG. 125A




FIG. 125B




FIG. 125C




FIG. 125D




FIG. 125E



FIG. 125F




FIG. 125G

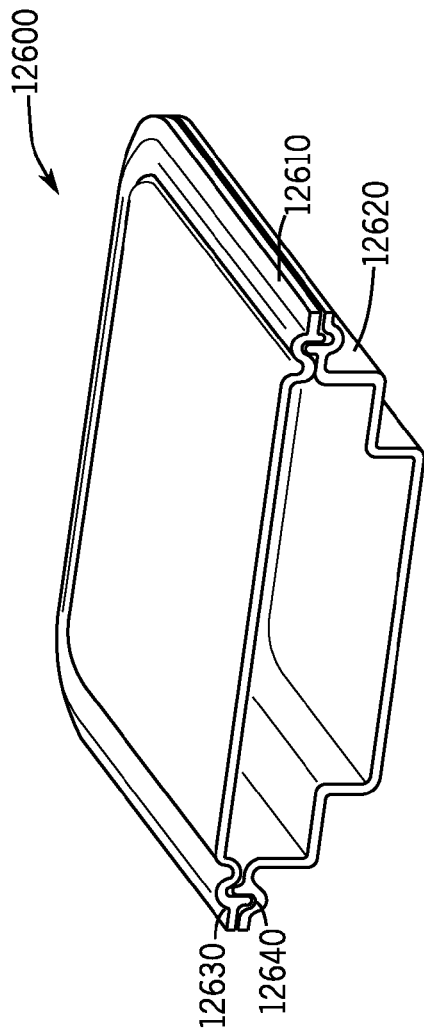


FIG. 126A

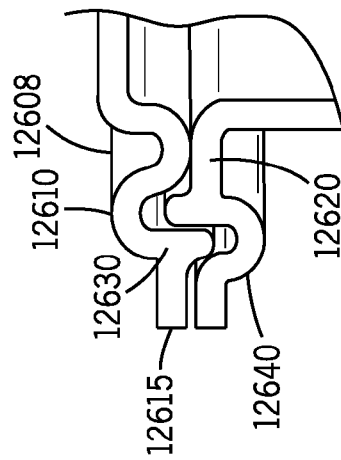


FIG. 126B

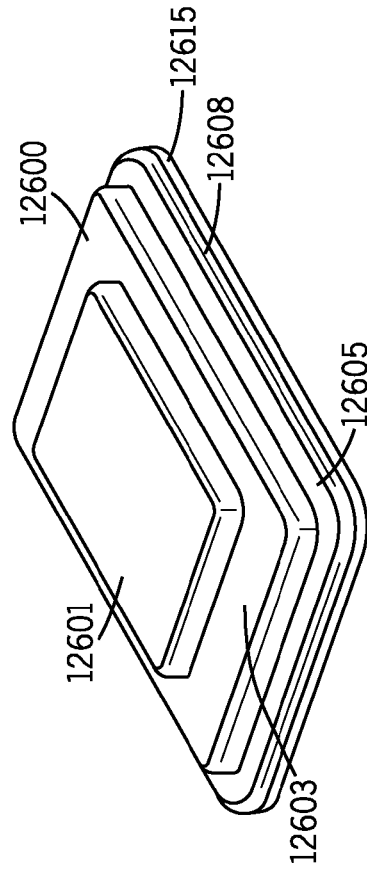


FIG. 126C

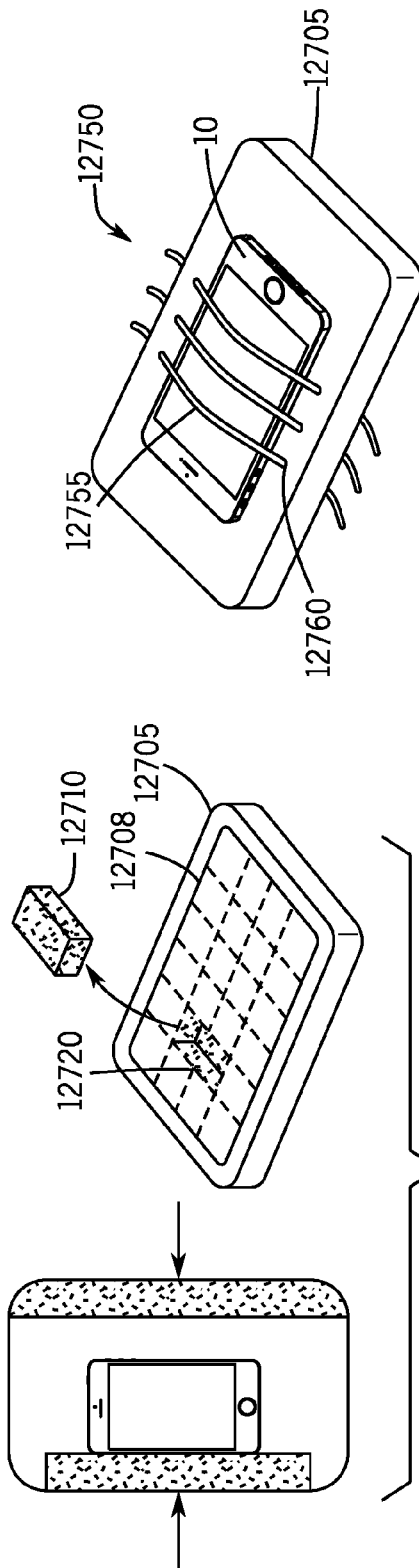
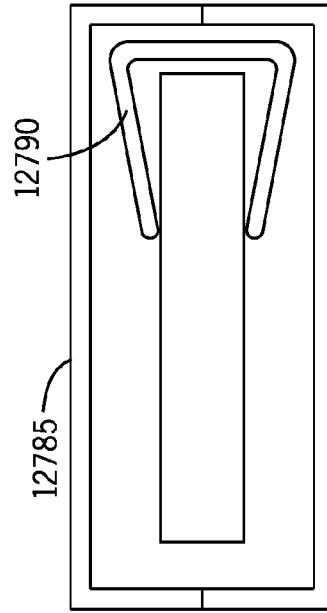
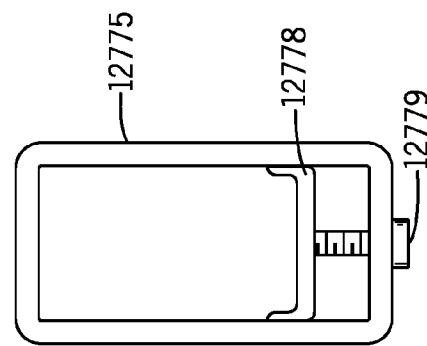


FIG. 127A

FIG. 127B



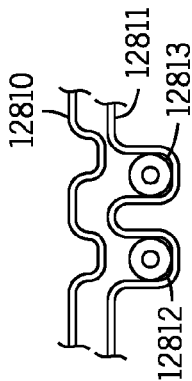


FIG. 128A




FIG. 128B




FIG. 128C




FIG. 128D




FIG. 128E

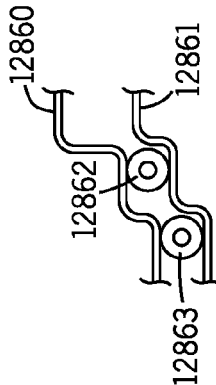


FIG. 128F

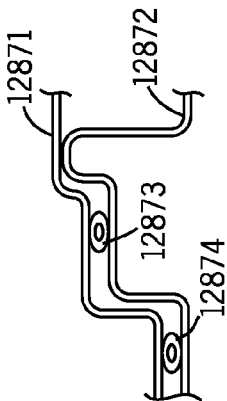


FIG. 128G

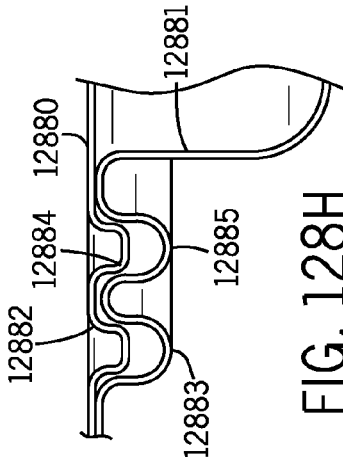
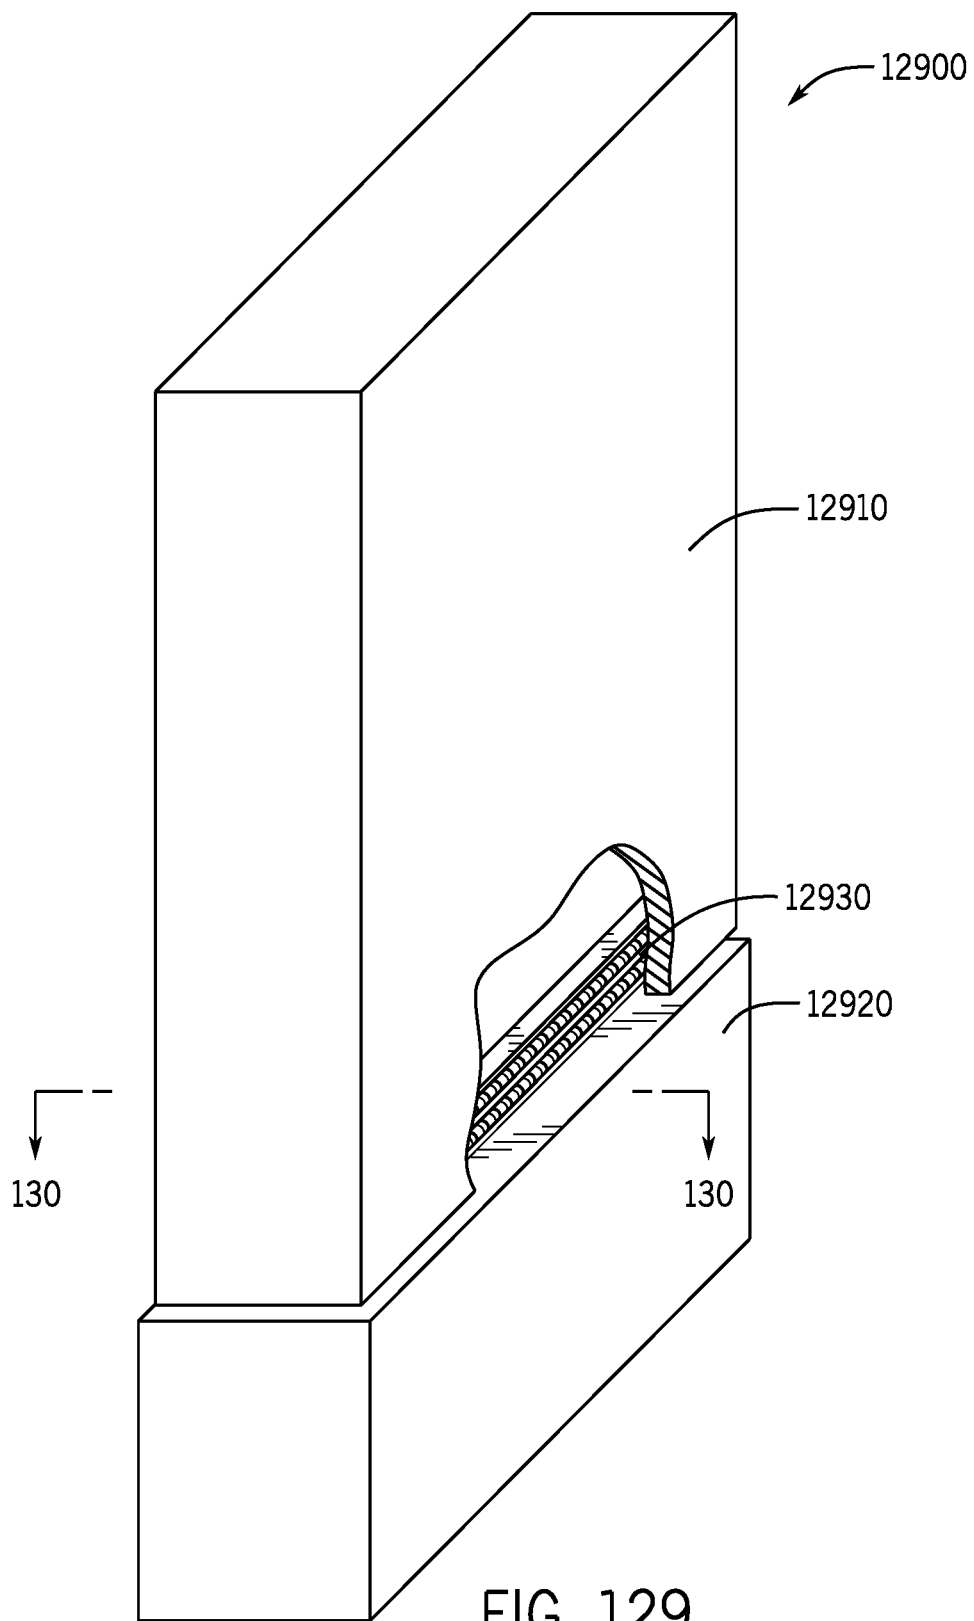
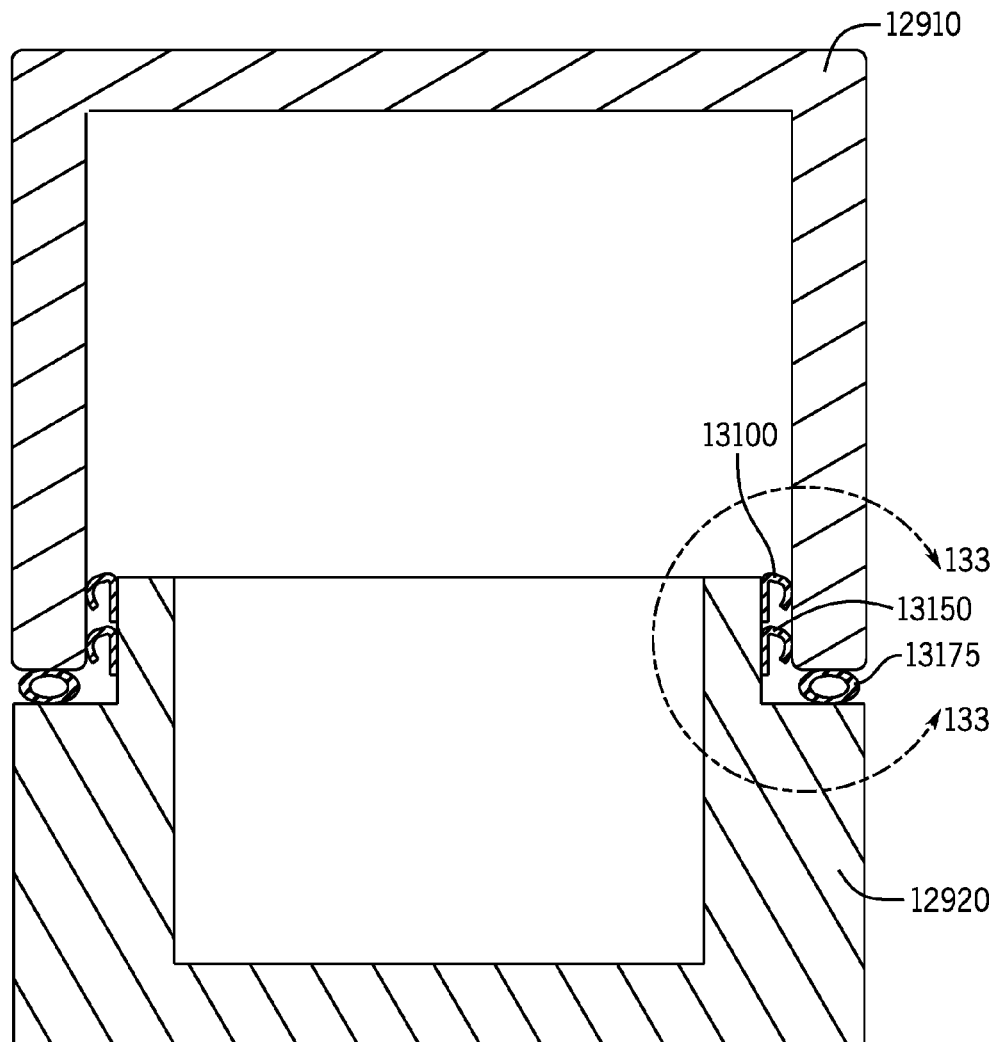
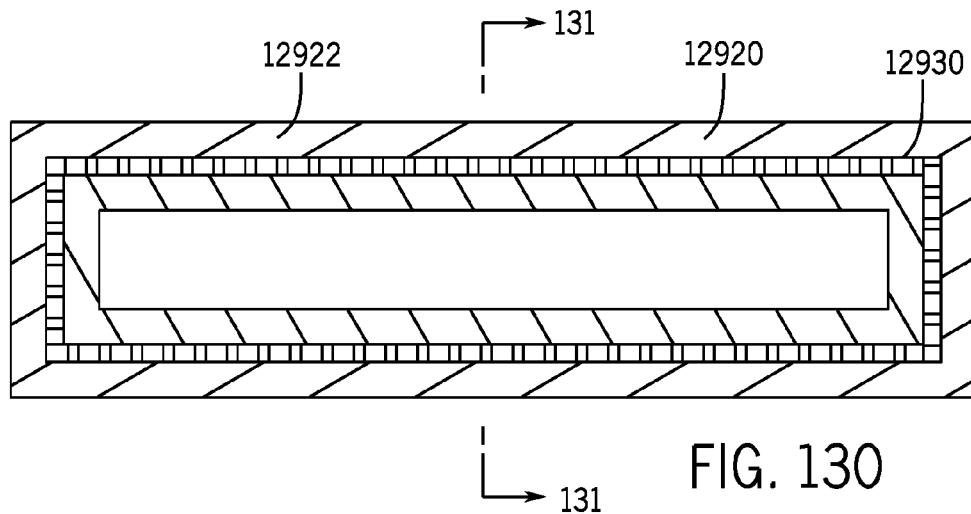


FIG. 128H





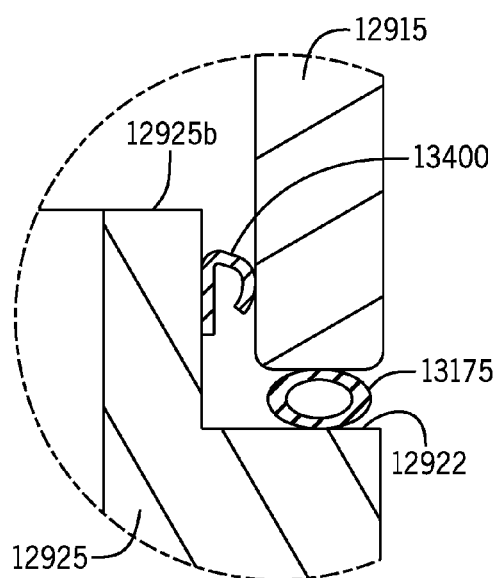
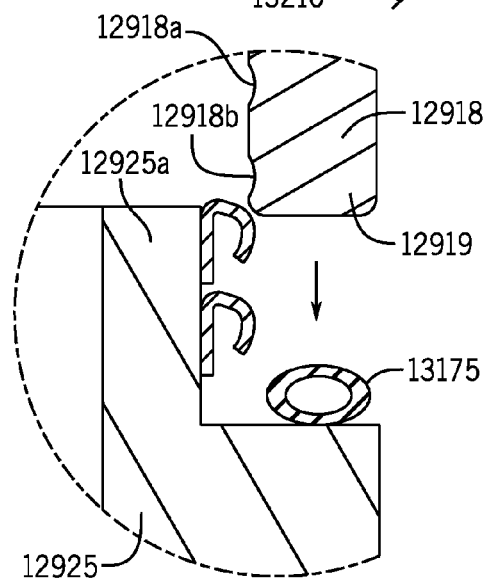
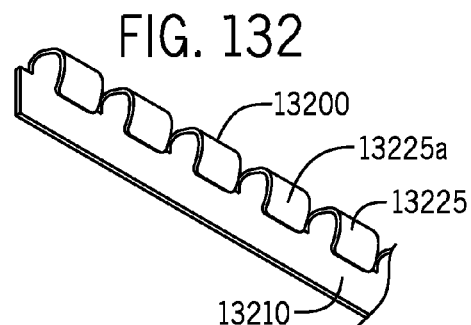
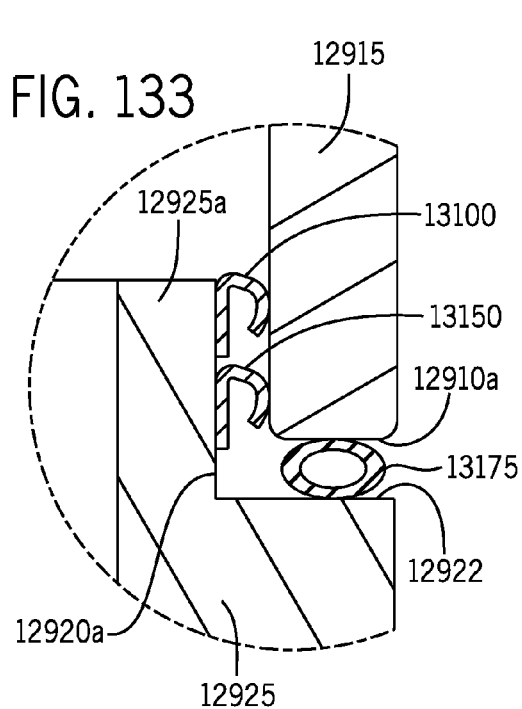


FIG. 135

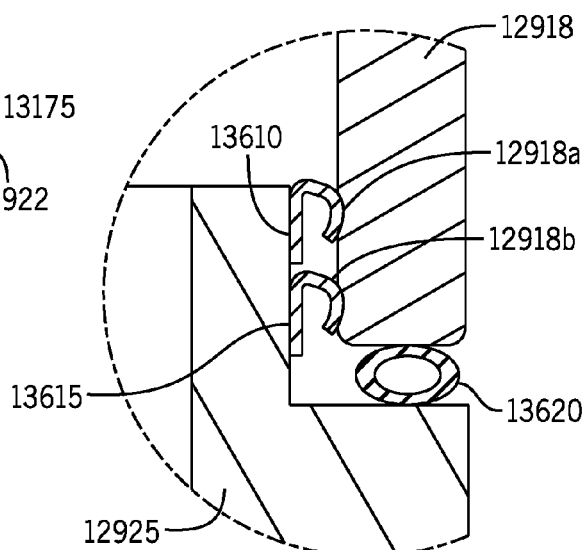
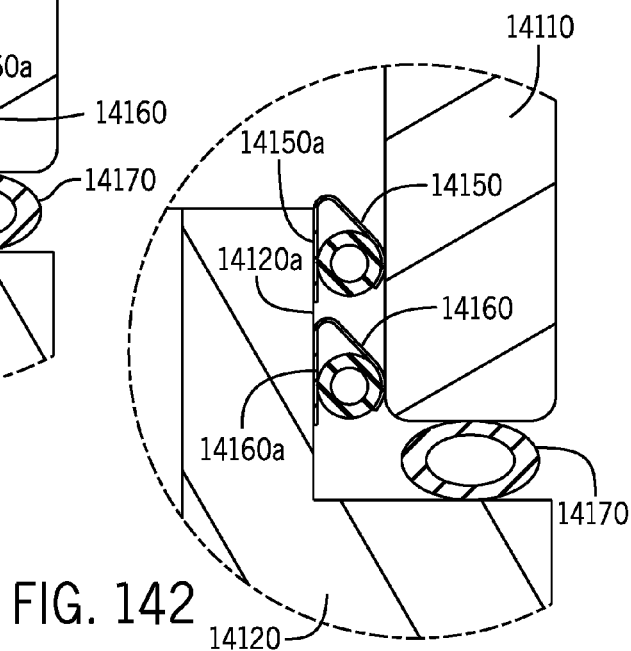
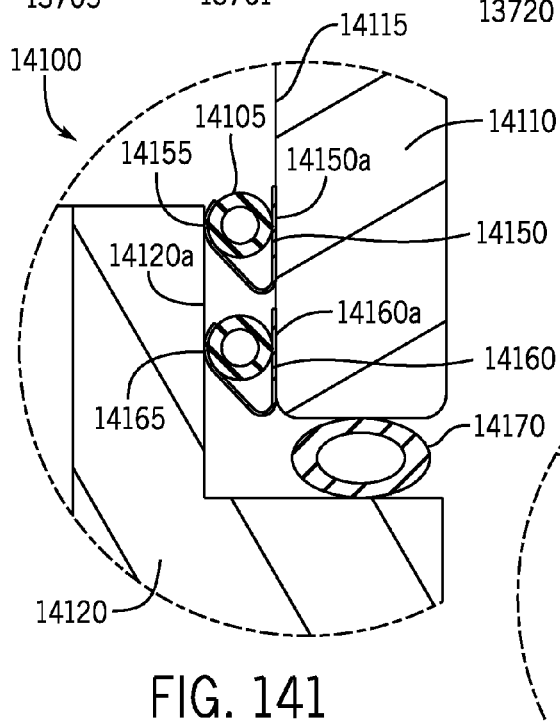
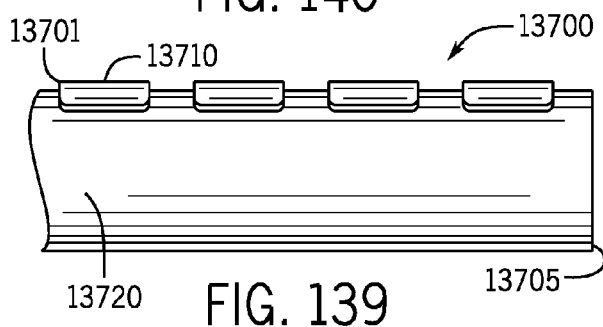
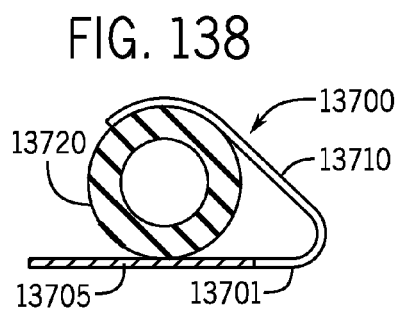
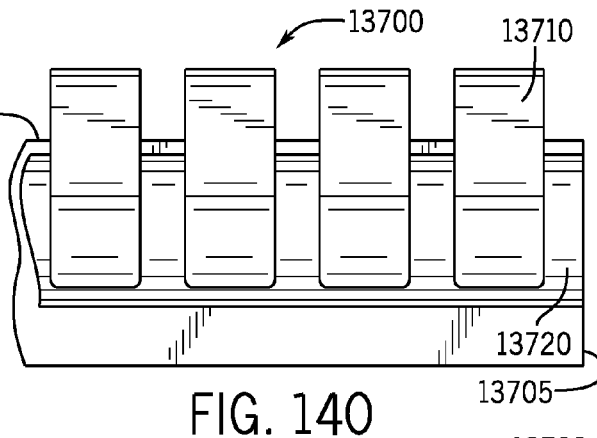
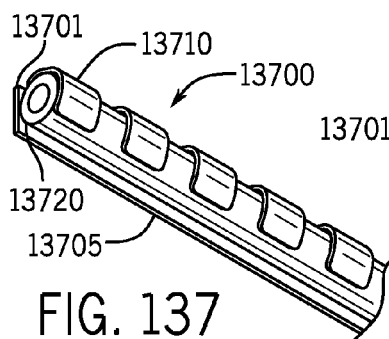


FIG. 136

FIG. 134



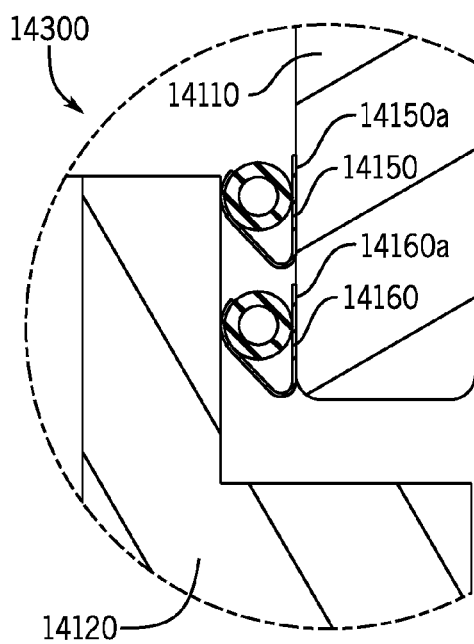


FIG. 143

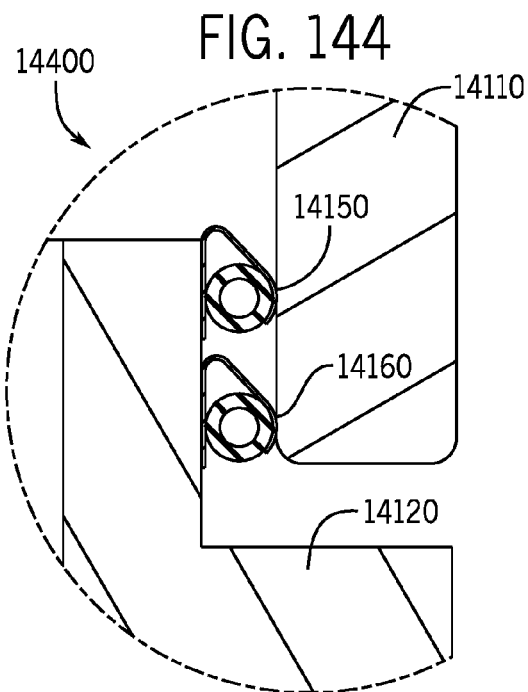


FIG. 144

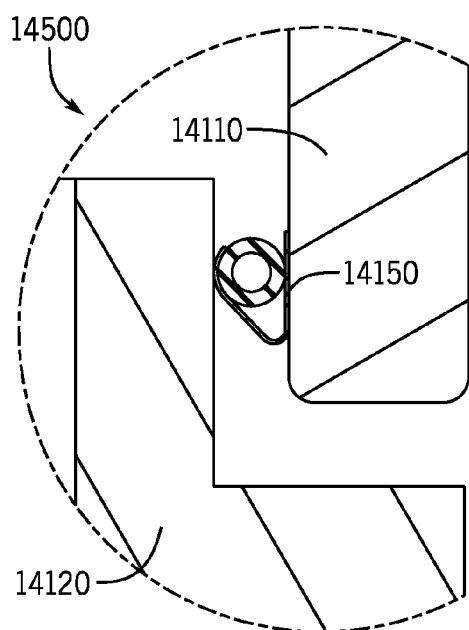


FIG. 145

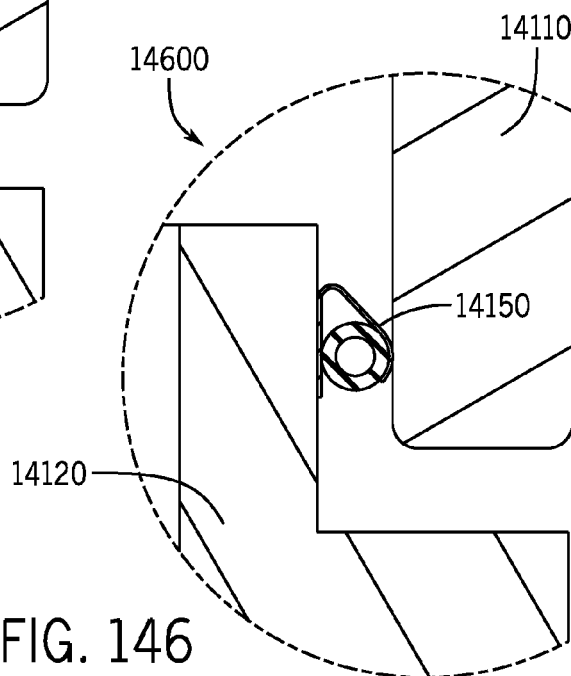
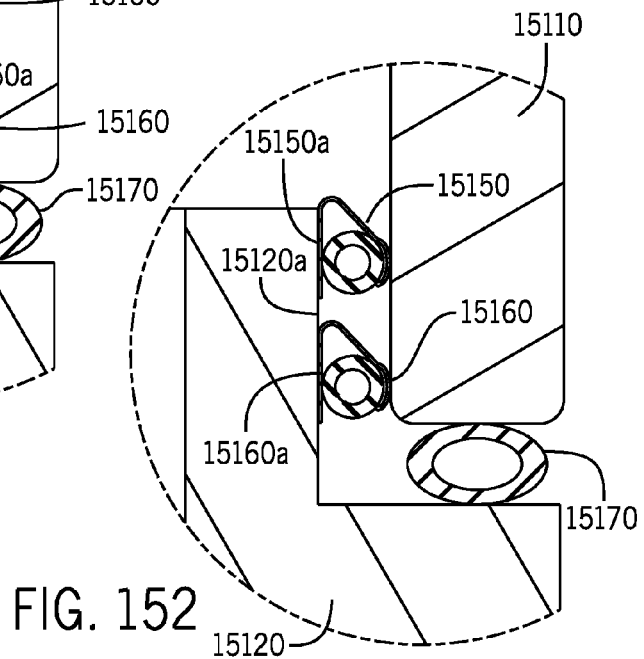
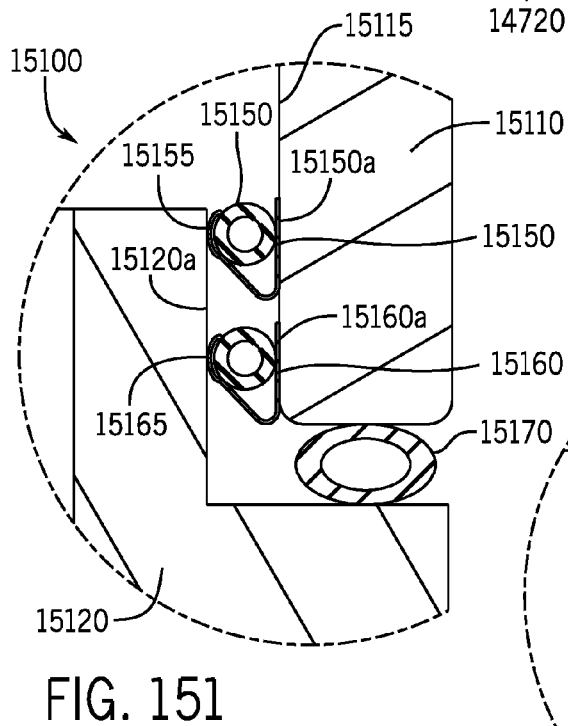
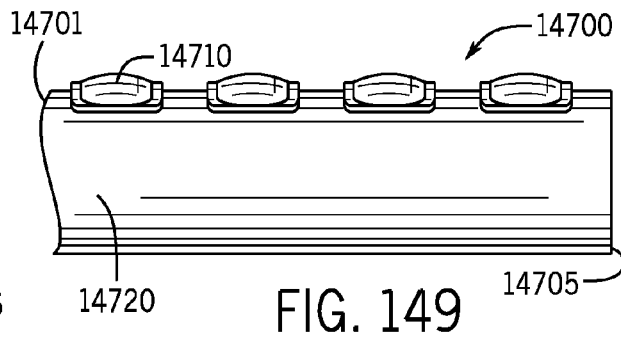
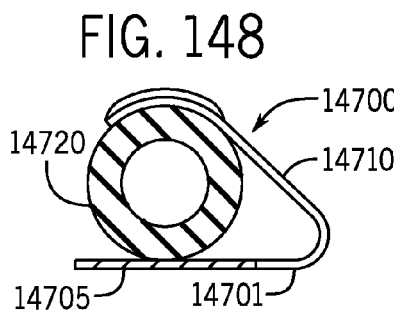
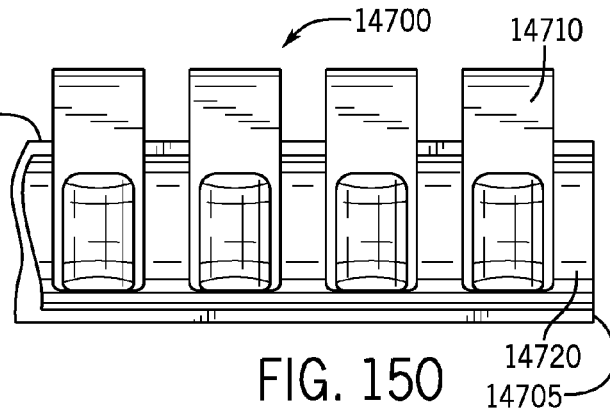
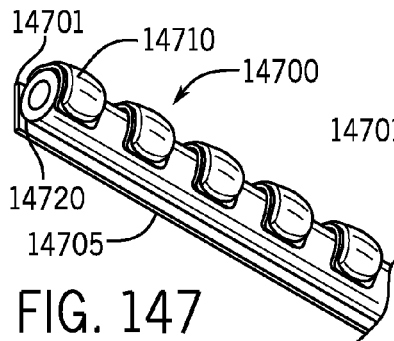


FIG. 146



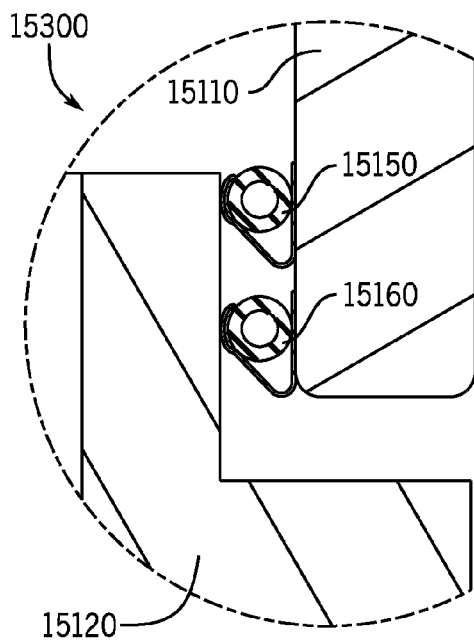


FIG. 153

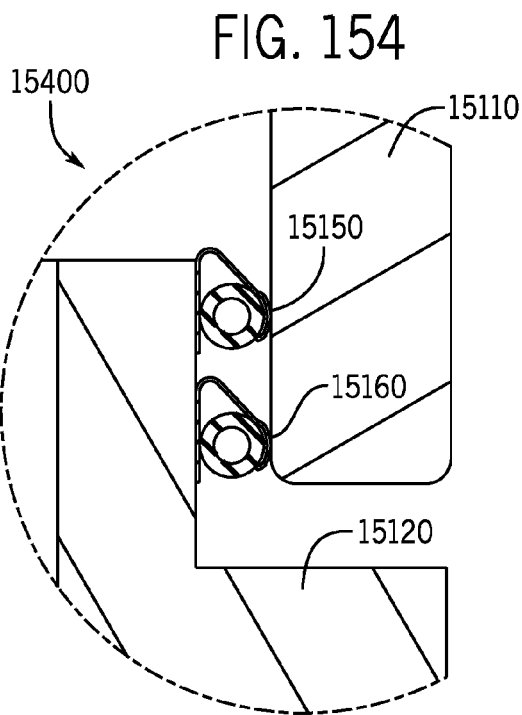


FIG. 154

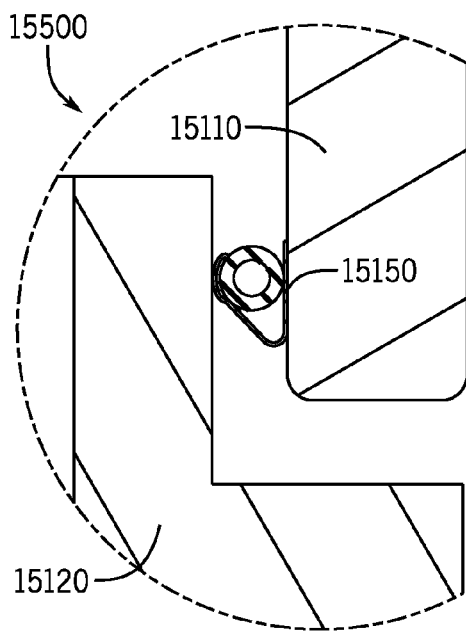


FIG. 155

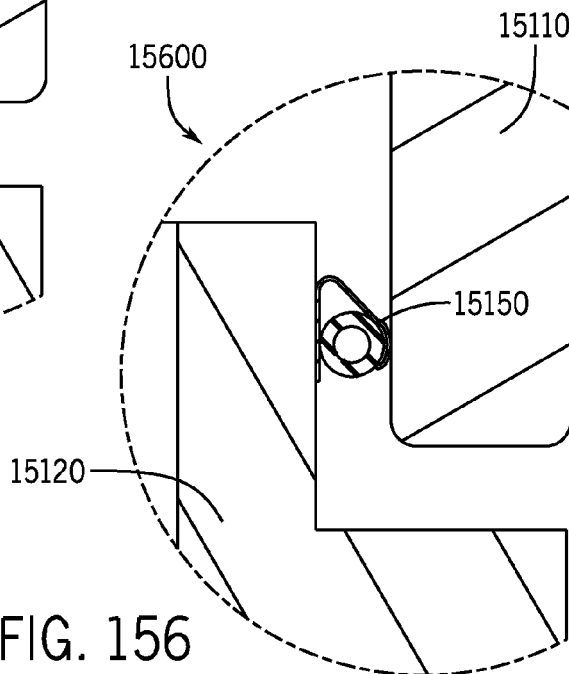


FIG. 156

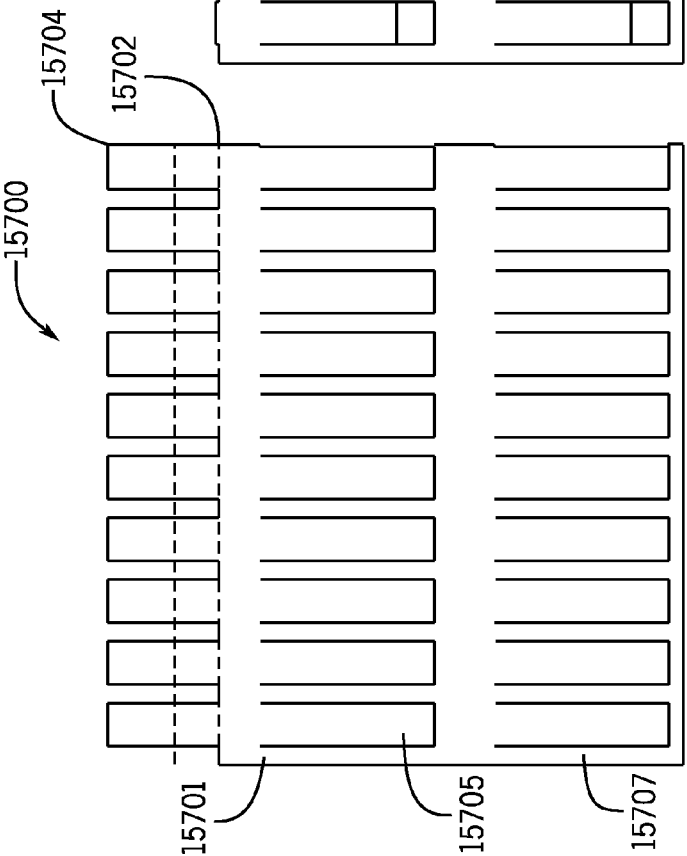


FIG. 157A

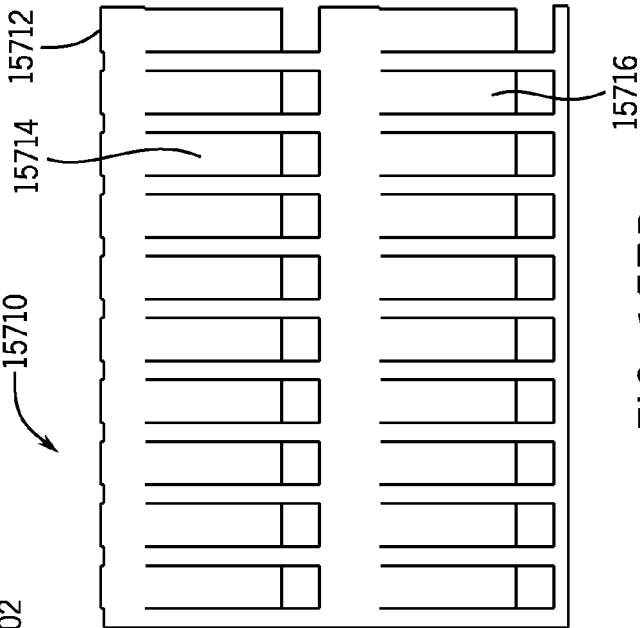


FIG. 157B

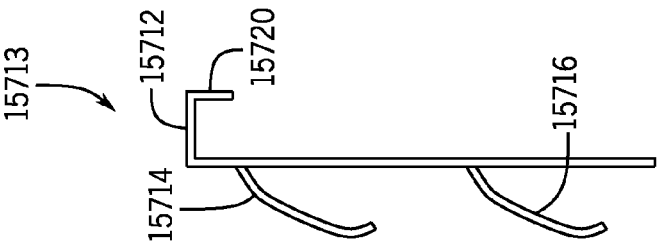


FIG. 157C

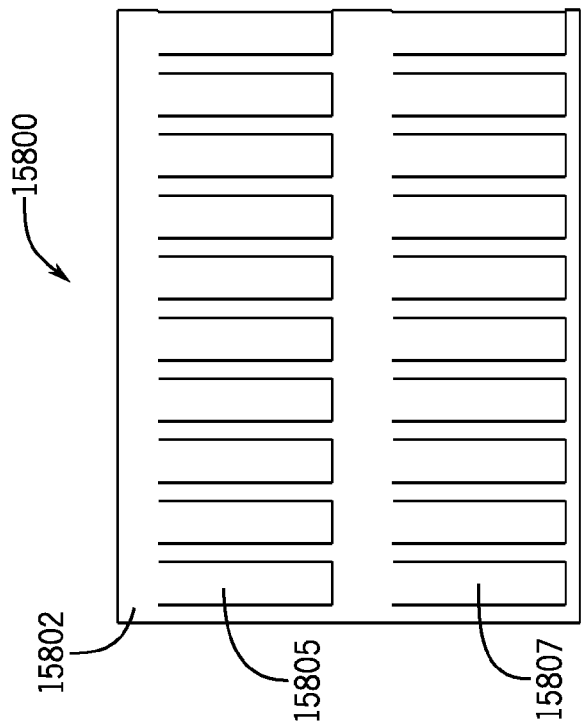


FIG. 158A

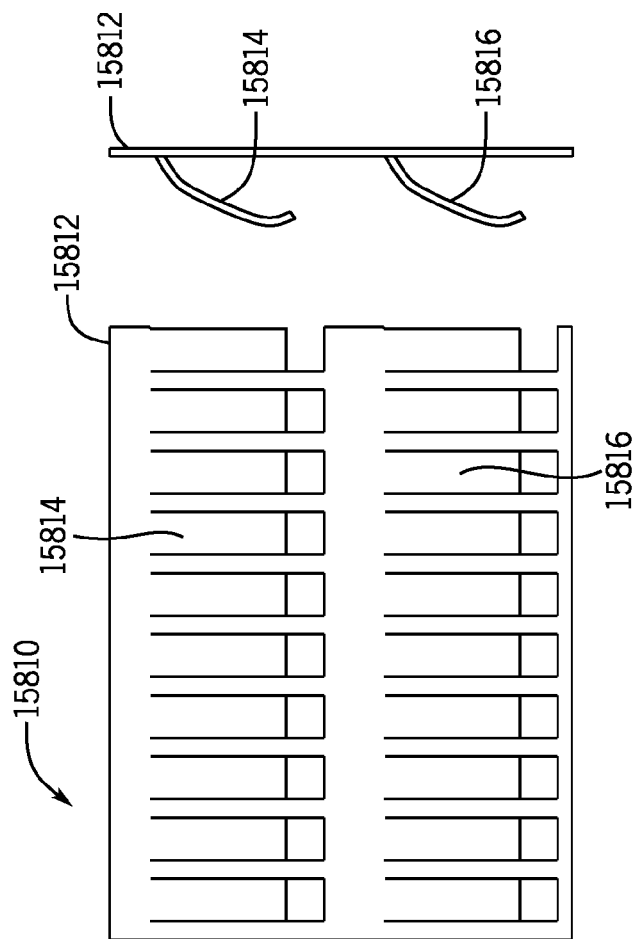


FIG. 158B

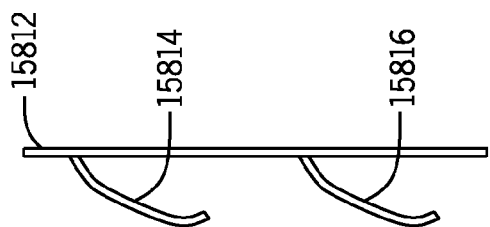


FIG. 158C

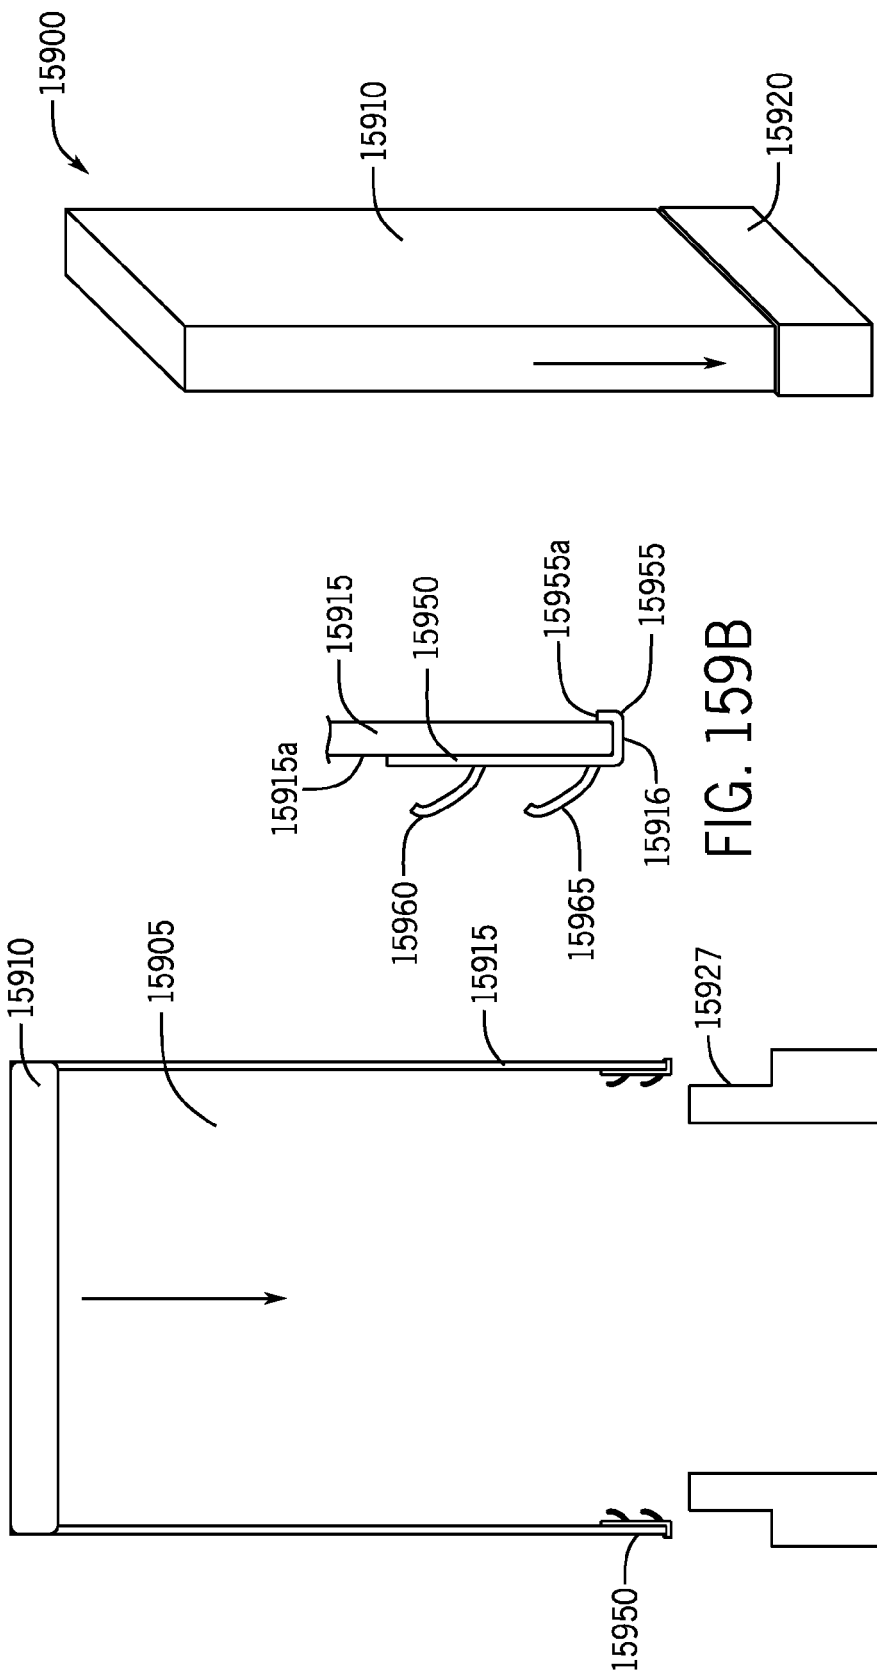
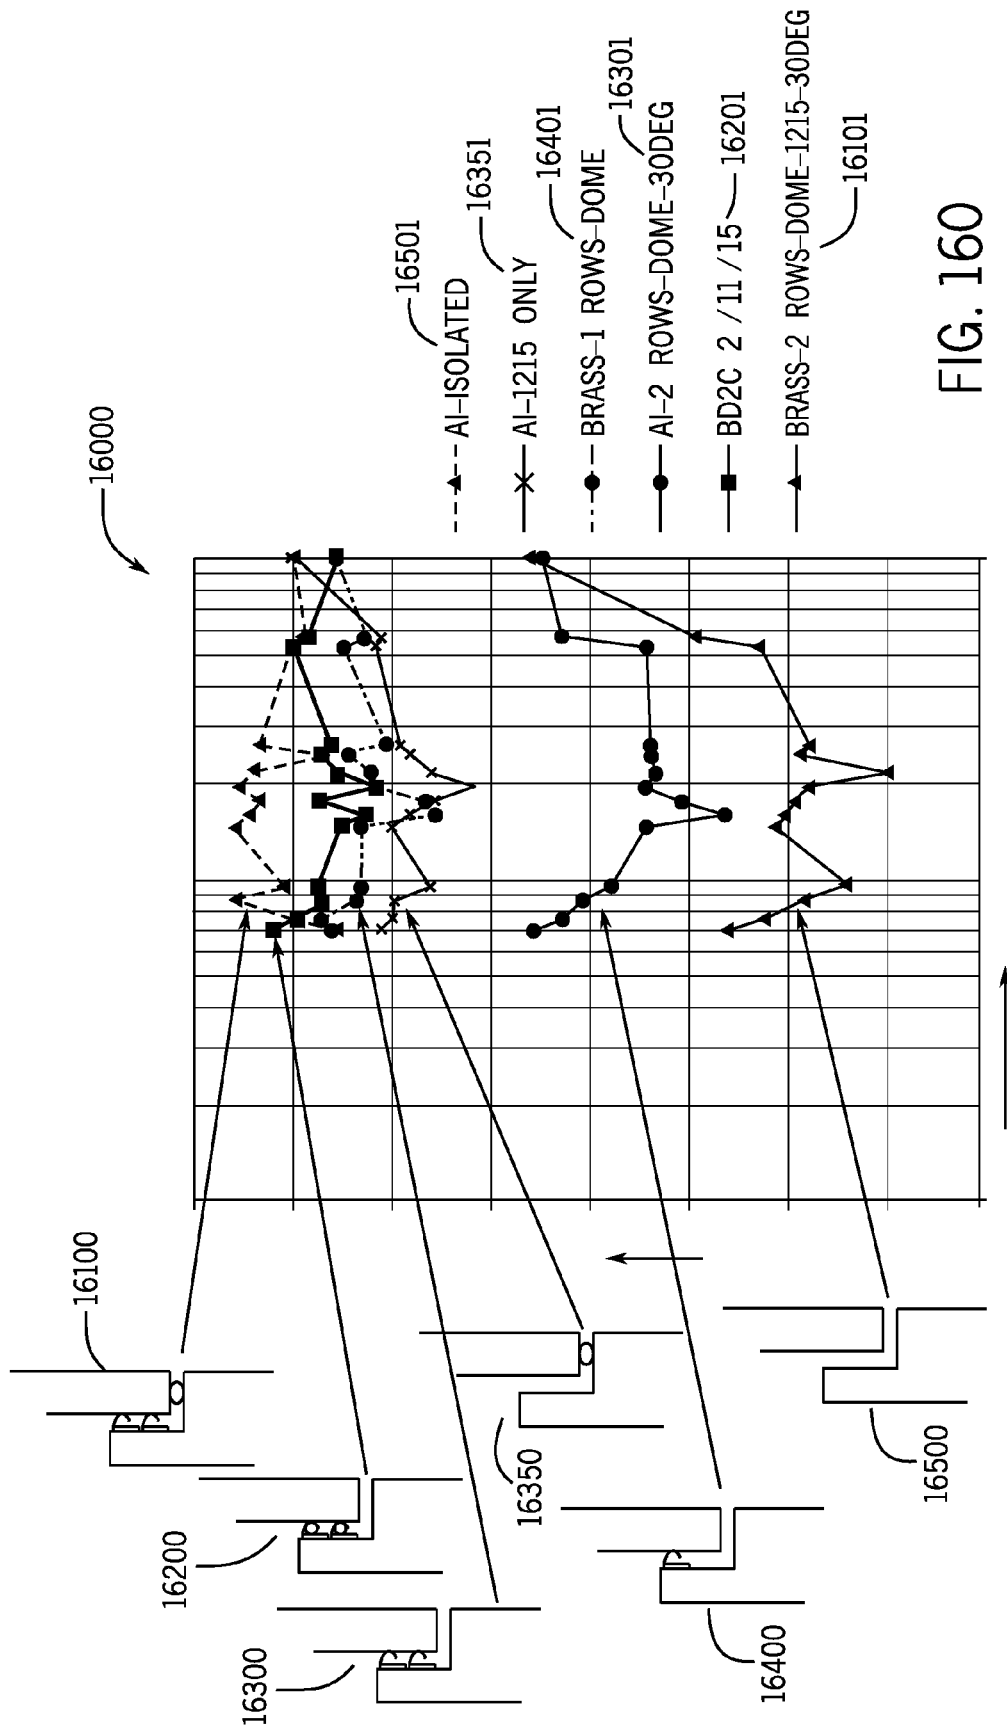


FIG. 159C

FIG. 159B

FIG. 159A



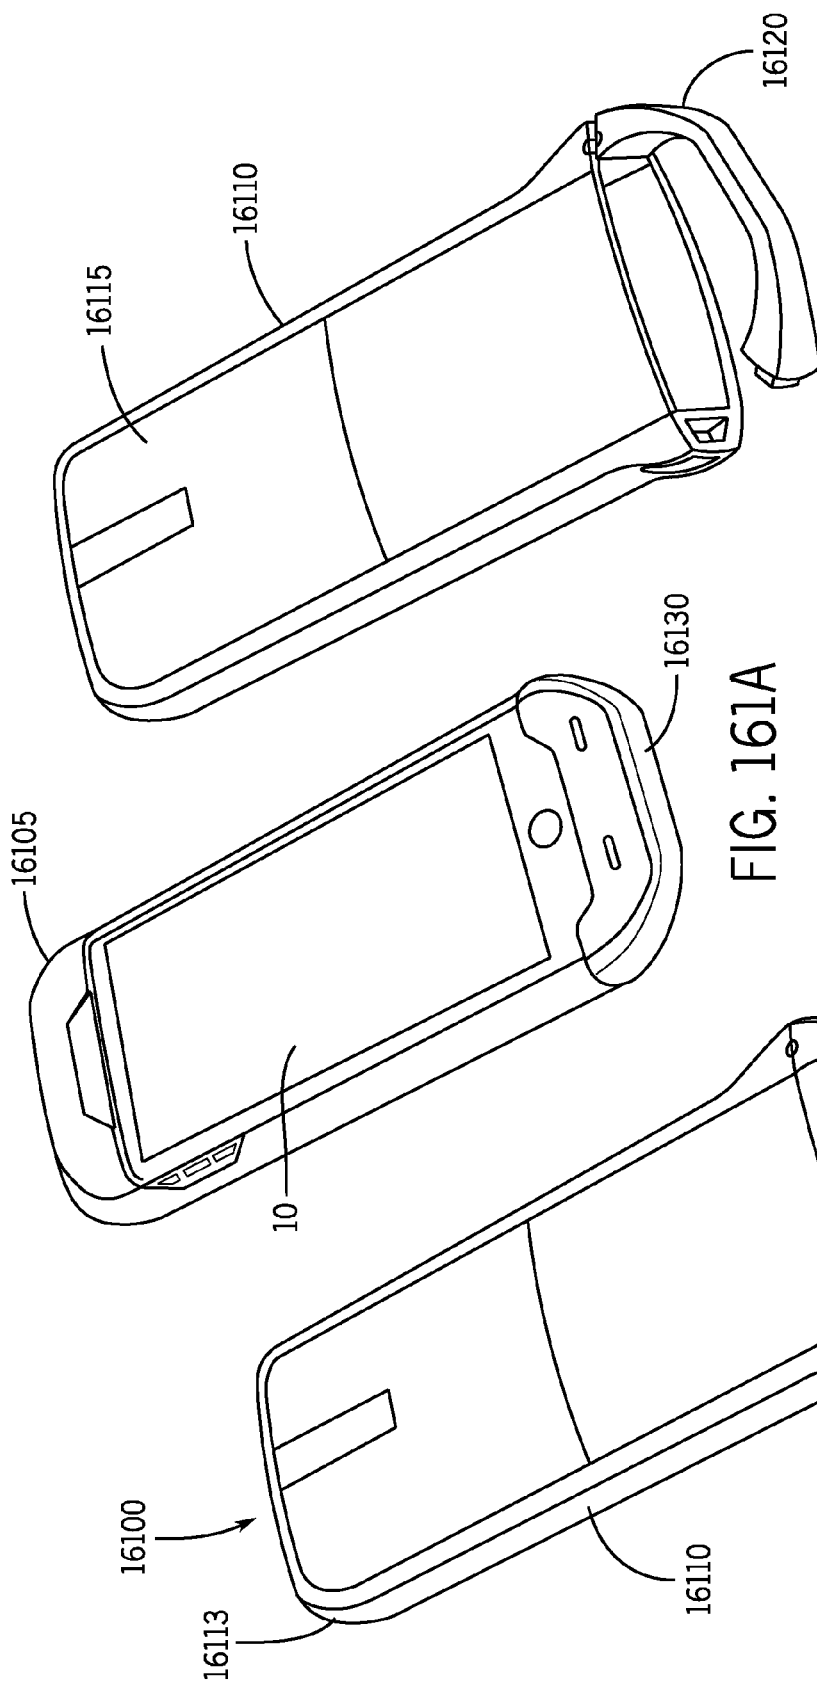
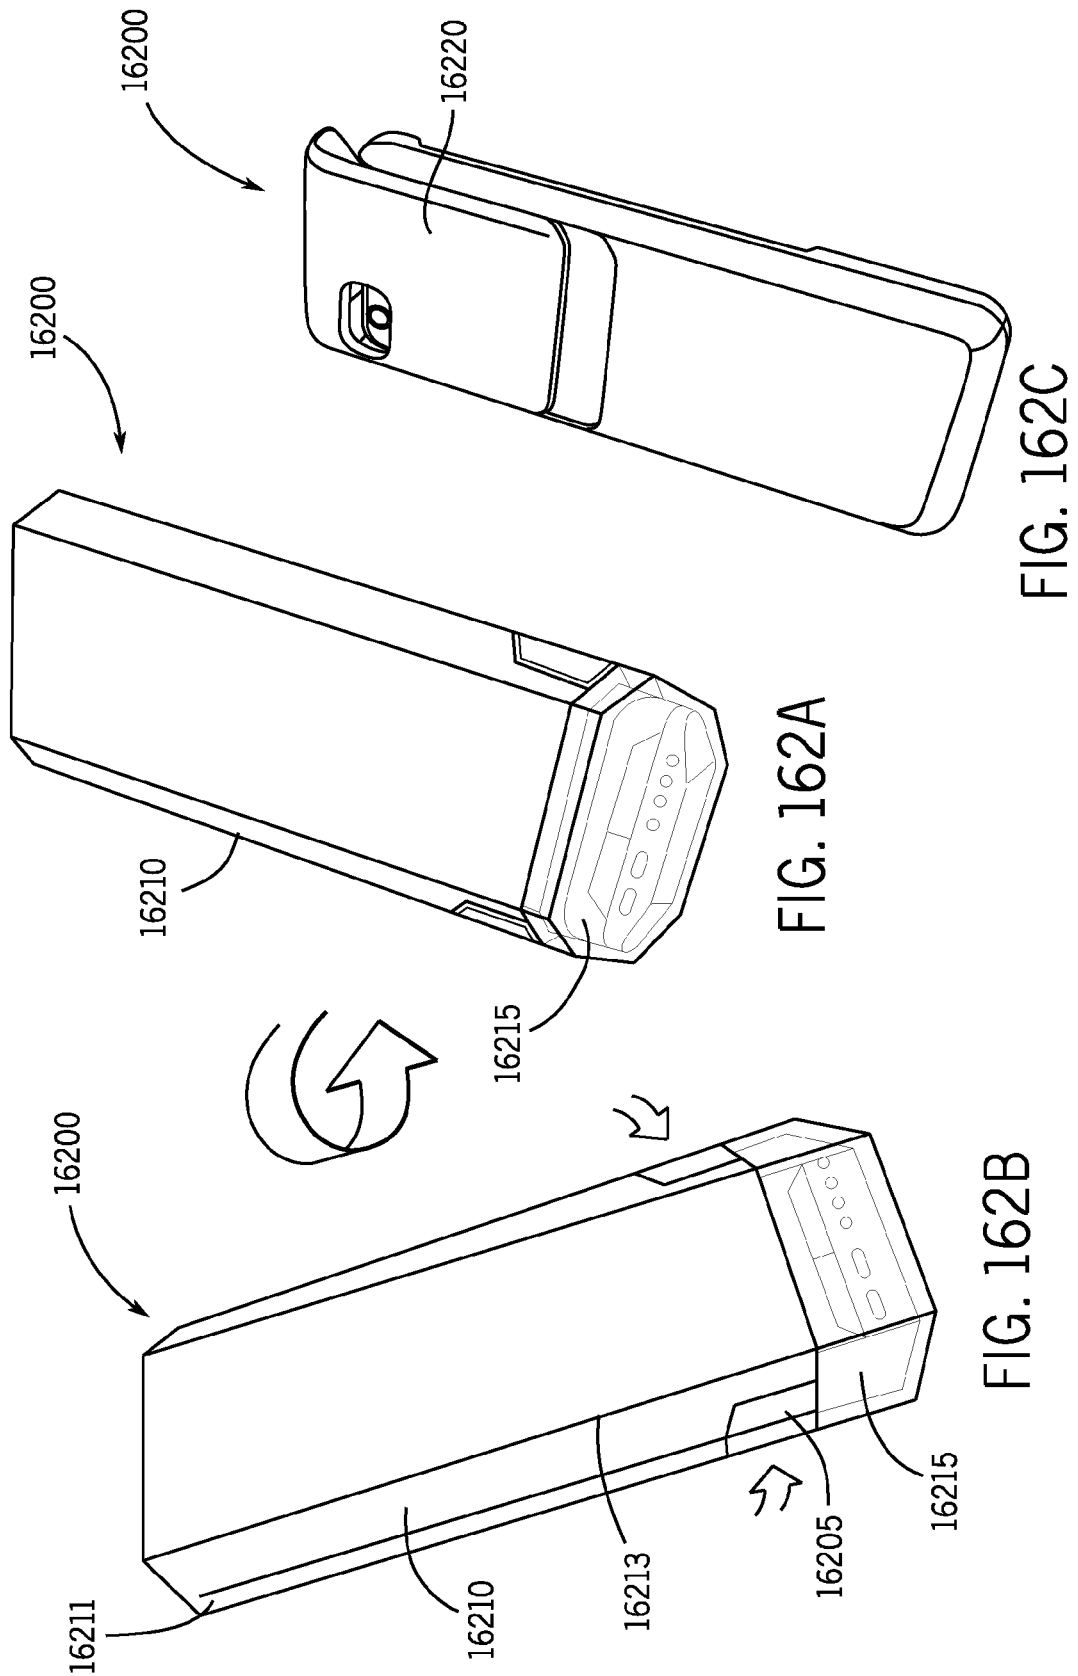
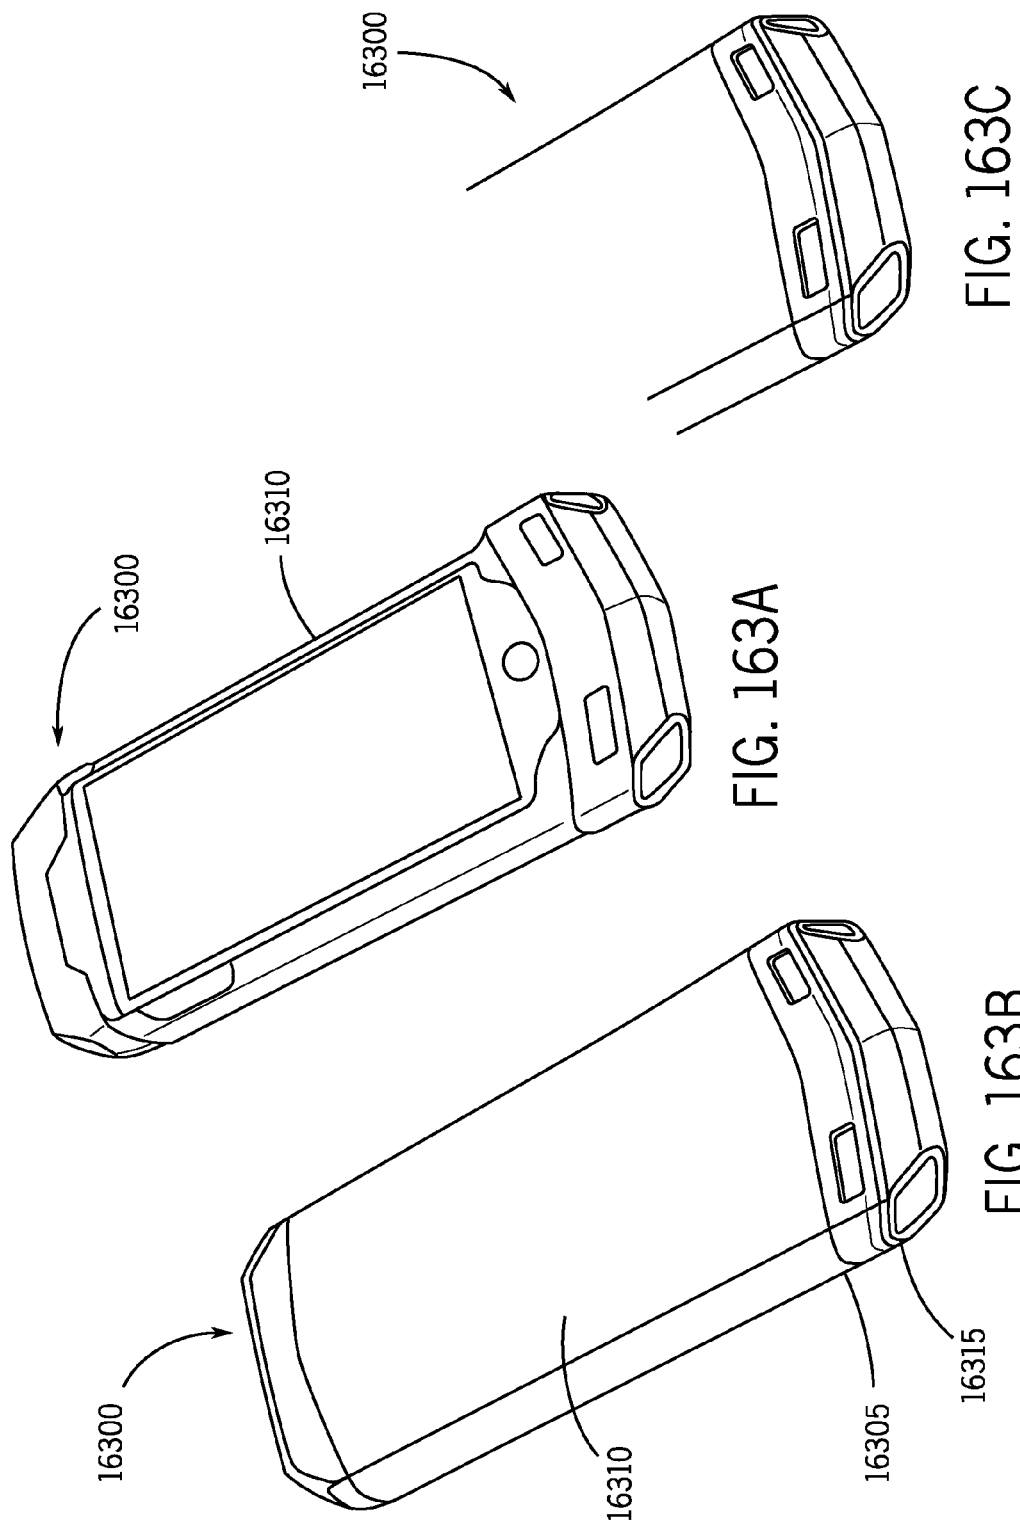



FIG. 161A


FIG. 161C


FIG. 161B






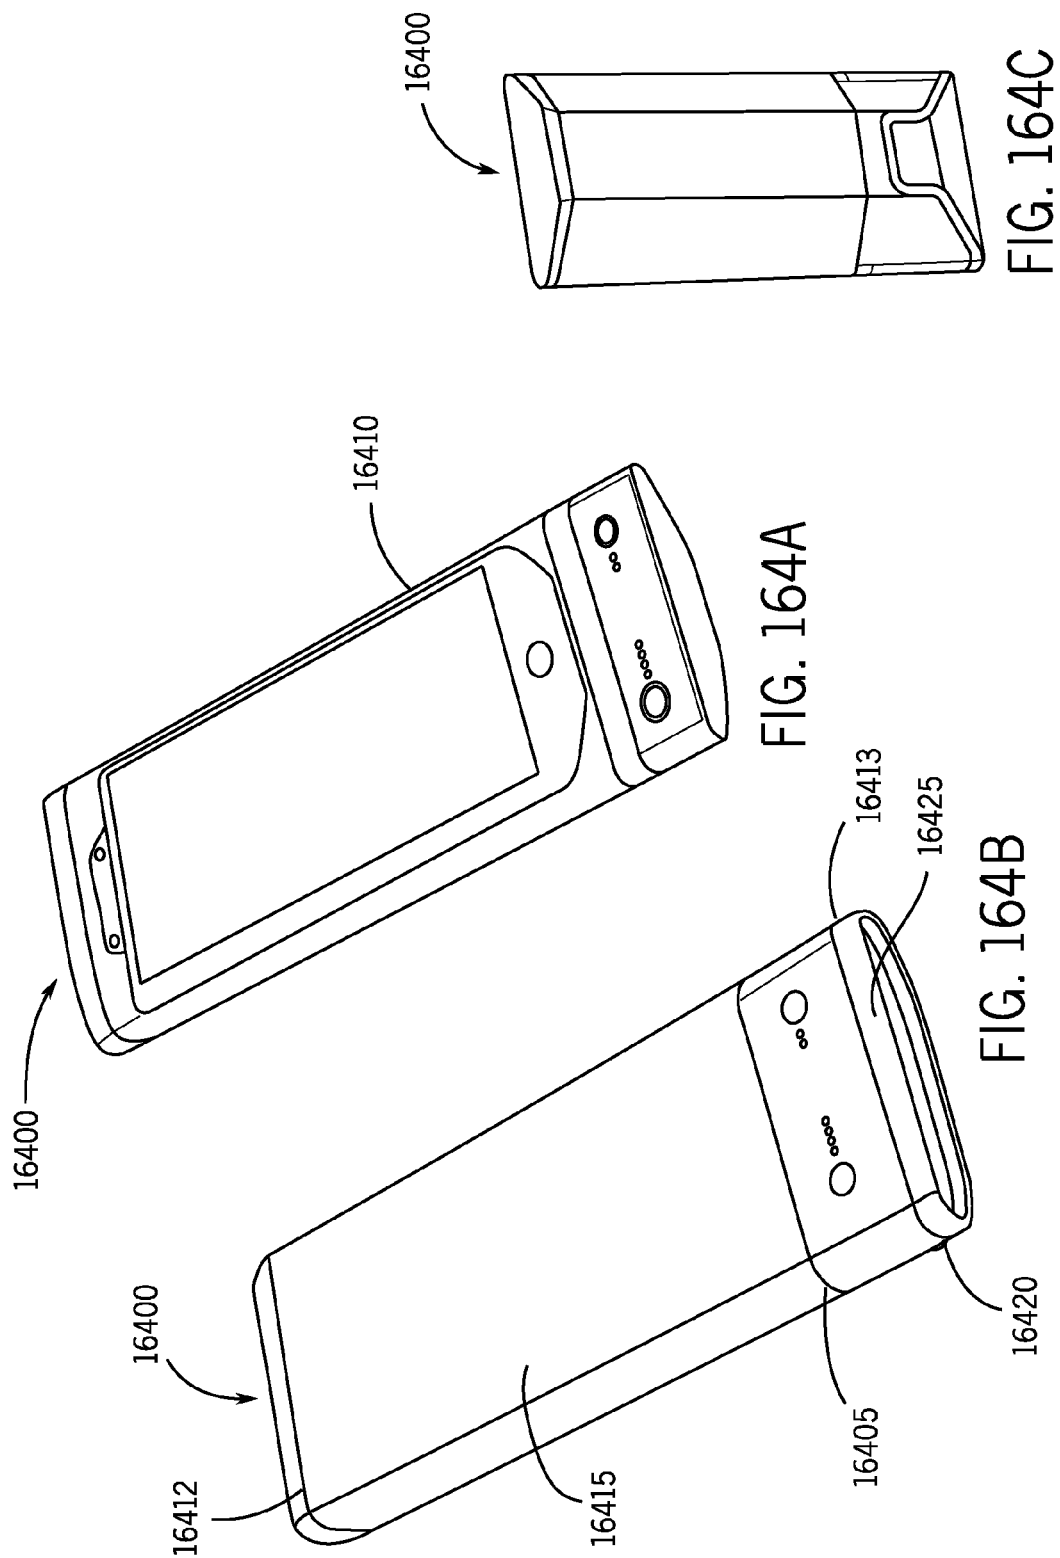

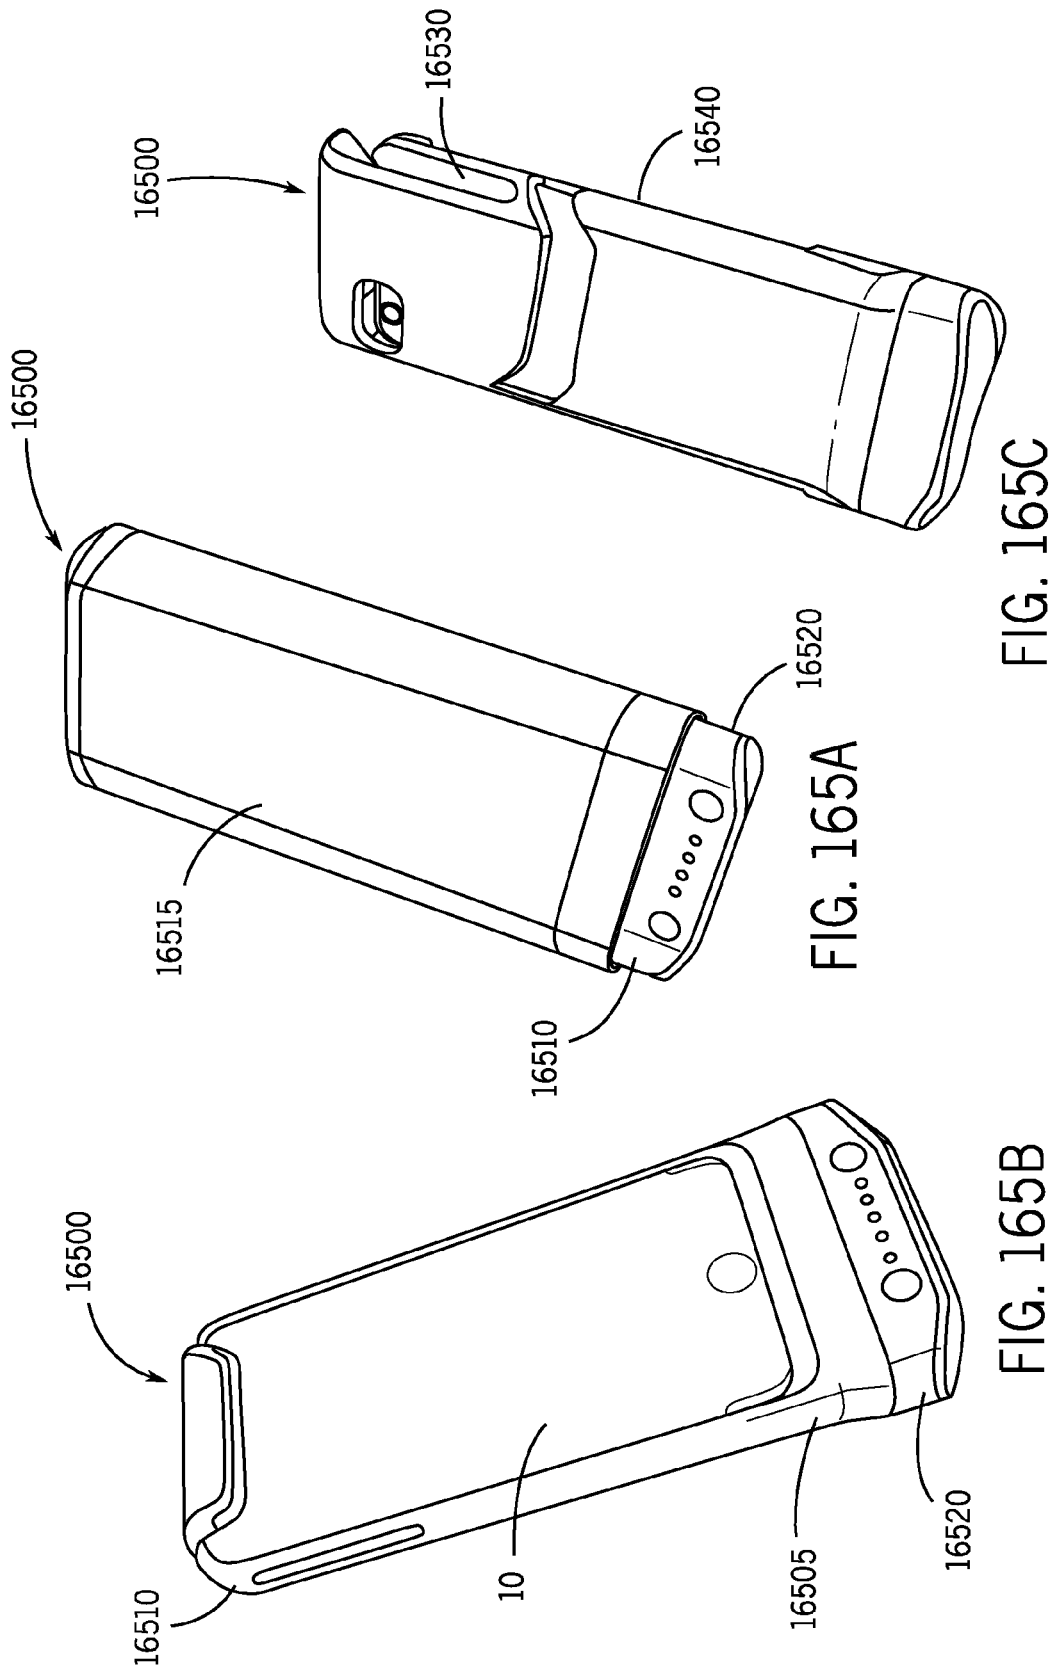

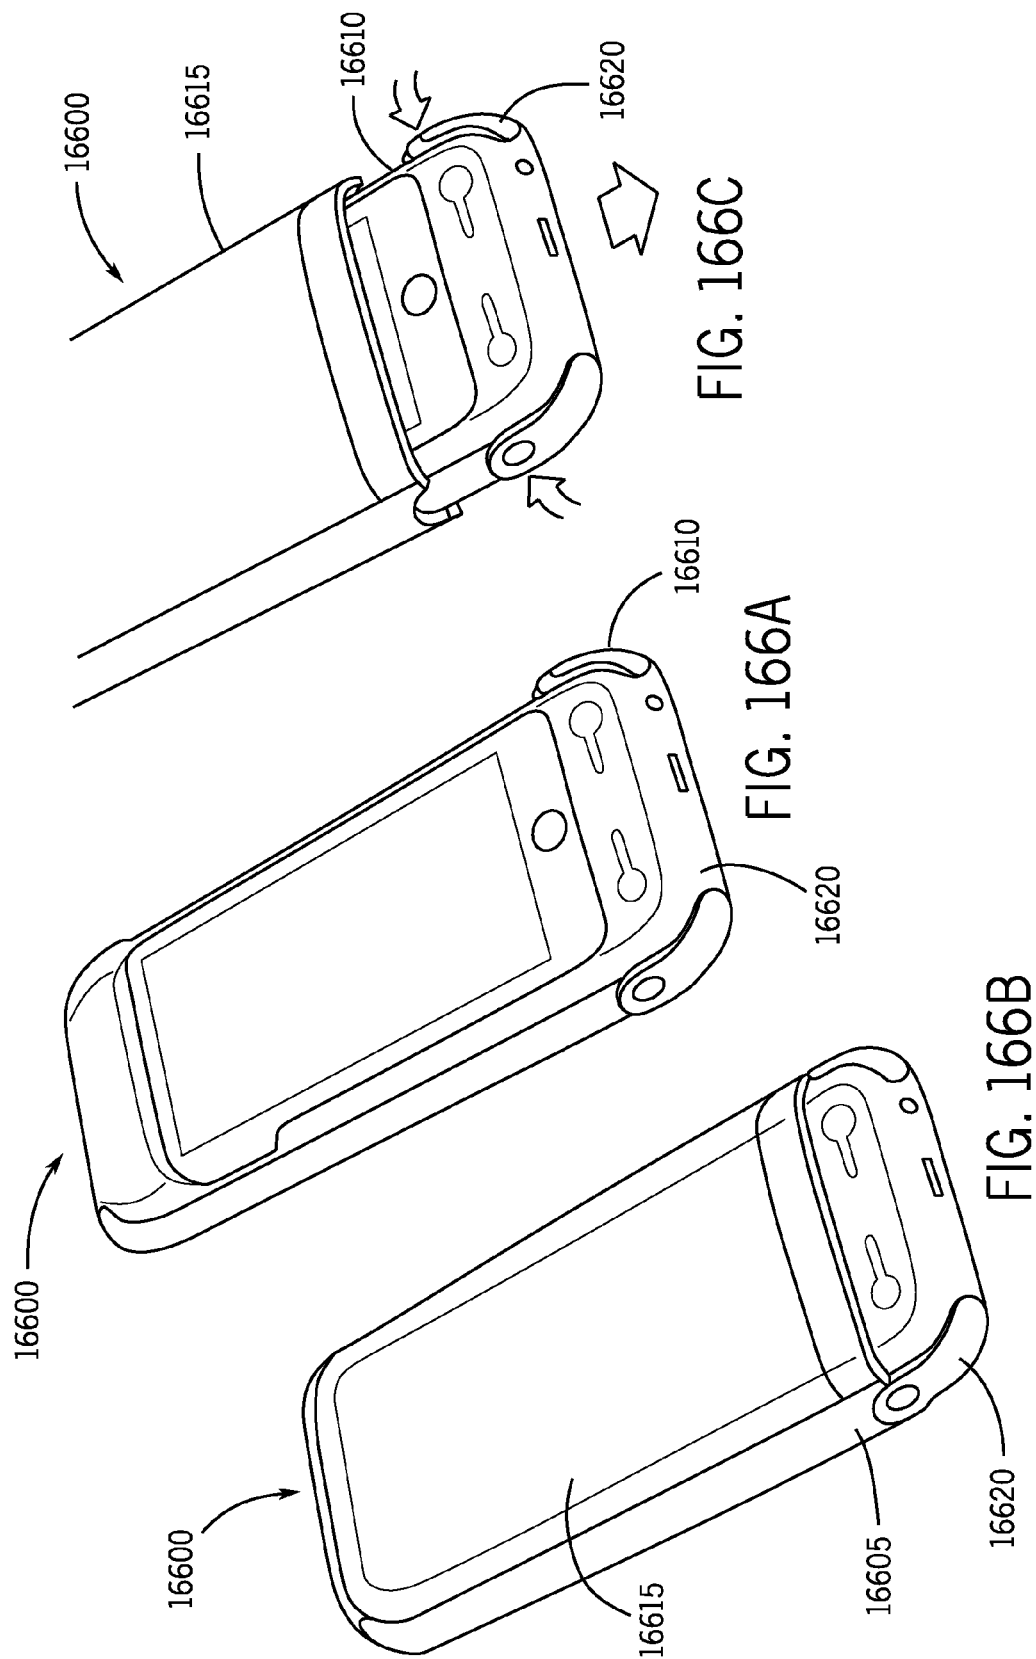

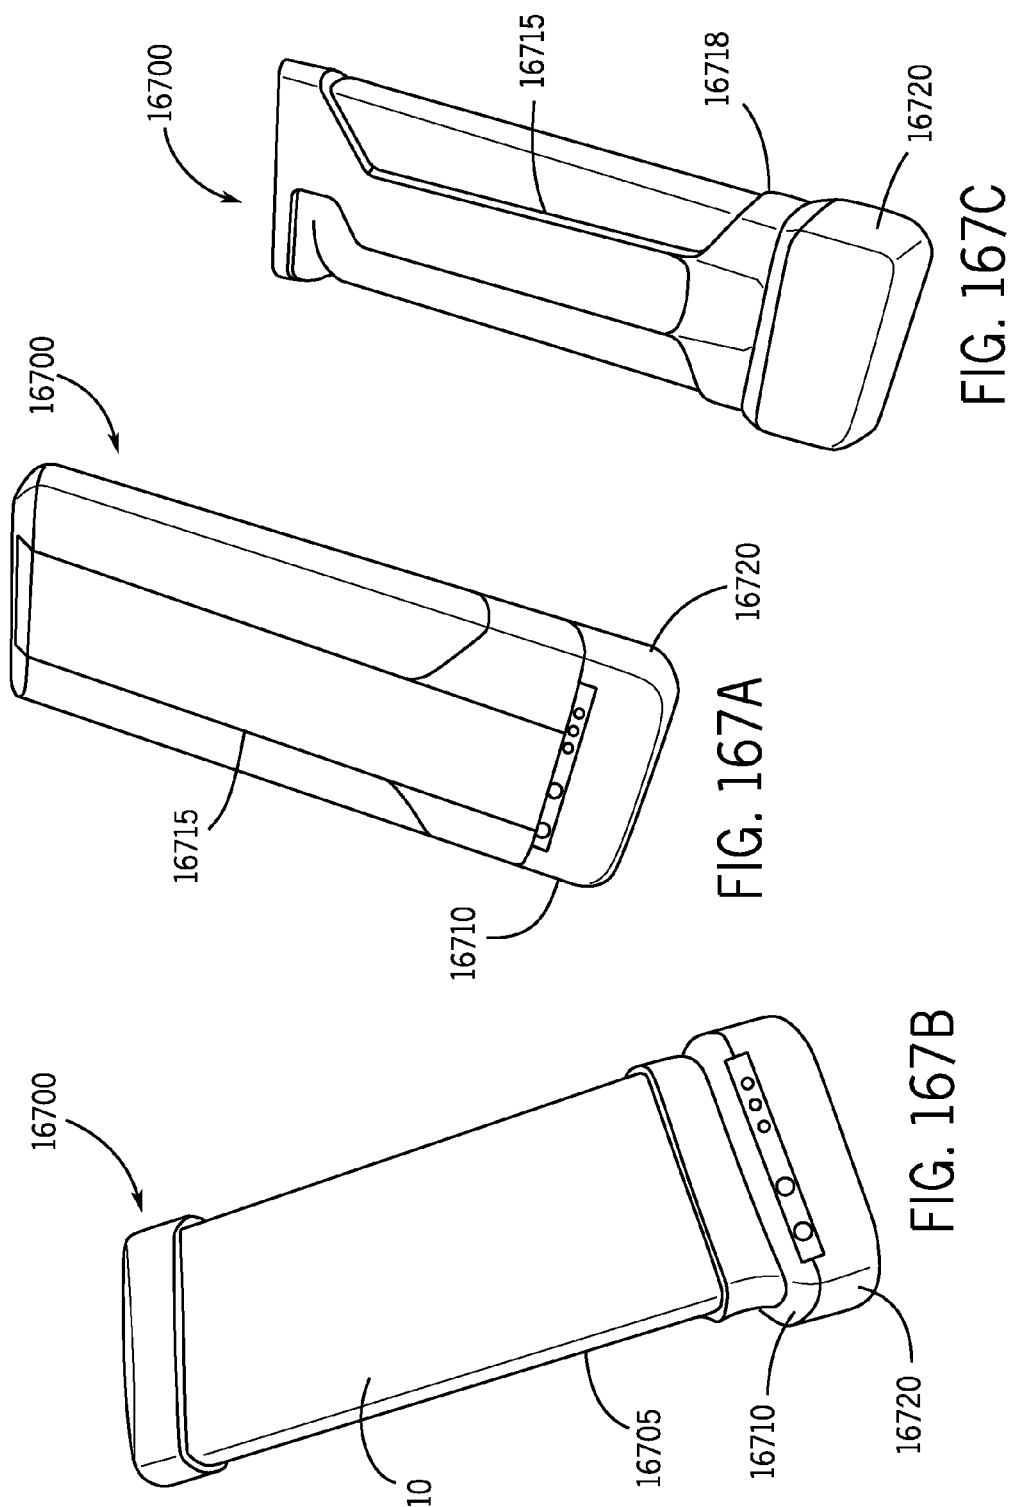

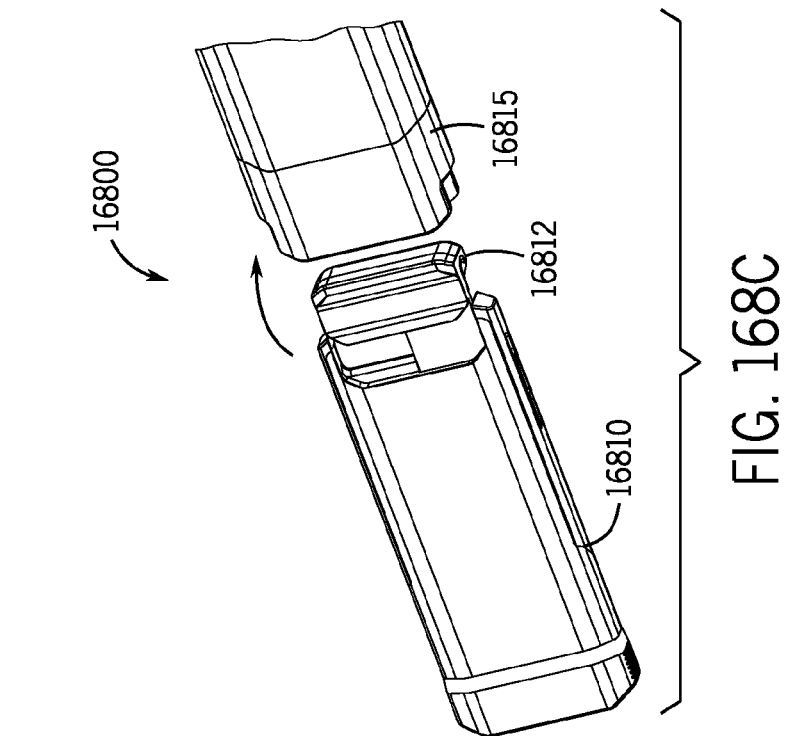


FIG. 168C

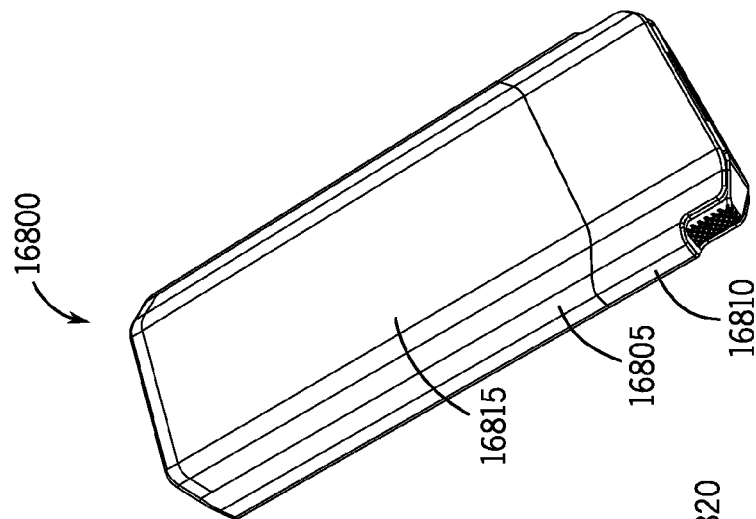


FIG. 168B

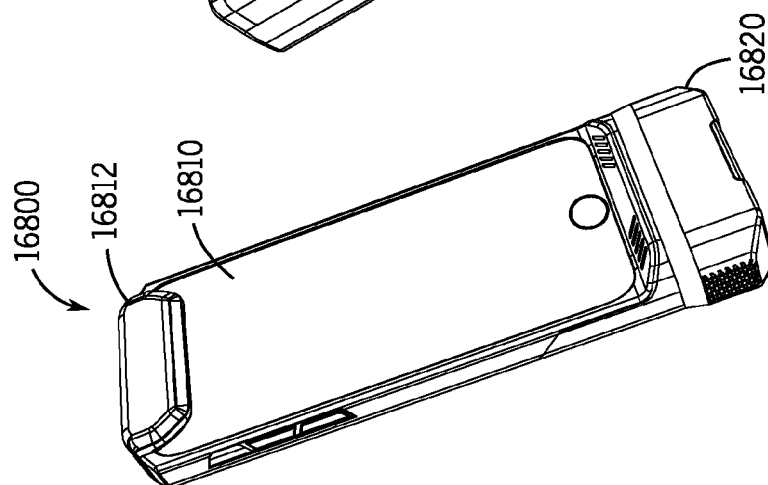
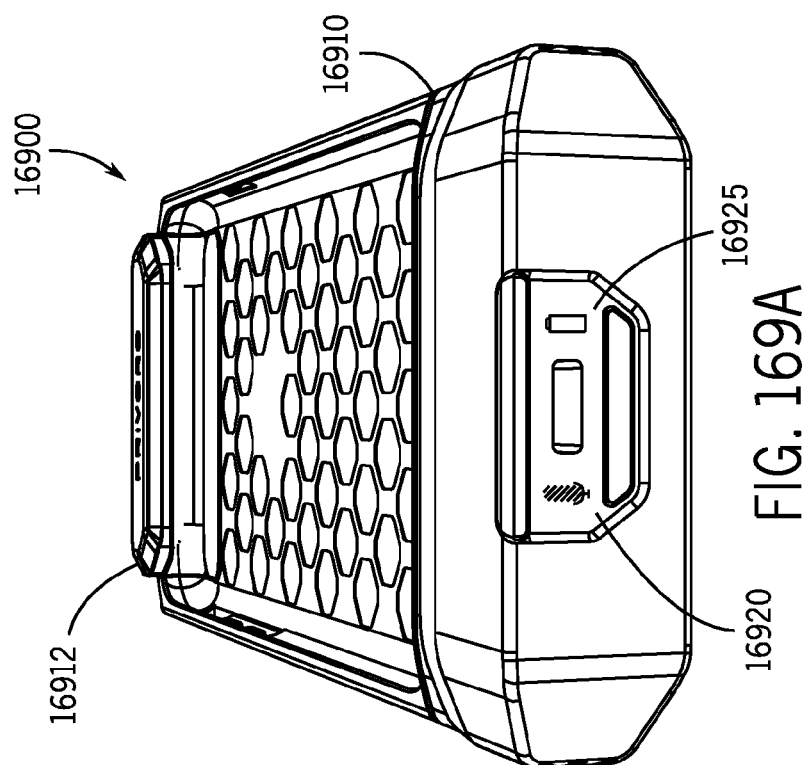
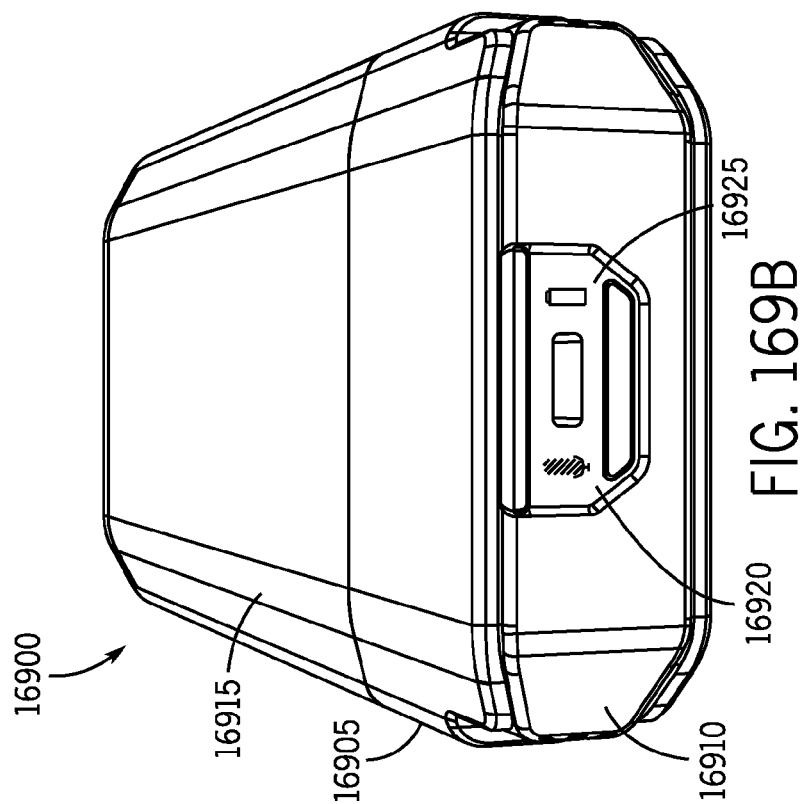
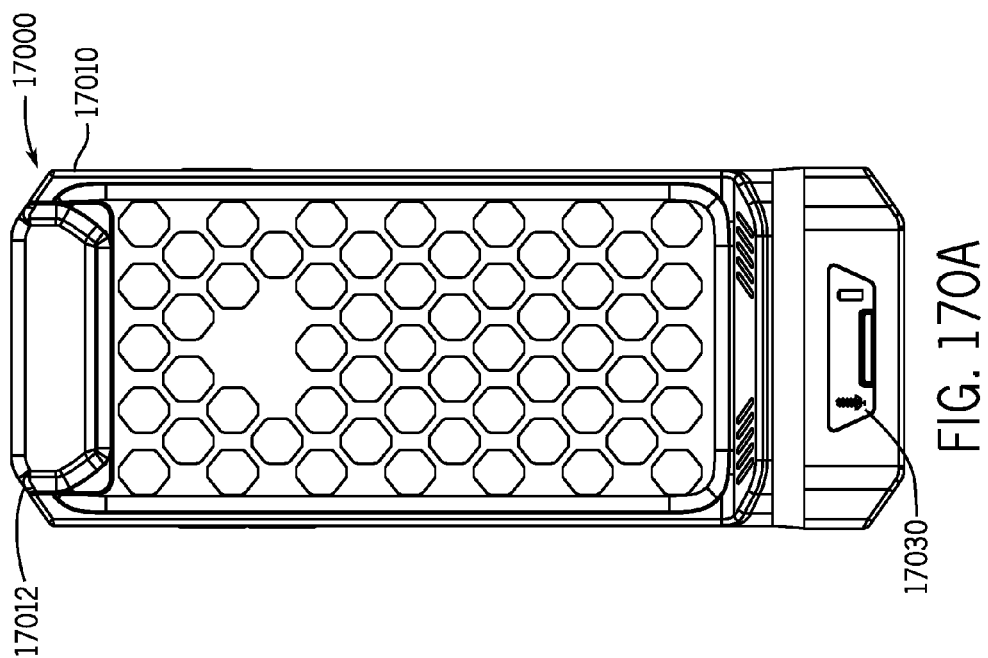
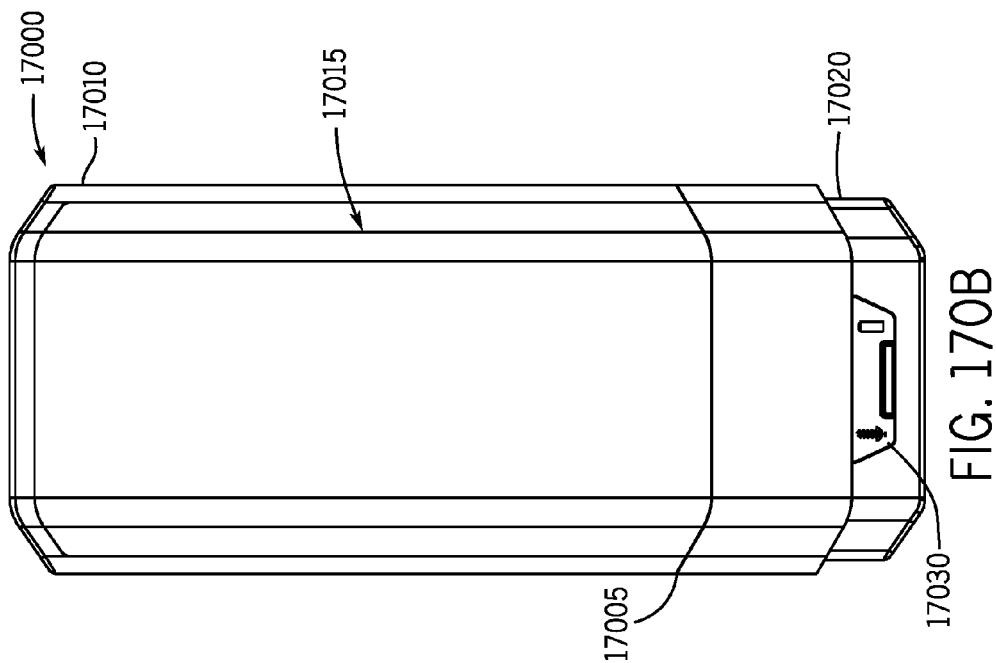
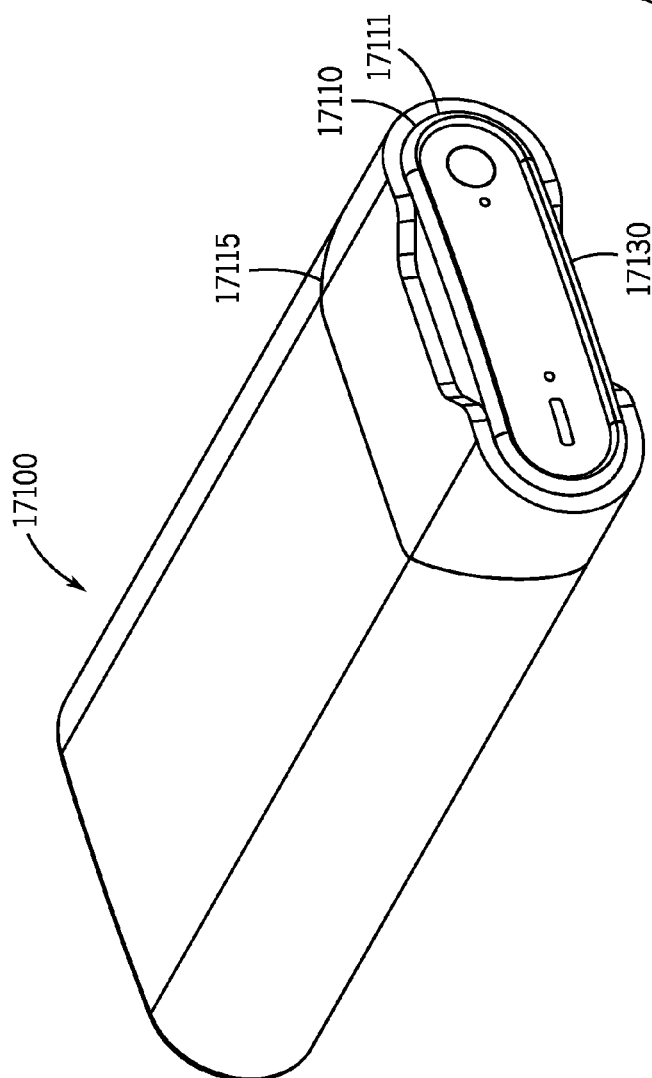
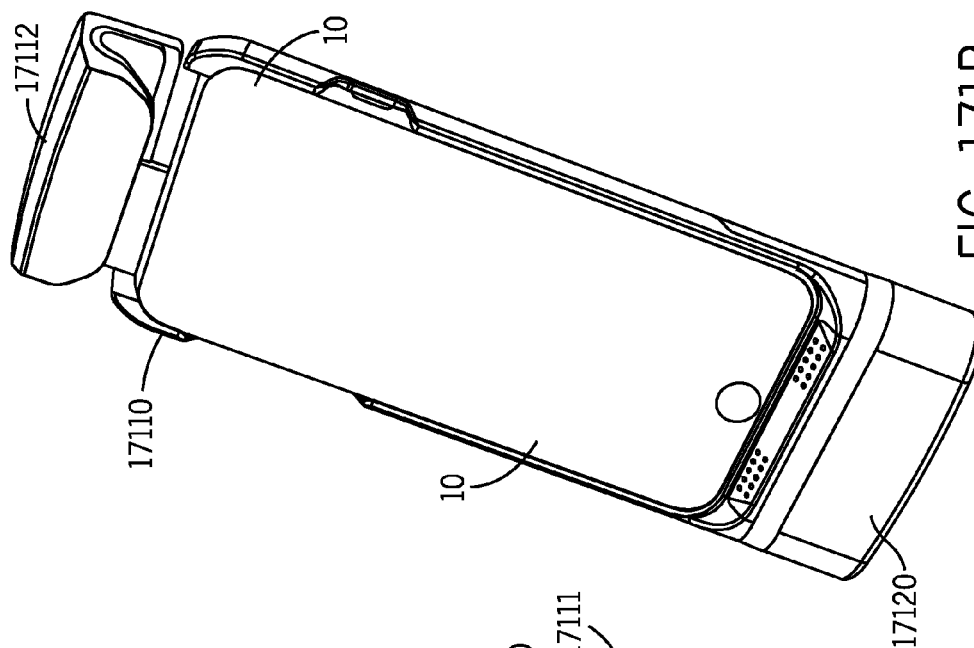


FIG. 168A







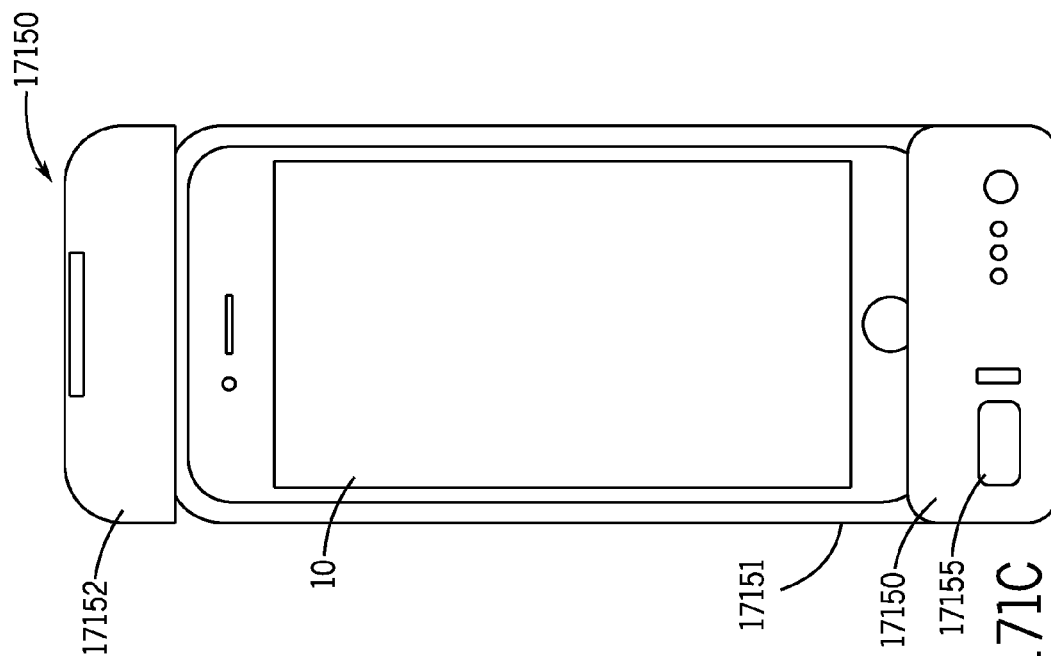


FIG. 171C

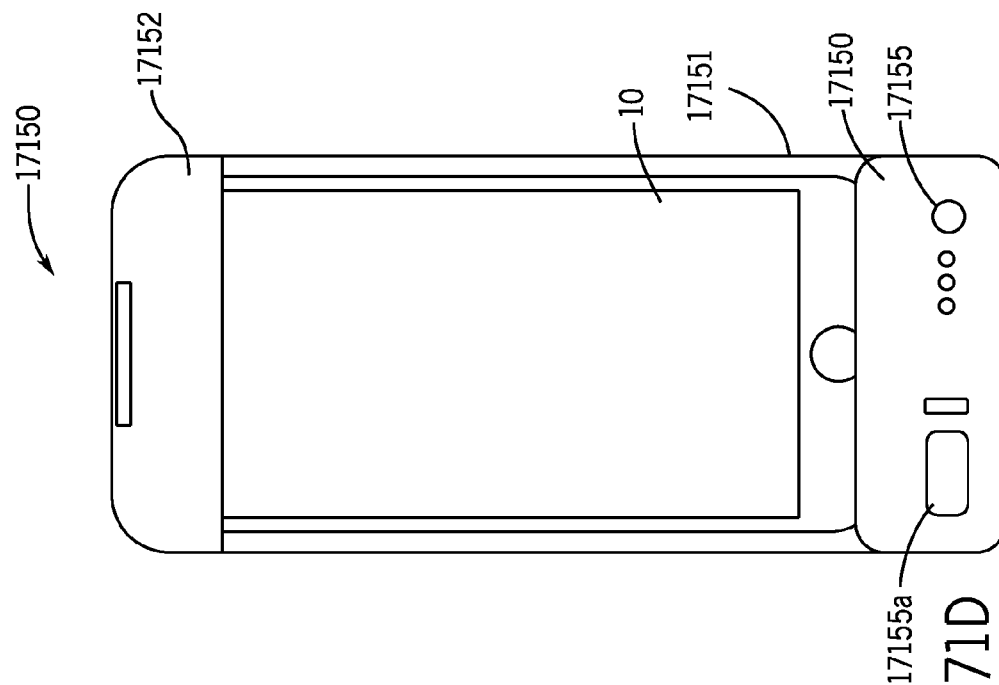
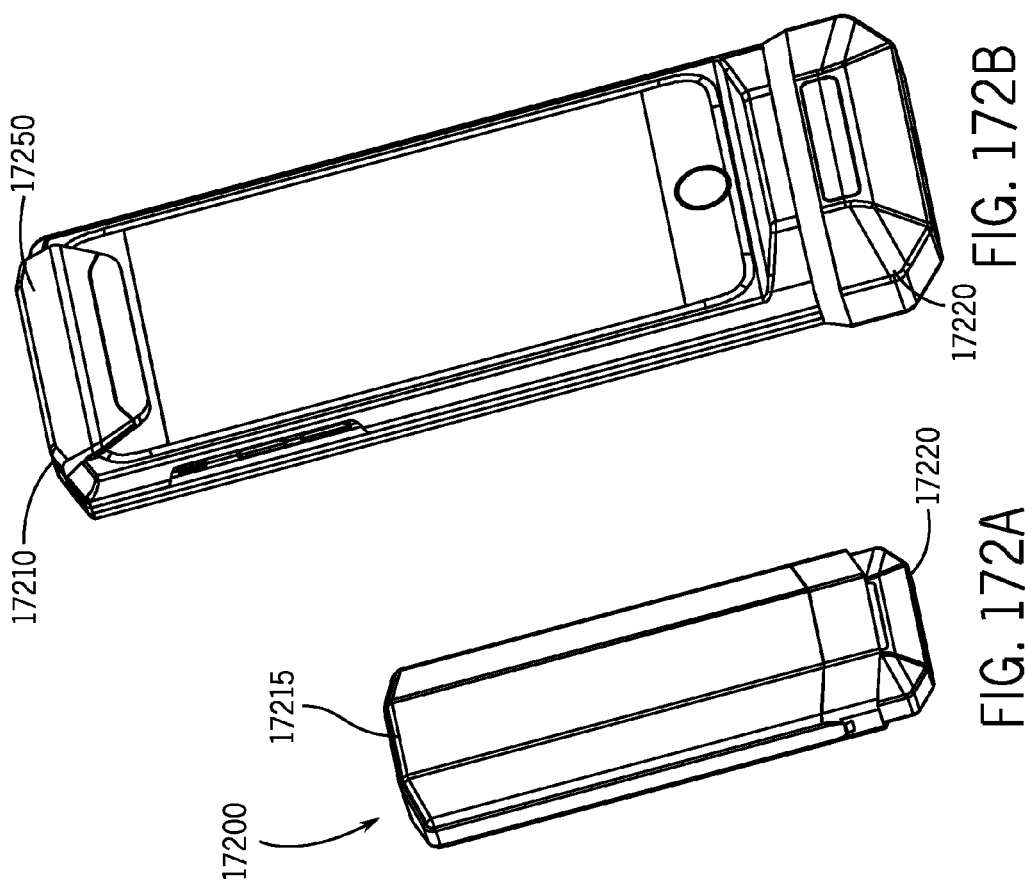
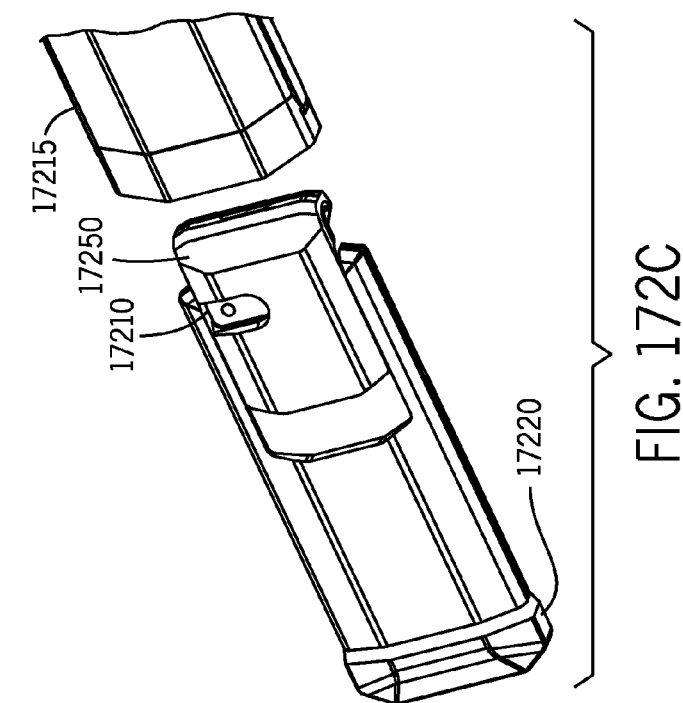


FIG. 171D



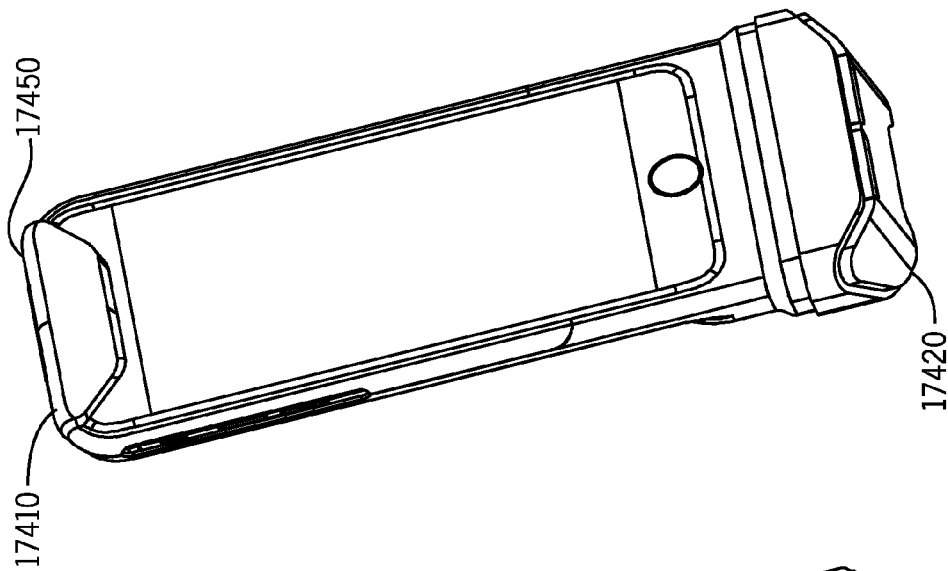
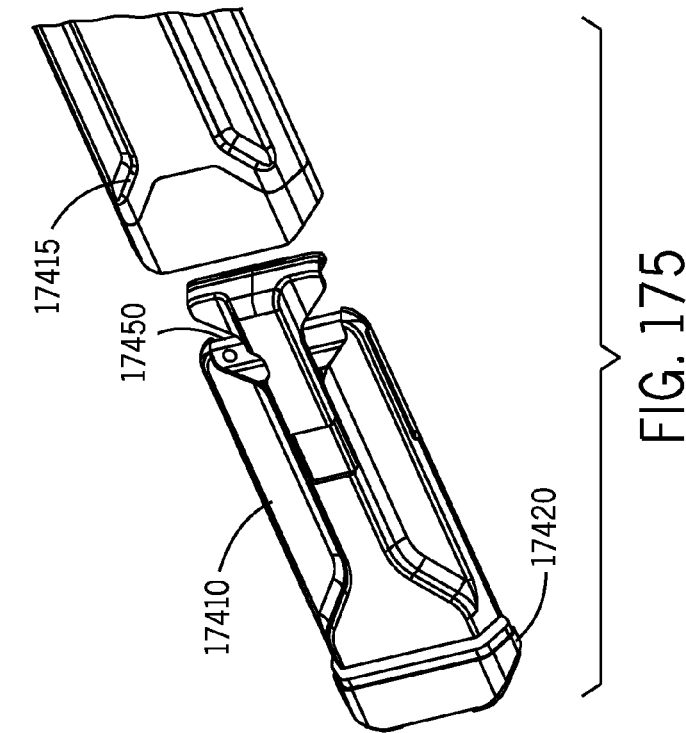


FIG. 174

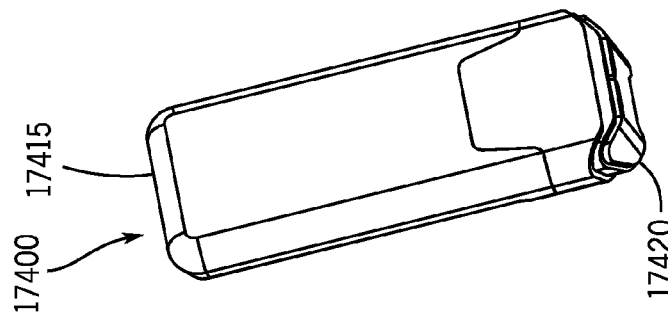
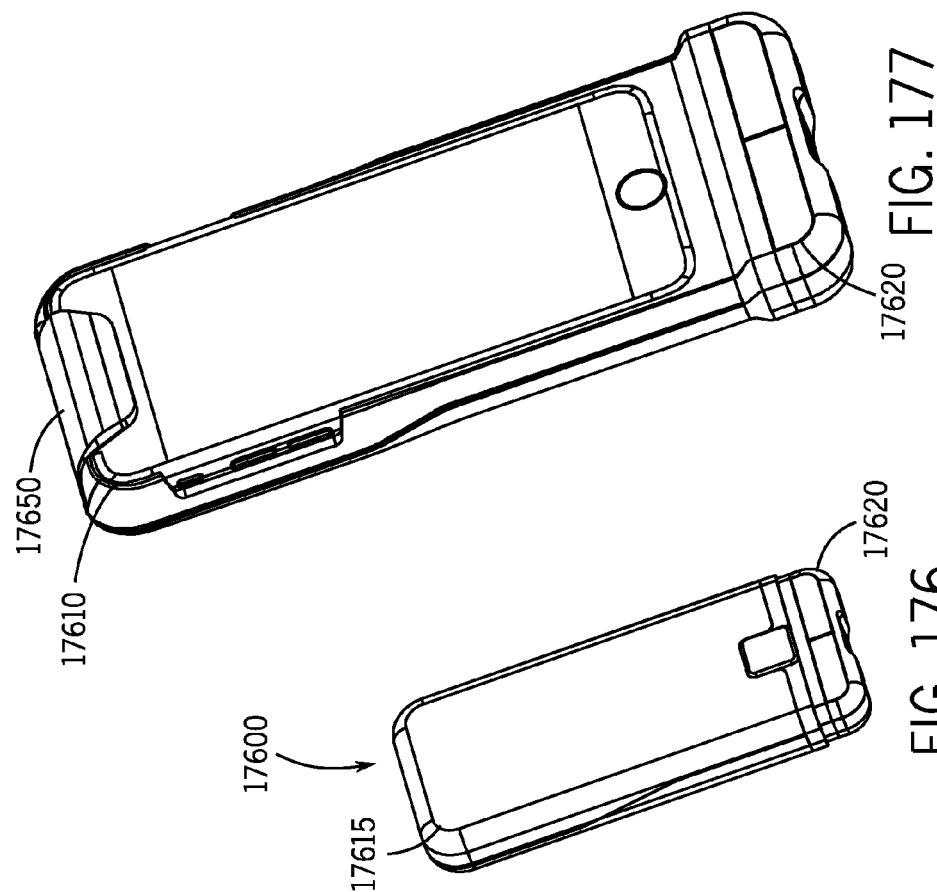
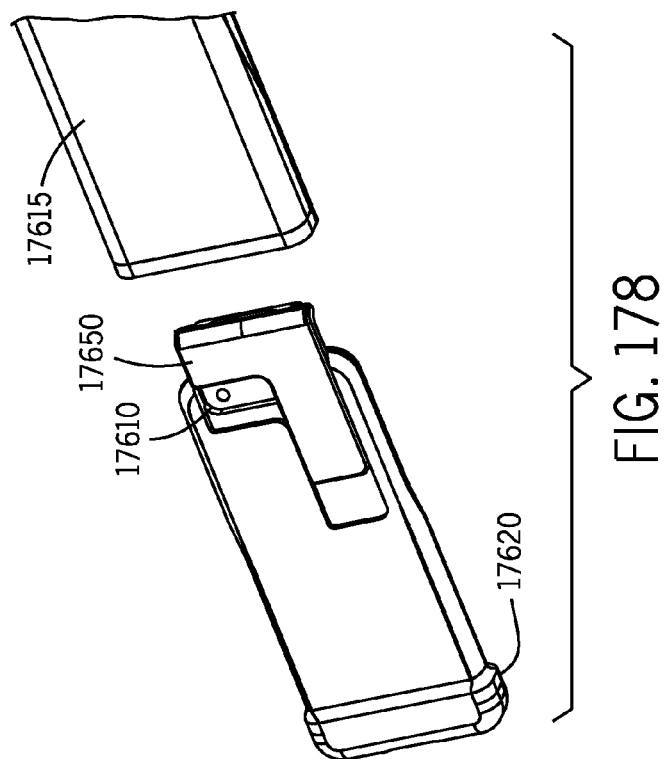
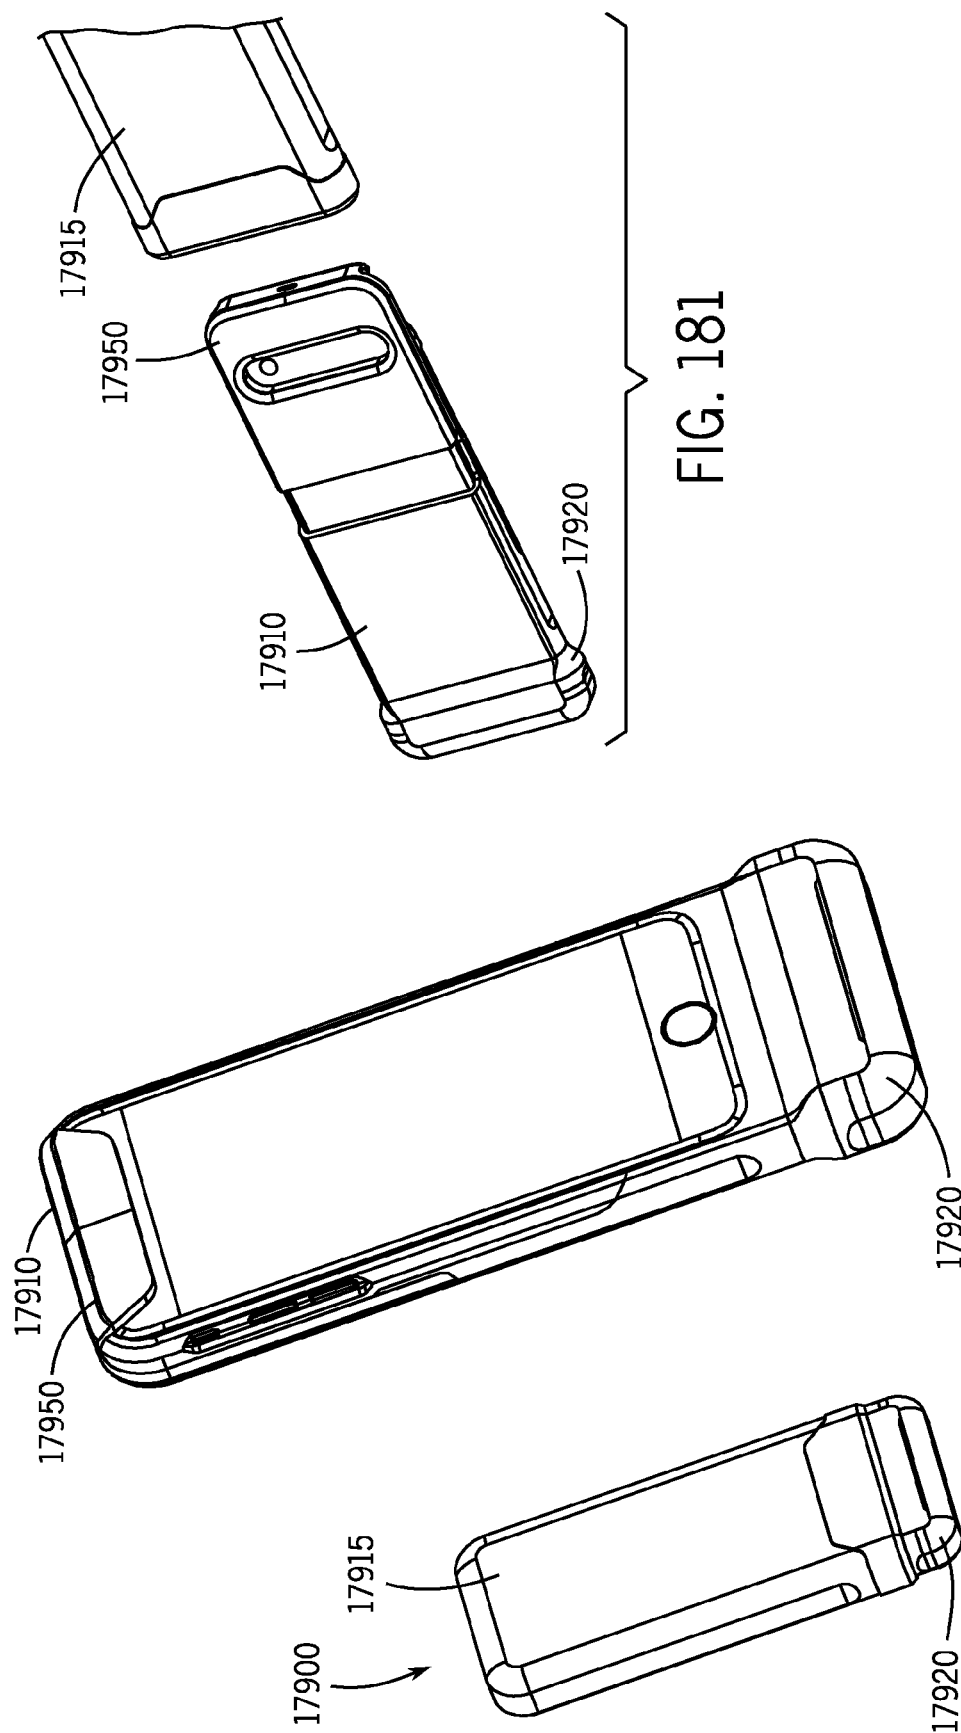


FIG. 173





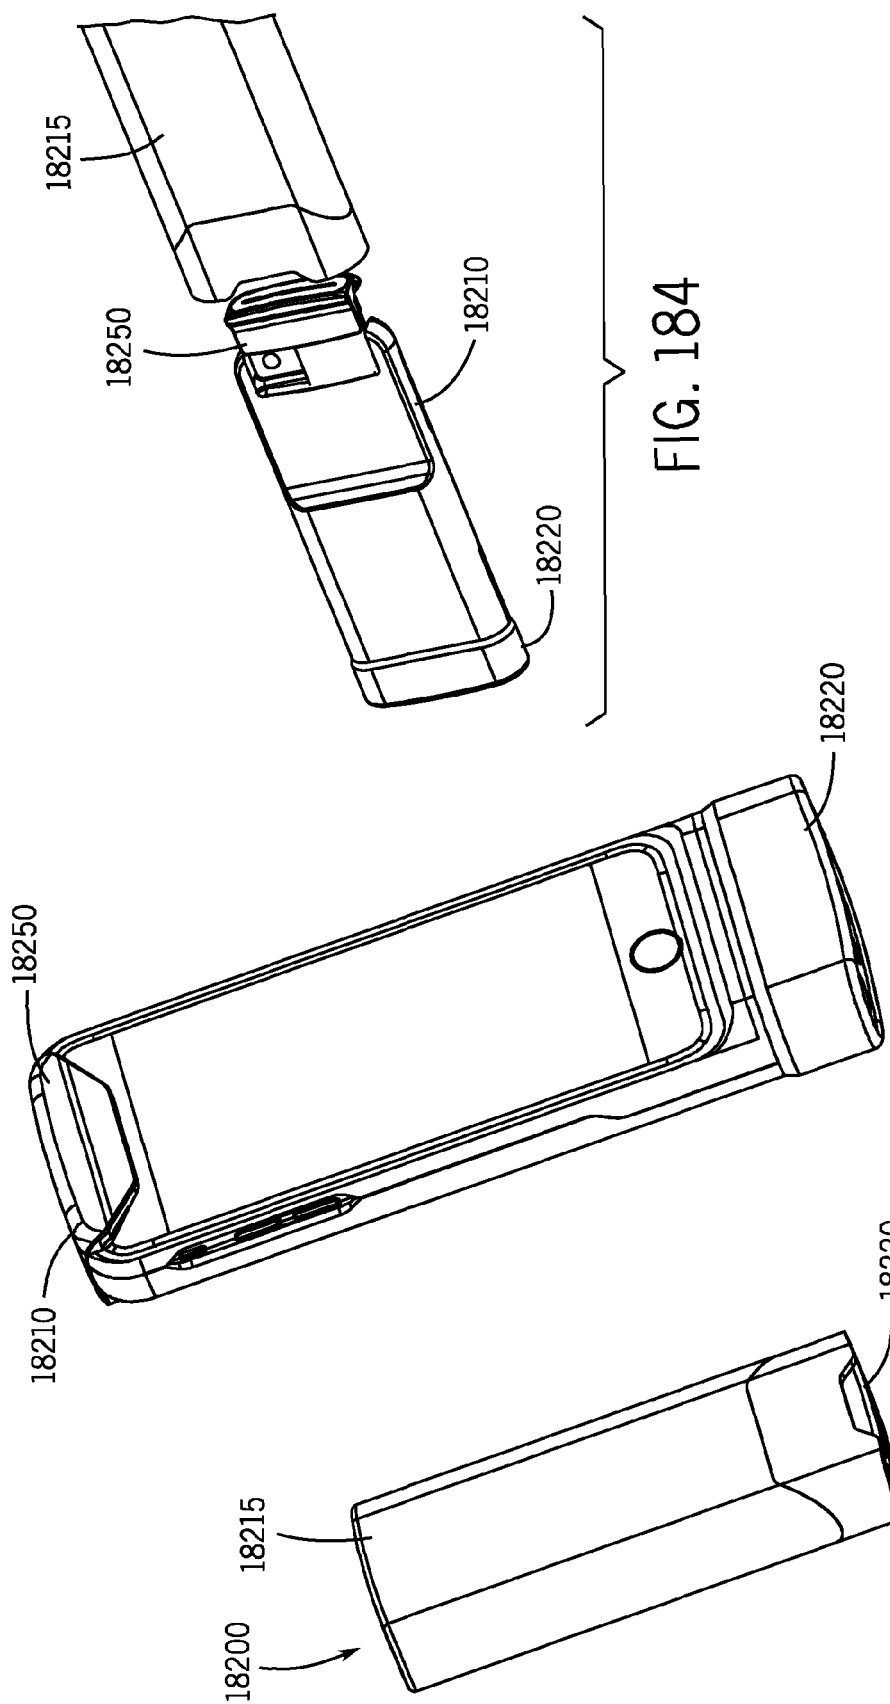
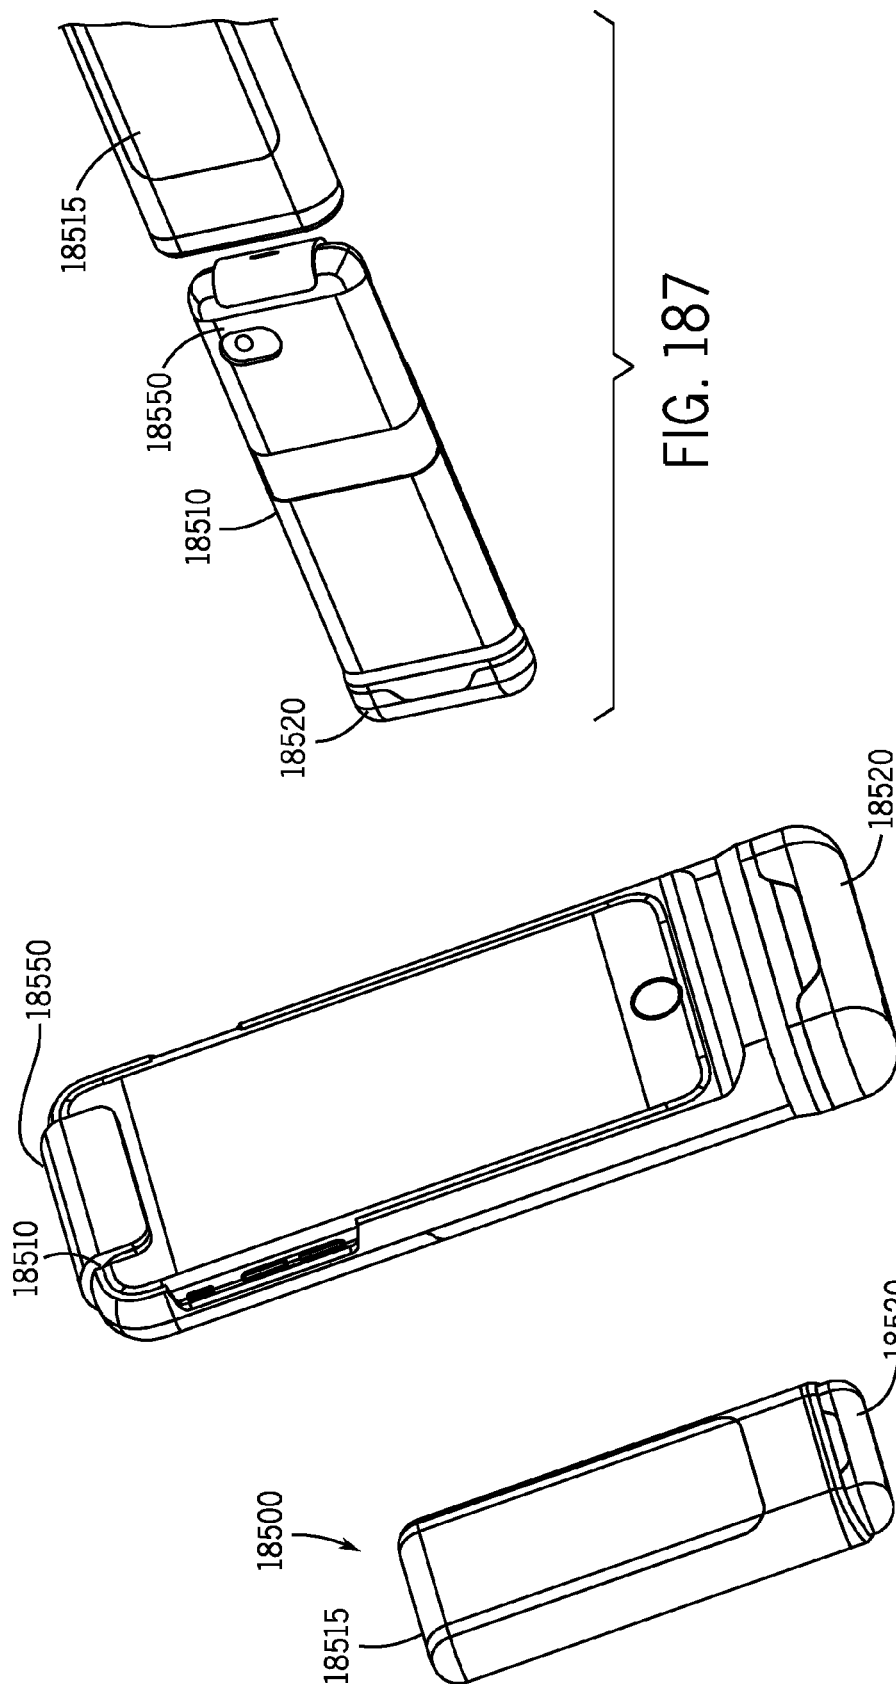


FIG. 184

FIG. 183

FIG. 182



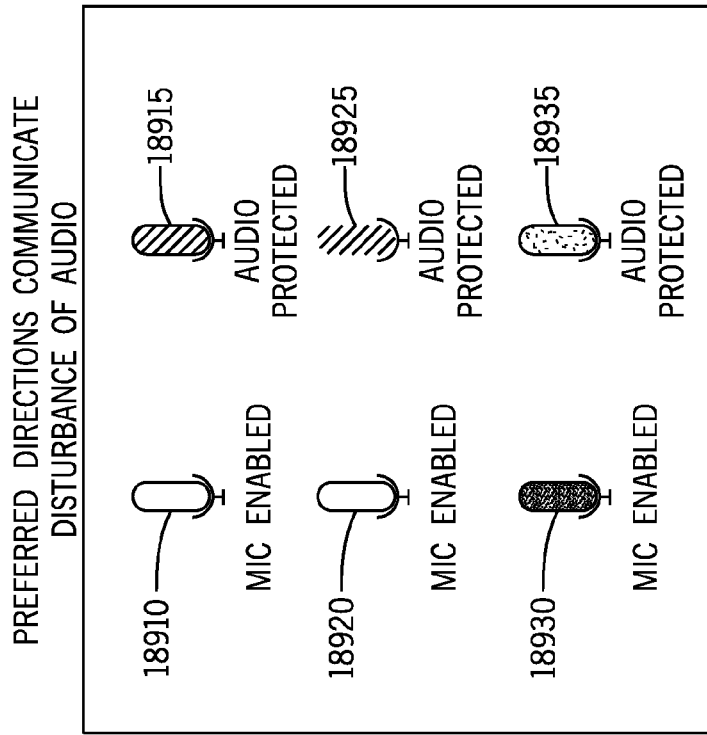


FIG. 189


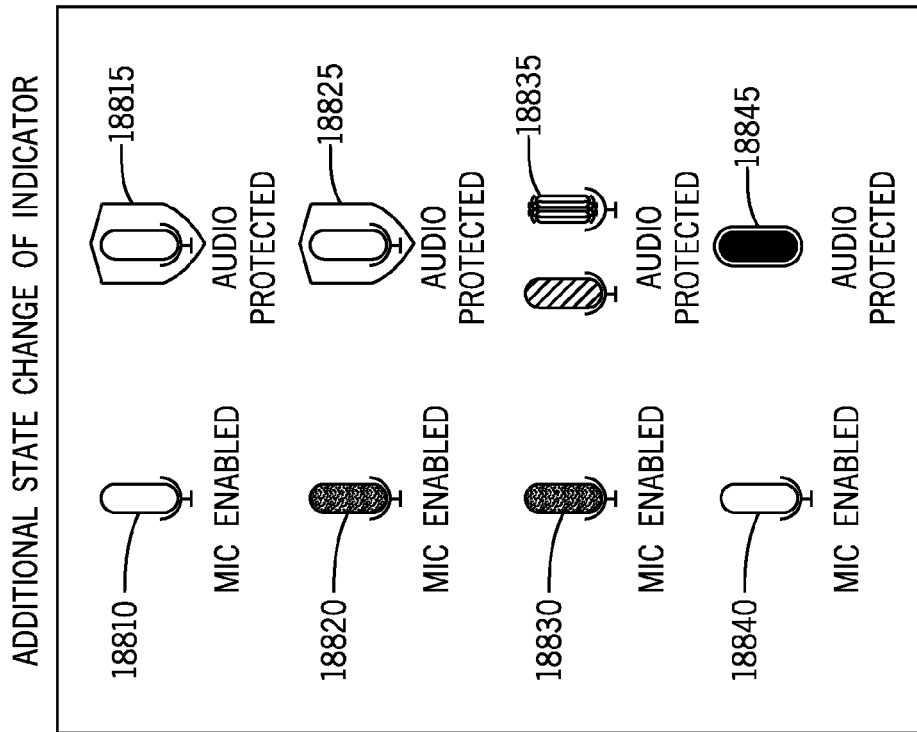


FIG. 188

COMBINE AUDIO PROTECTION WITH BATTERY INDICATOR

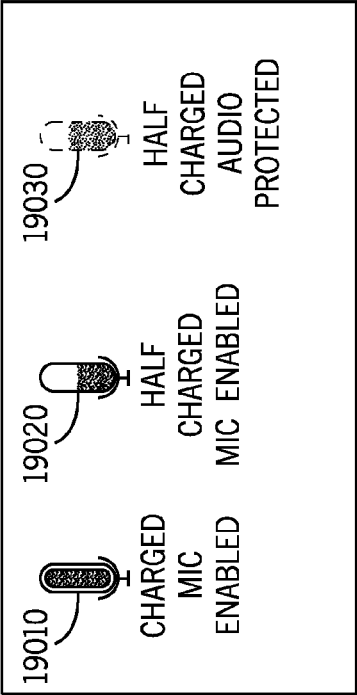

COLOR STATE CHANGE OF ICON

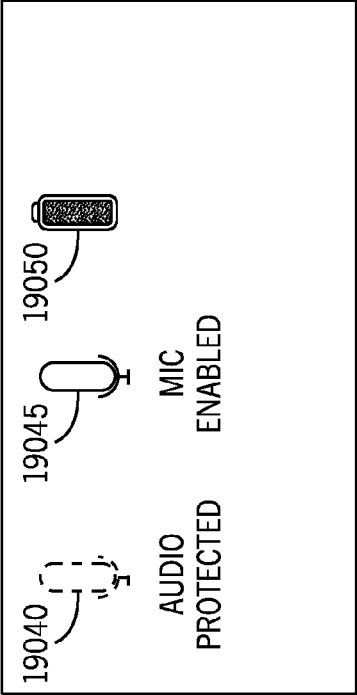


FIG. 190A

MIC ICONS TURNS INTO LOCK ICON OR SHIELD

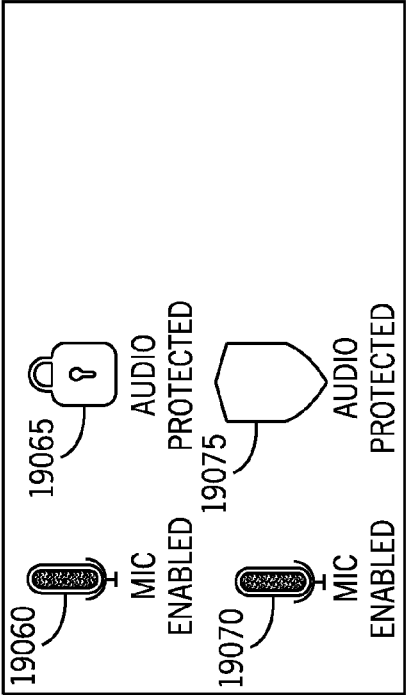


FIG. 190B

PRIVACY TEXT STATE CHANGE

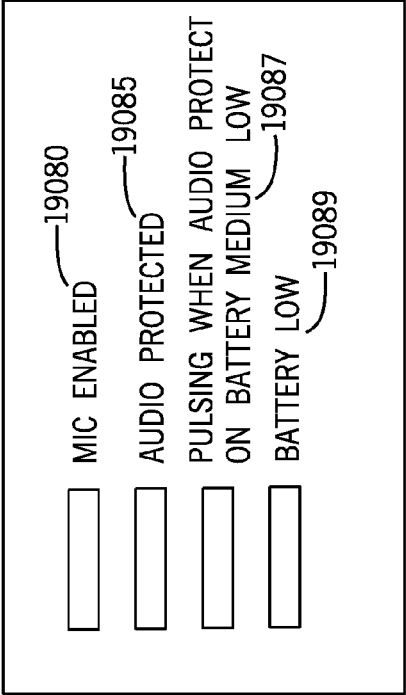


FIG. 190C

FIG. 190D

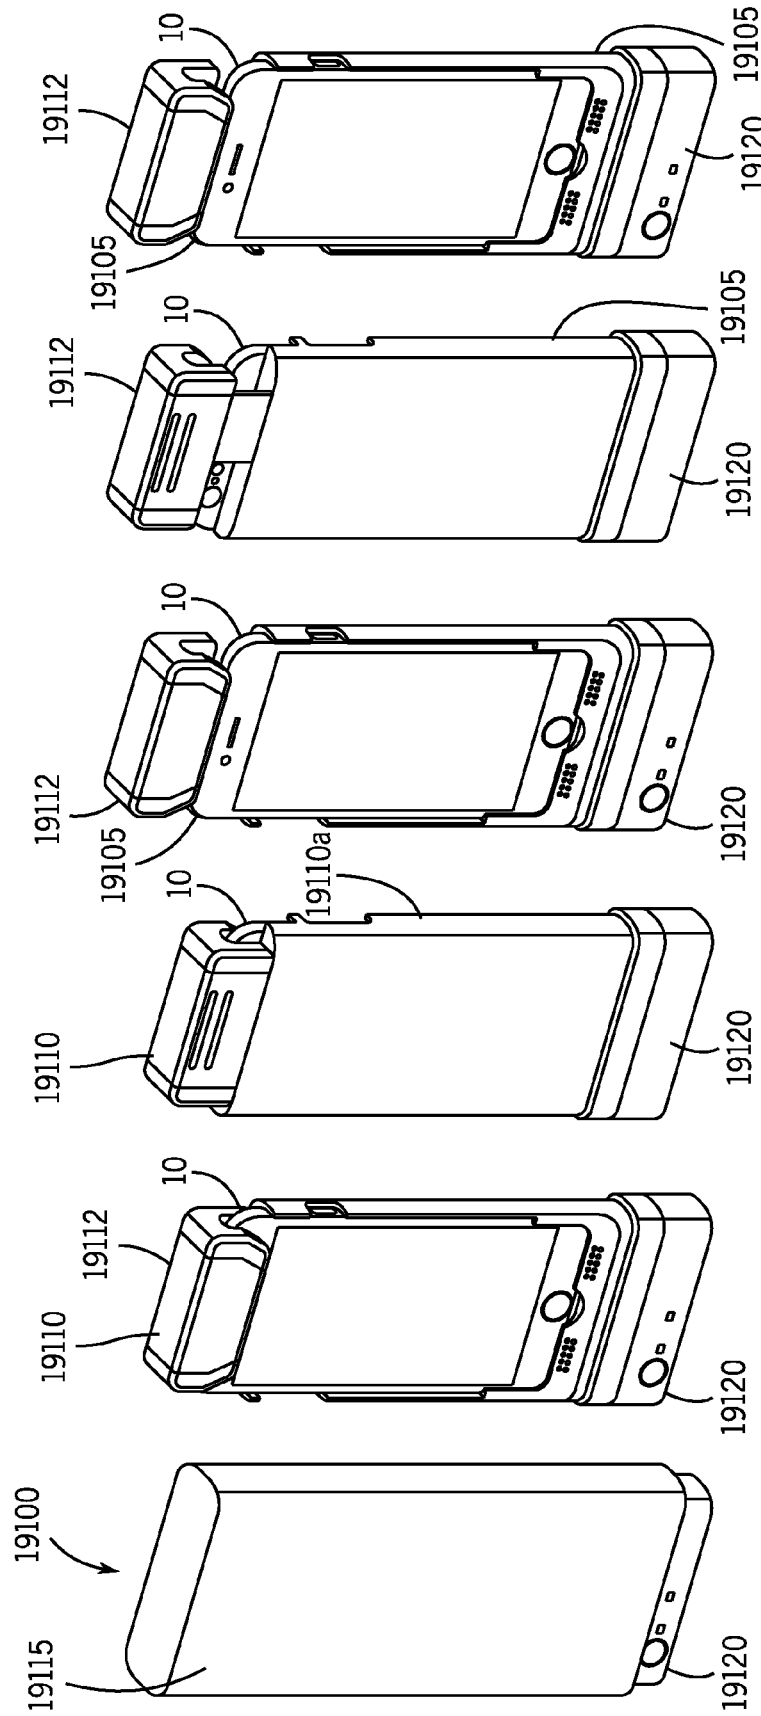


FIG. 191A FIG. 191B FIG. 191C FIG. 191D FIG. 191E FIG. 191F

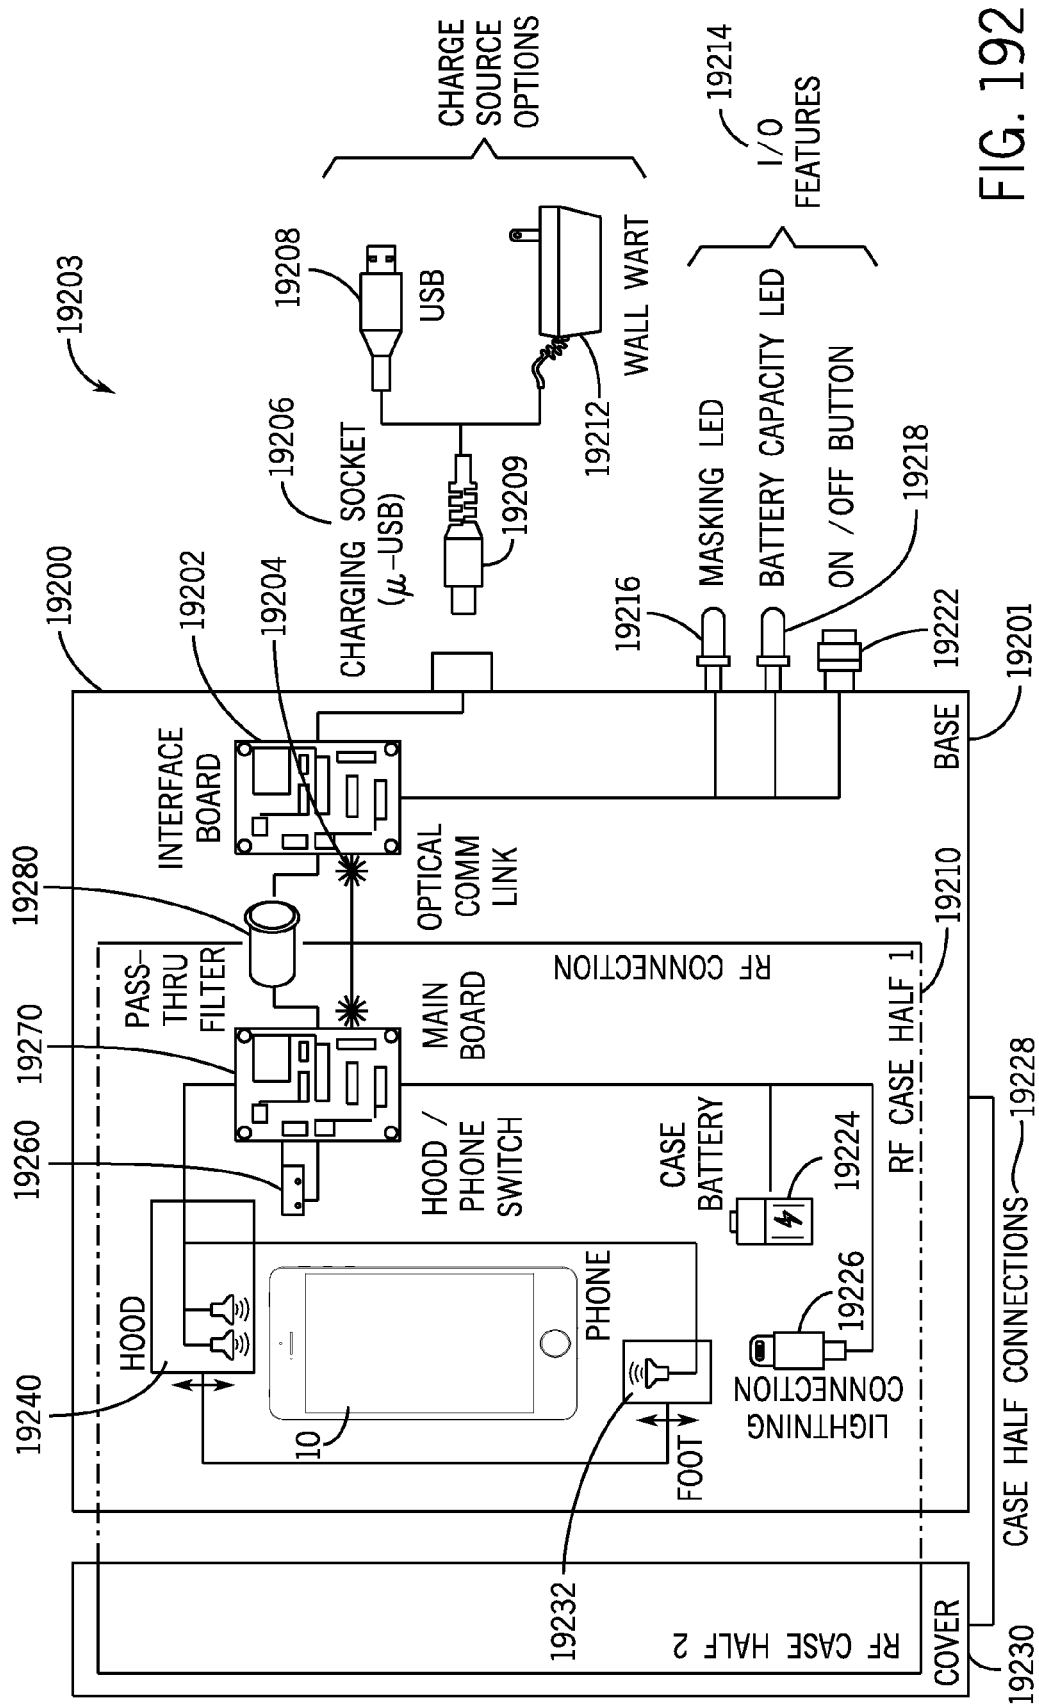
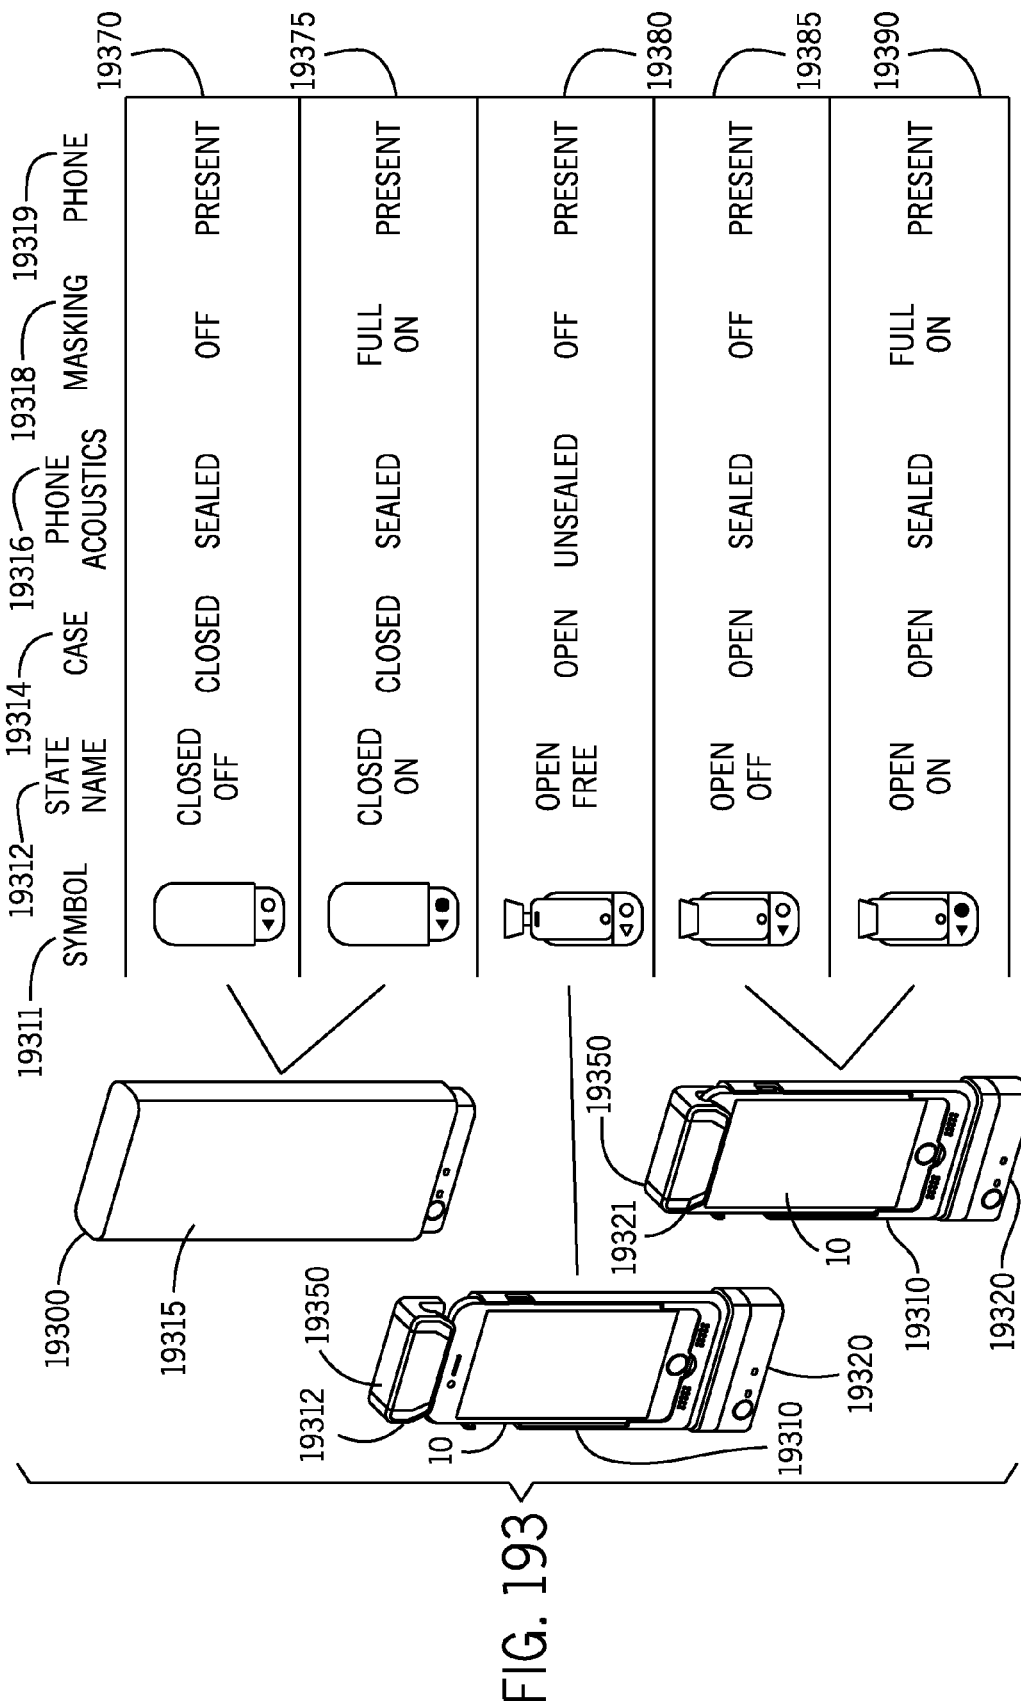
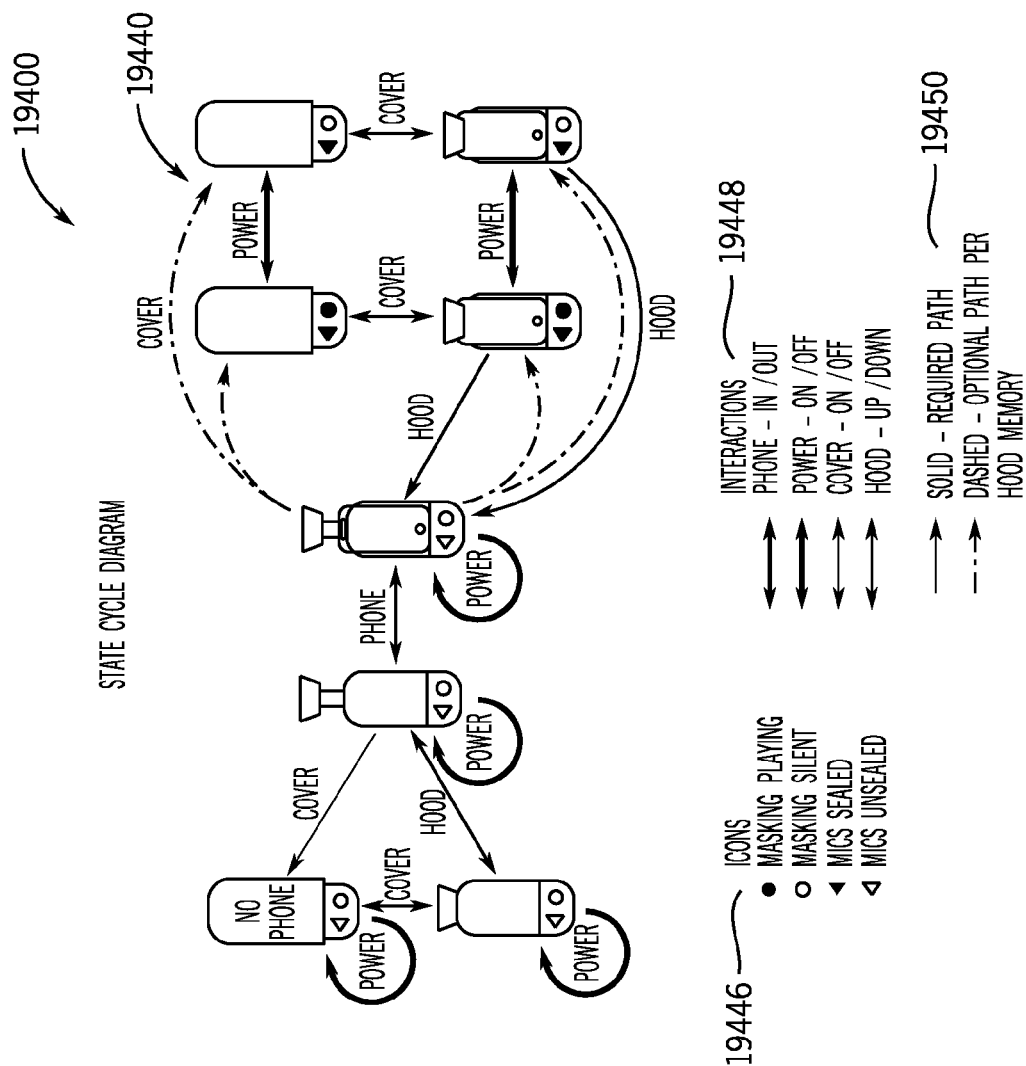


FIG. 192





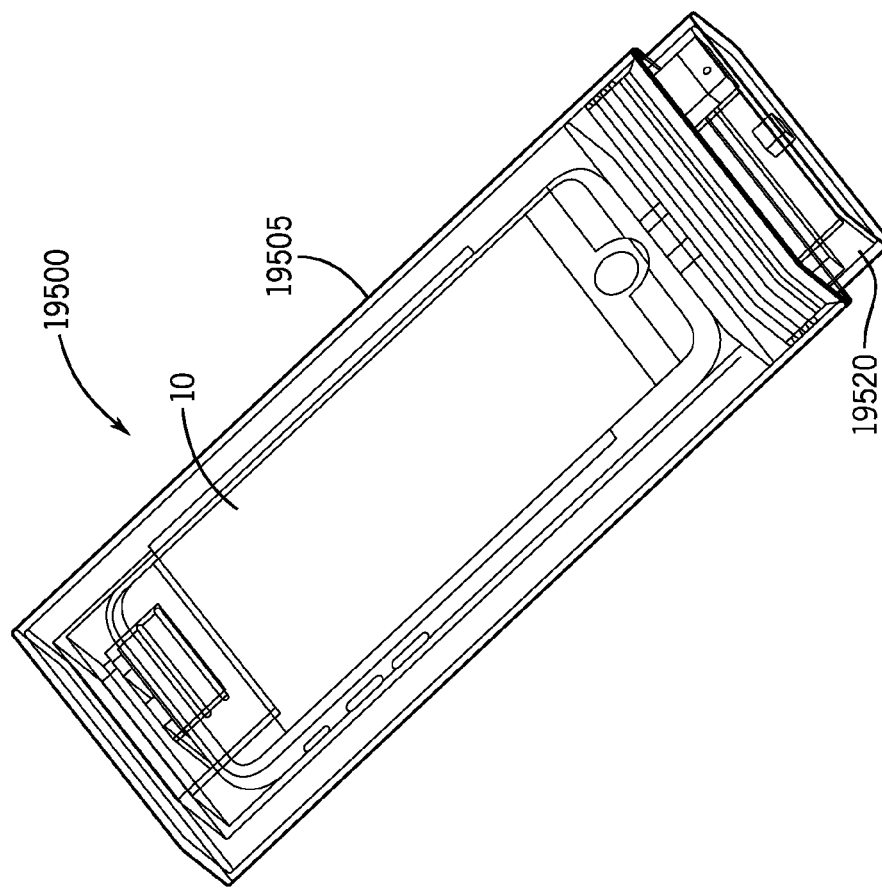


FIG. 195A

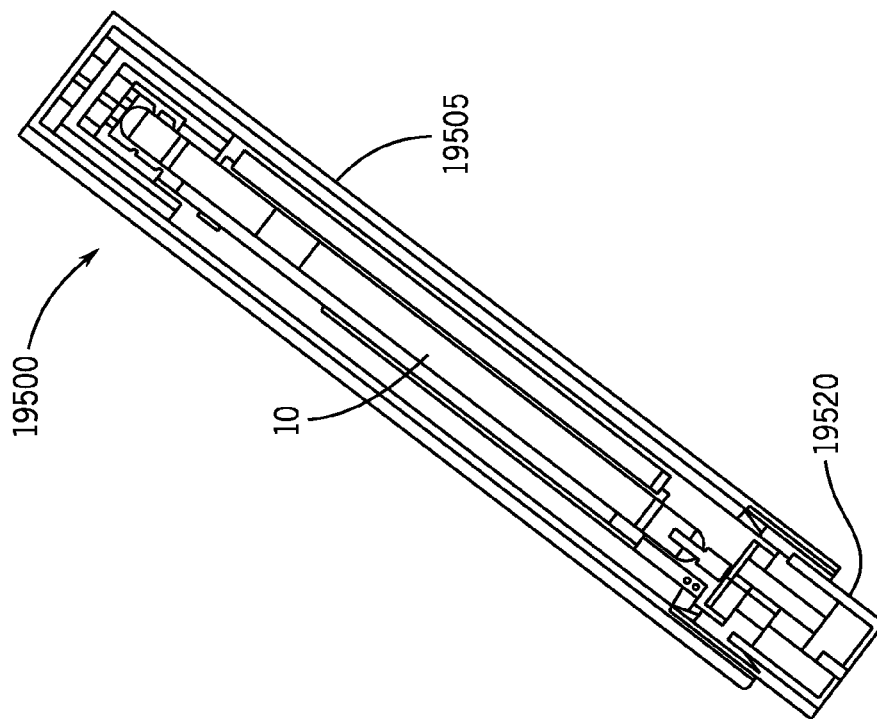


FIG. 195B

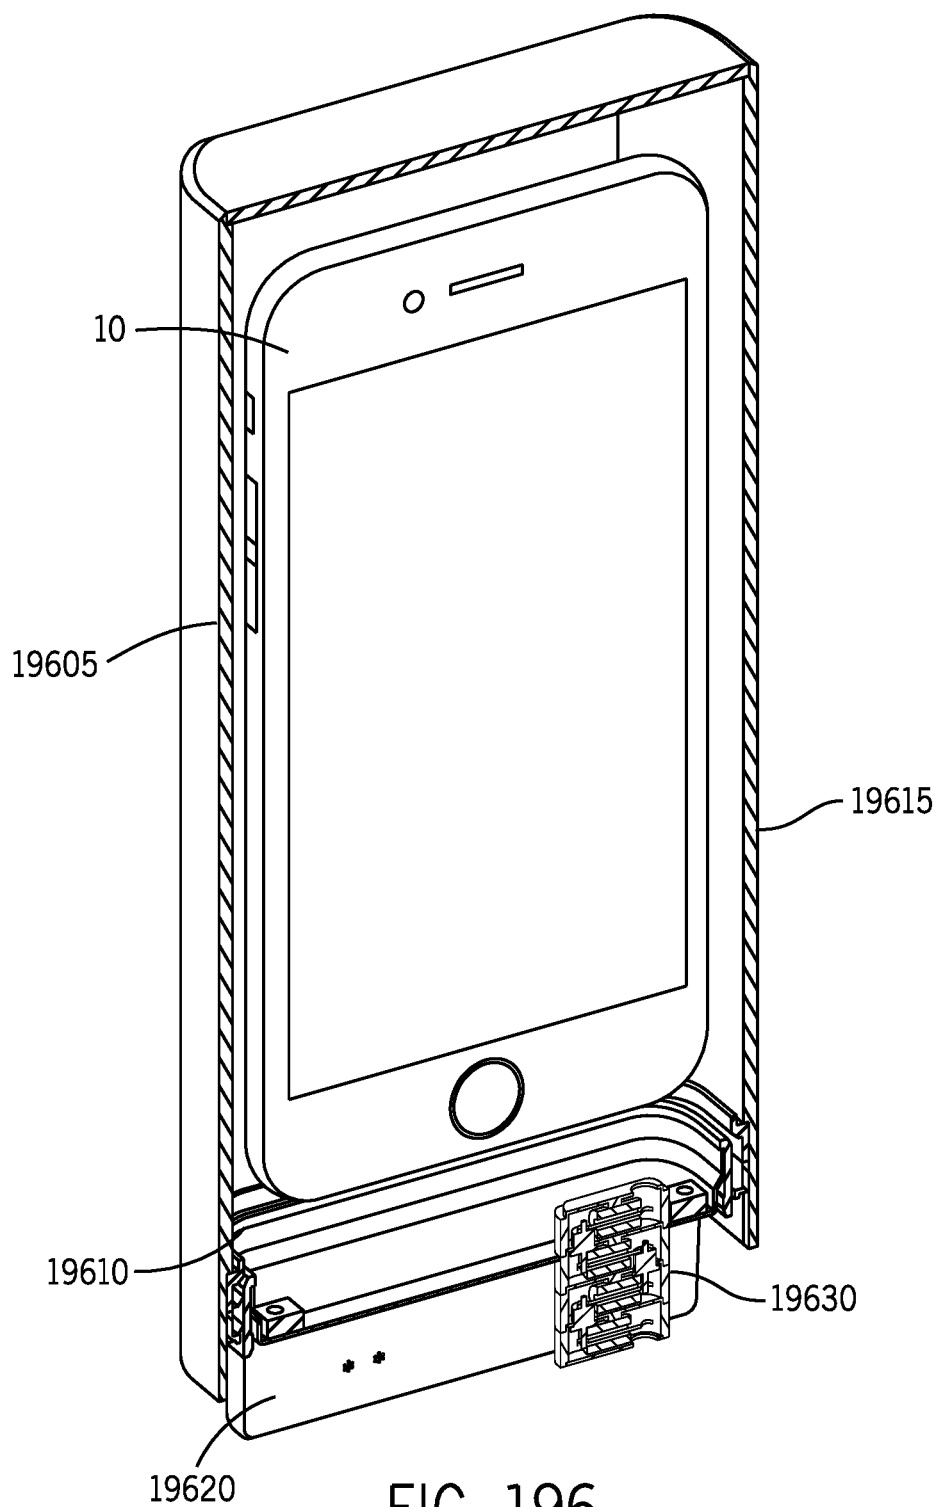


FIG. 196

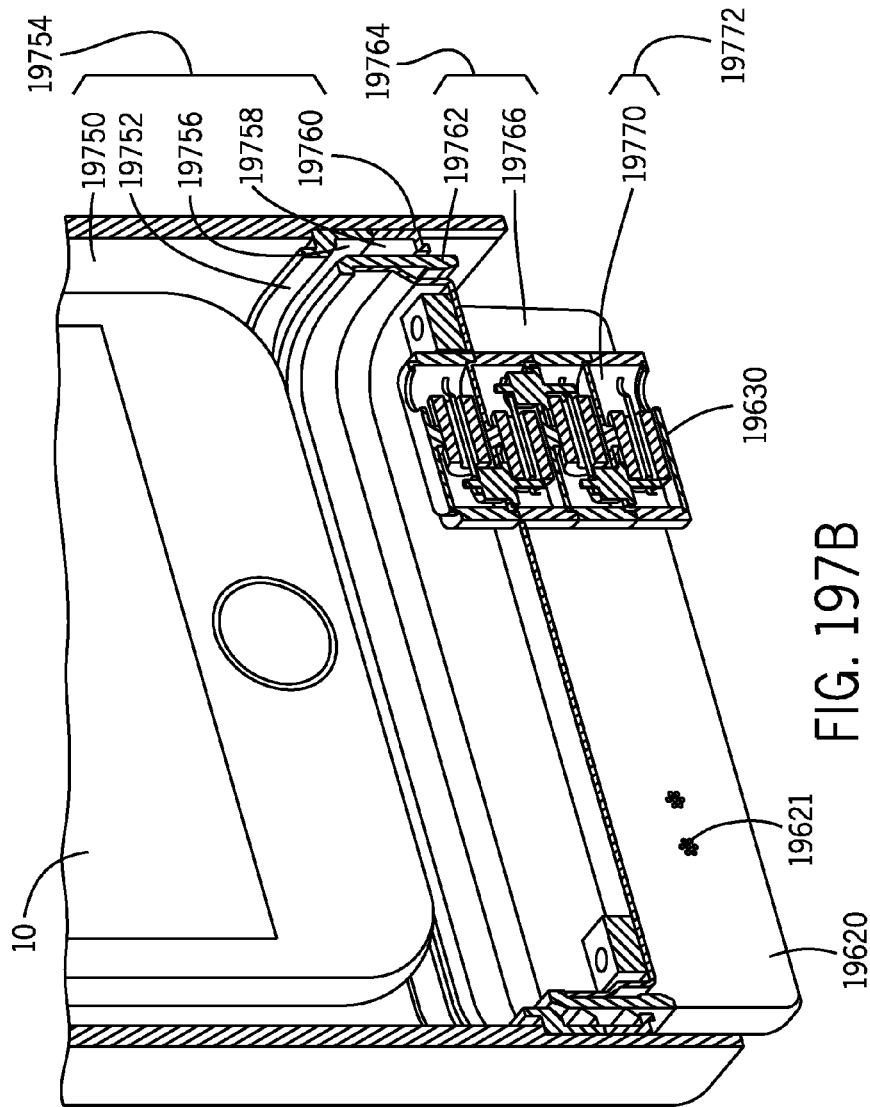


FIG. 197B

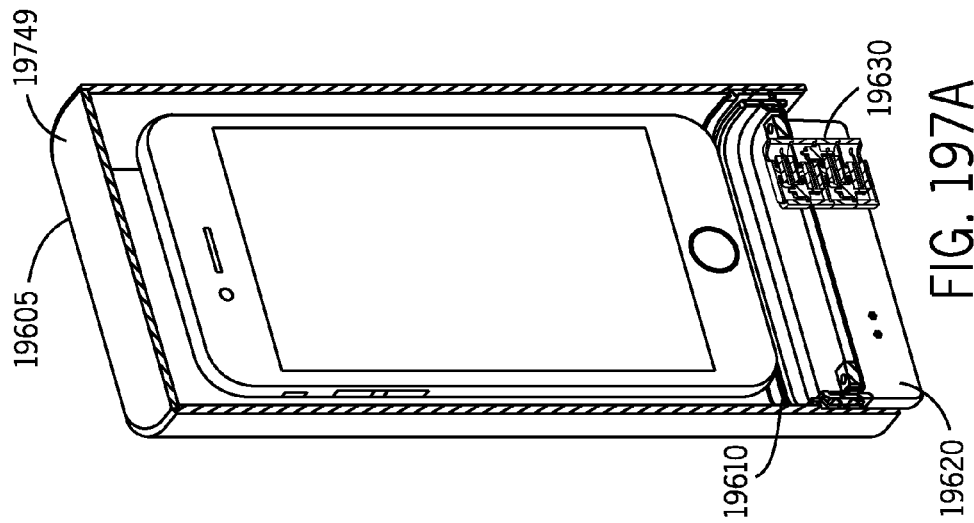
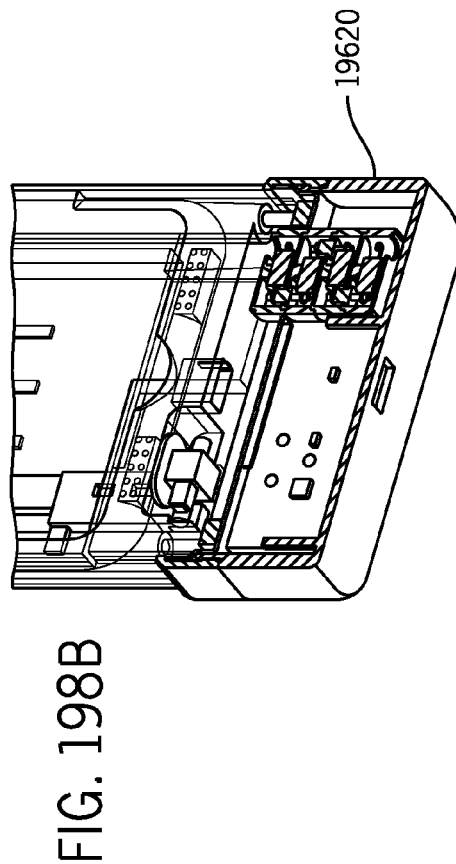
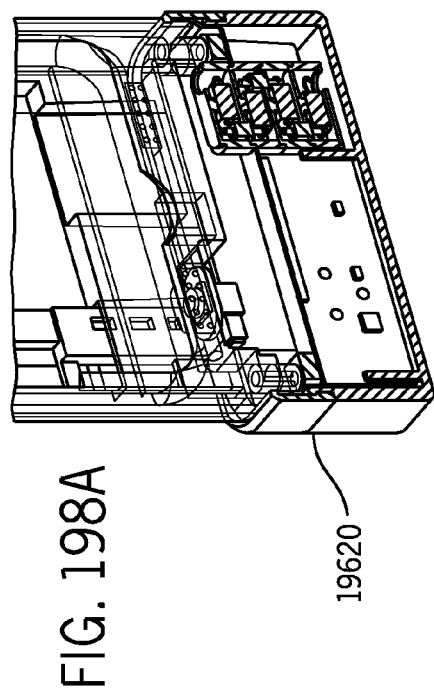
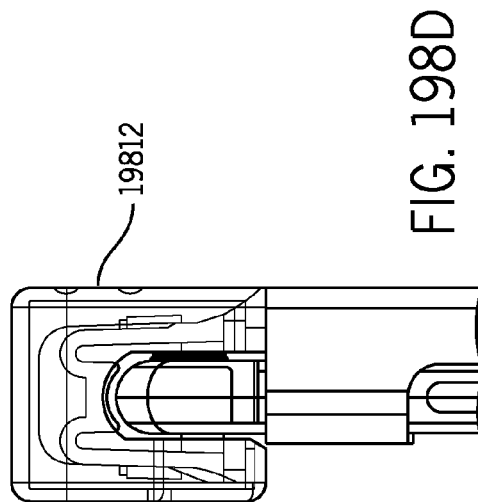
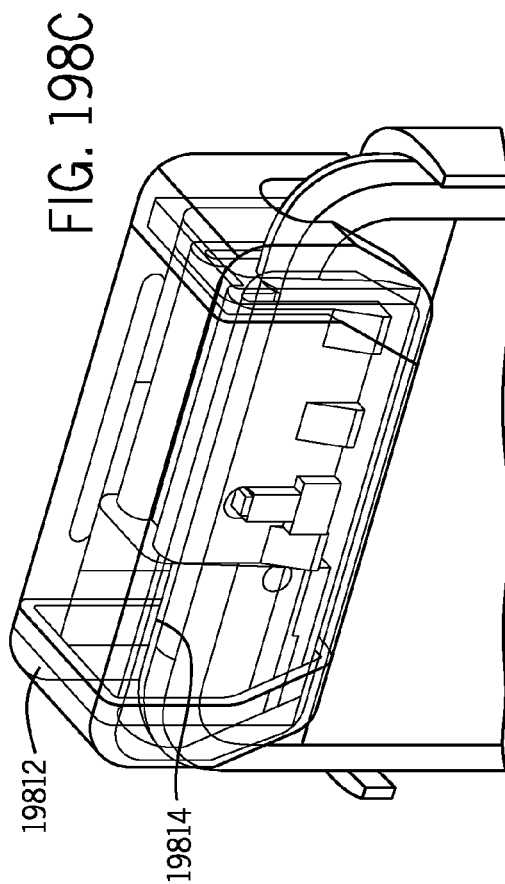
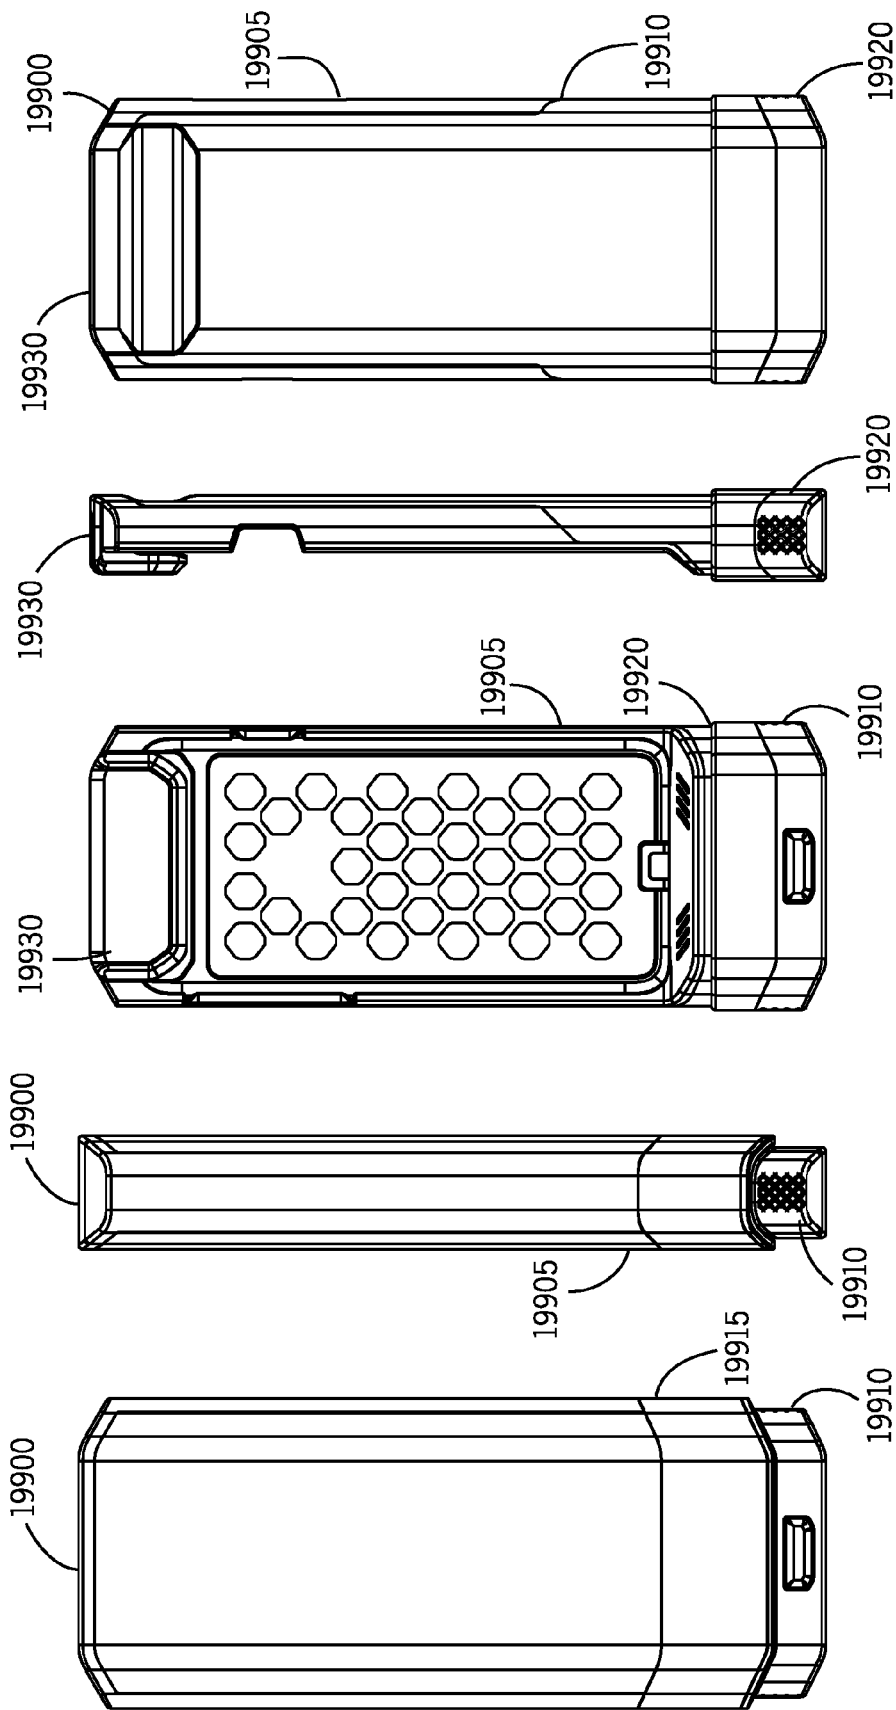
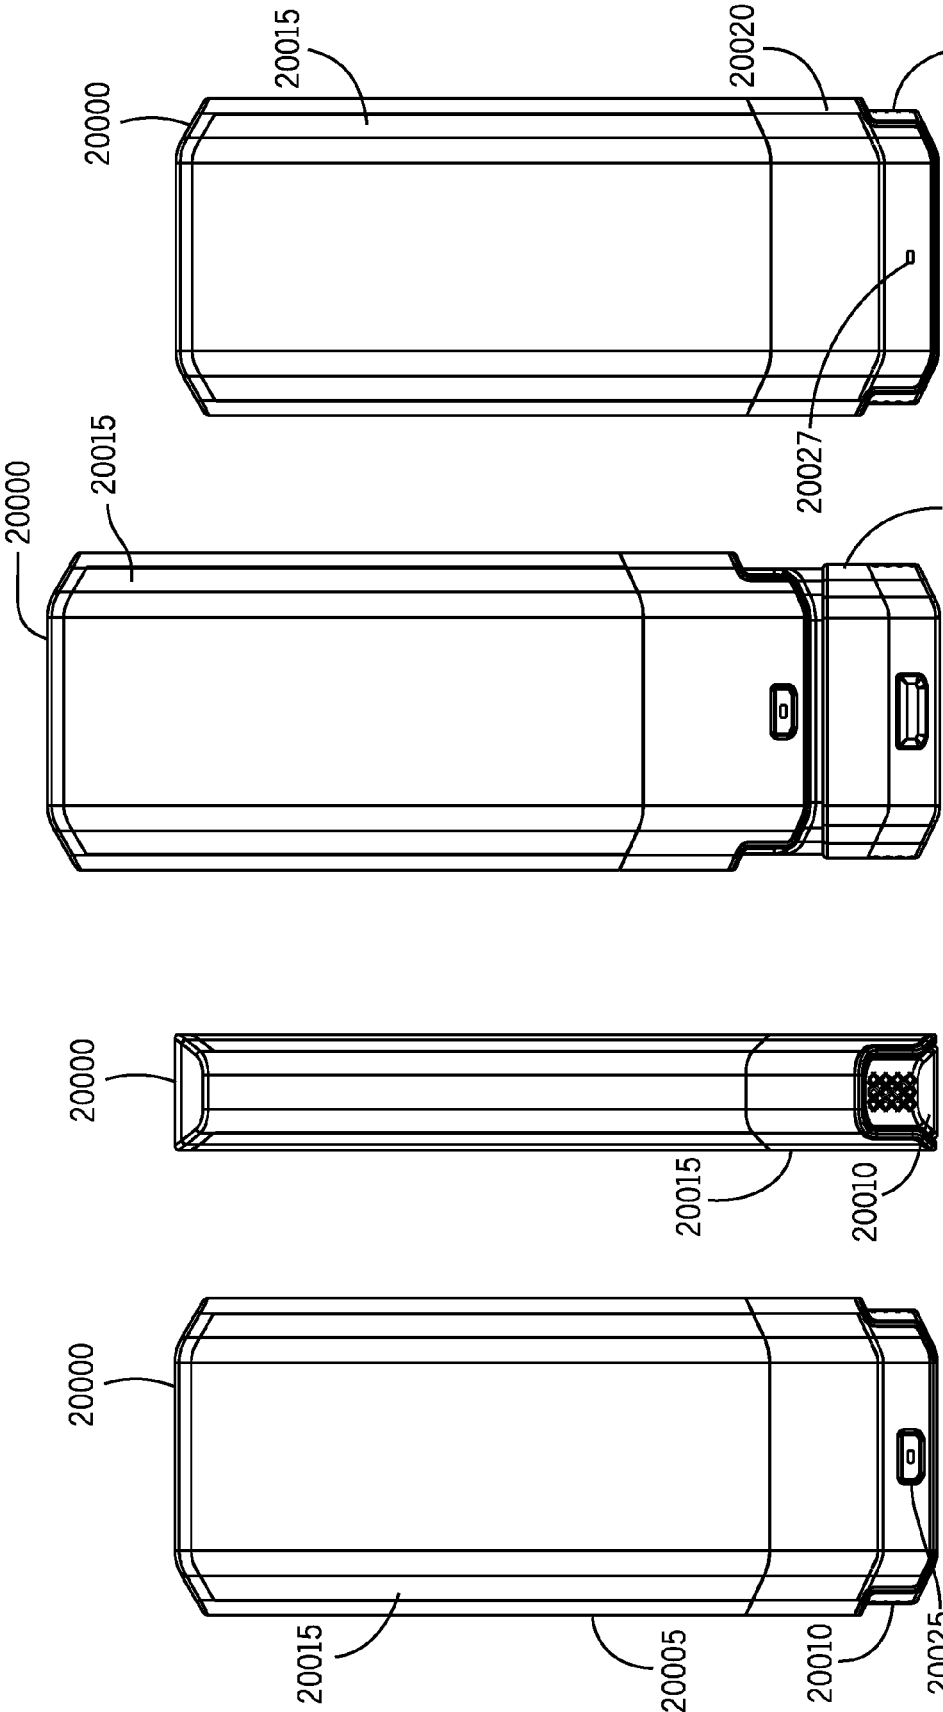


FIG. 197A







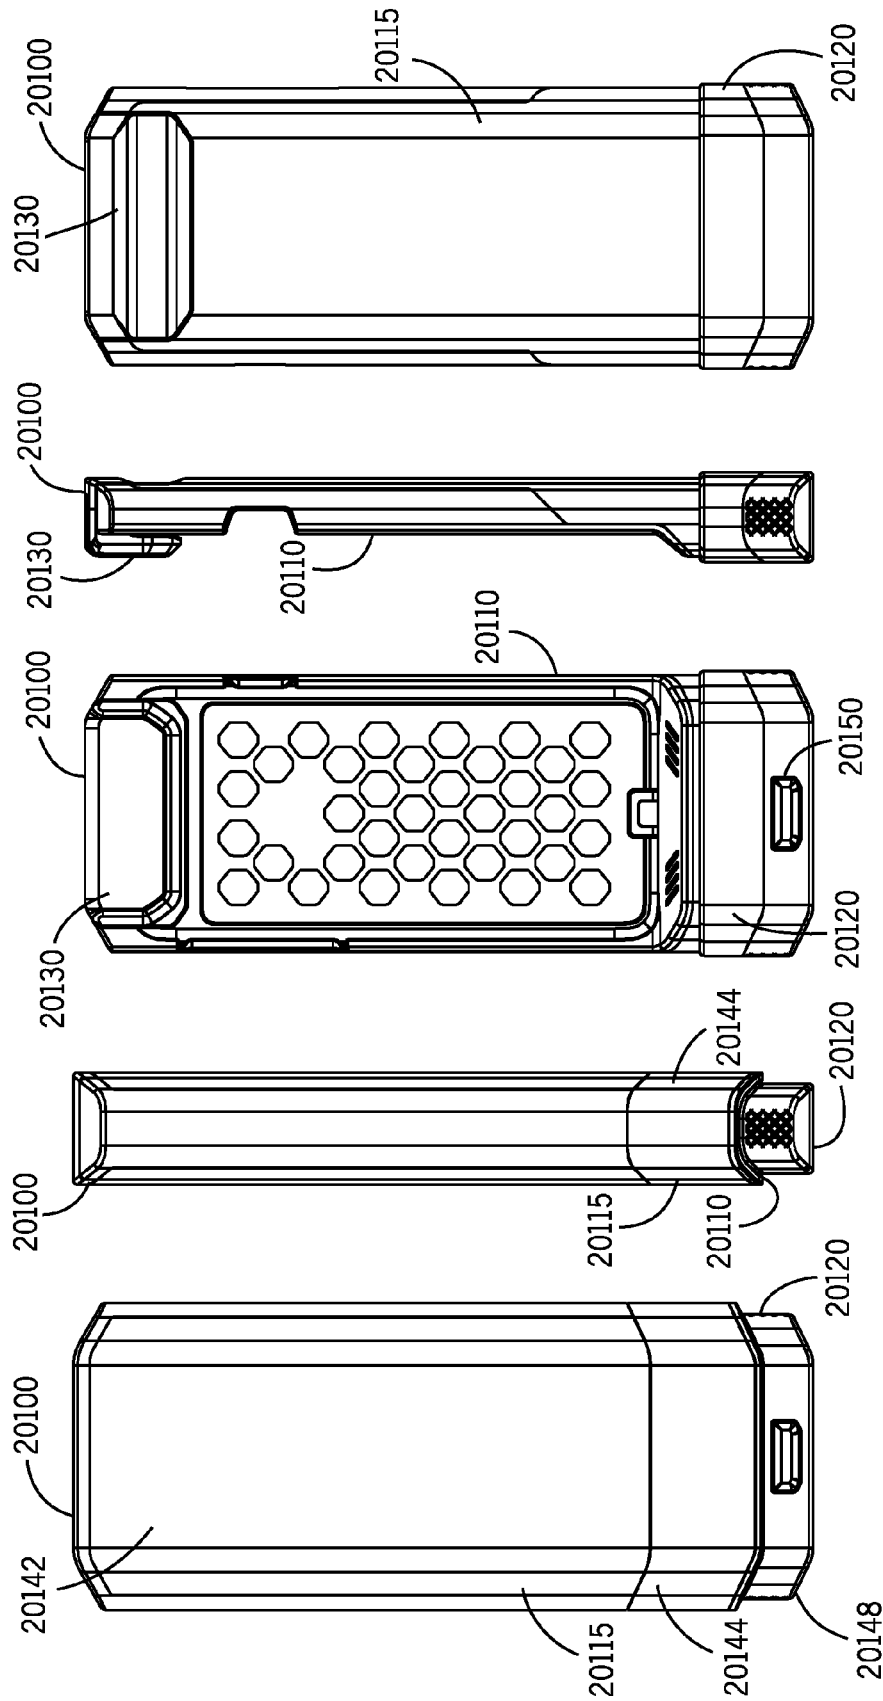


FIG. 201A FIG. 201B FIG. 201C FIG. 201D FIG. 201E

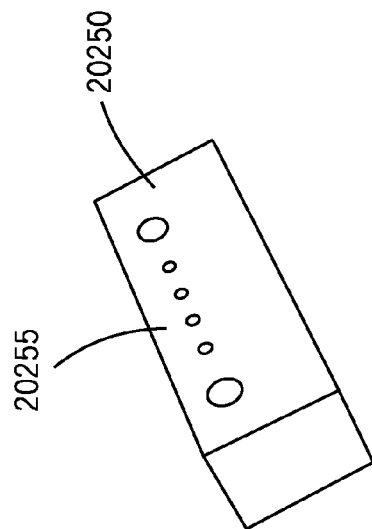
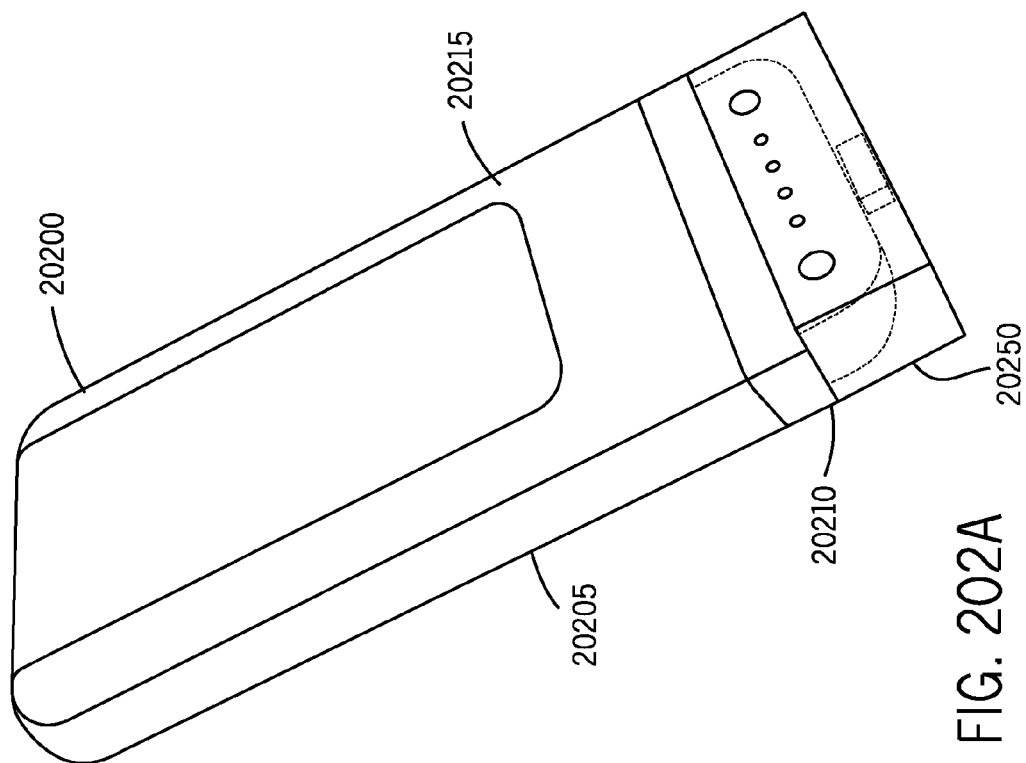


FIG. 202B

FIG. 202A

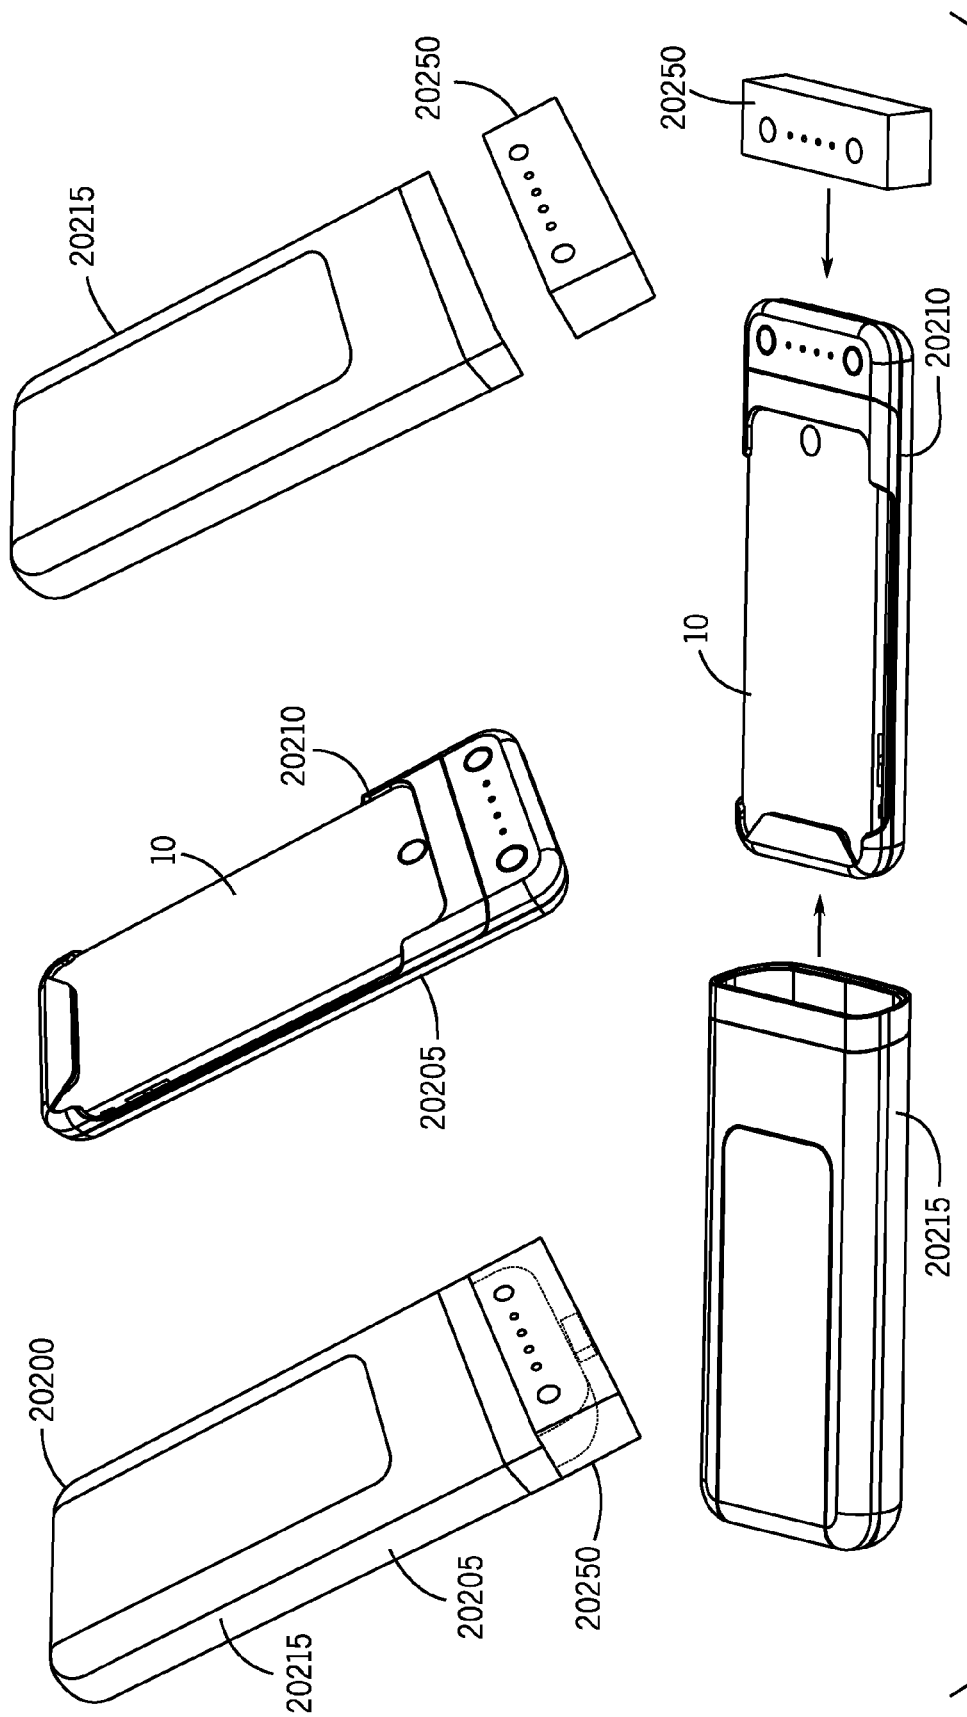


FIG. 203

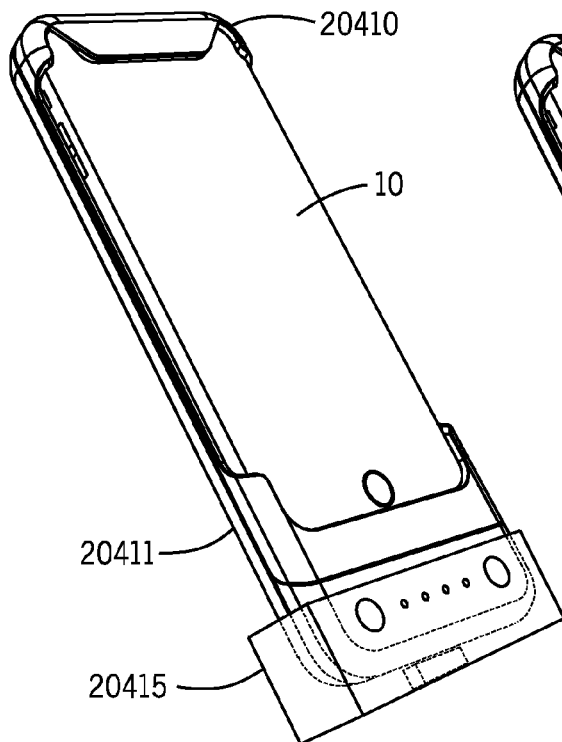


FIG. 204A

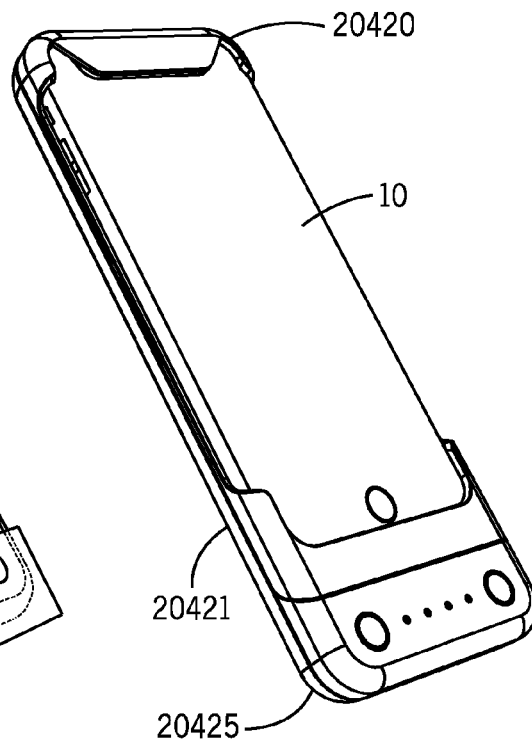


FIG. 204B

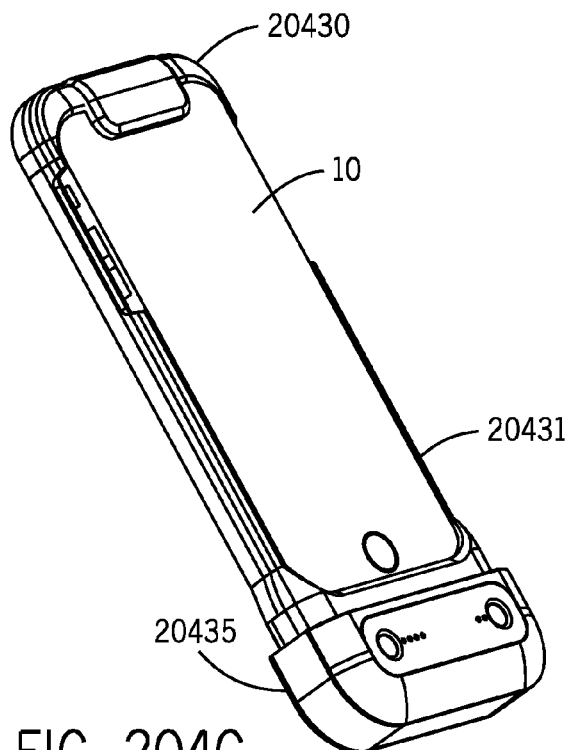


FIG. 204C

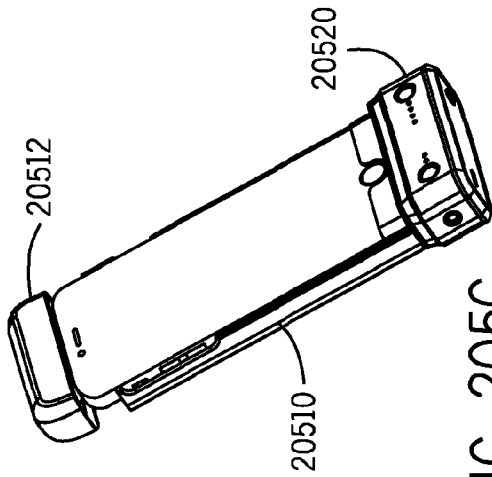


FIG. 205C

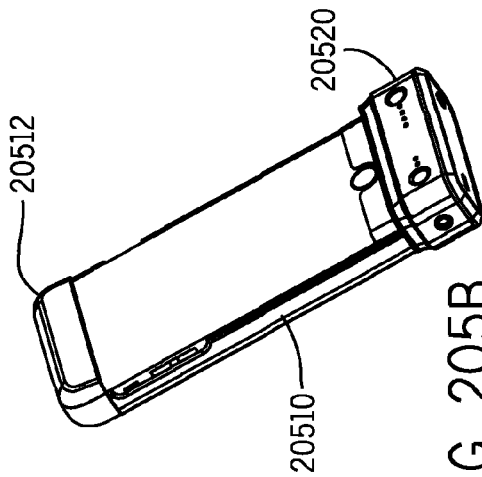


FIG. 205B

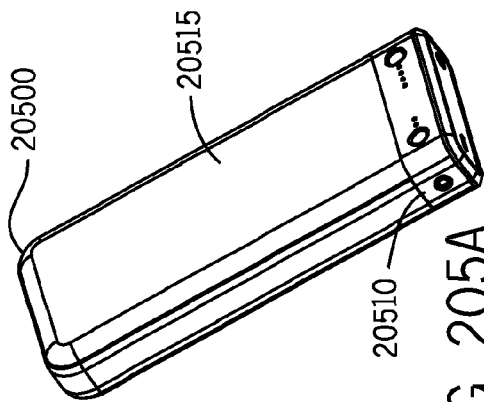


FIG. 205A

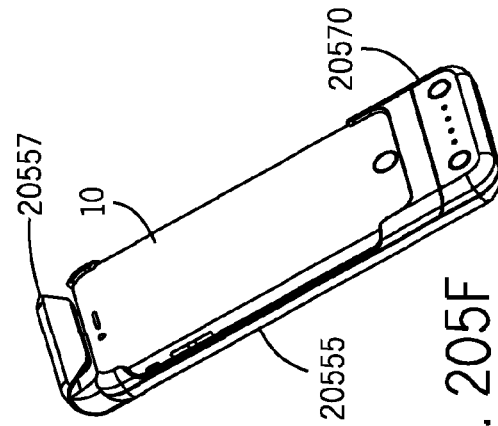


FIG. 205F

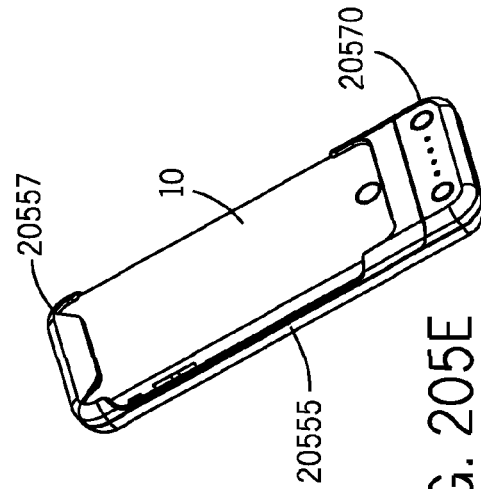


FIG. 205E

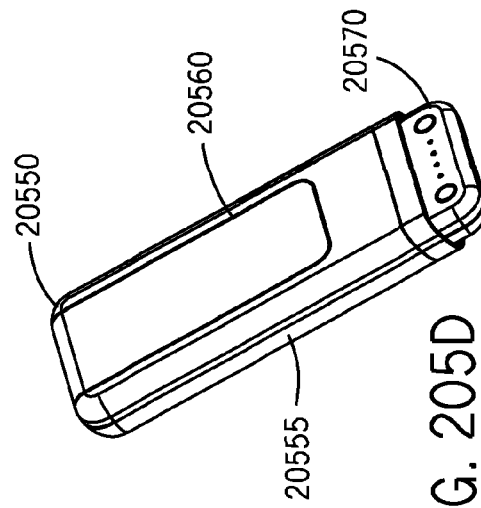


FIG. 205D

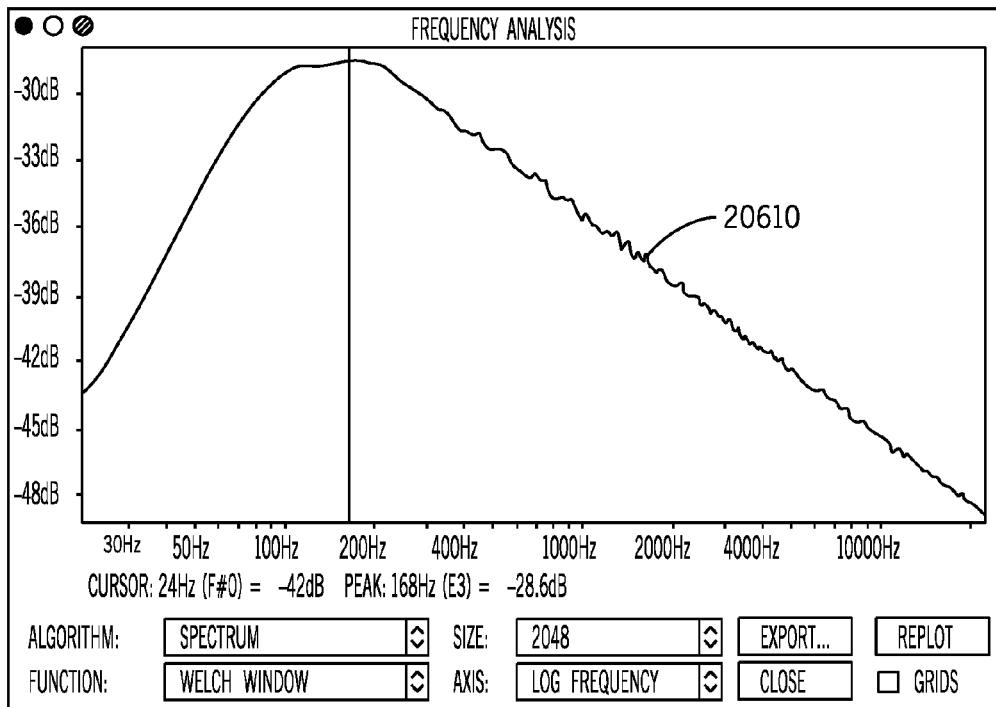


FIG. 206

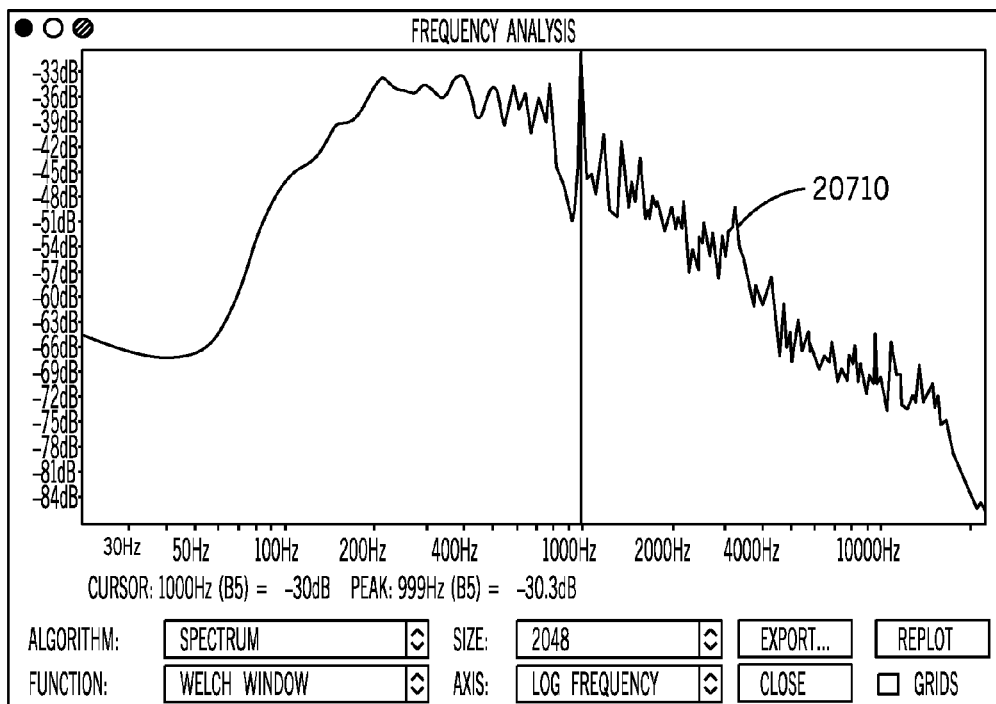


FIG. 207

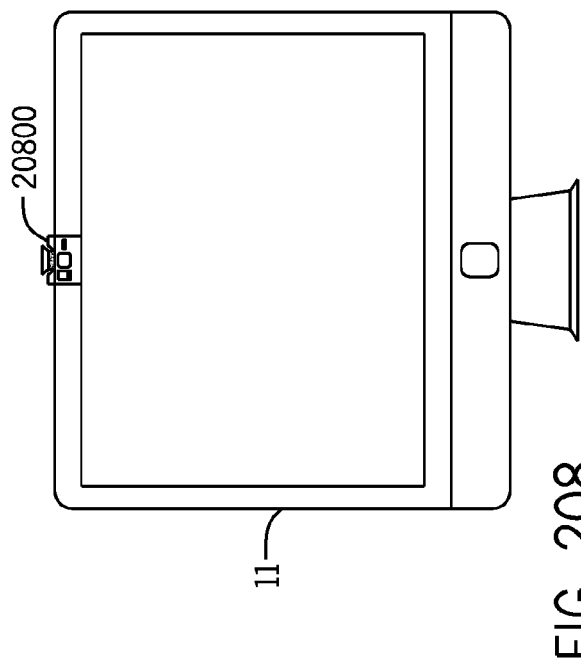


FIG. 209

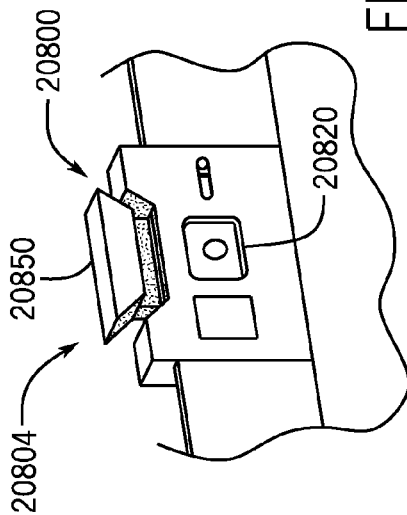
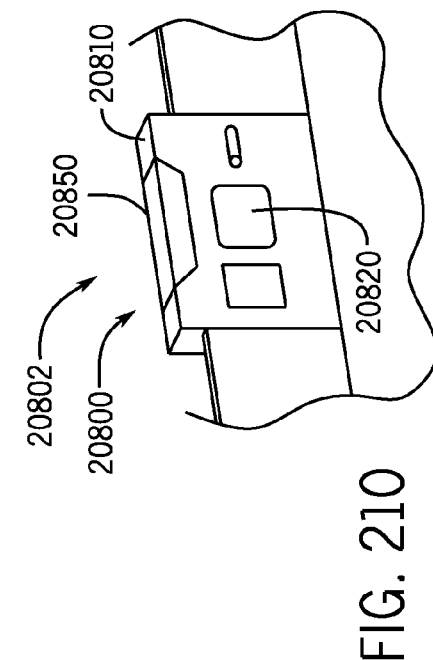
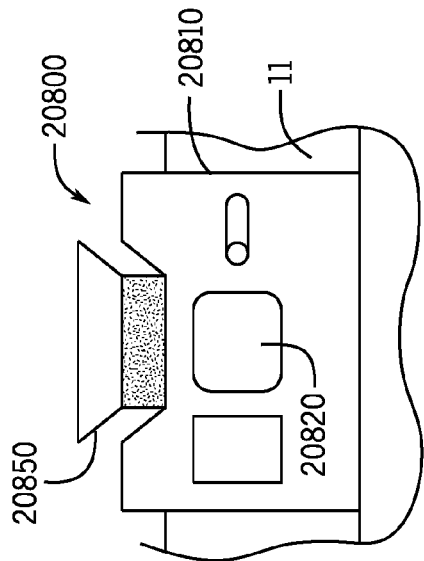


FIG. 211

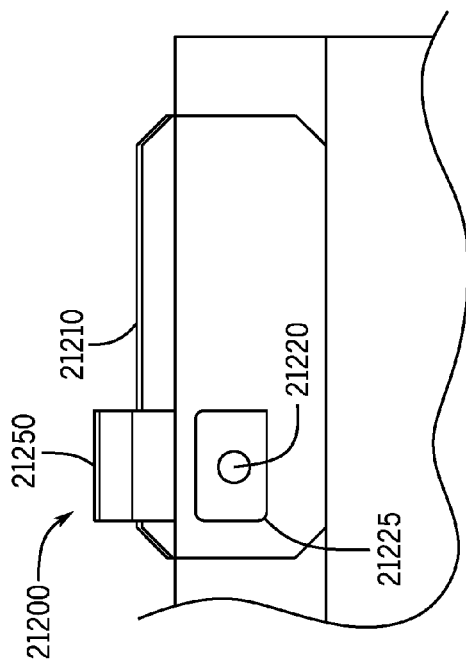


FIG. 212A

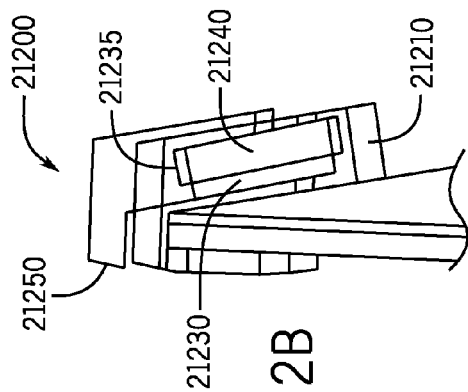


FIG. 212B

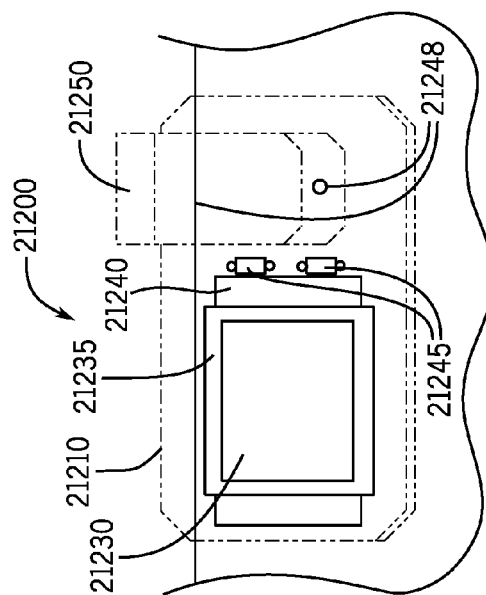
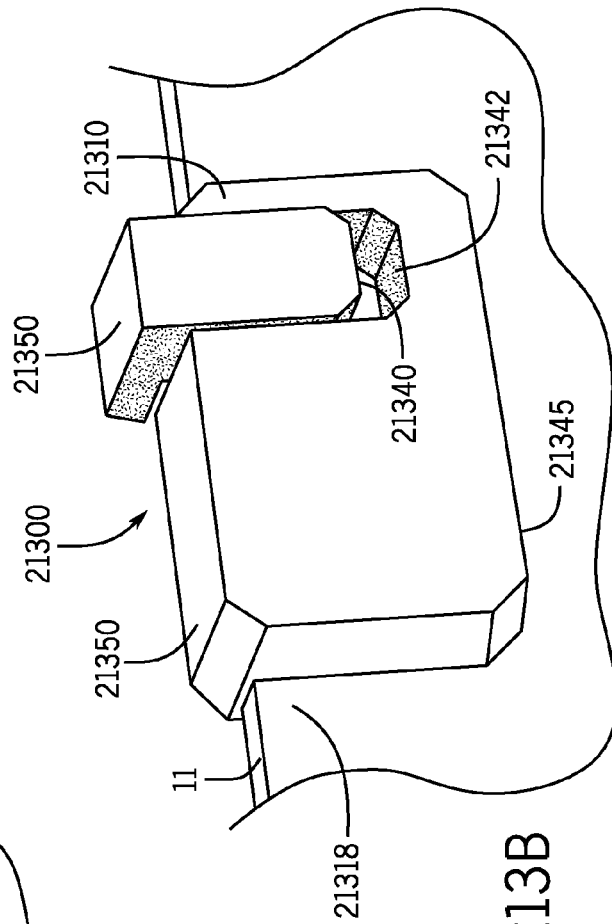
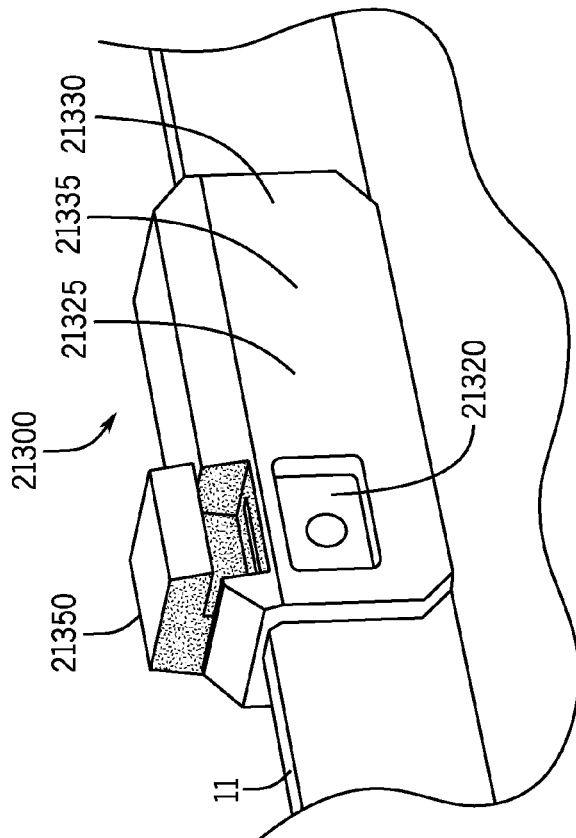


FIG. 212C



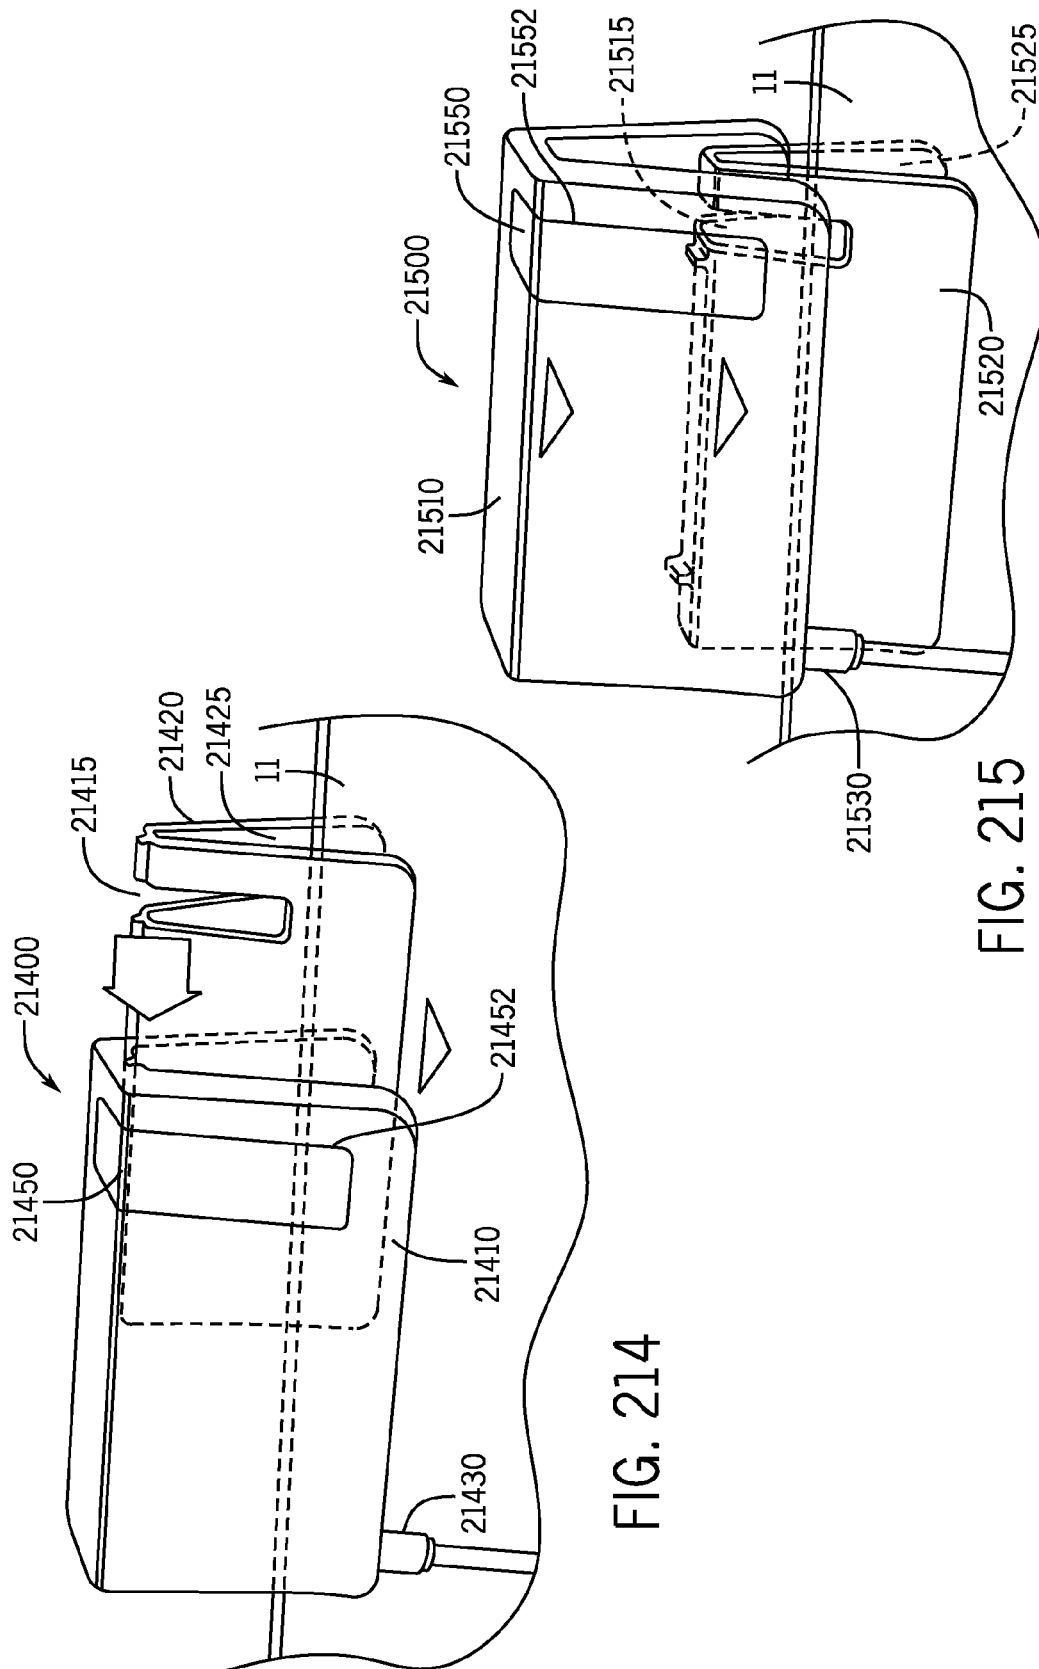
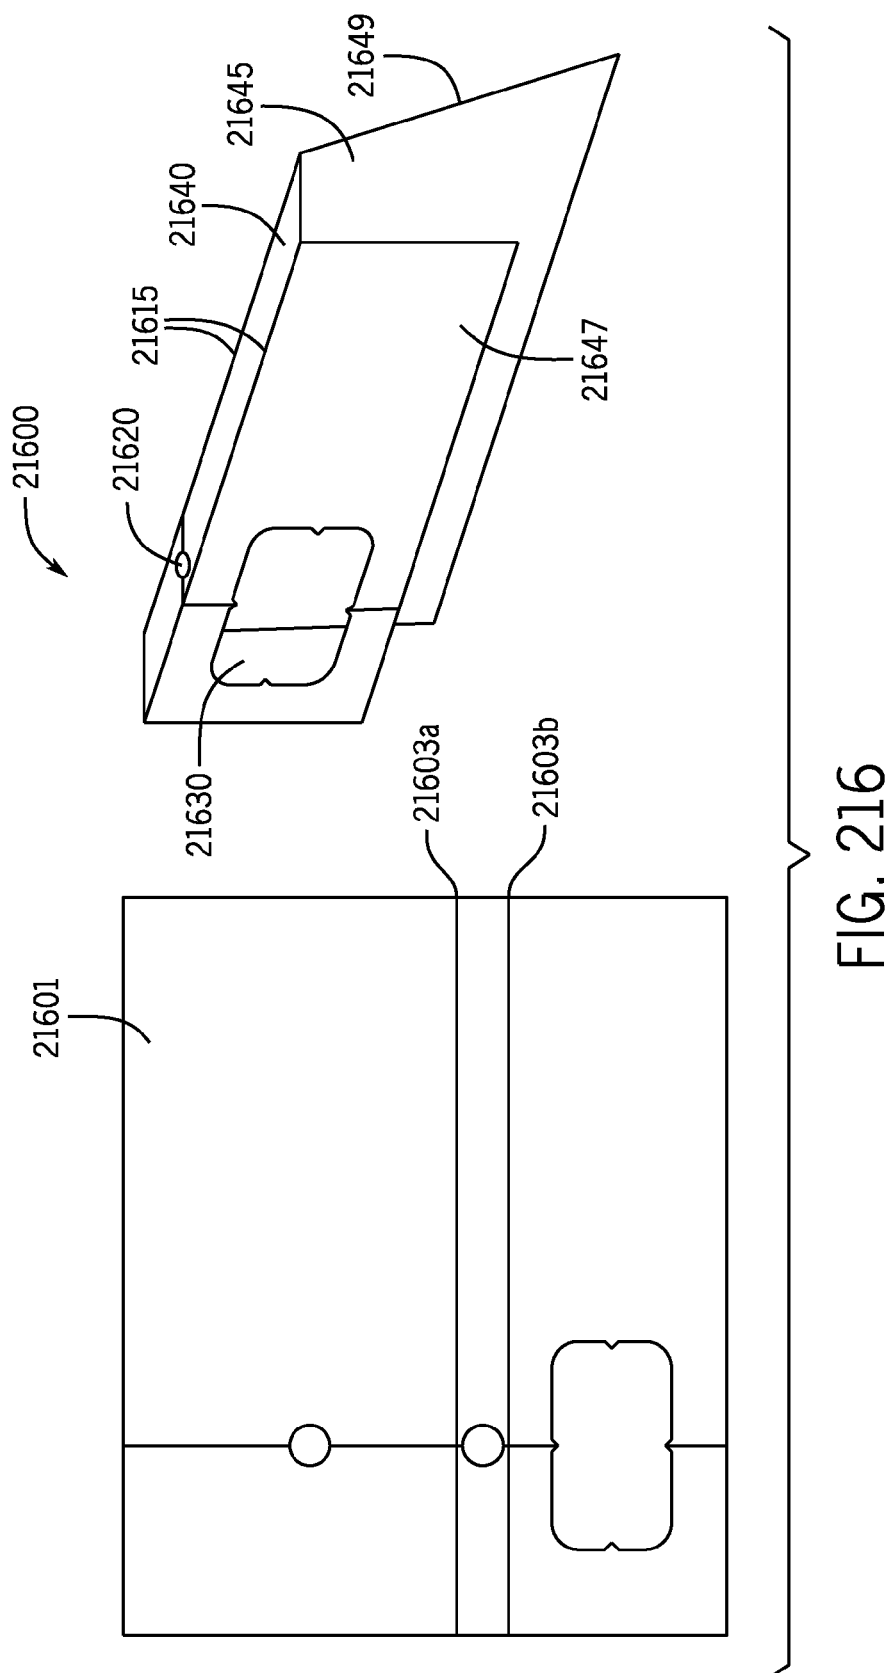


FIG. 214

FIG. 215



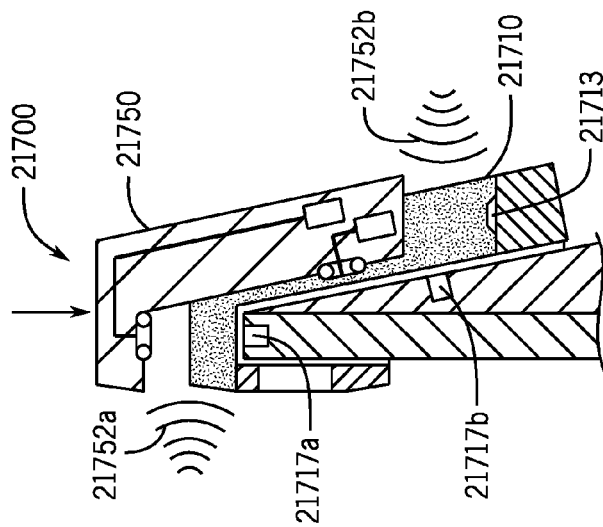
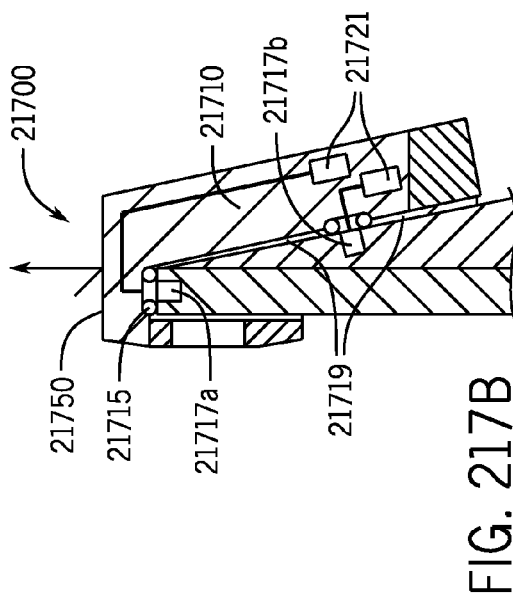
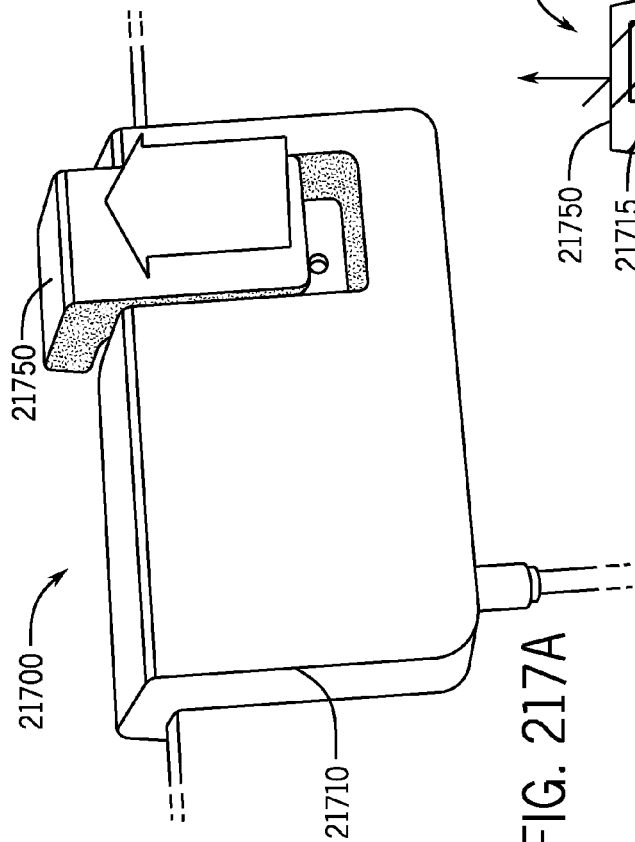


FIG. 217C

FIG. 217A

FIG. 217B

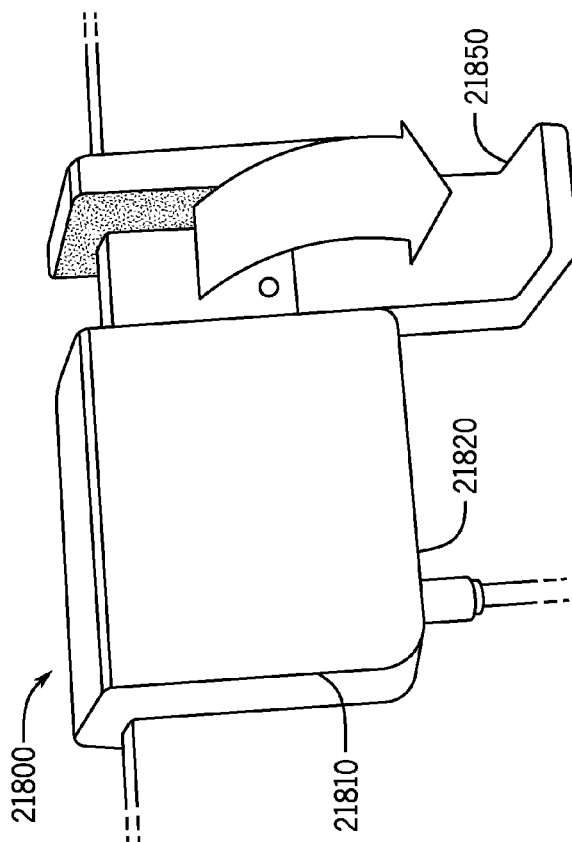


FIG. 218A

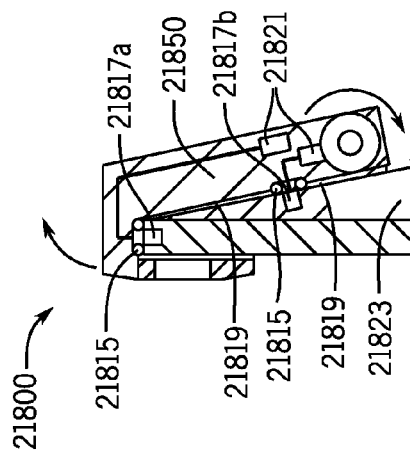


FIG. 218B

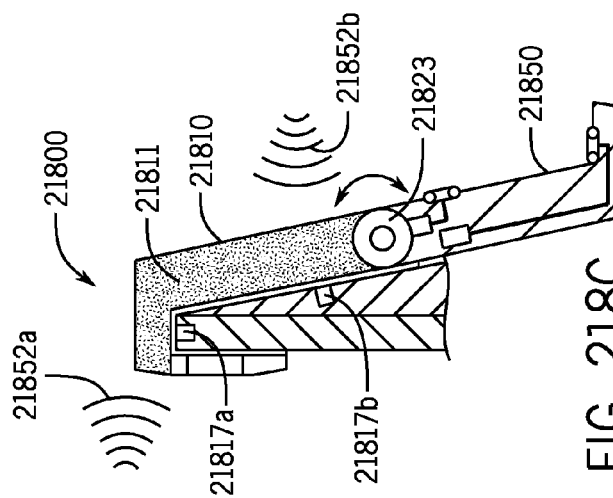


FIG. 218C

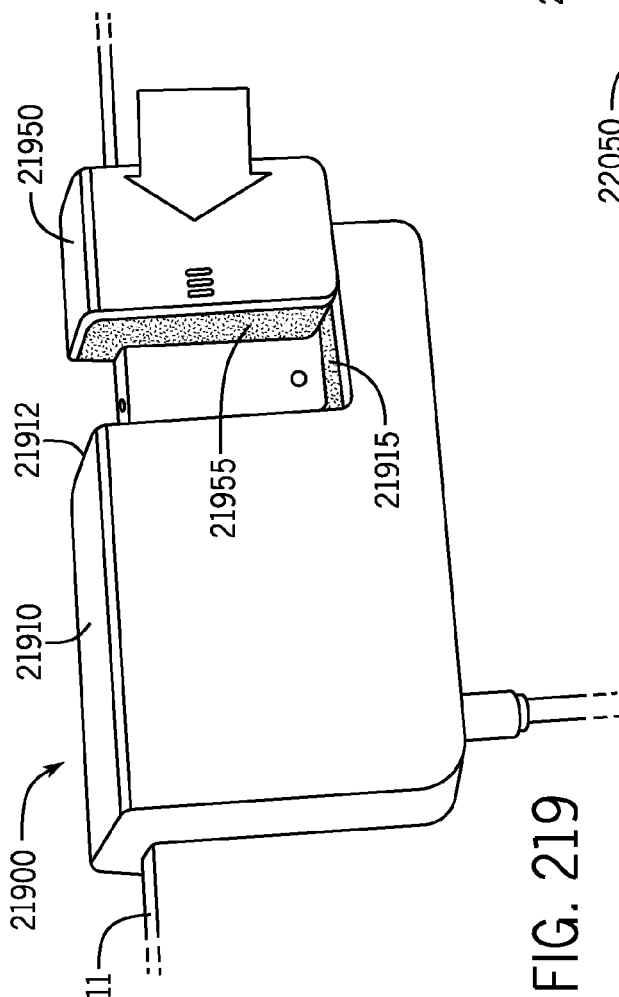


FIG. 219

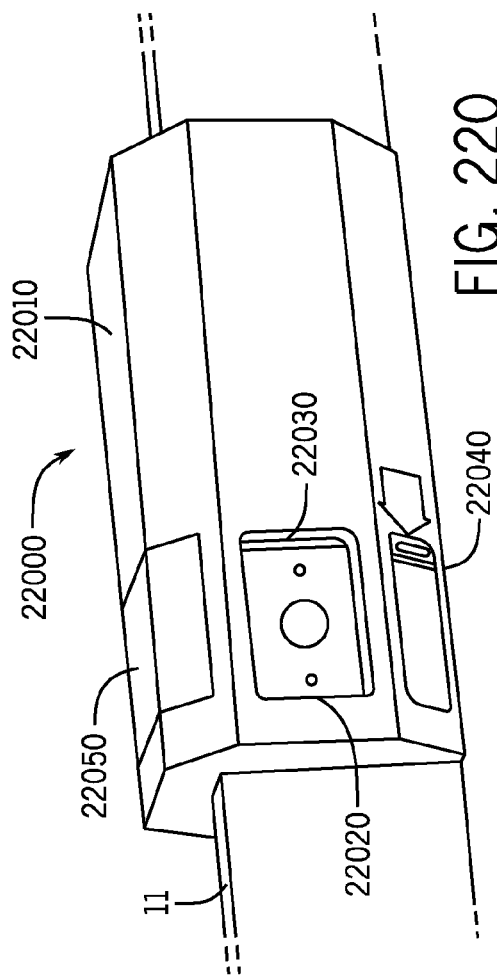


FIG. 220

FIG. 221

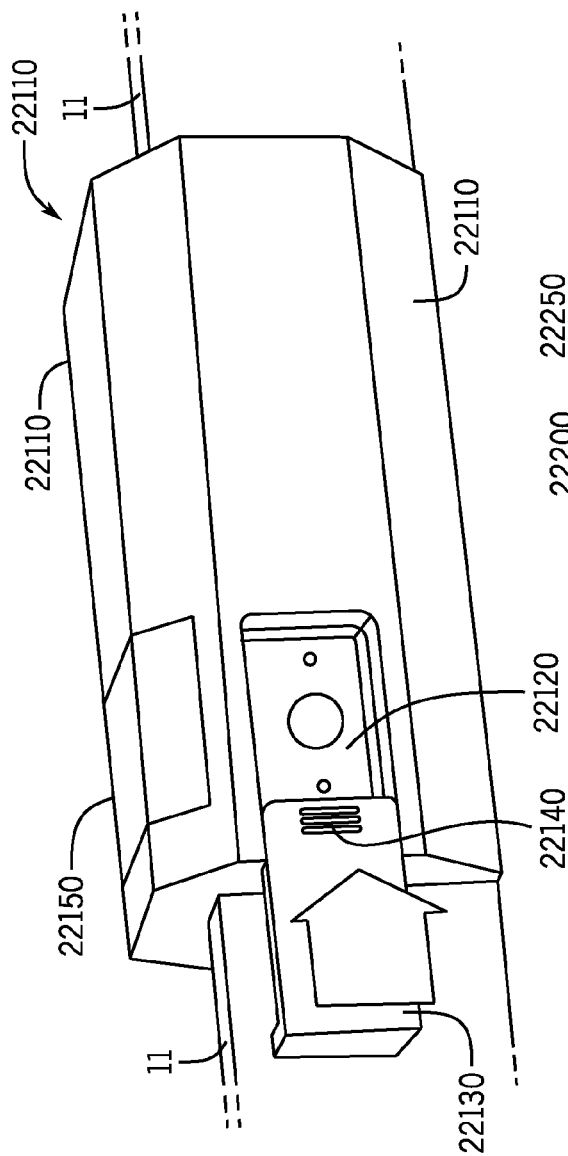
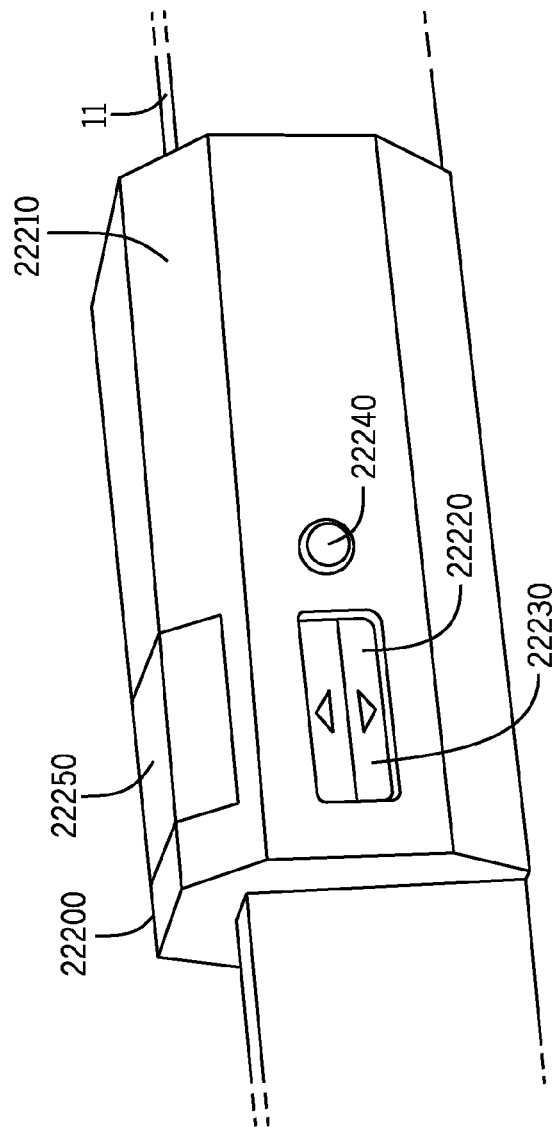


FIG. 222



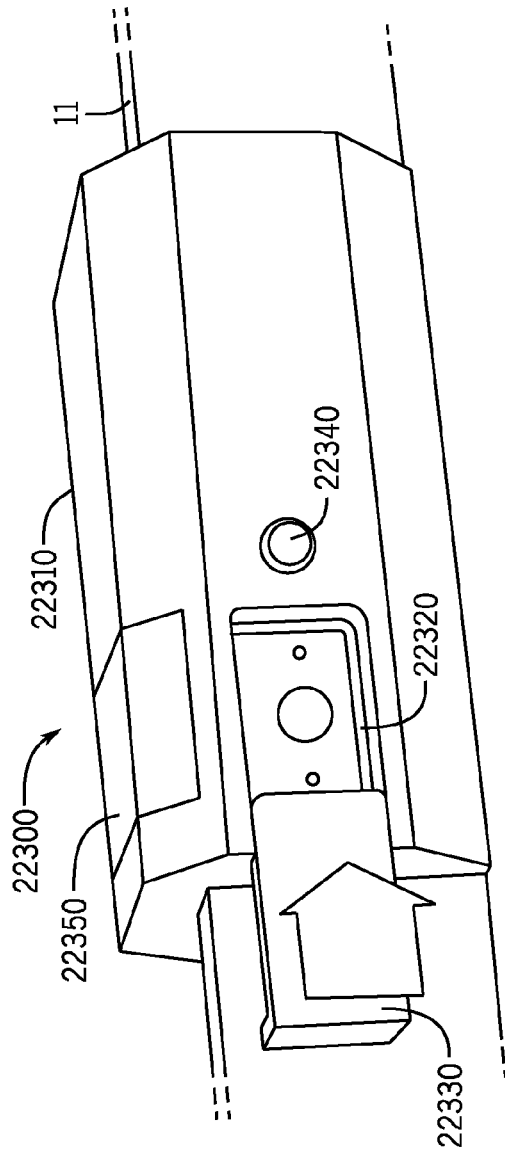


FIG. 223

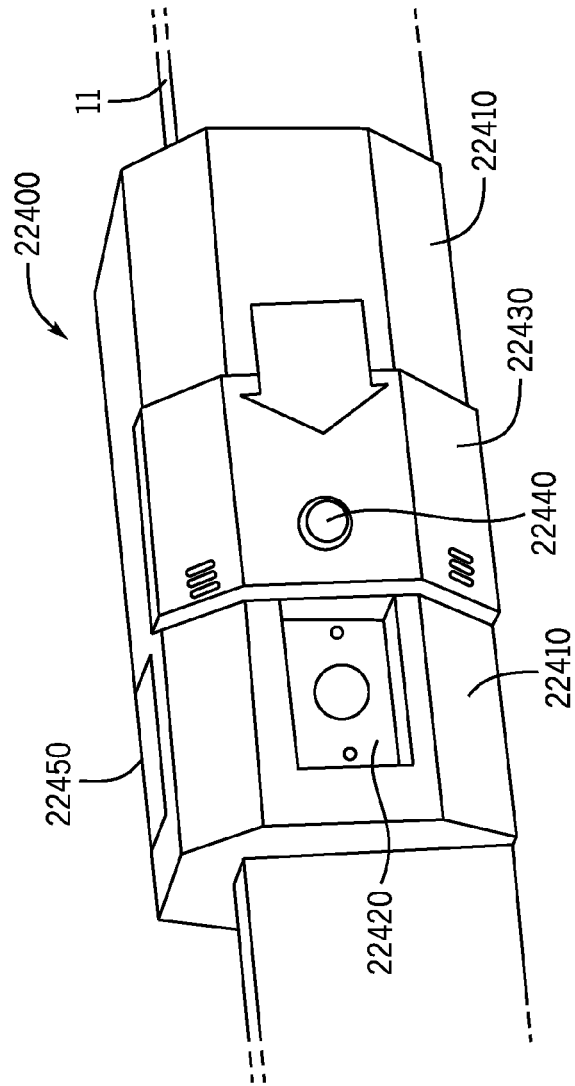
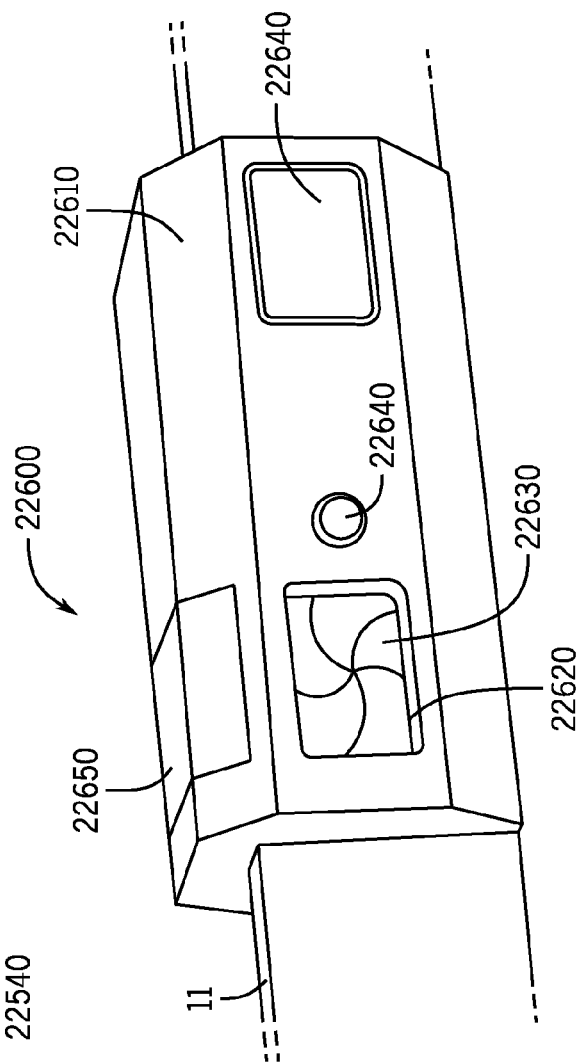
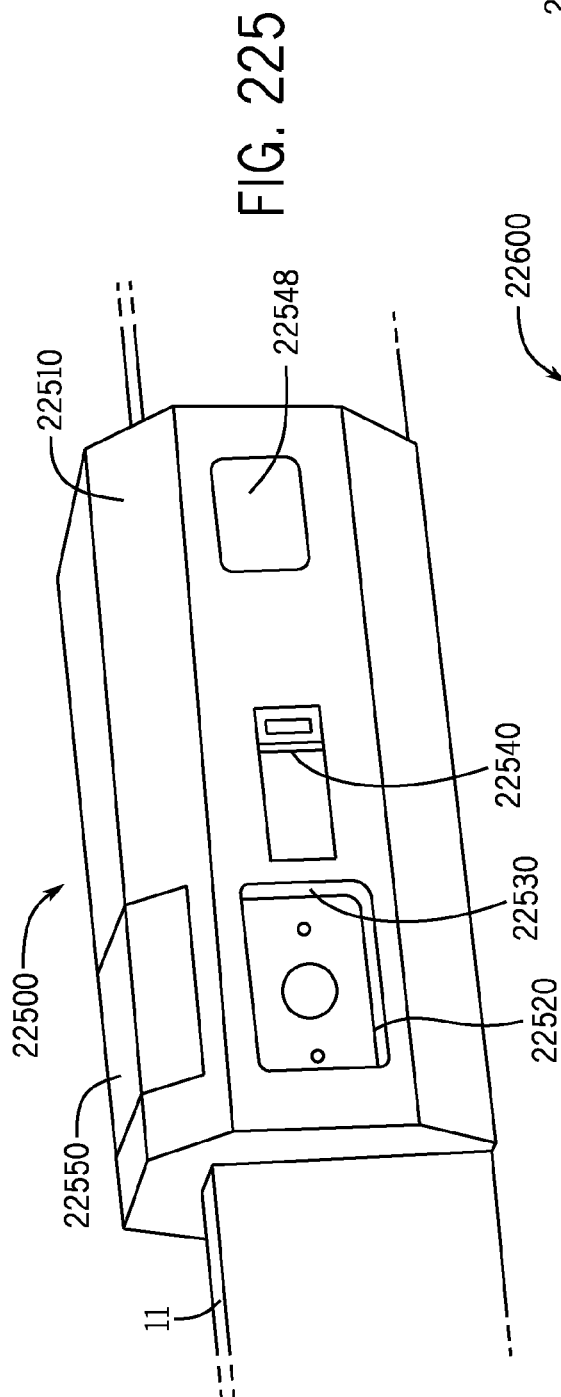


FIG. 224



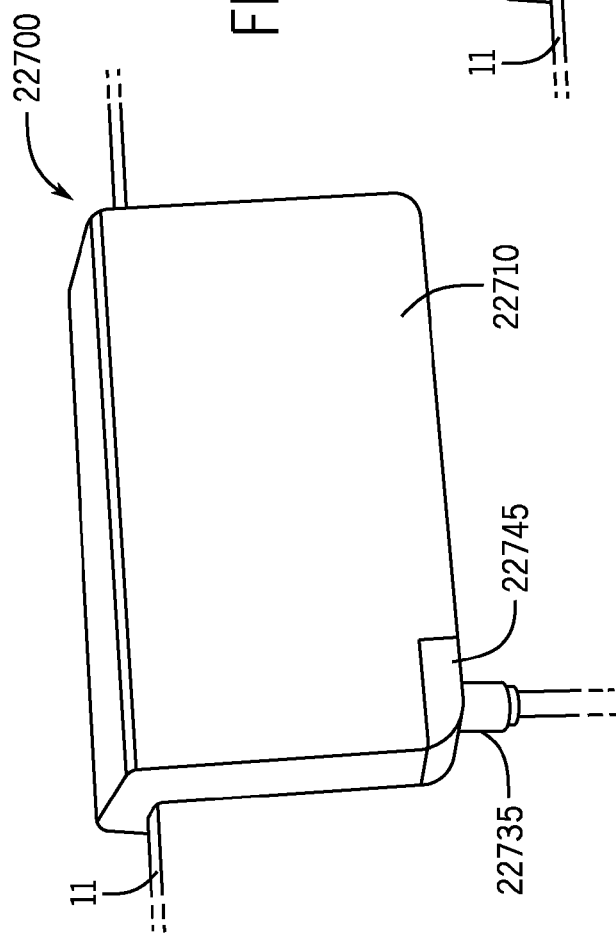


FIG. 227

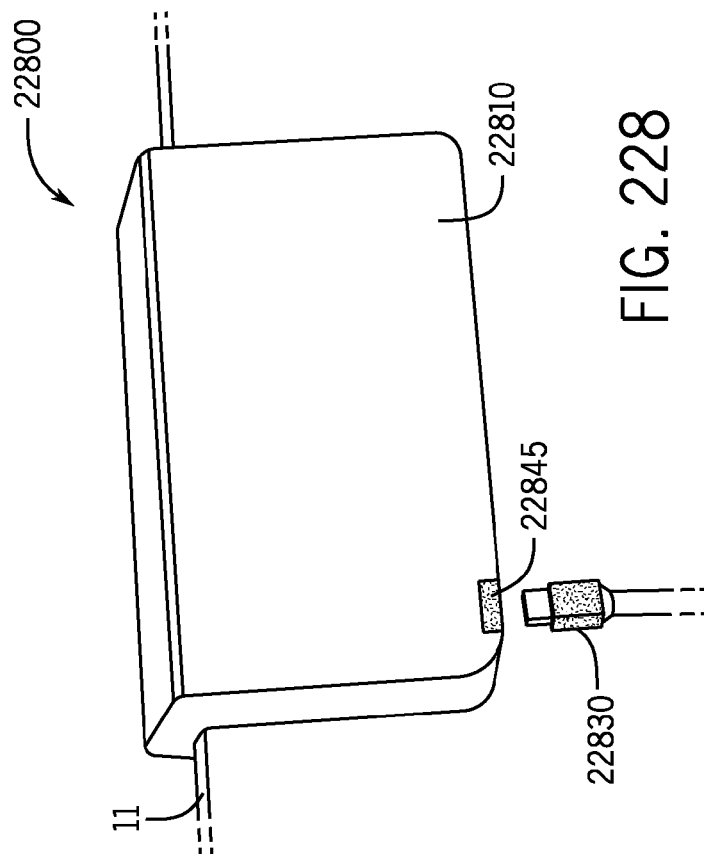


FIG. 228

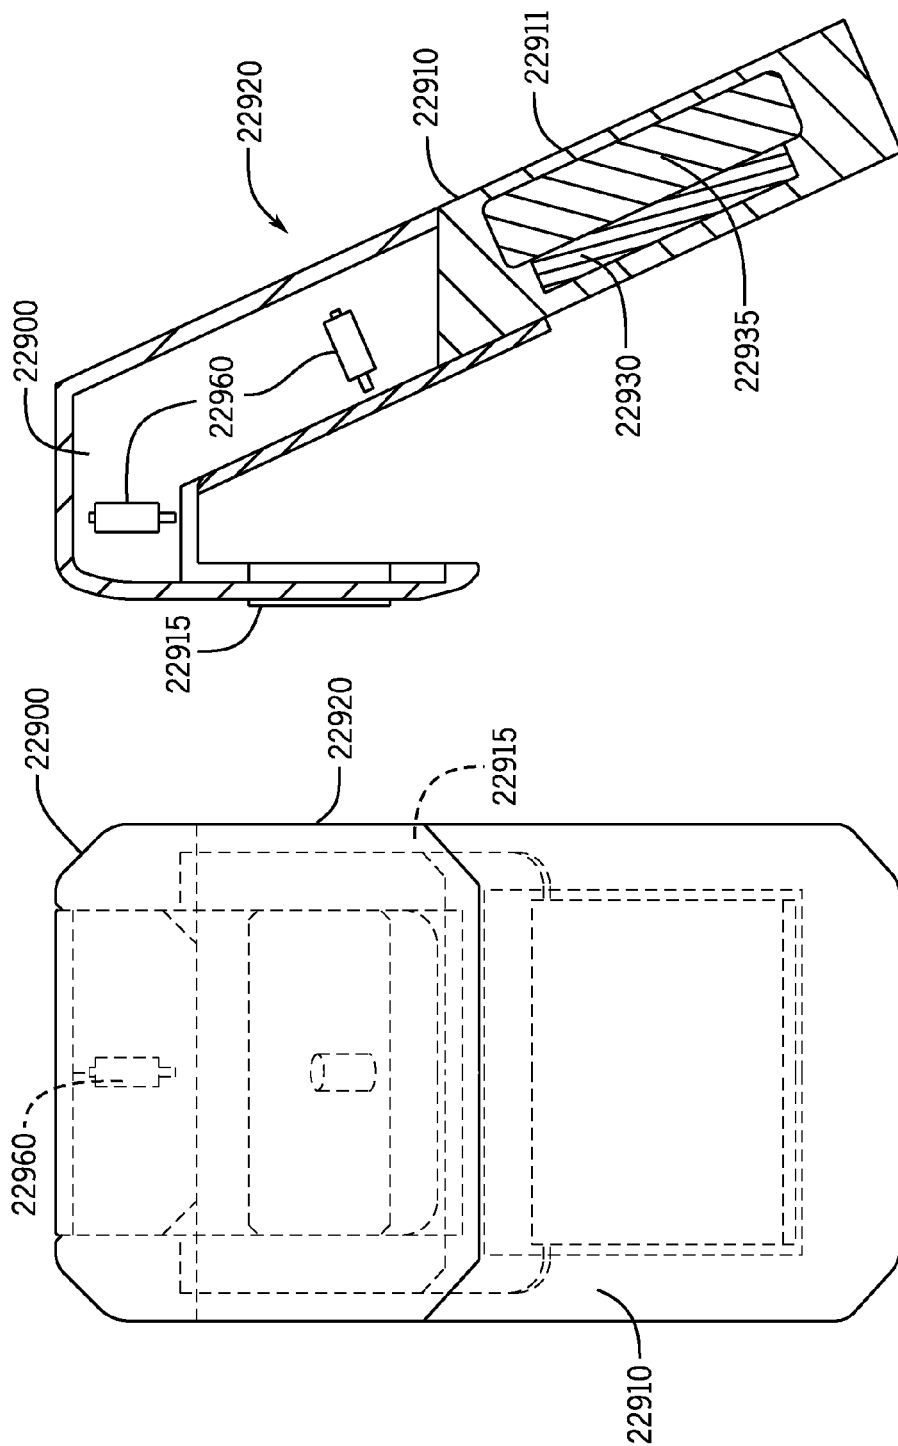


FIG. 229

FIG. 230

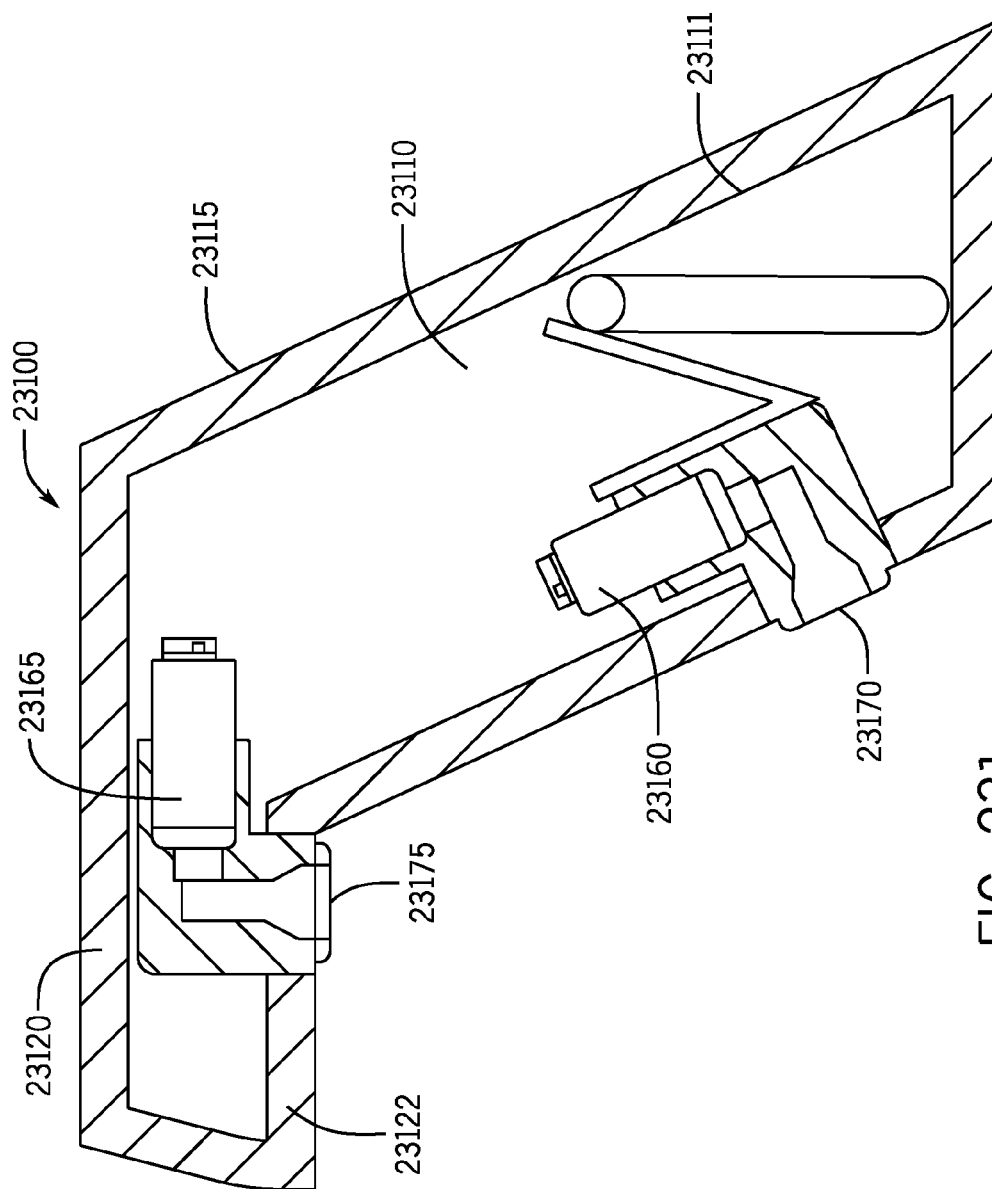


FIG. 231

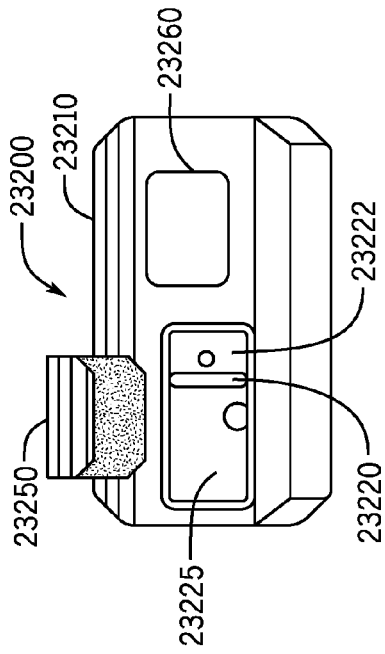


FIG. 232C

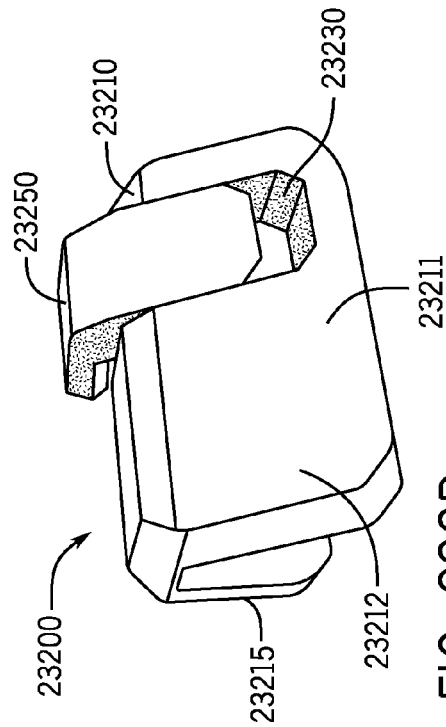


FIG. 232B

FIG. 232A

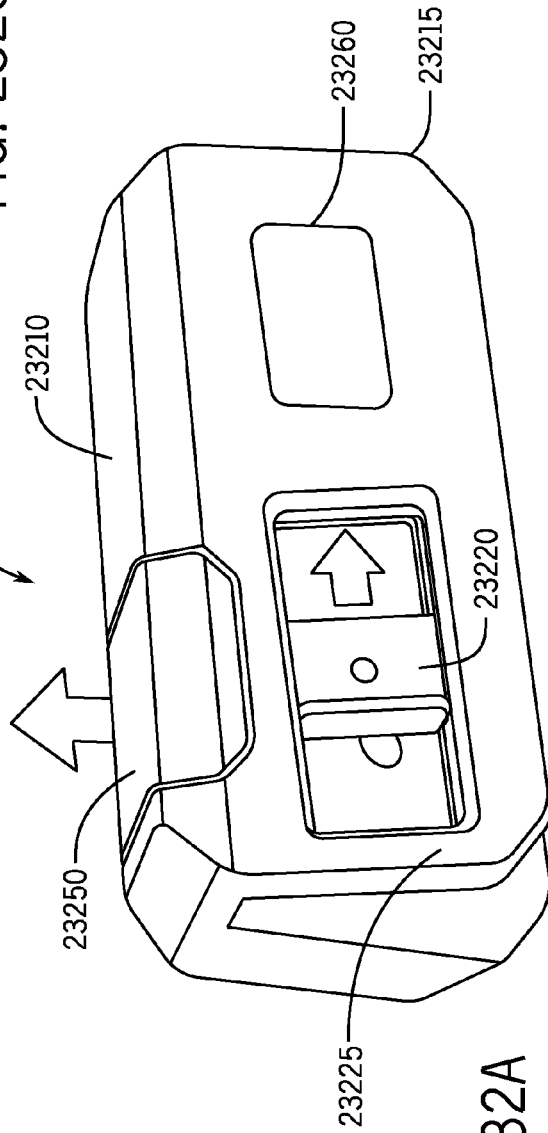


FIG. 232A

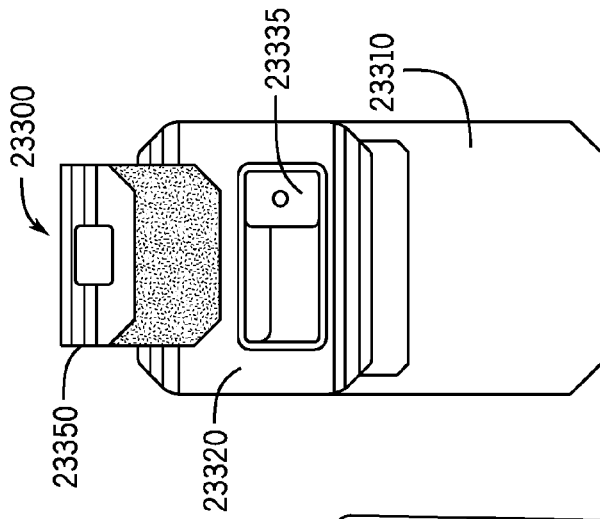


FIG. 233C

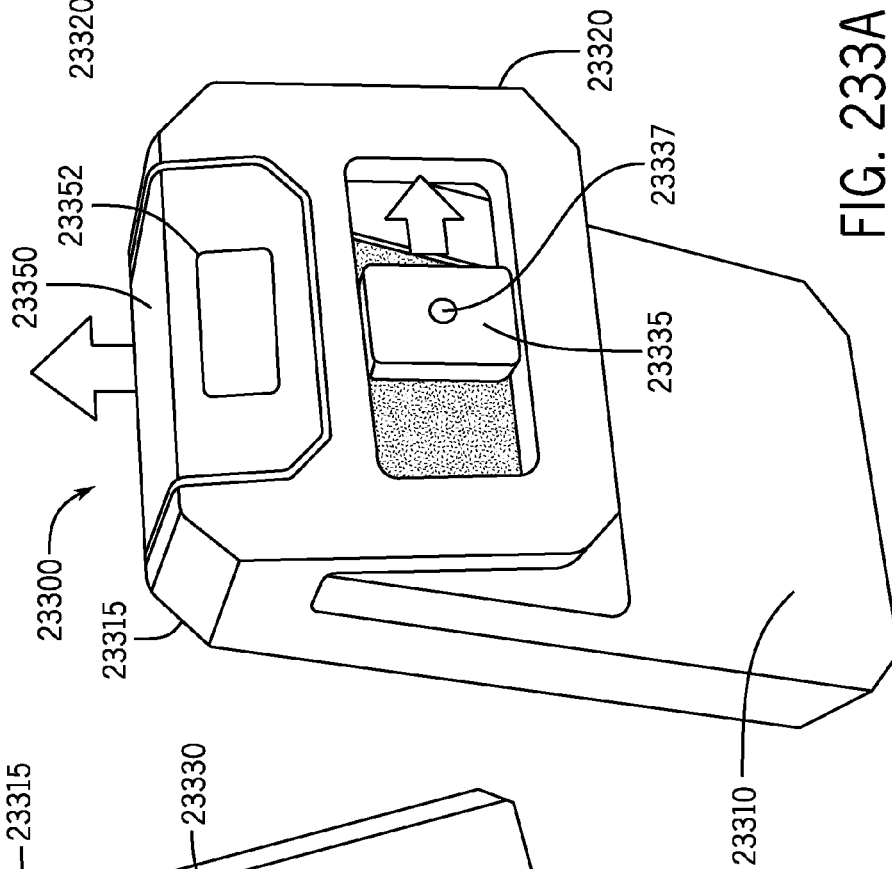


FIG. 233A

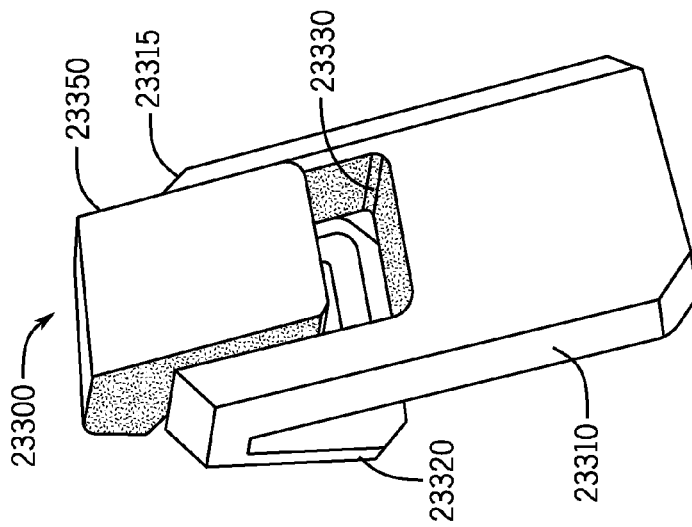


FIG. 233B

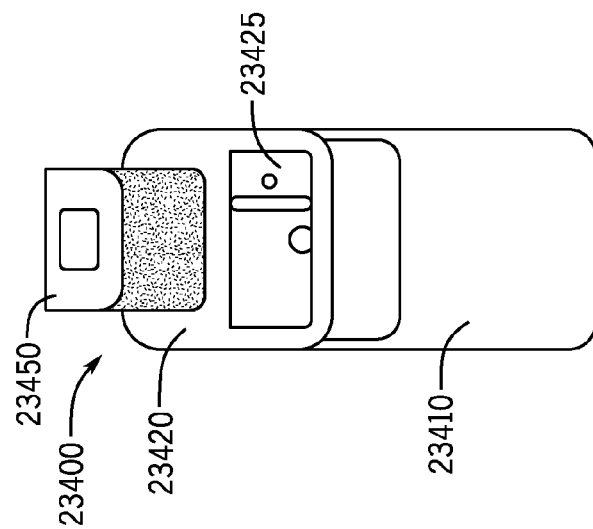


FIG. 234C

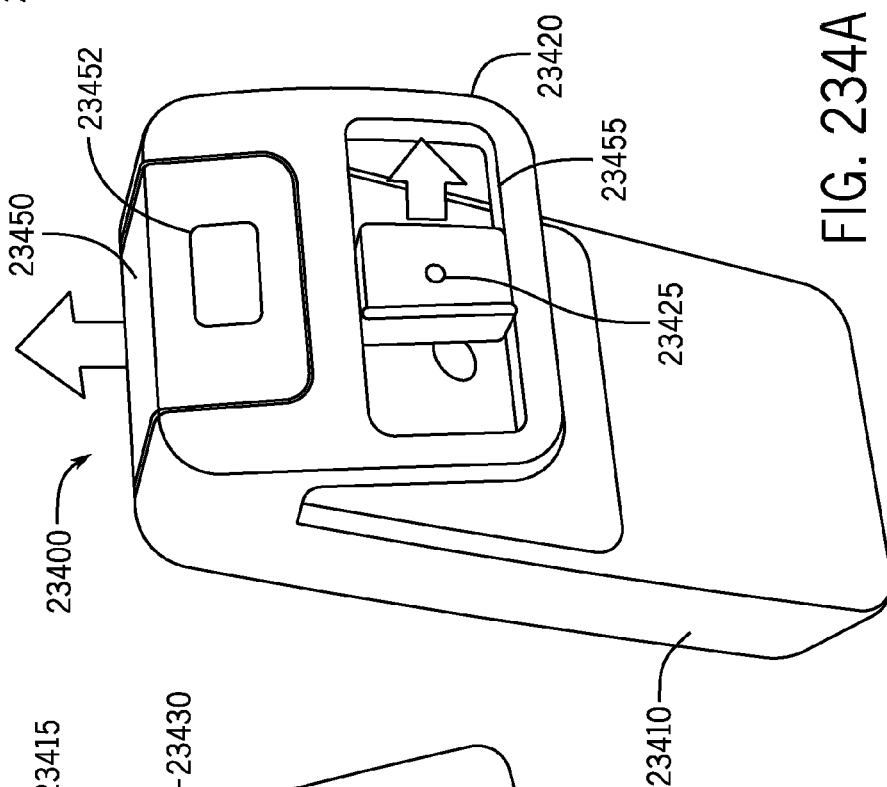


FIG. 234A

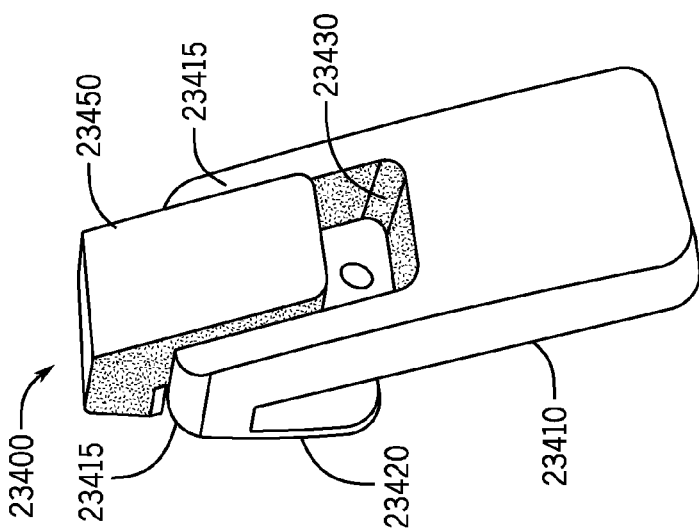


FIG. 234B

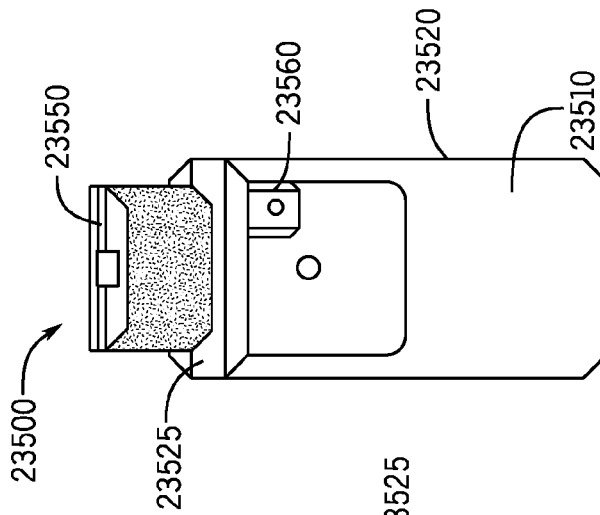


FIG. 235C

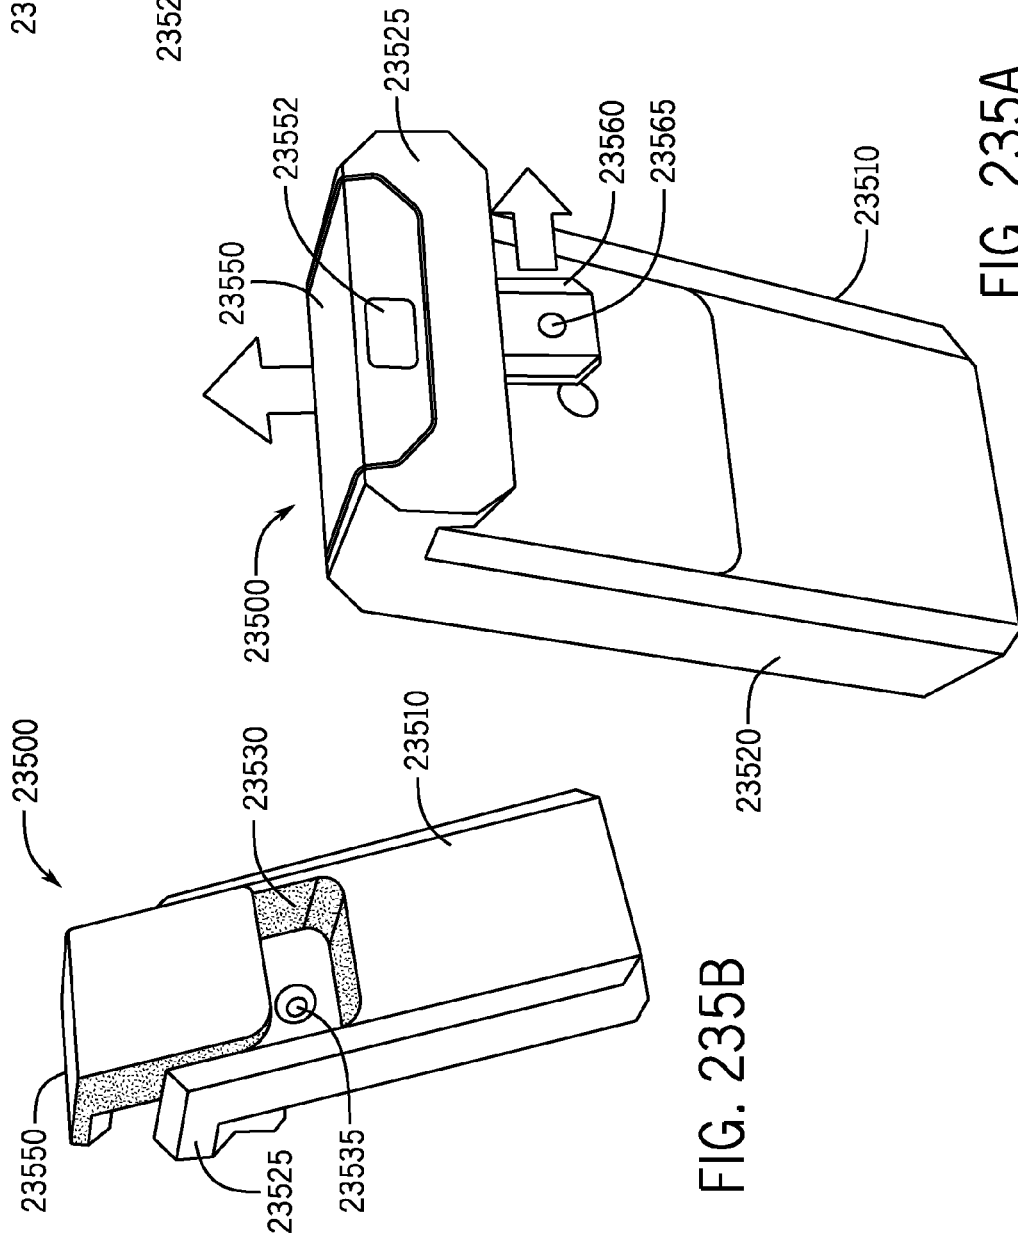


FIG. 235A

FIG. 235B

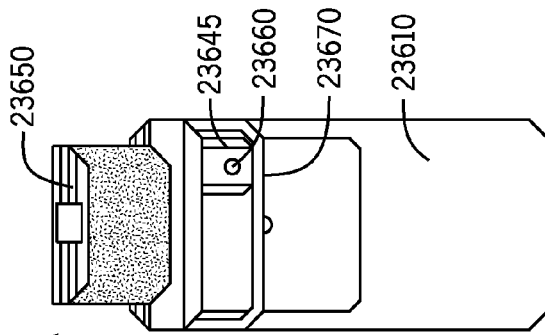


FIG. 236C

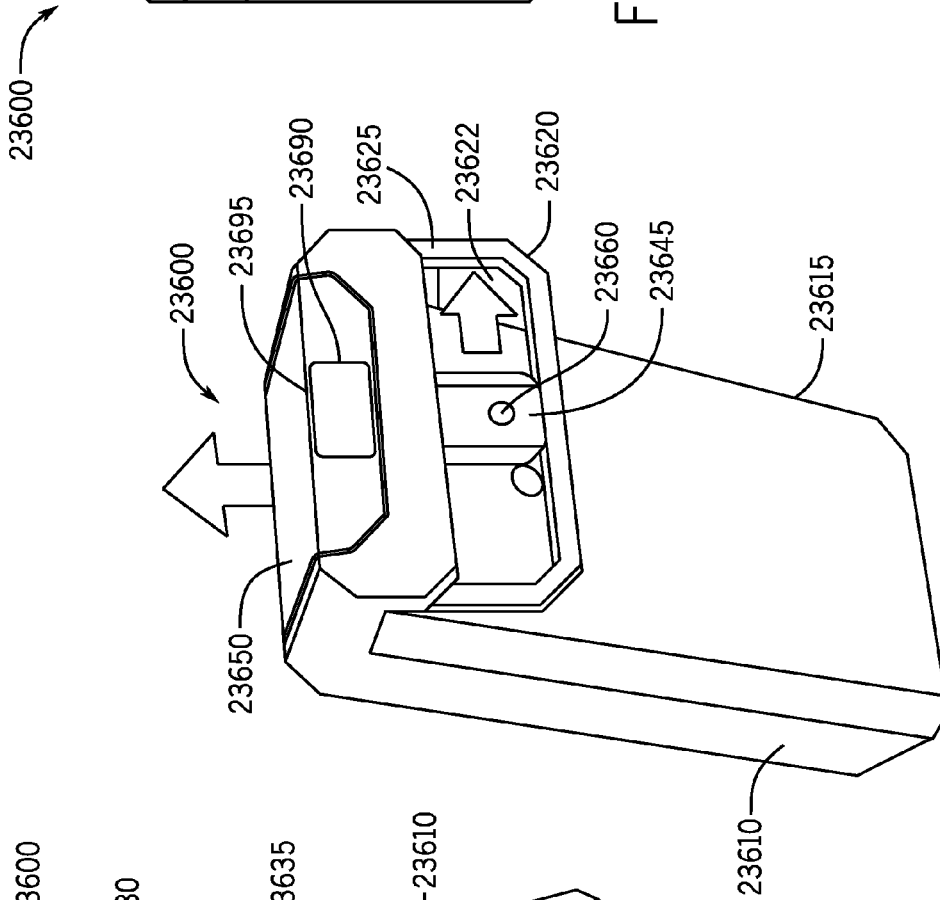


FIG. 236A

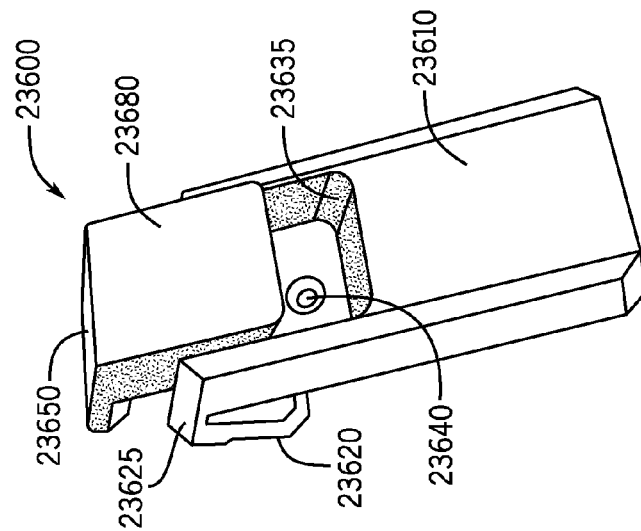
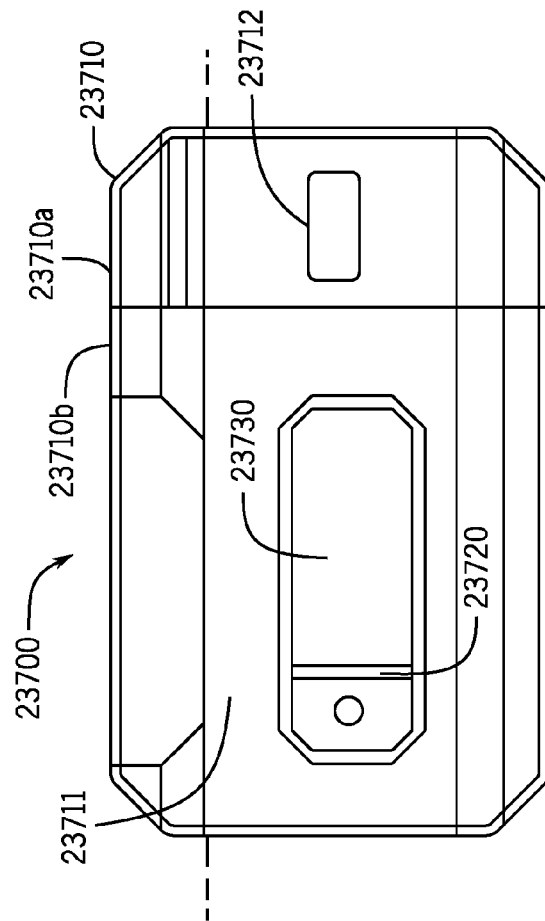
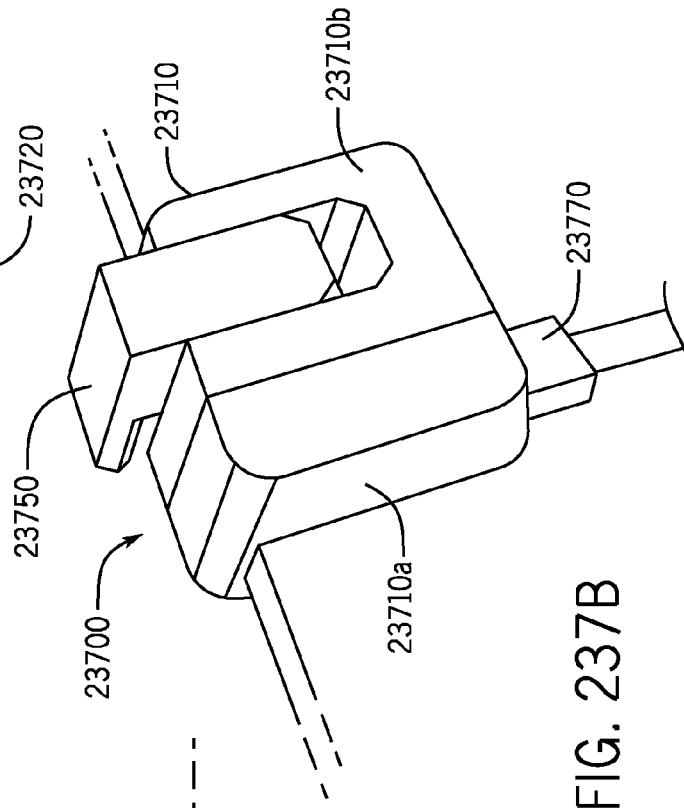
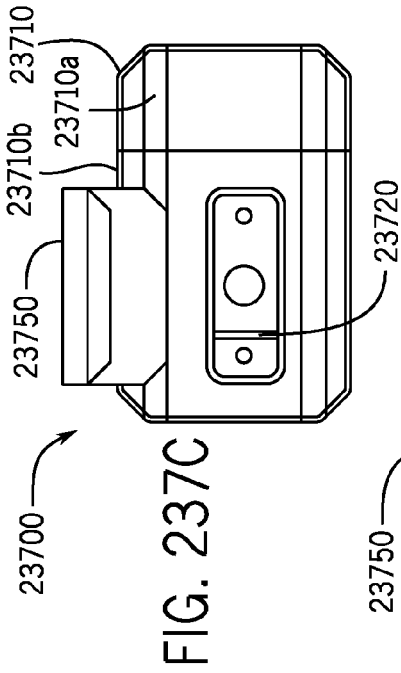
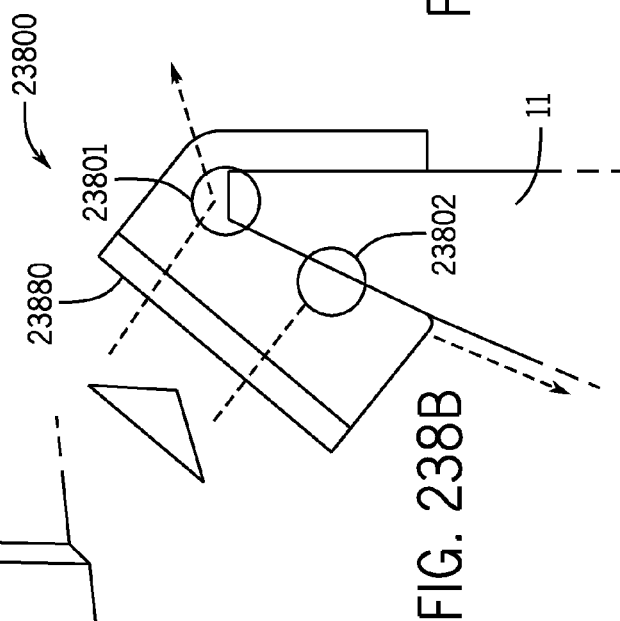
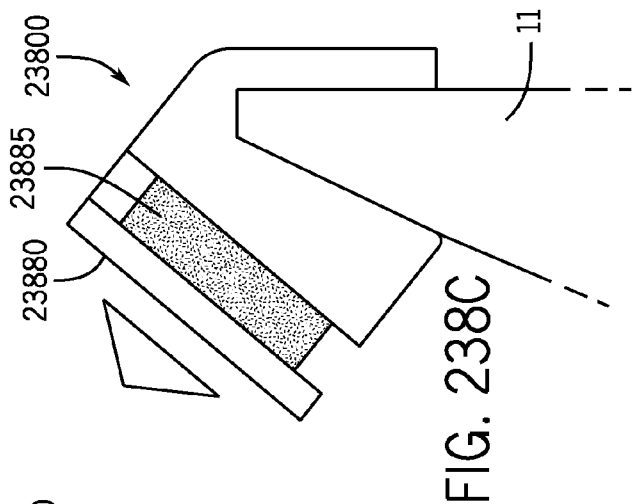
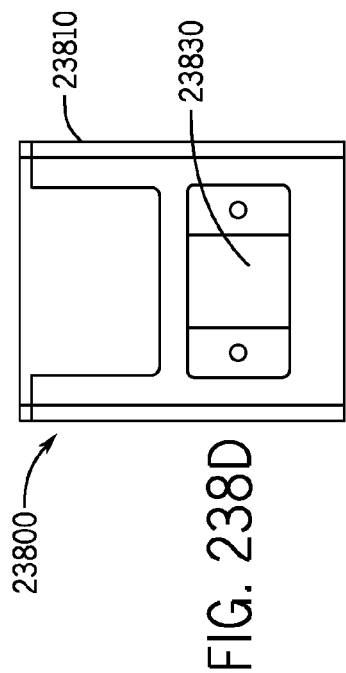
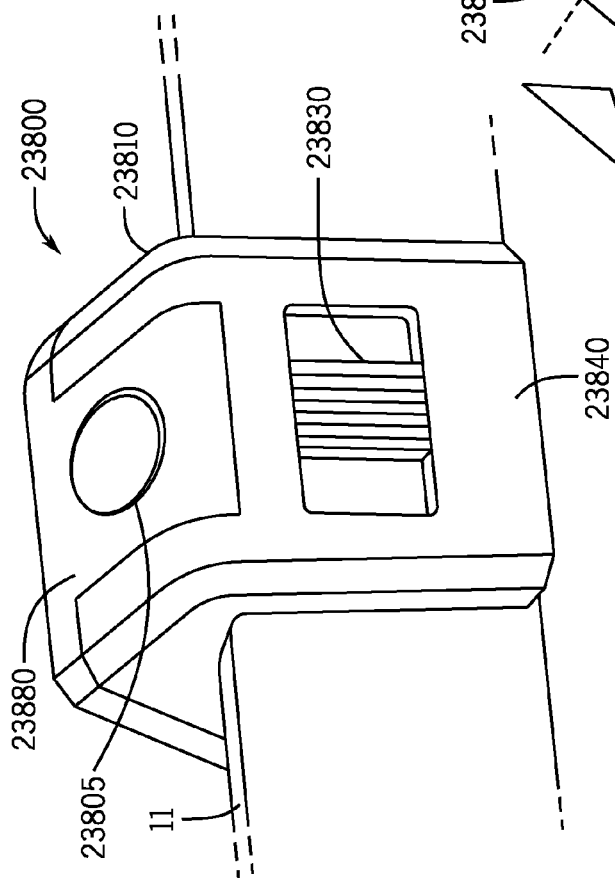


FIG. 236B





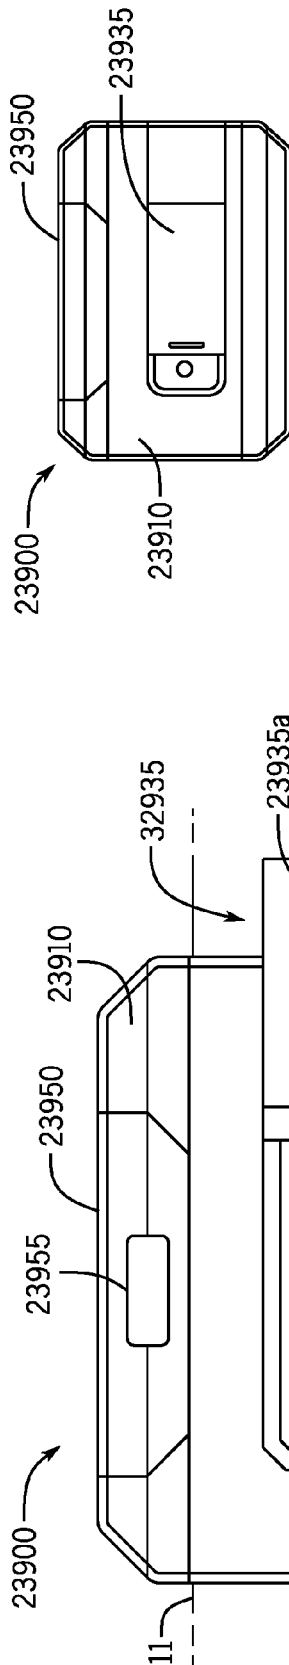


FIG. 239A

FIG. 239C

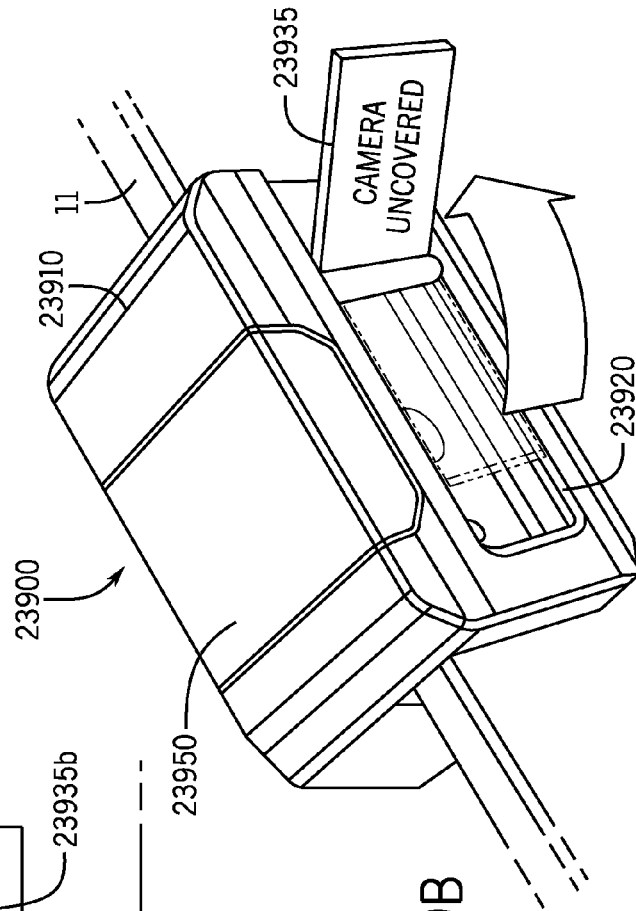


FIG. 239B

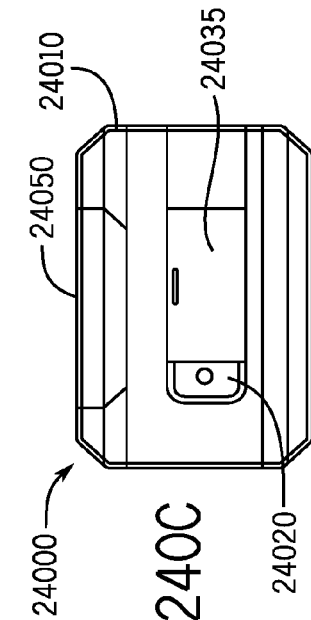


FIG. 240C

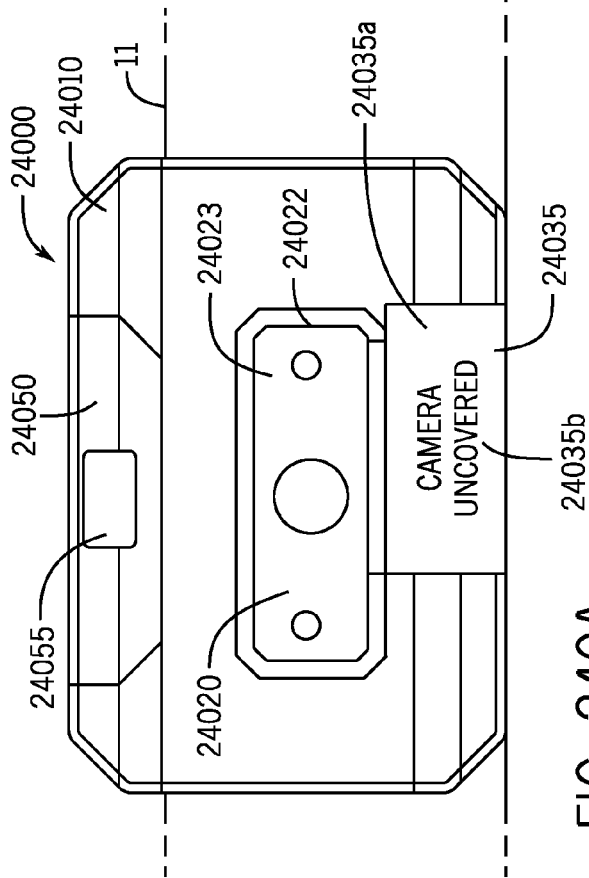


FIG. 240A

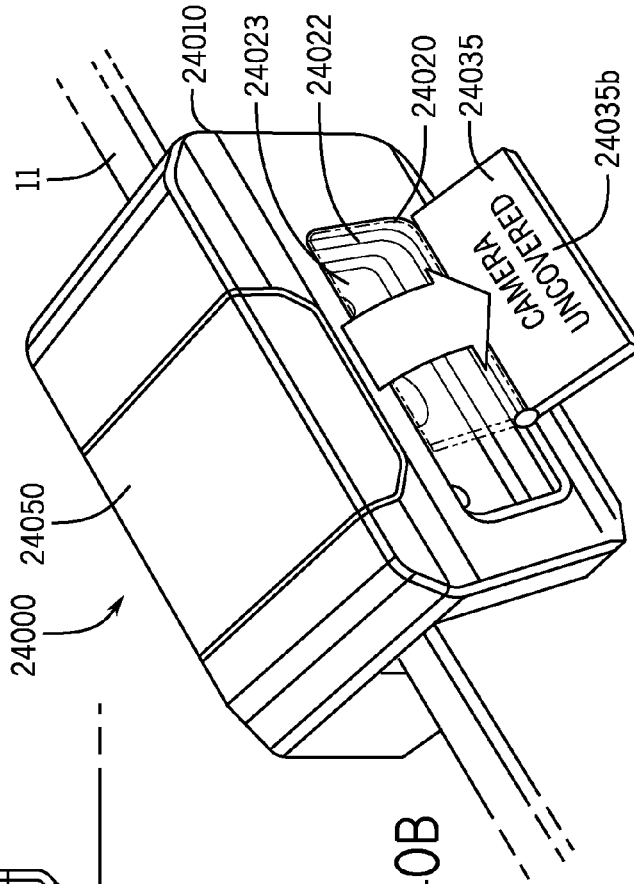


FIG. 240B

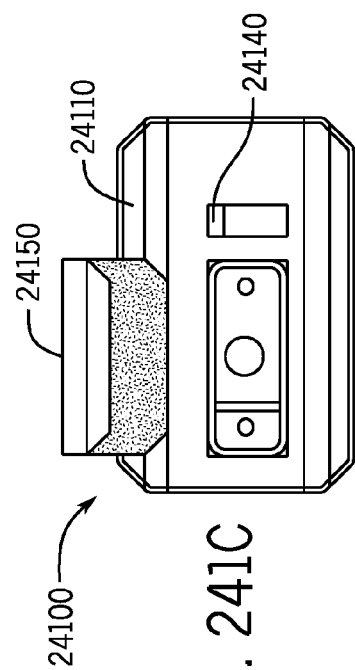


FIG. 241C

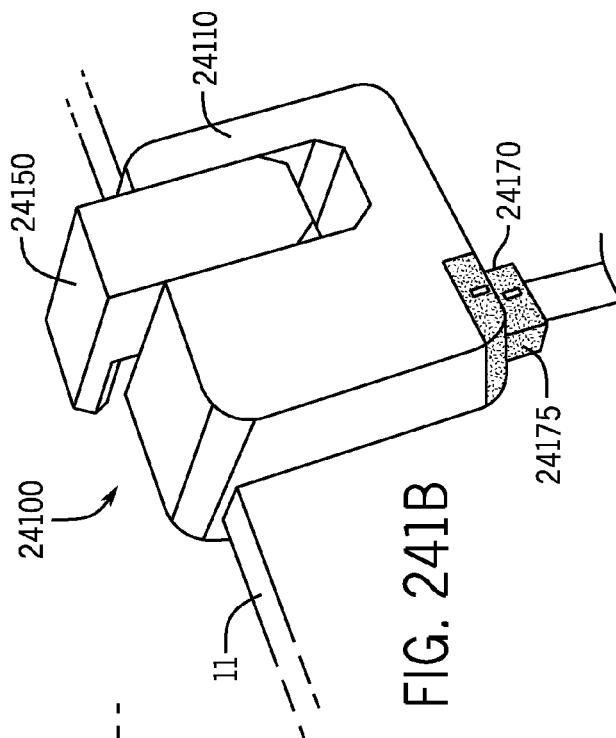


FIG. 241B

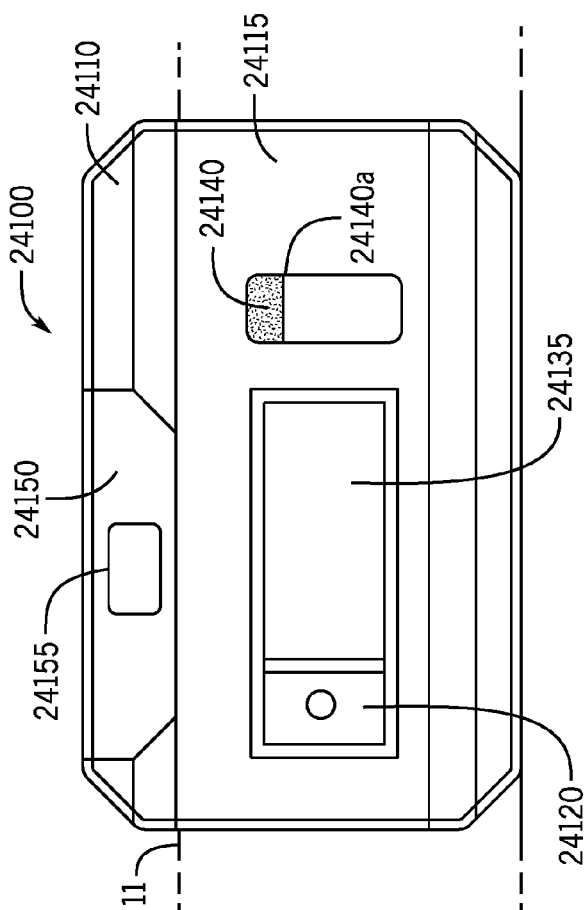


FIG. 241A

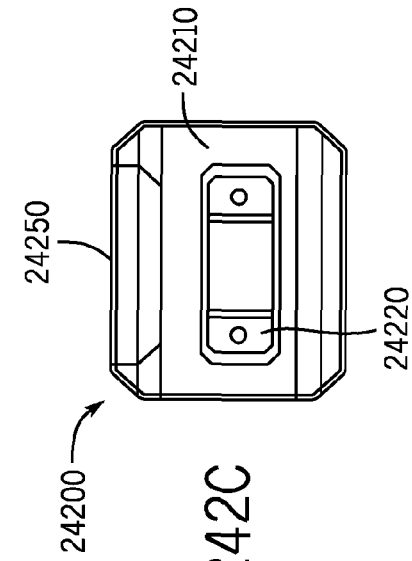


FIG. 242C

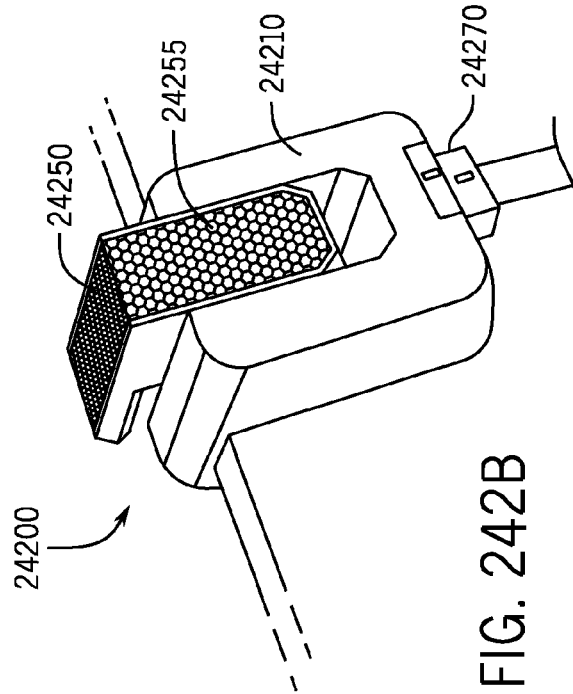


FIG. 242B

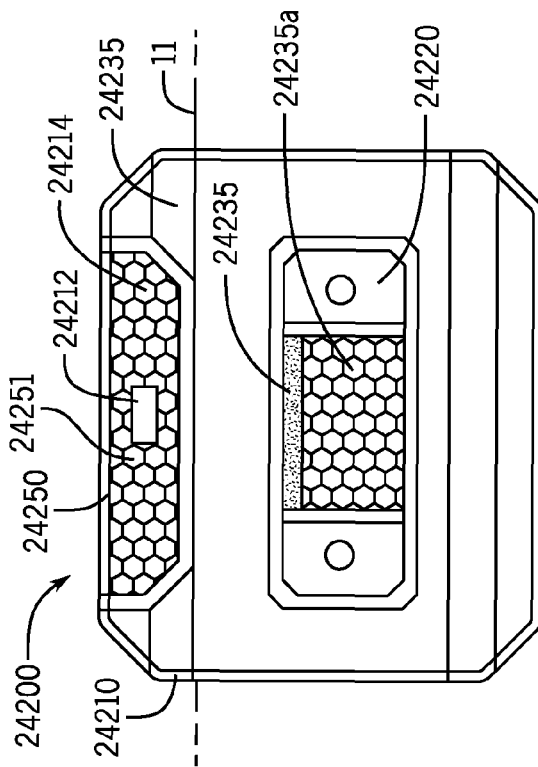
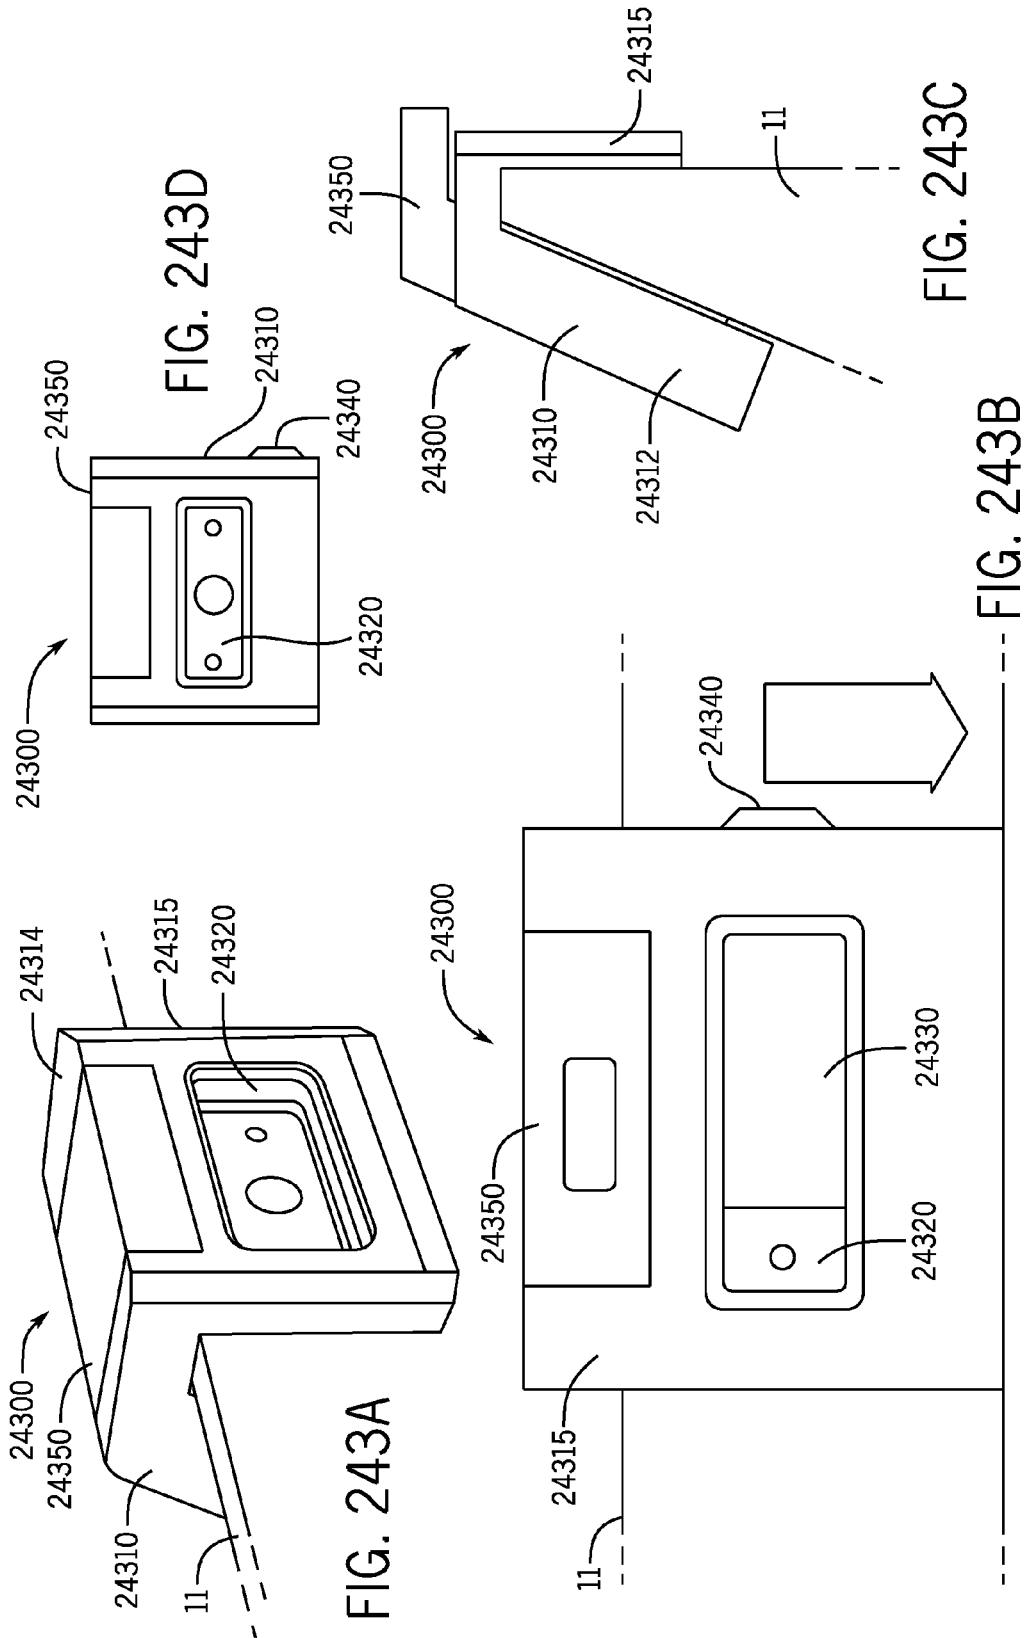


FIG. 242A



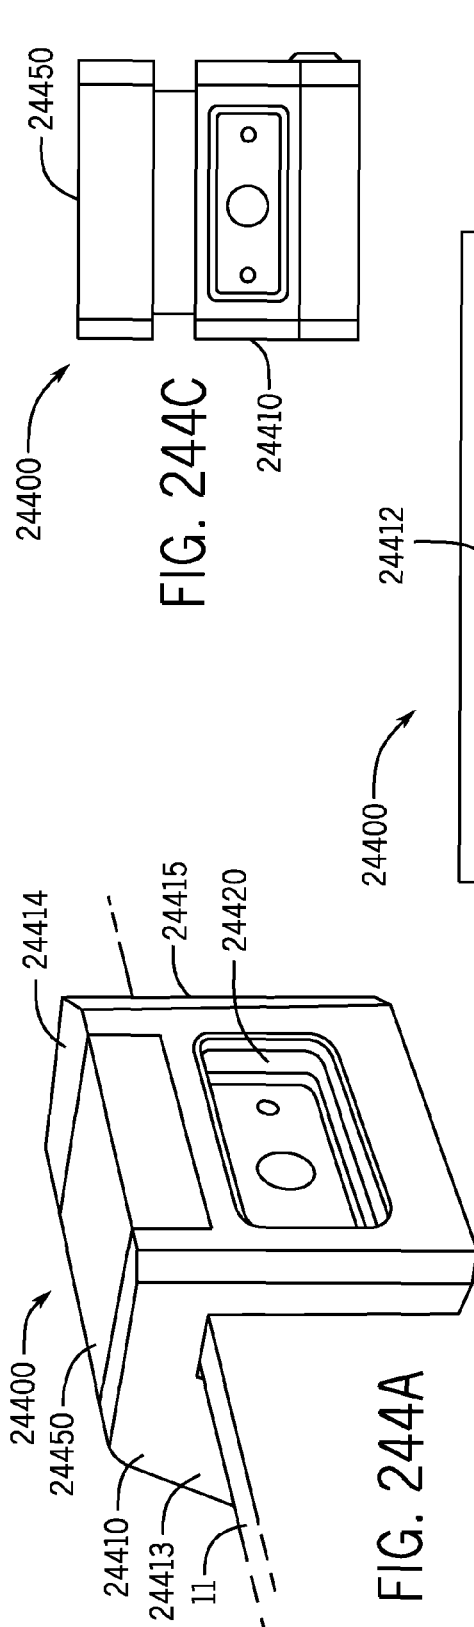


FIG. 244C

FIG. 244A

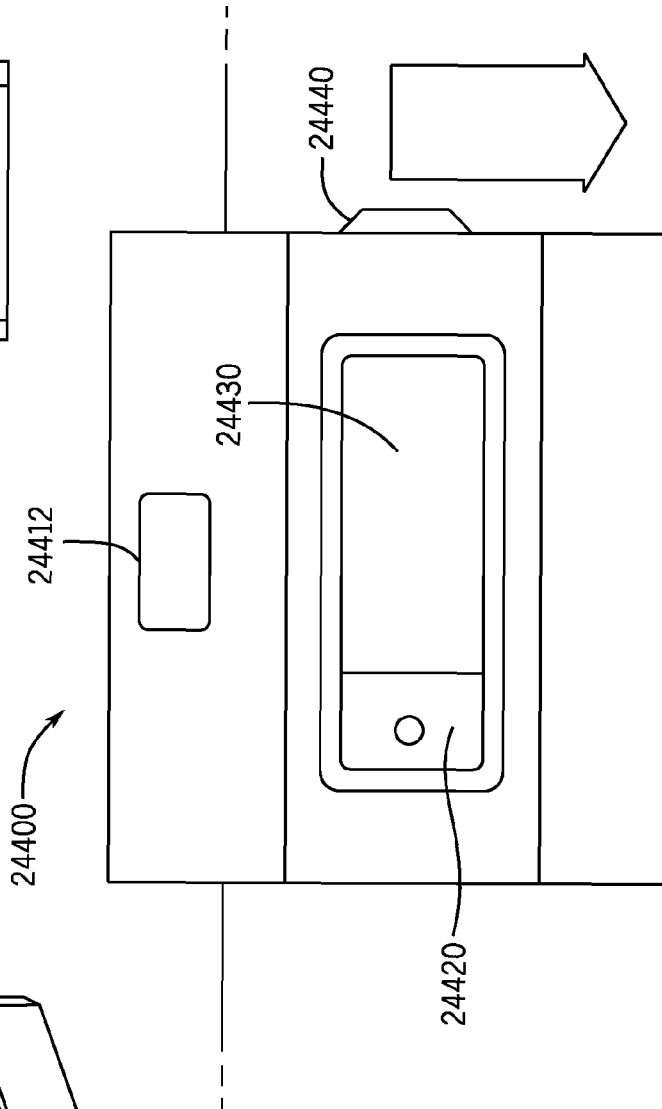


FIG. 244B

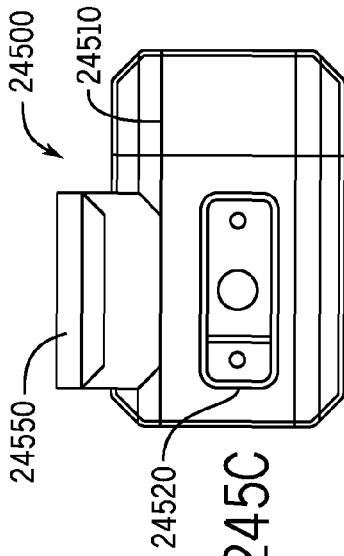


FIG. 245C

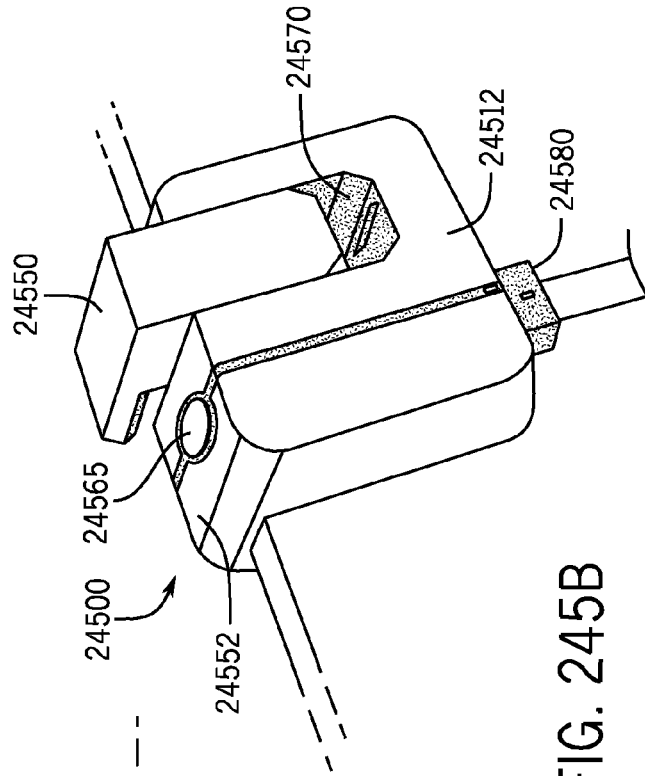


FIG. 245B

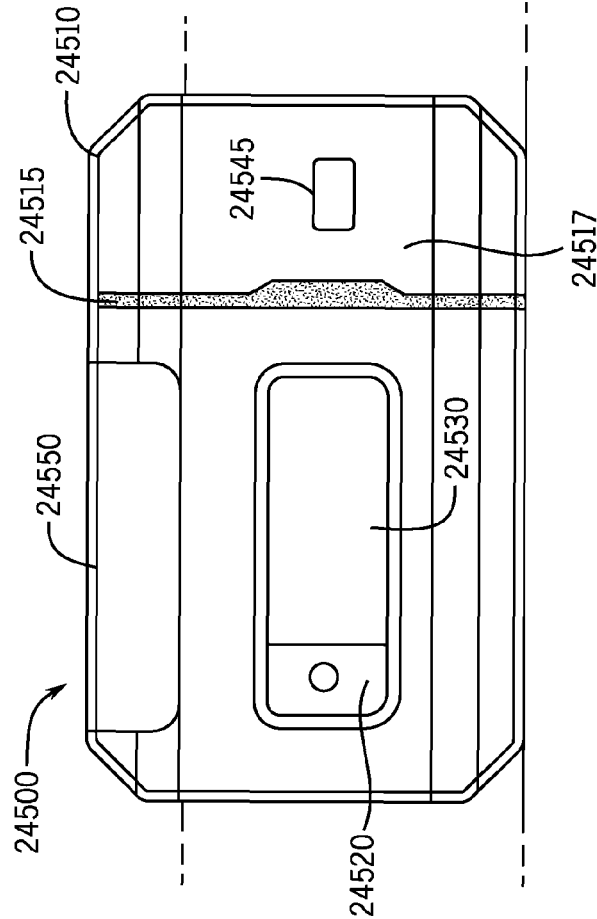


FIG. 245A

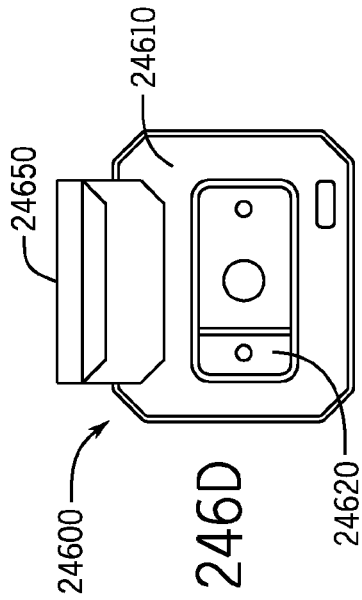


FIG. 246D

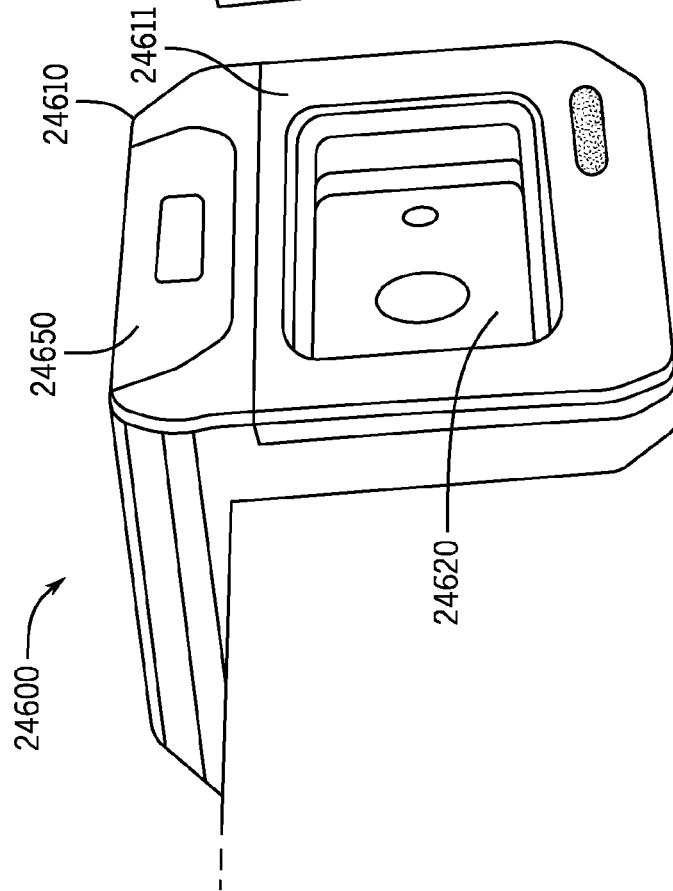


FIG. 246A

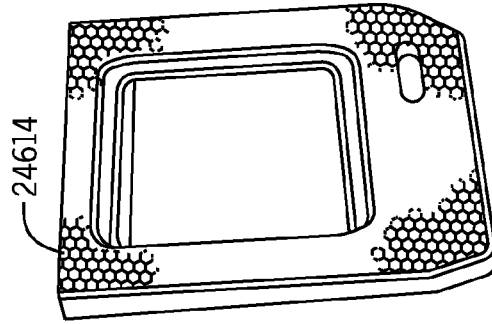


FIG. 246C

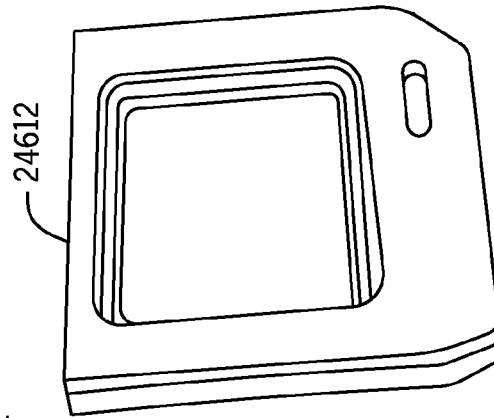


FIG. 246B

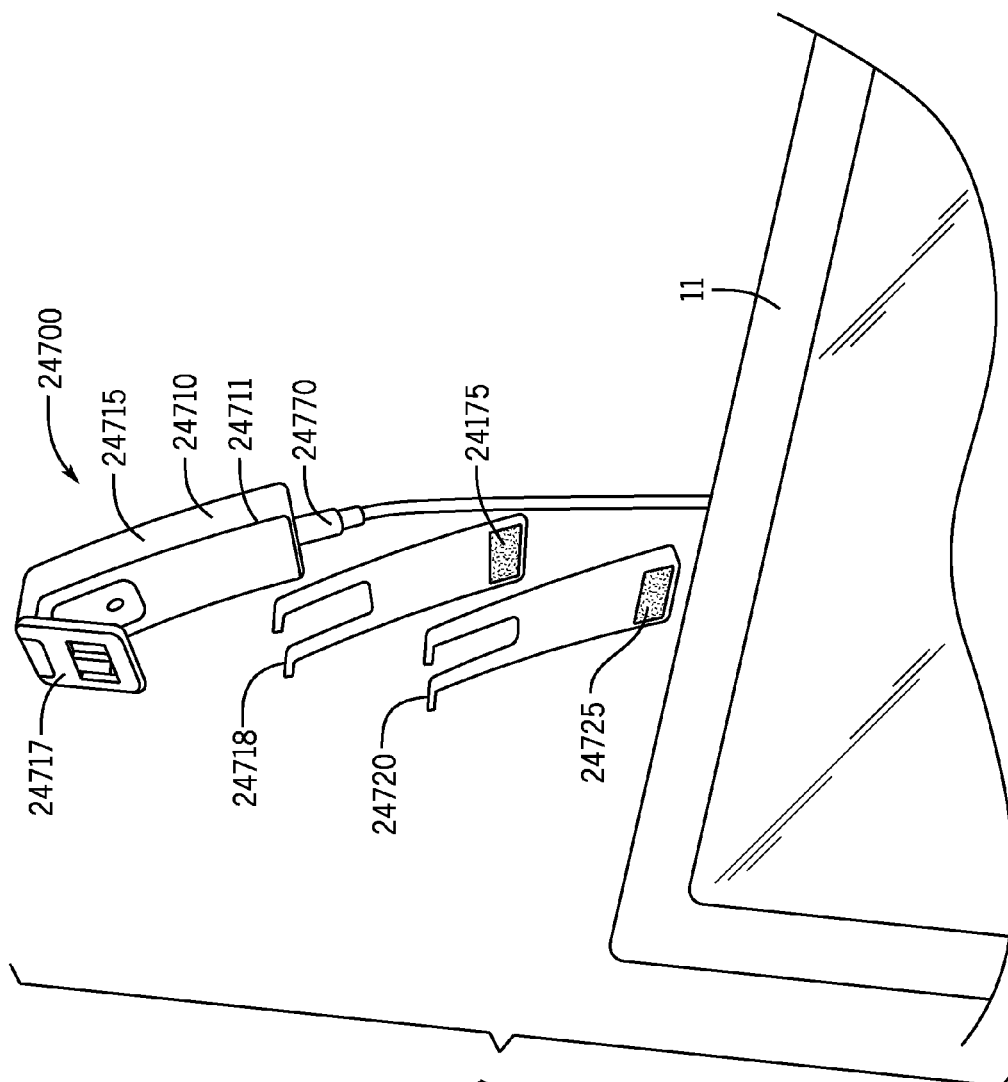
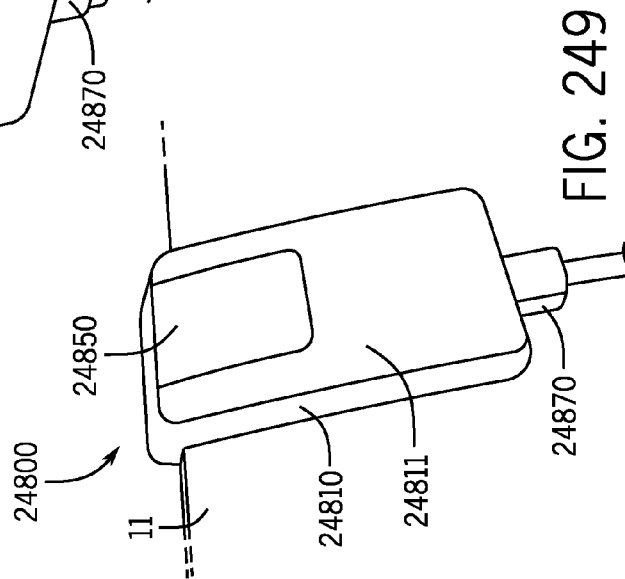
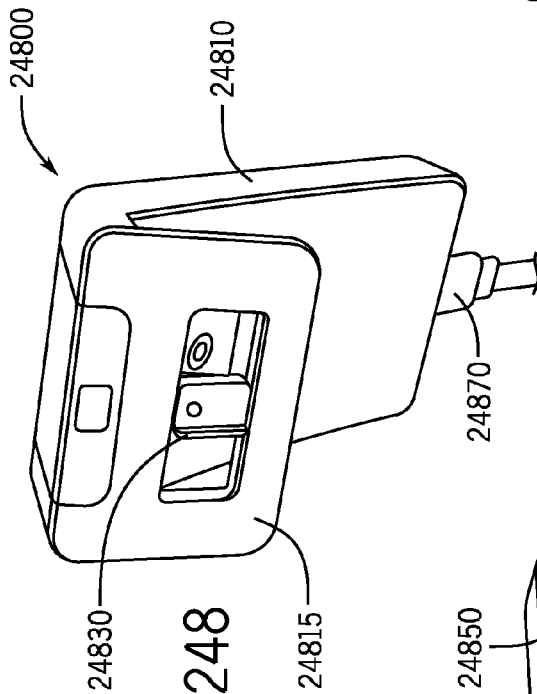
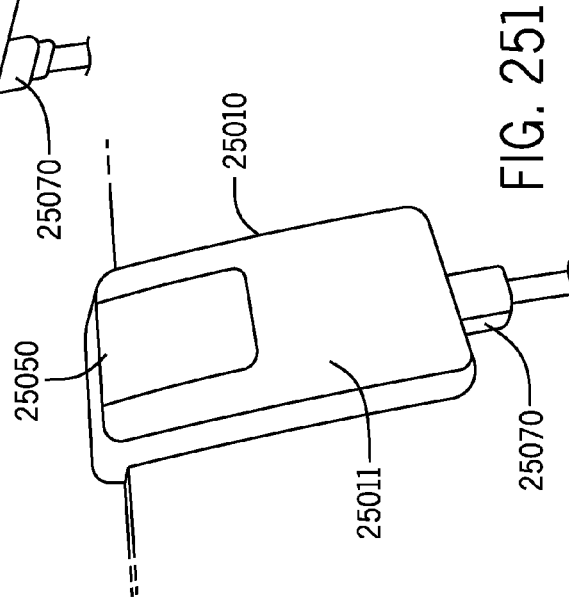
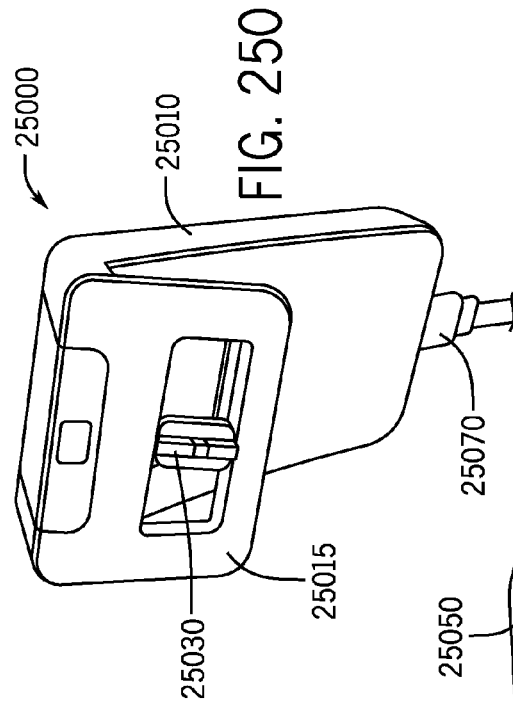


FIG. 247



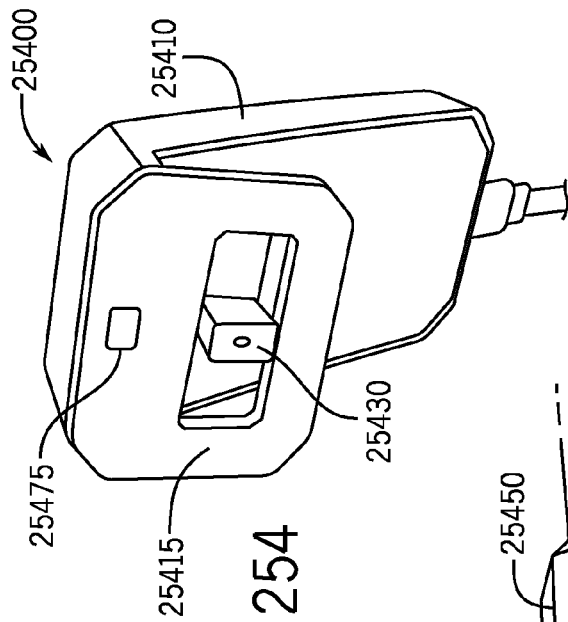


FIG. 254

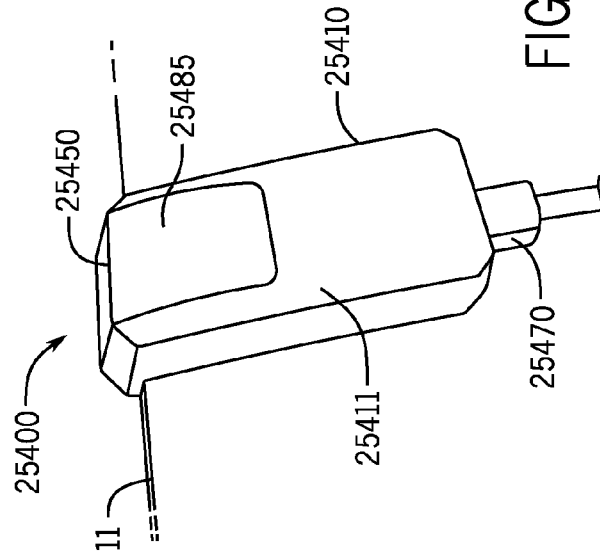


FIG. 255

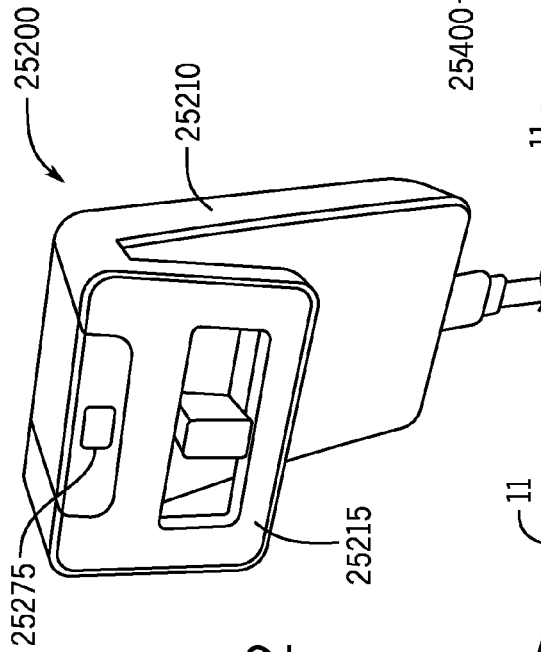


FIG. 252

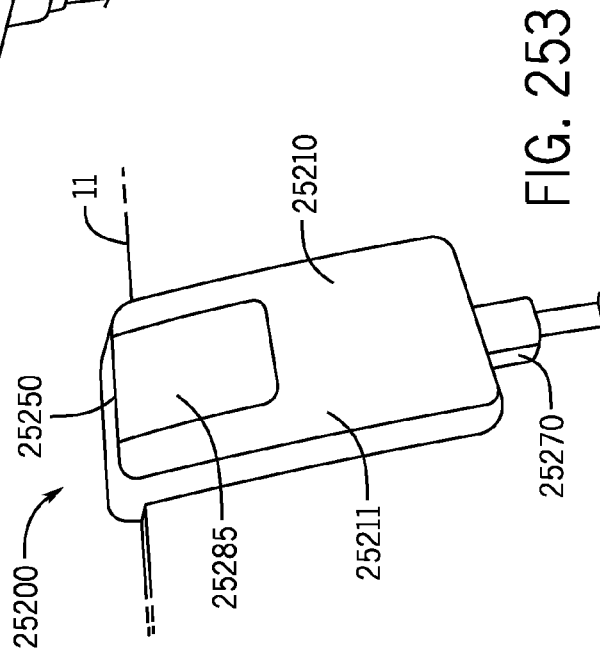


FIG. 253

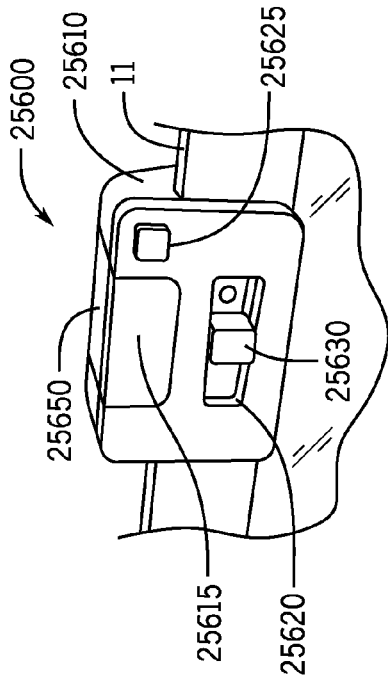


FIG. 256

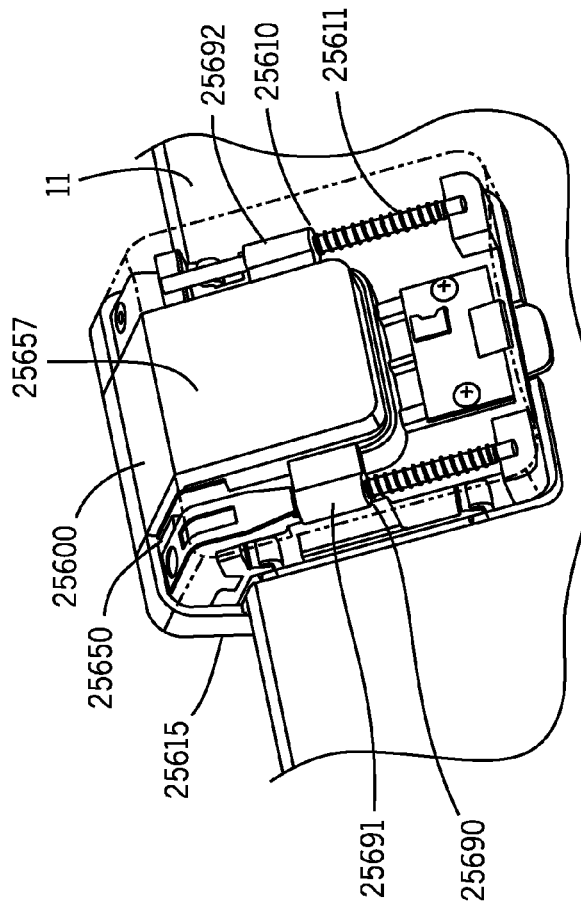


FIG. 257

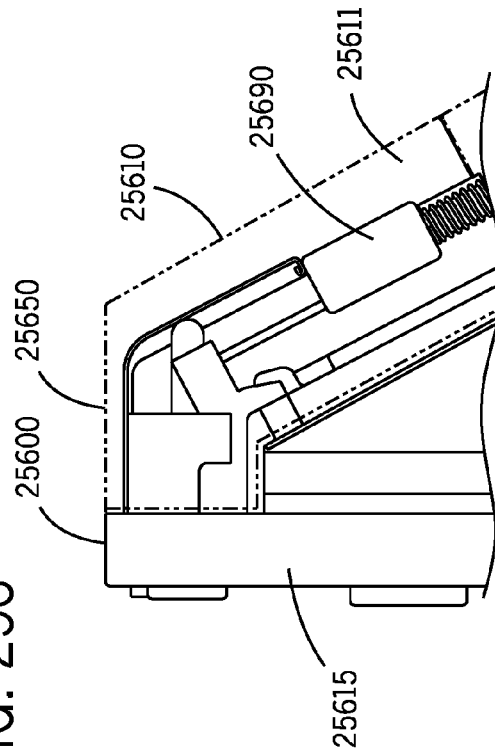


FIG. 258

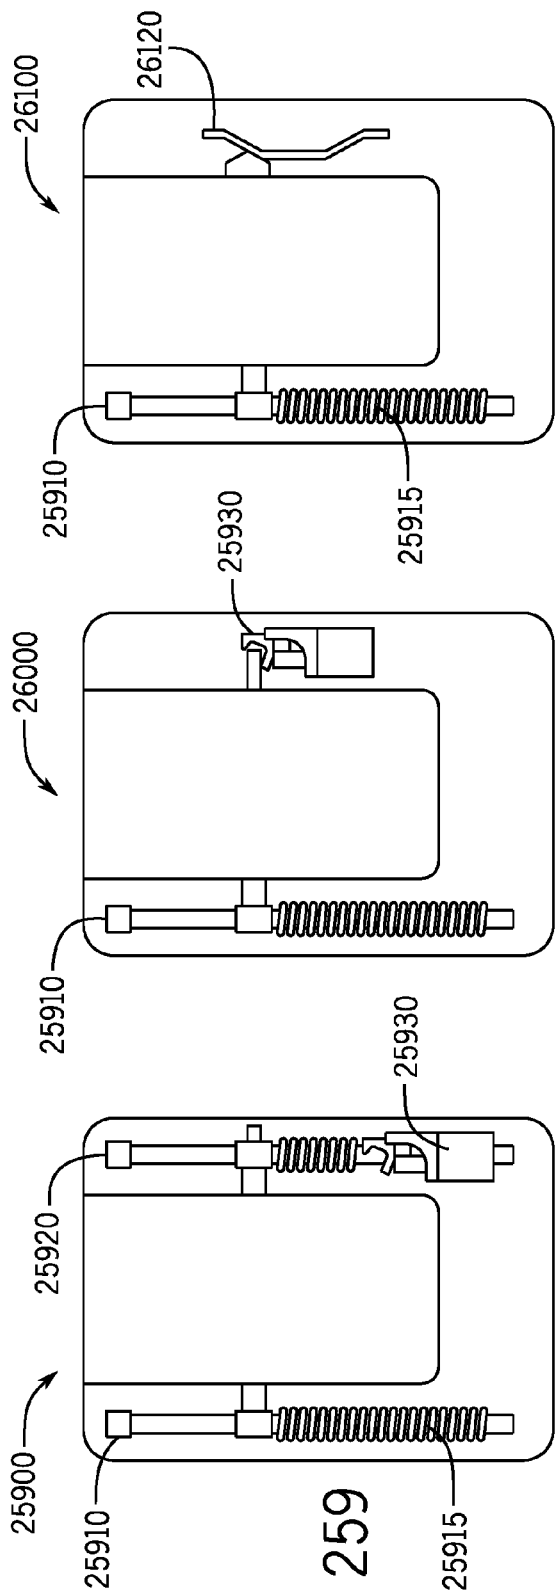


FIG. 260





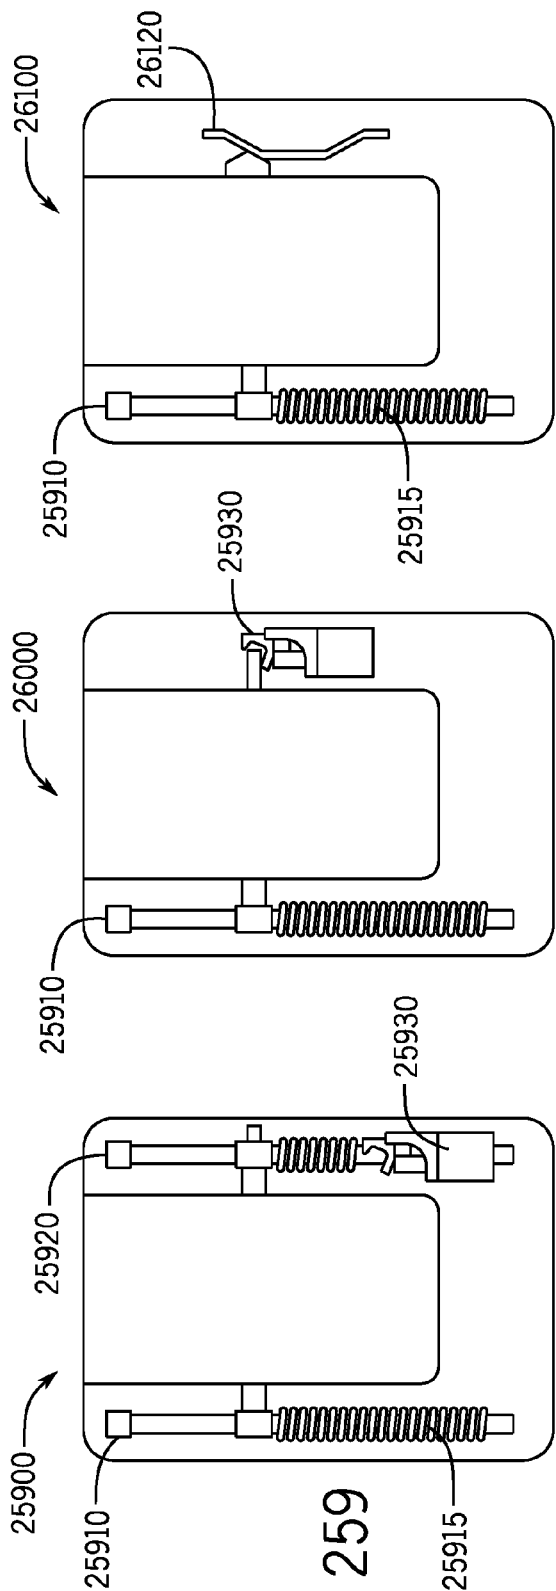
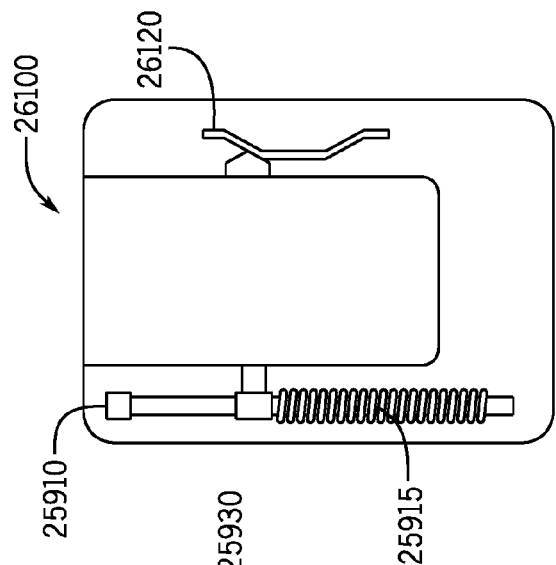
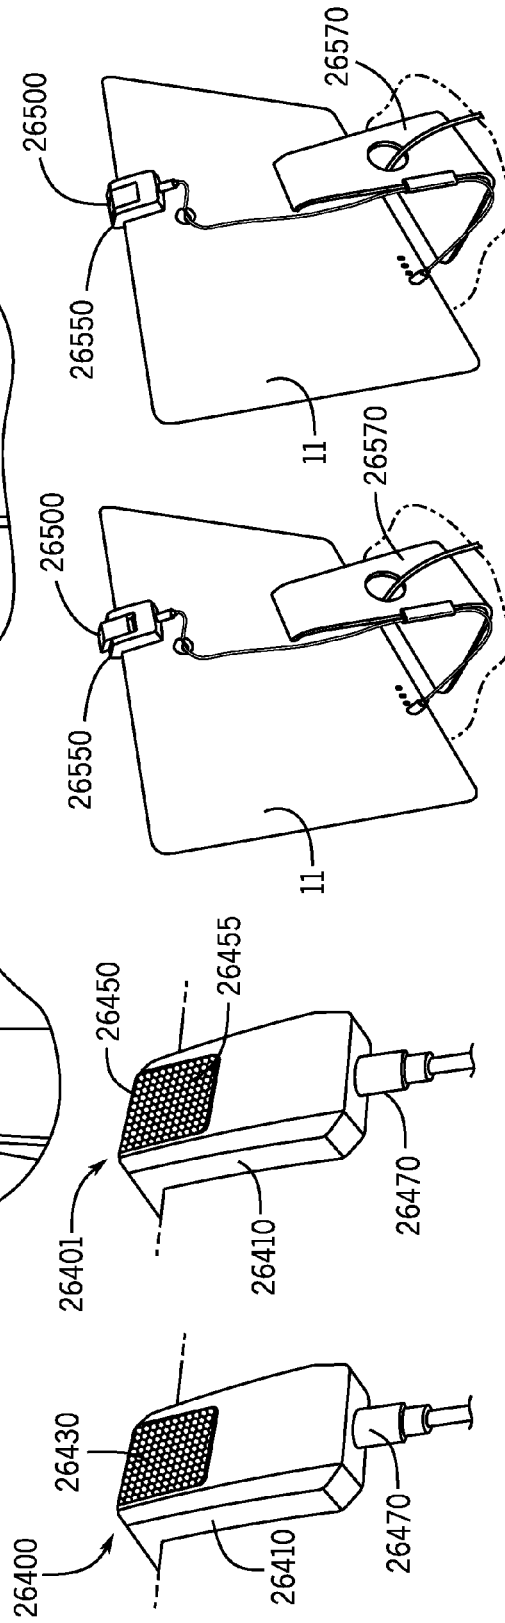
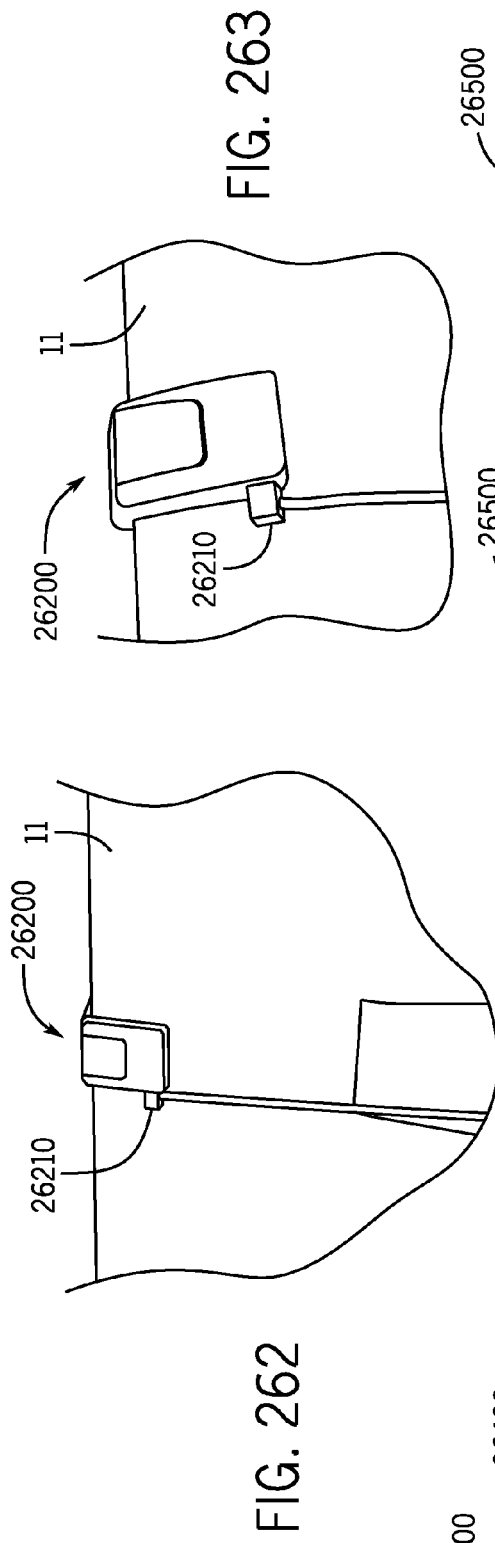


FIG. 261





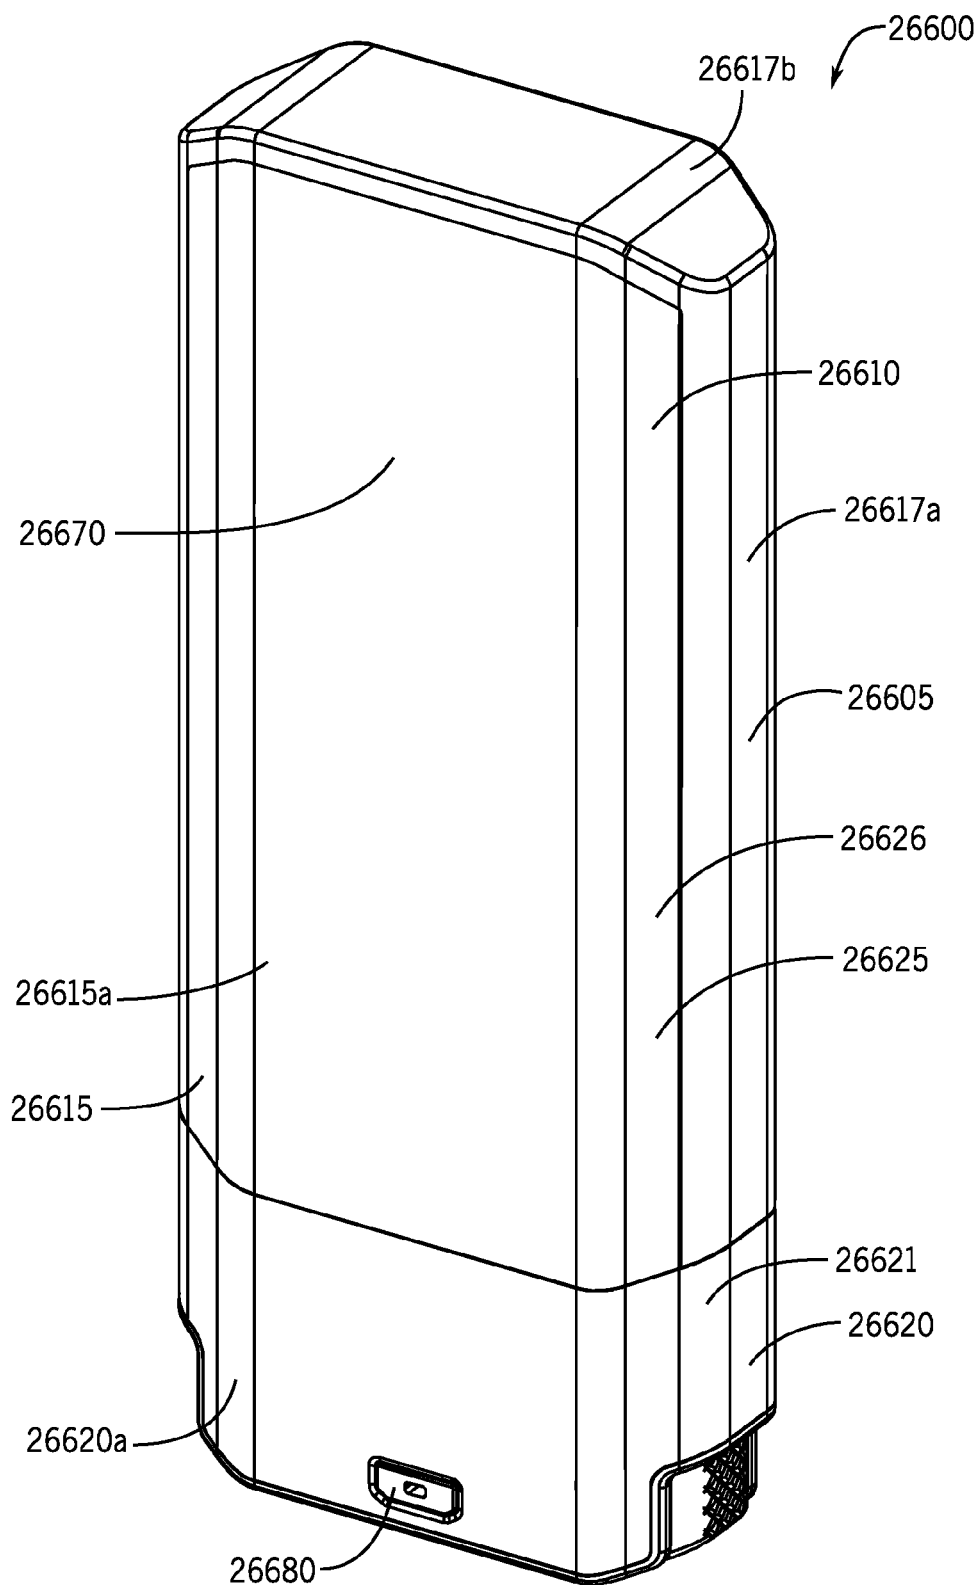


FIG. 266

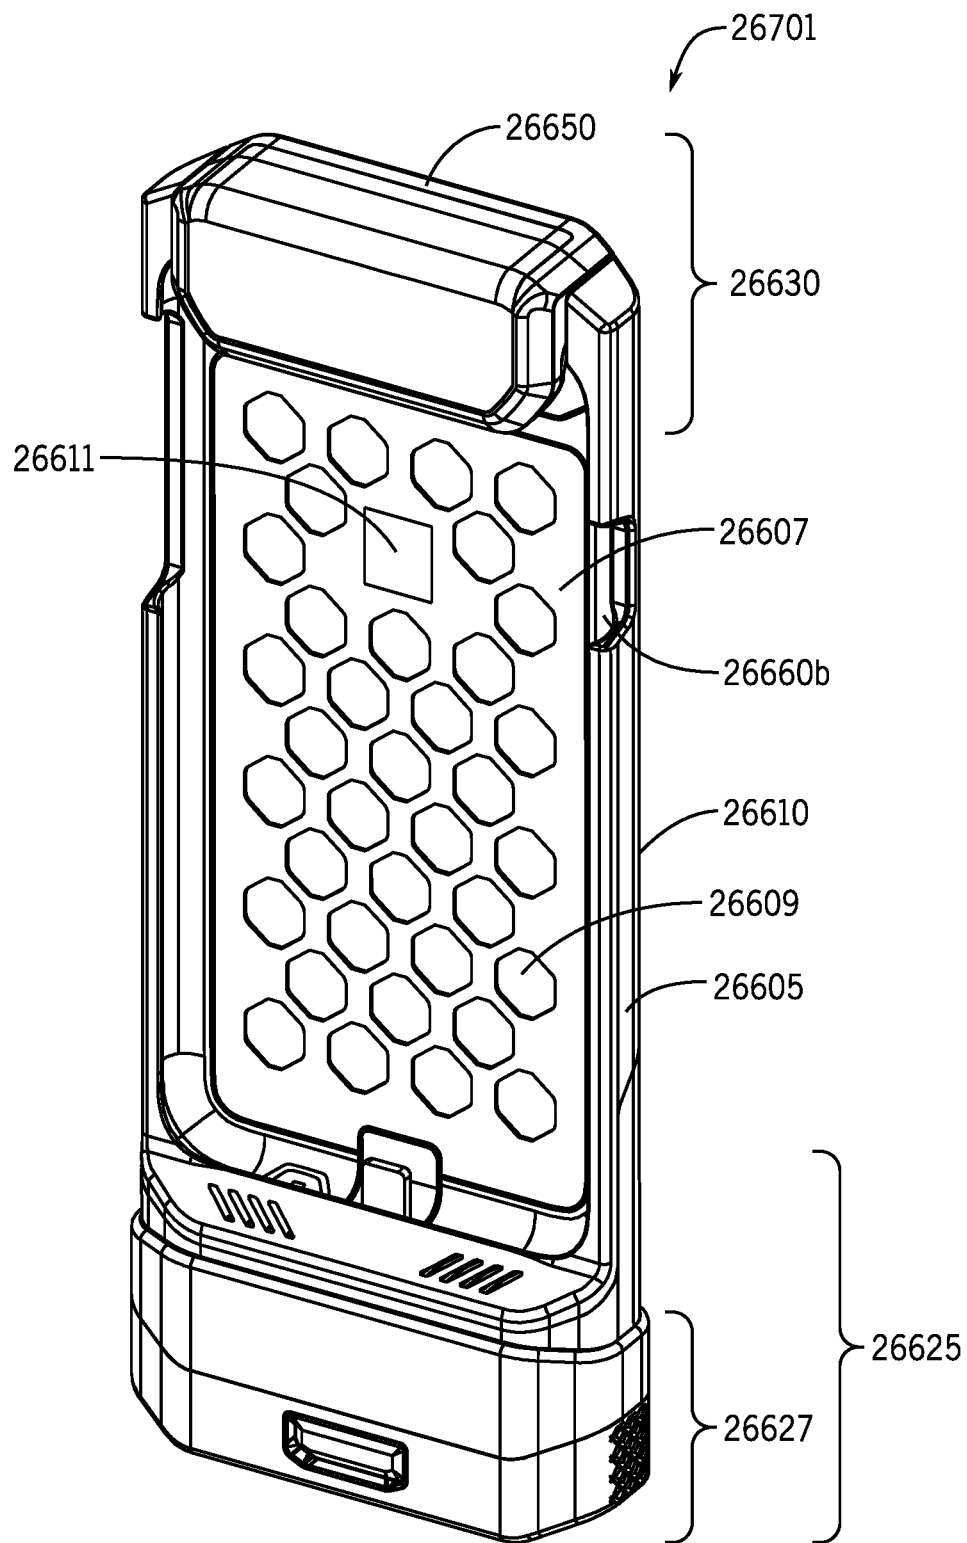


FIG. 267

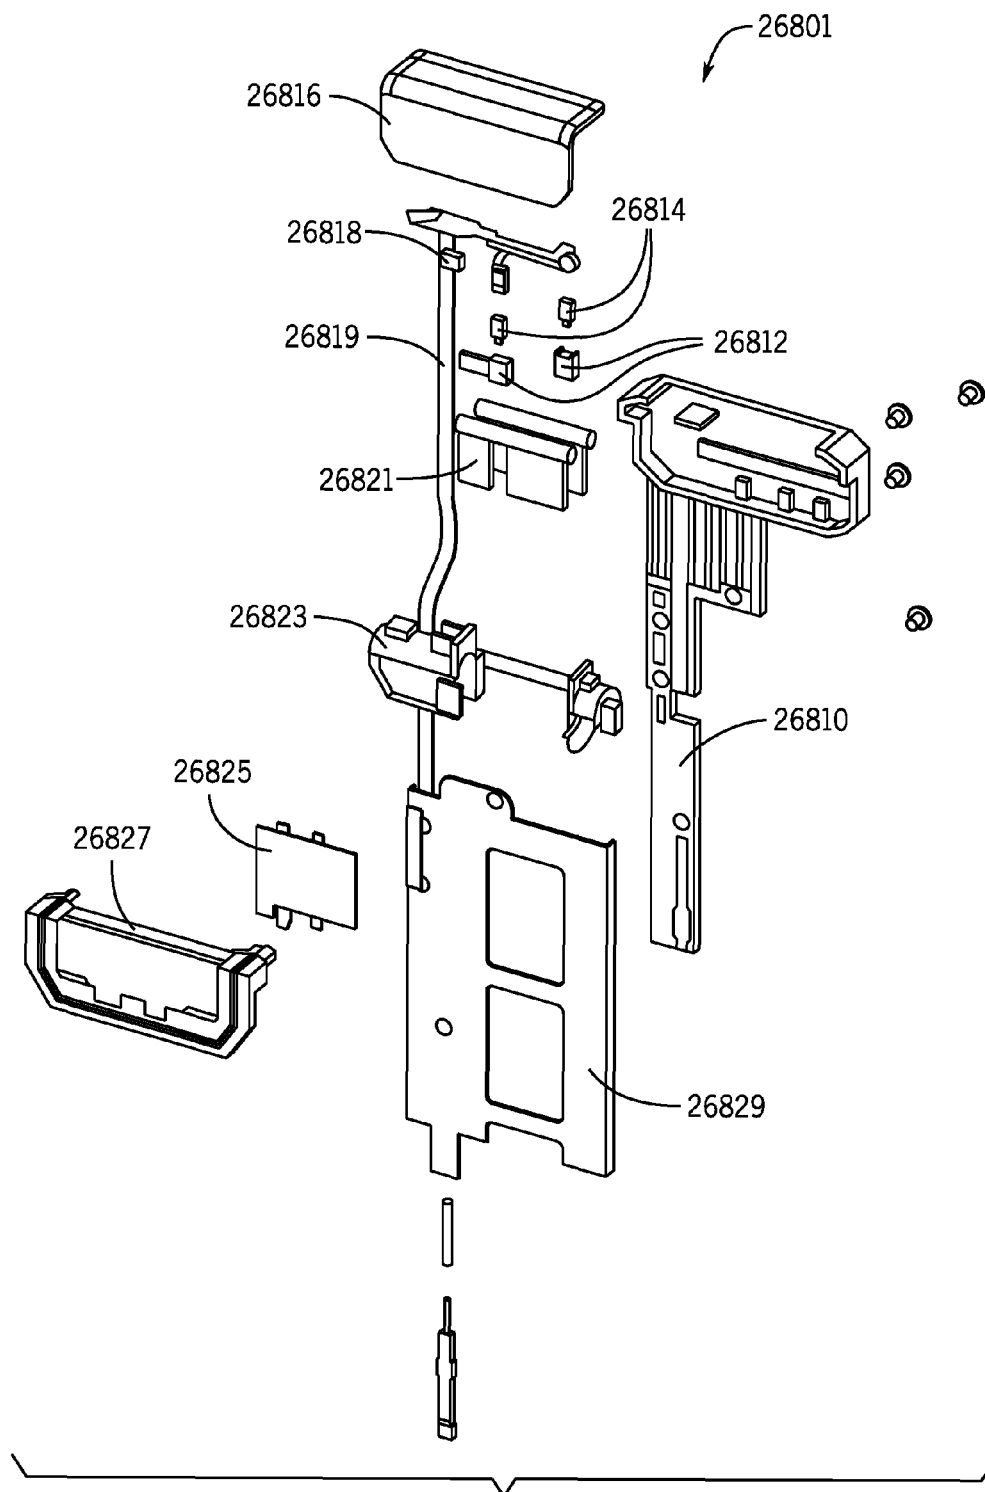


FIG. 268

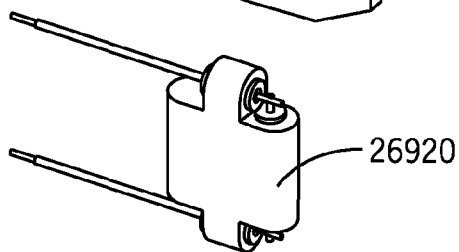
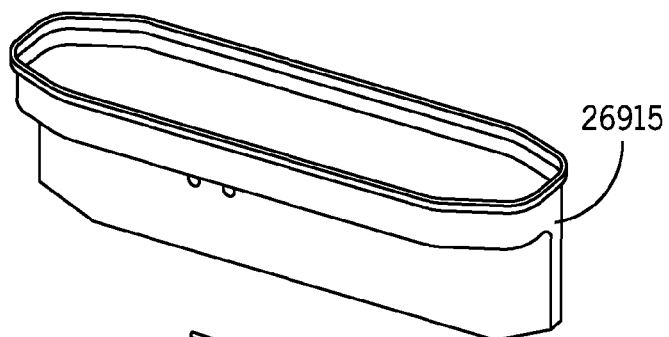
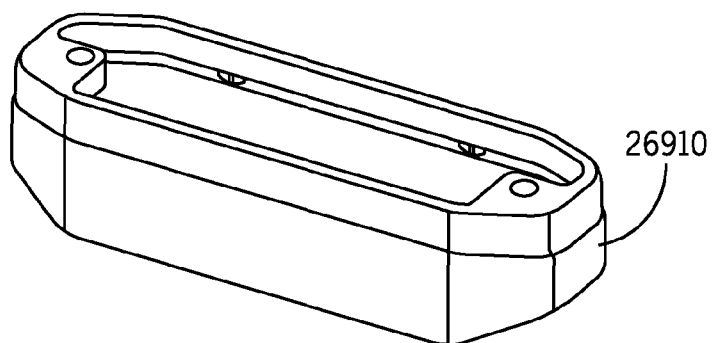


FIG. 269

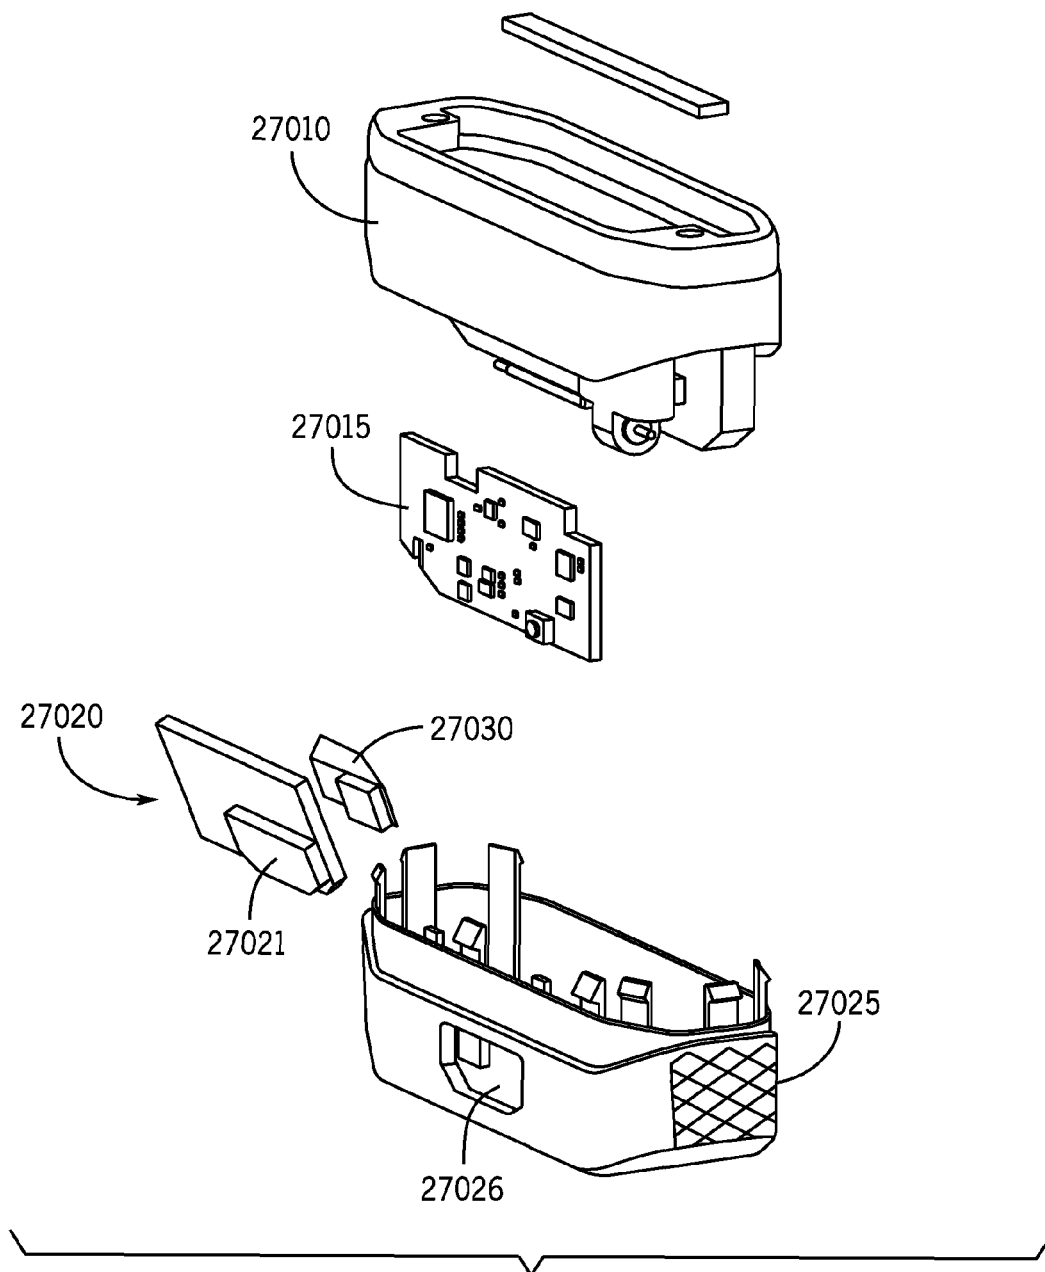


FIG. 270

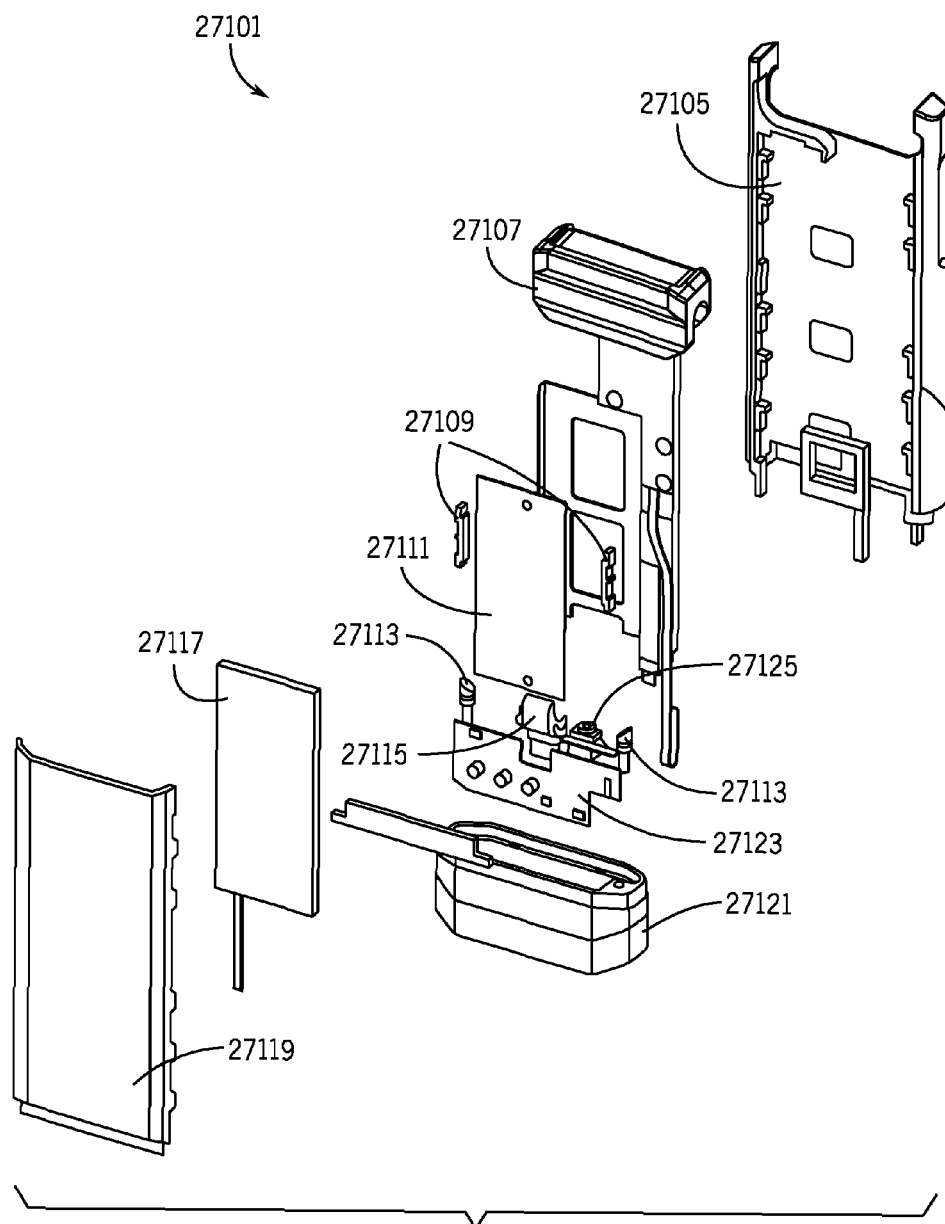


FIG. 271

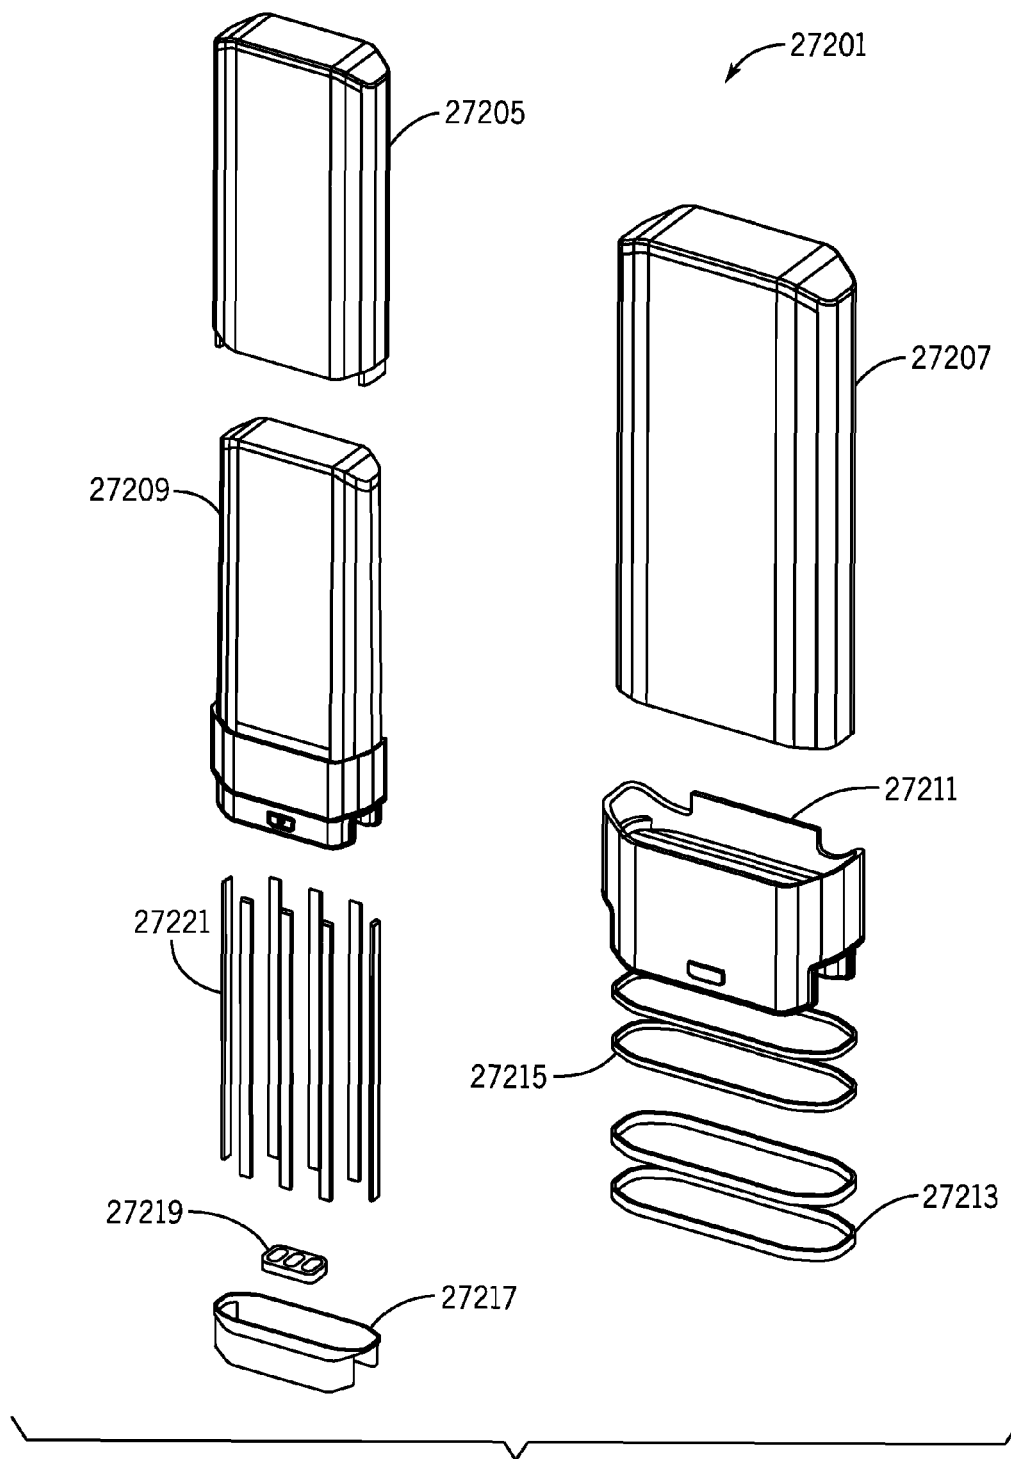


FIG. 272

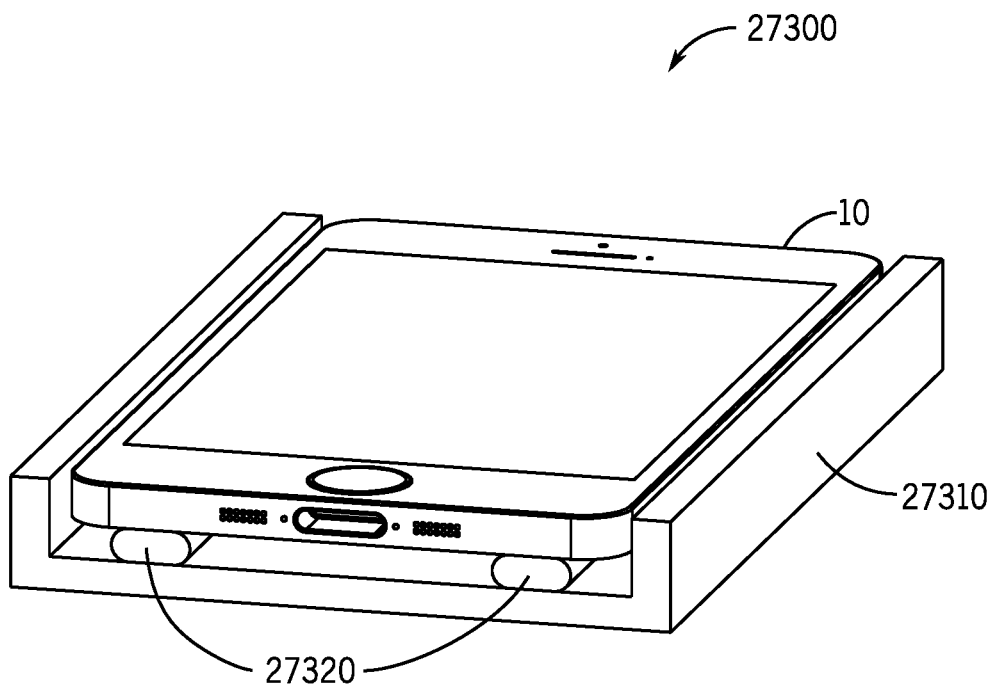


FIG. 273

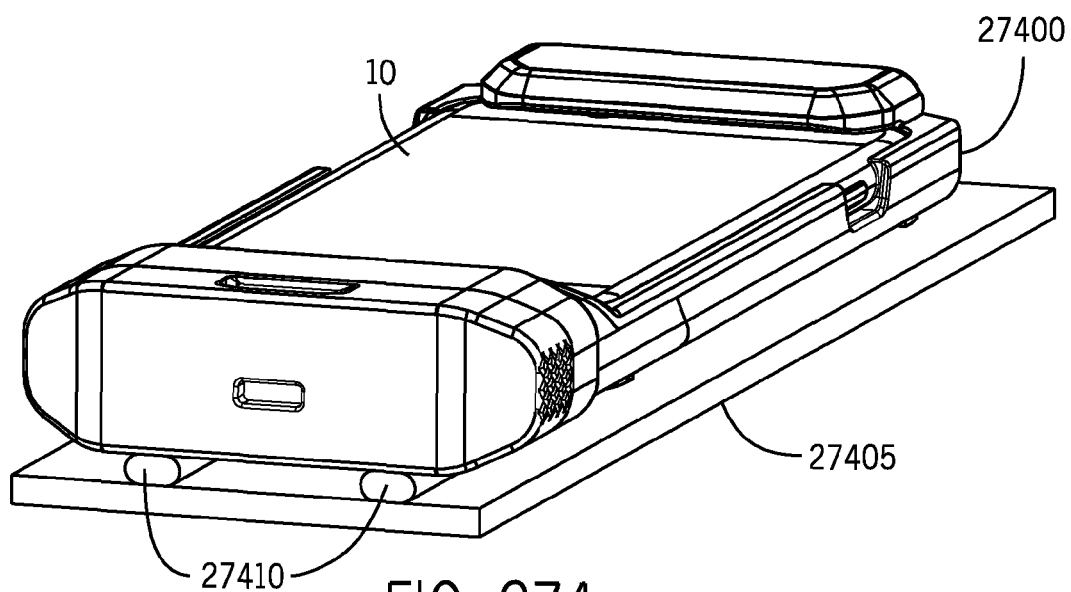


FIG. 274

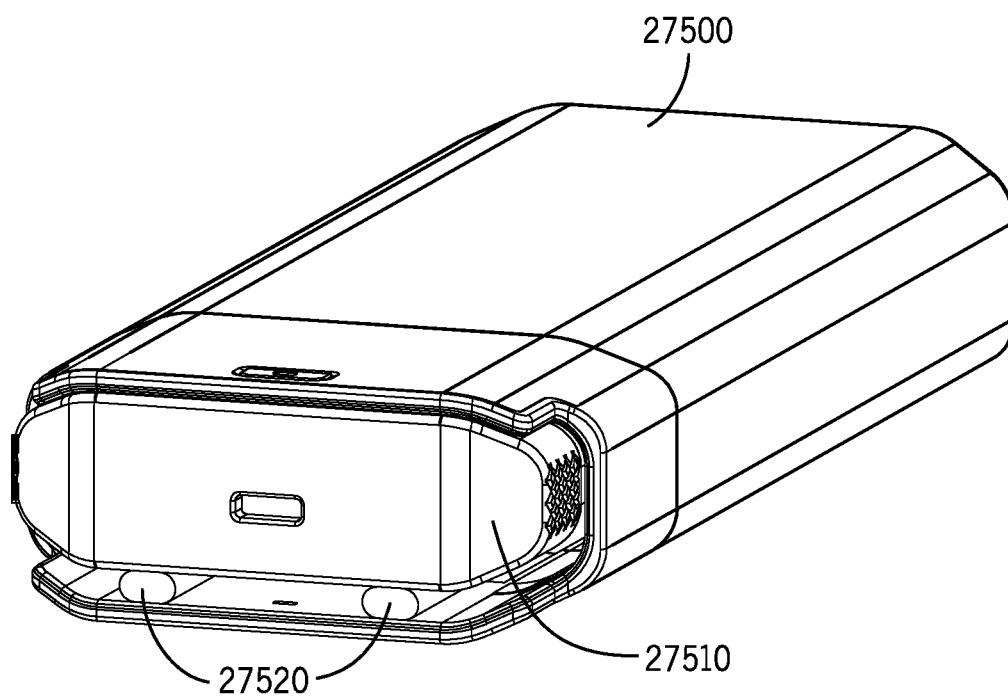


FIG. 275

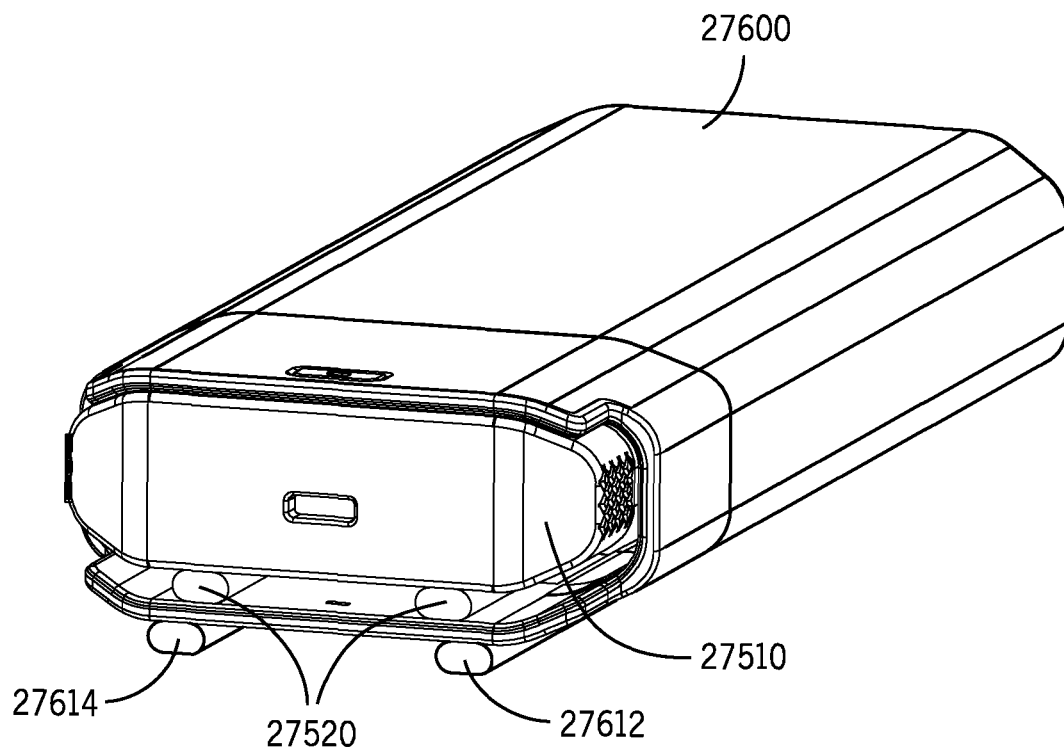


FIG. 276

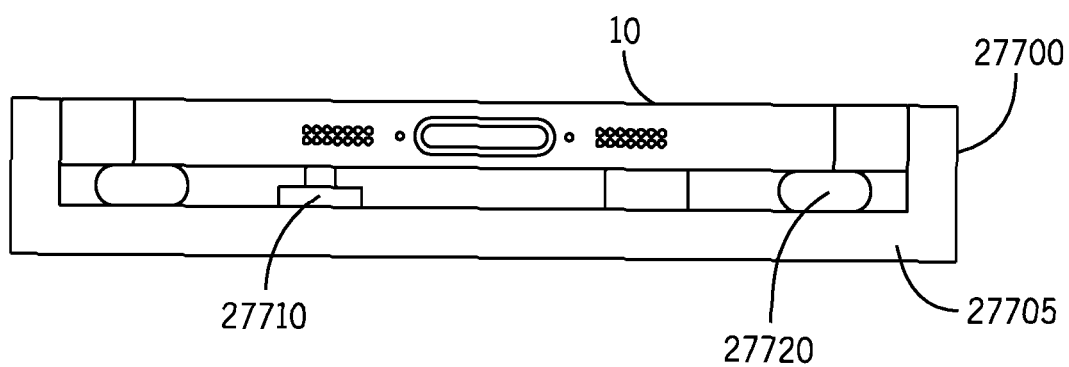


FIG. 277

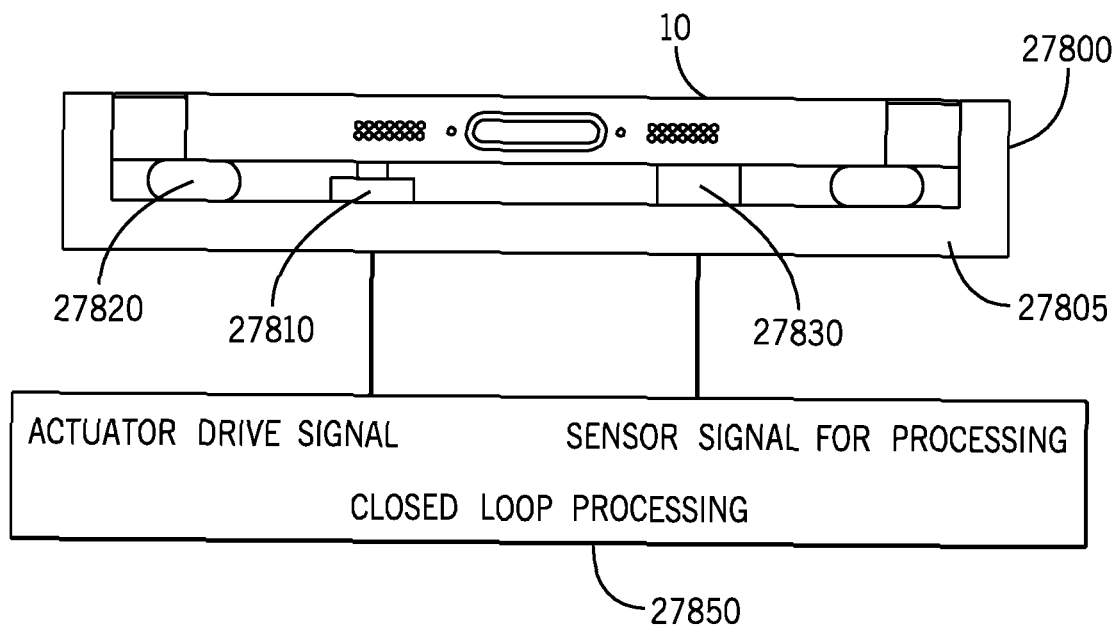


FIG. 278

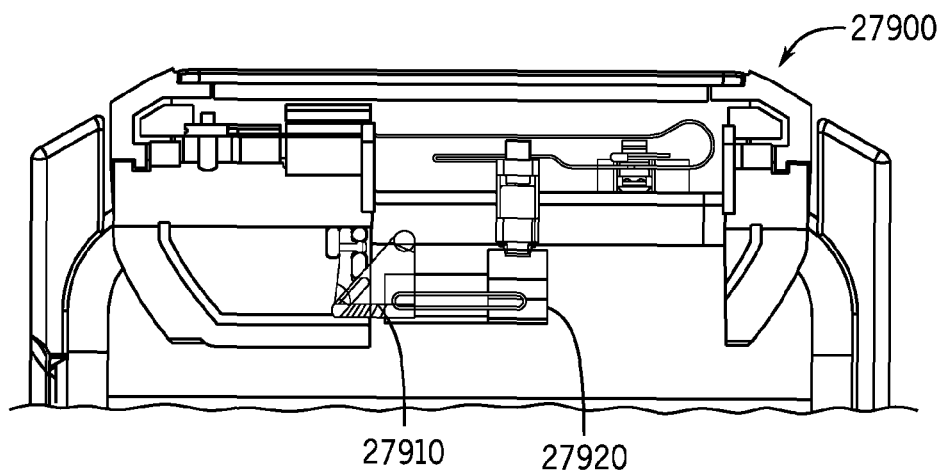


FIG. 279

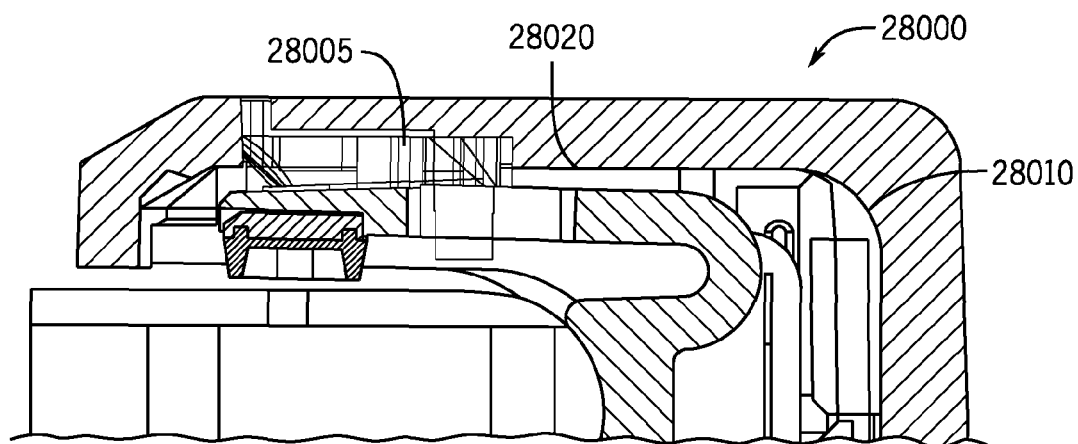


FIG. 280

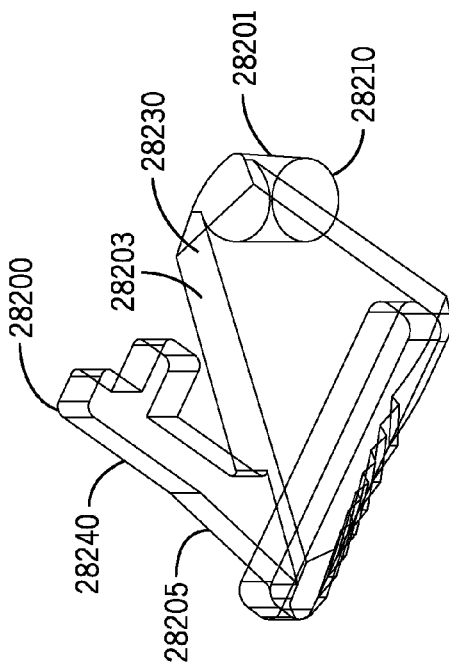


FIG. 282

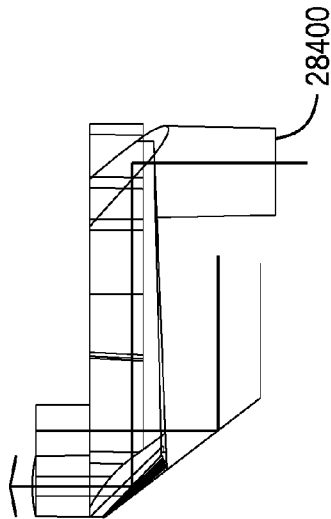


FIG. 284

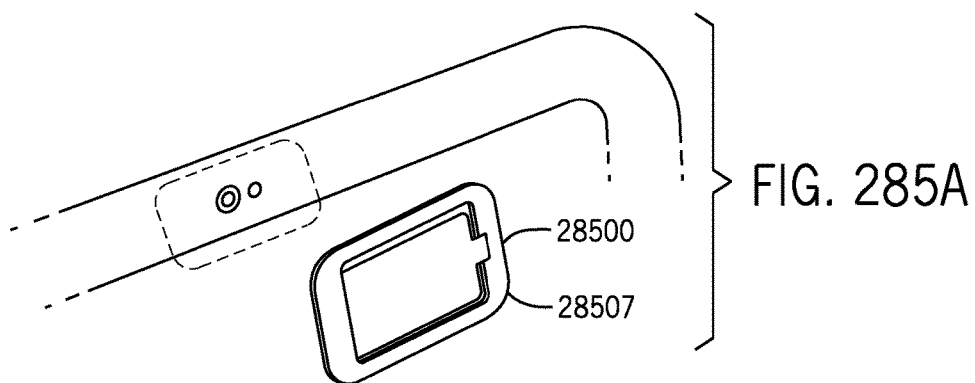
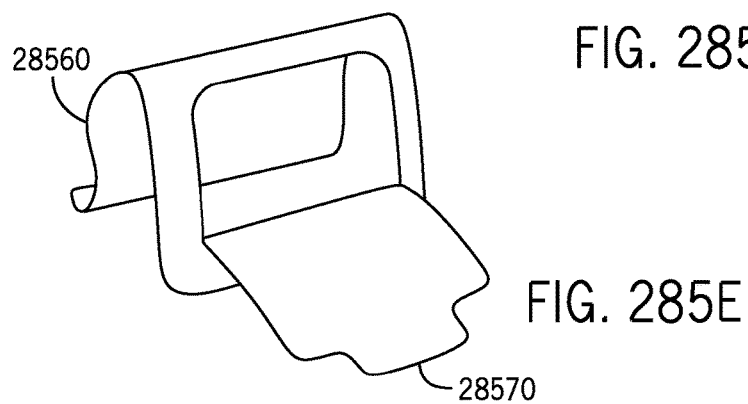
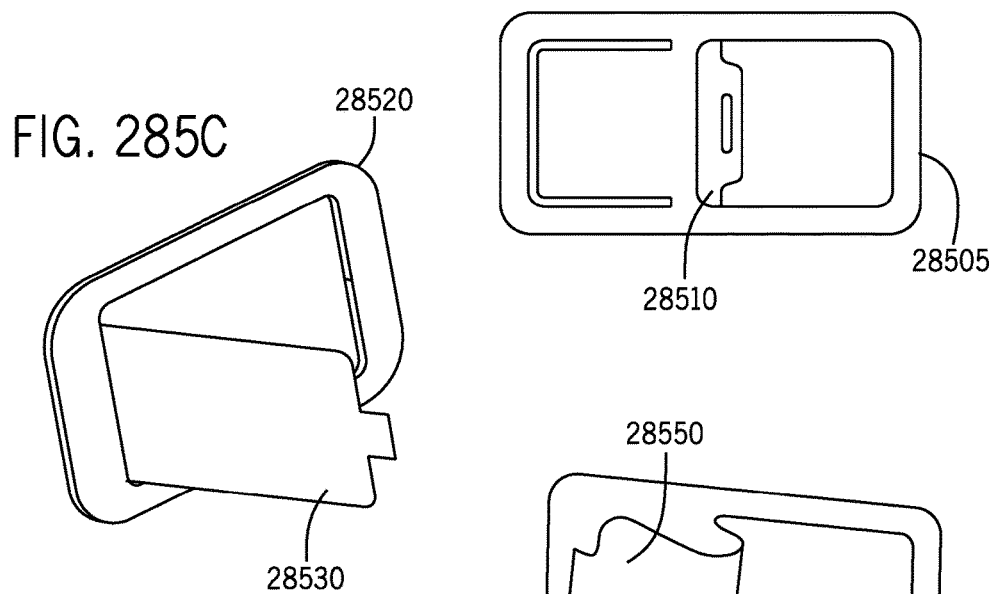


FIG. 285B



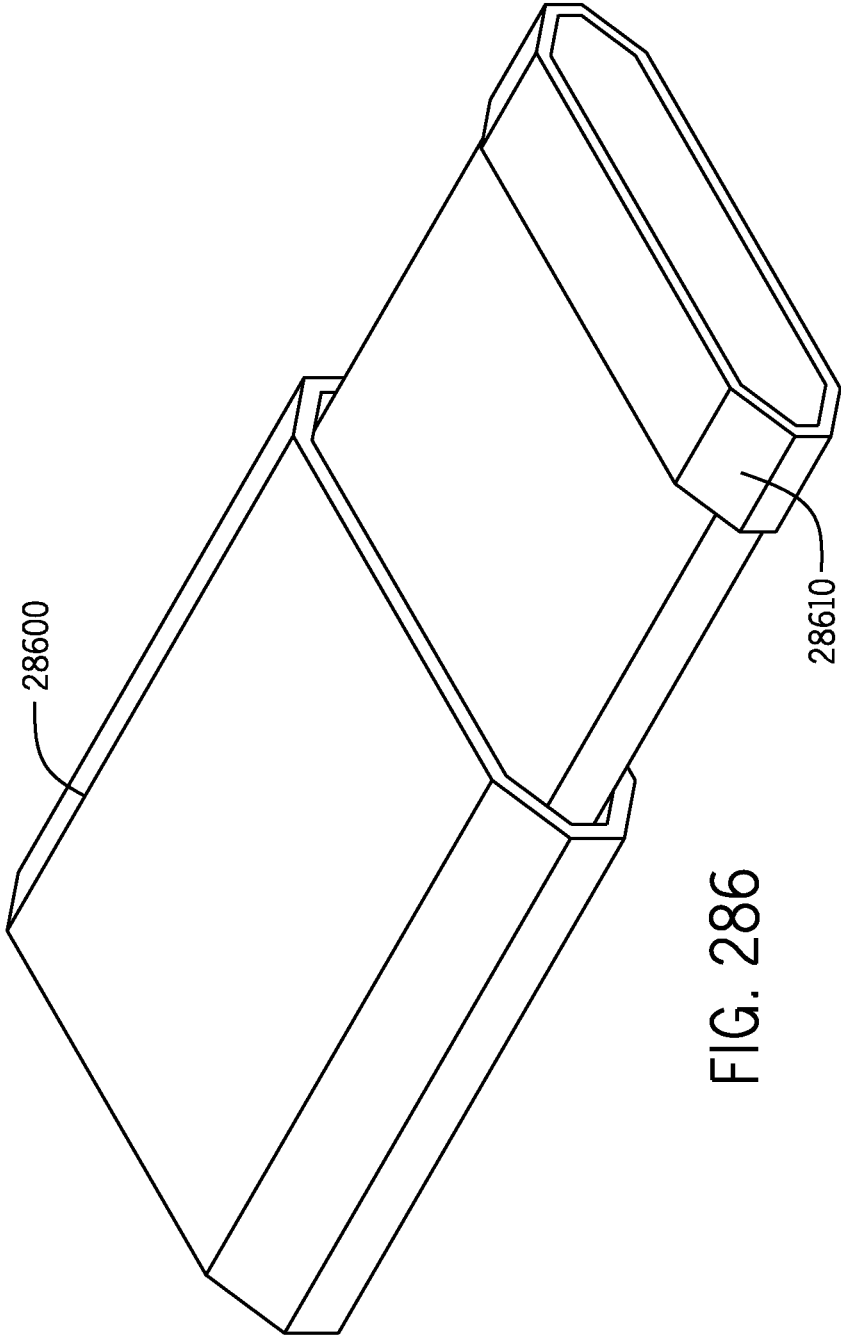


FIG. 286

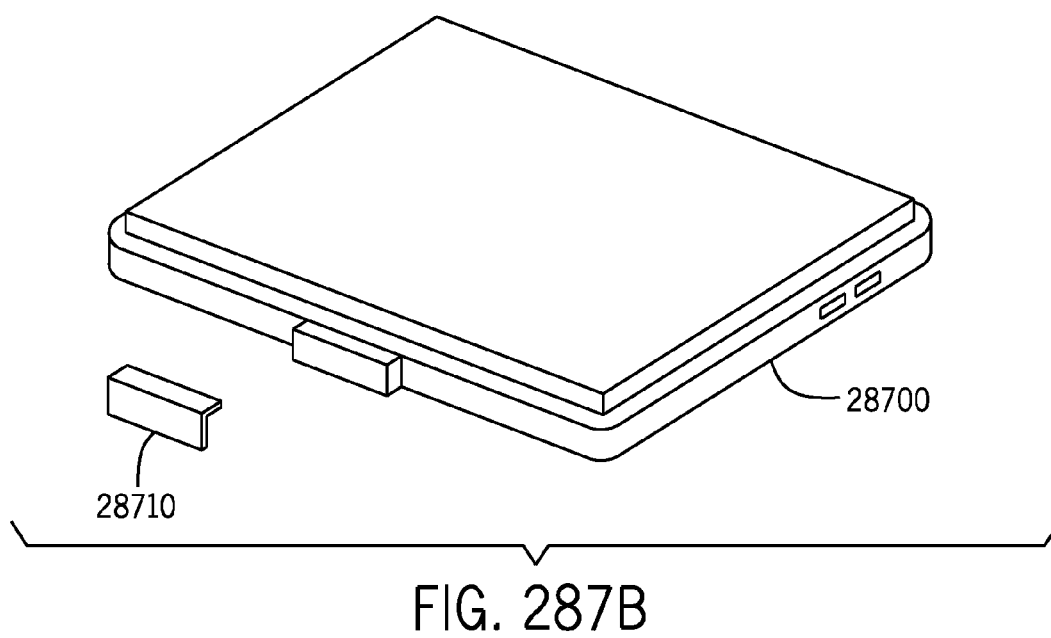
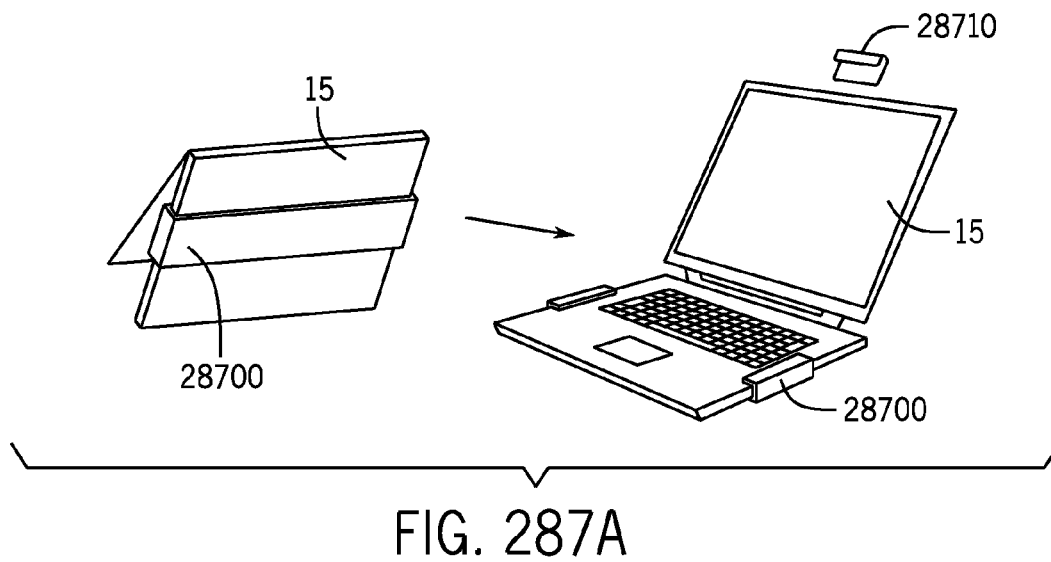
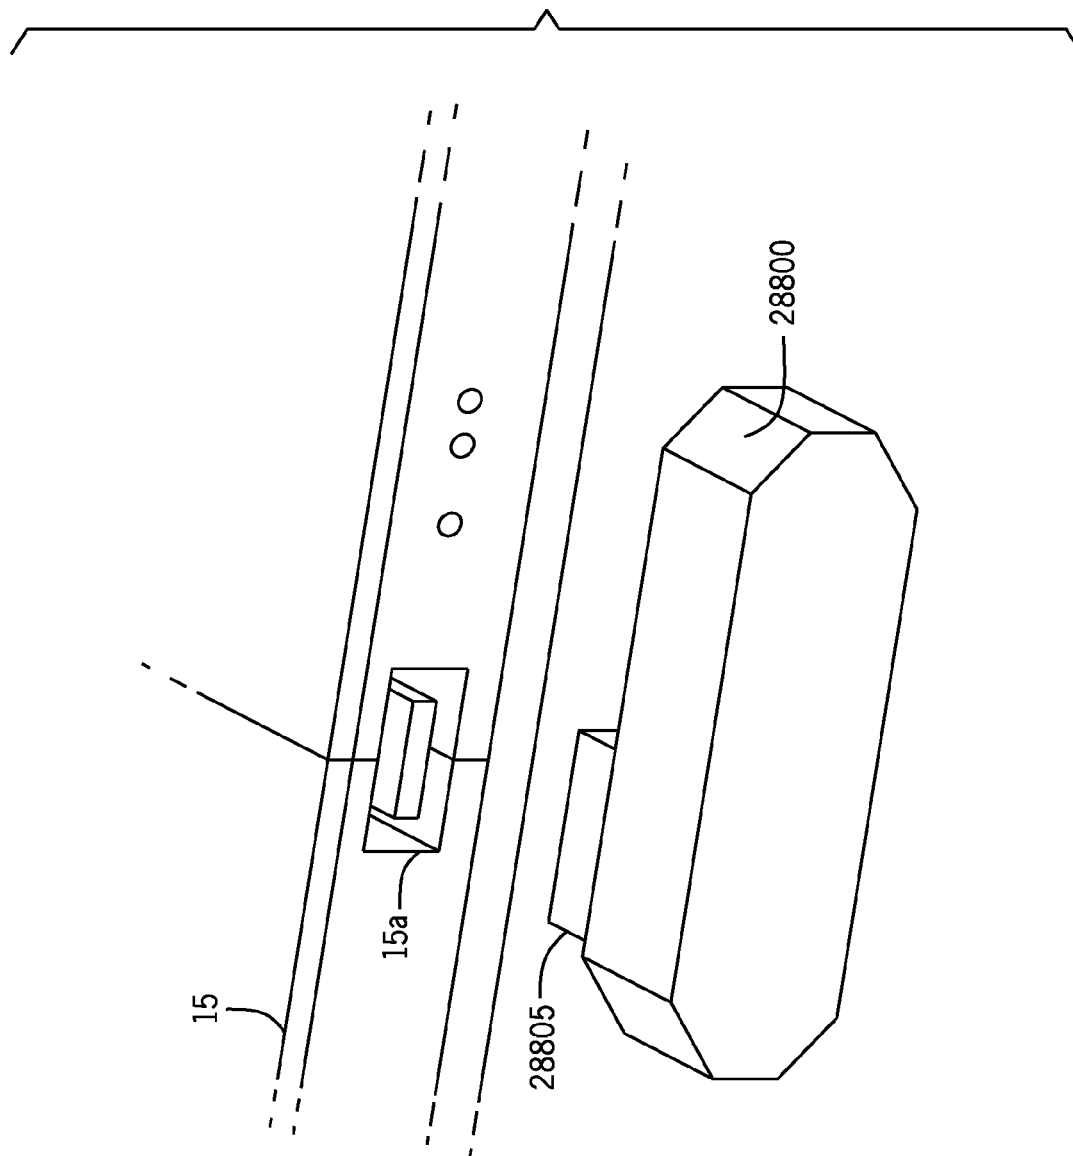


FIG. 288



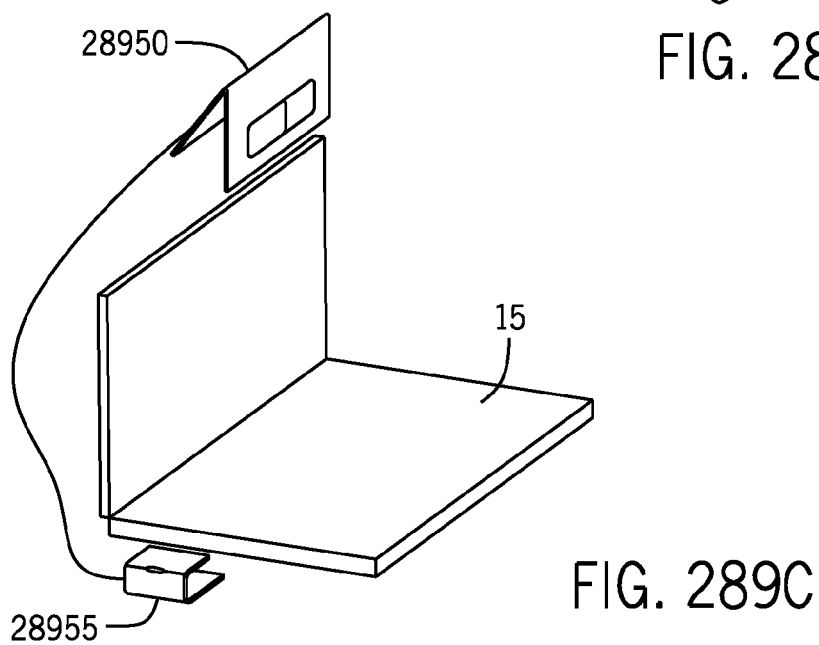
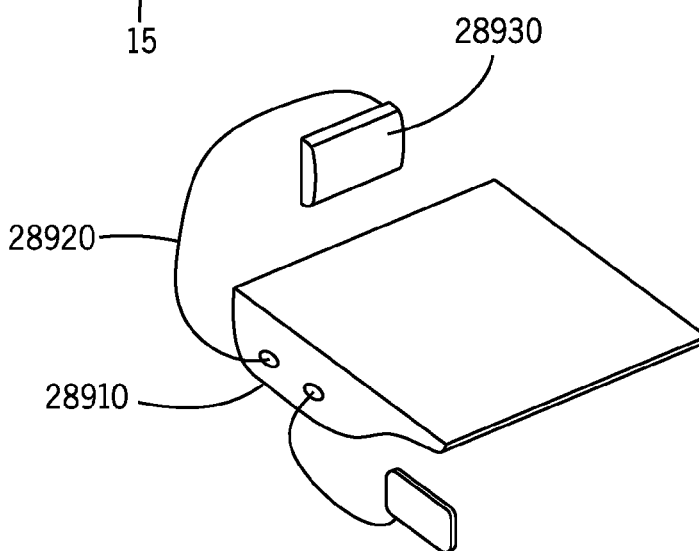
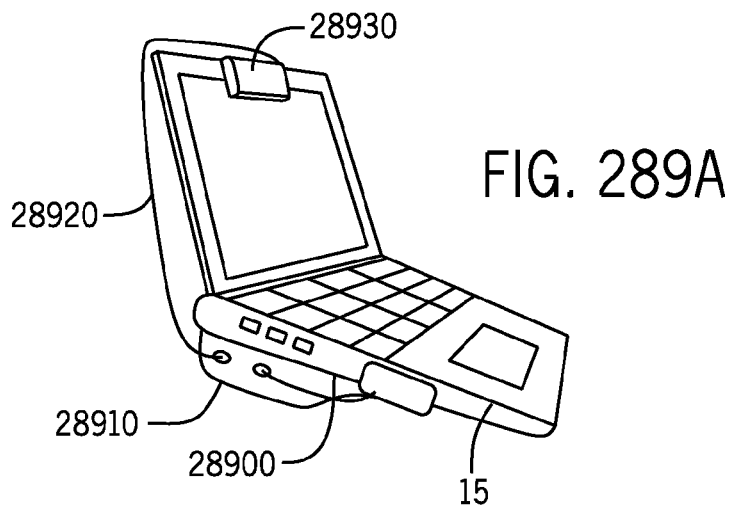
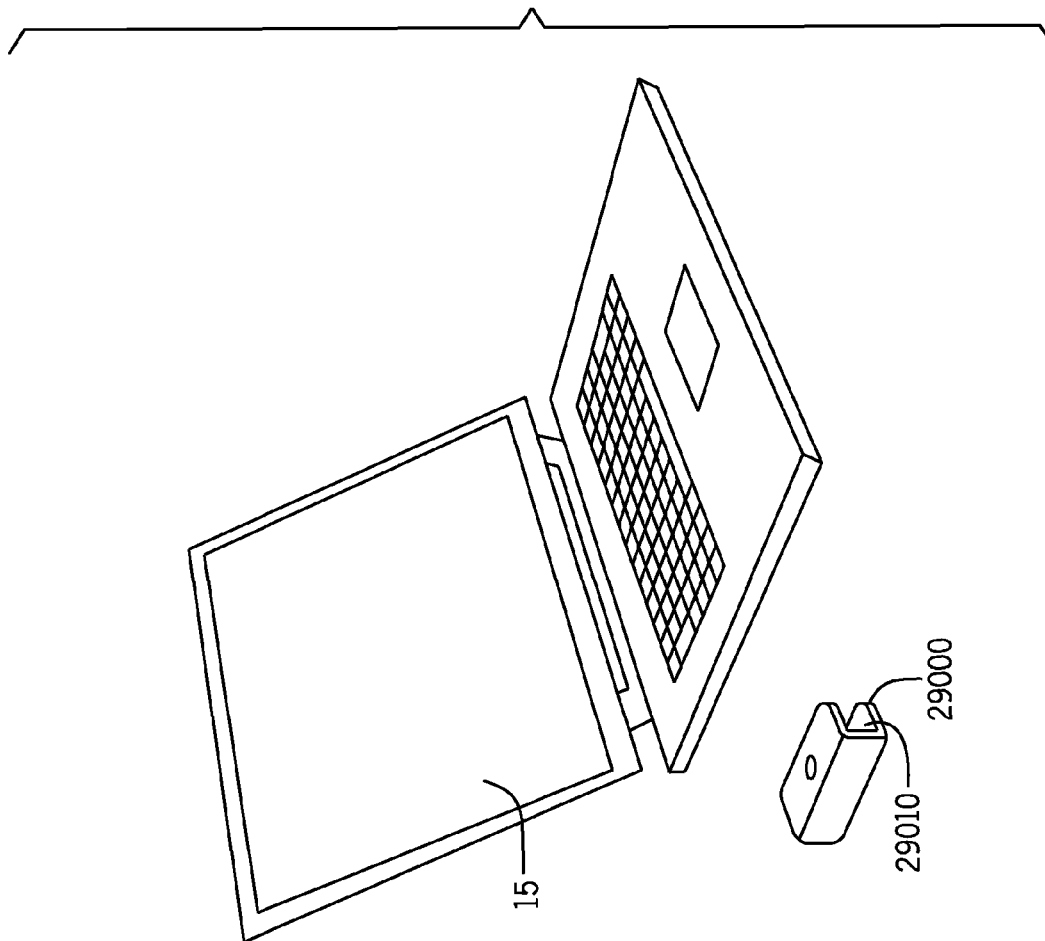


FIG. 290



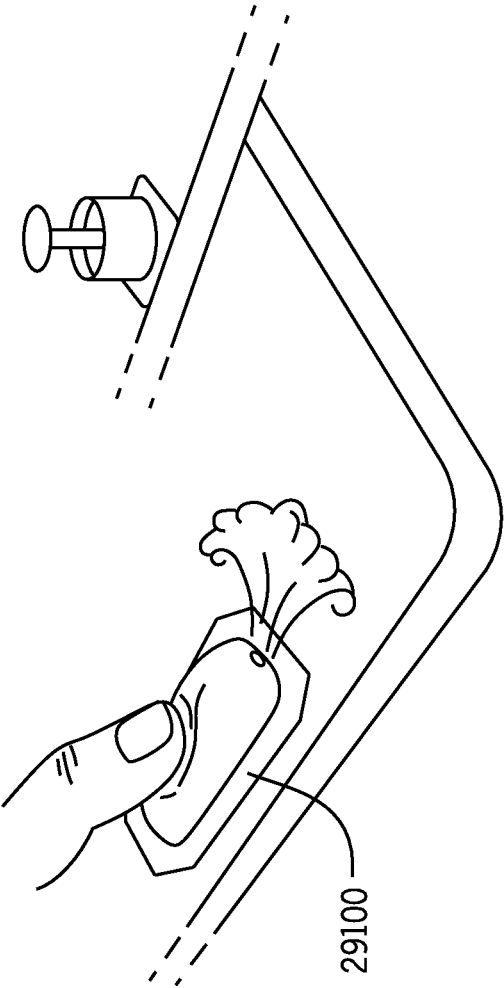


FIG. 291

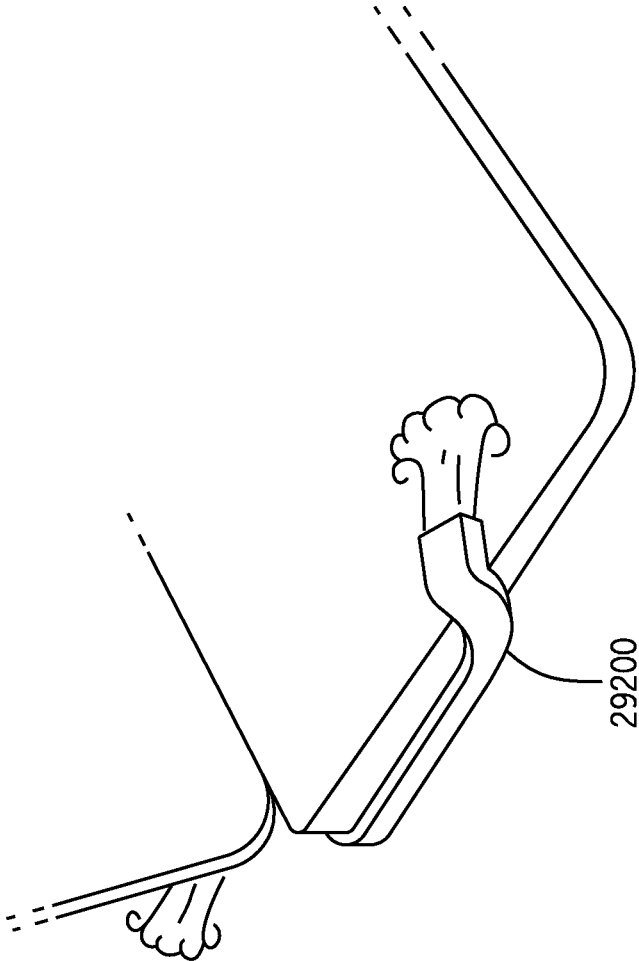


FIG. 292

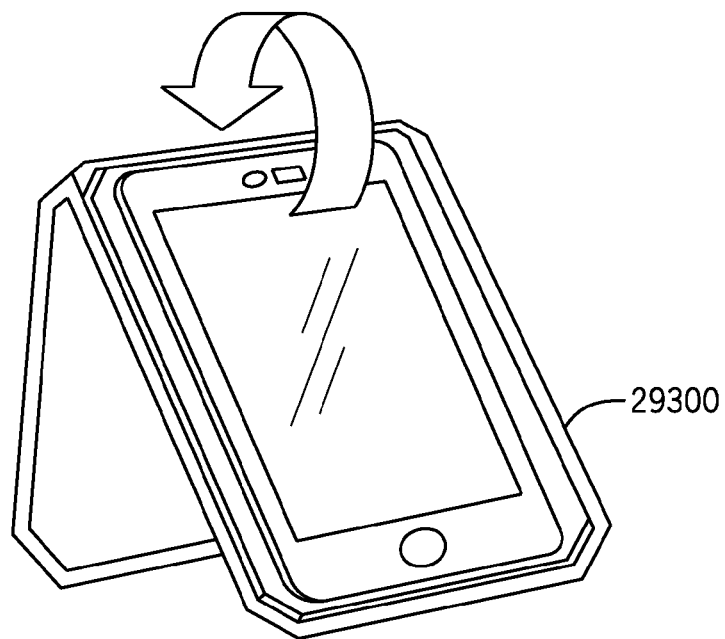


FIG. 293A

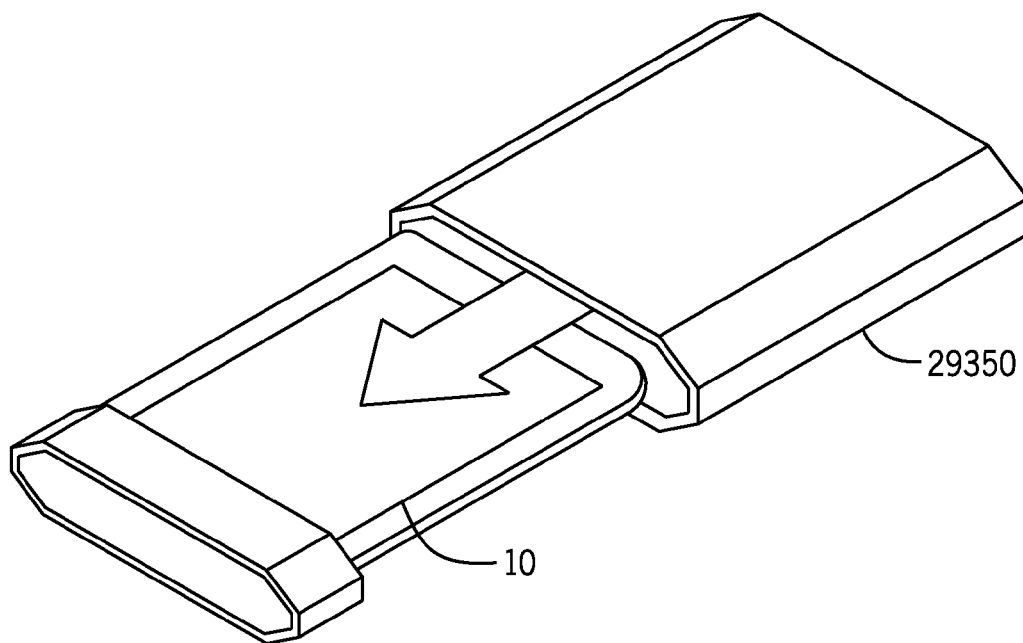


FIG. 293B

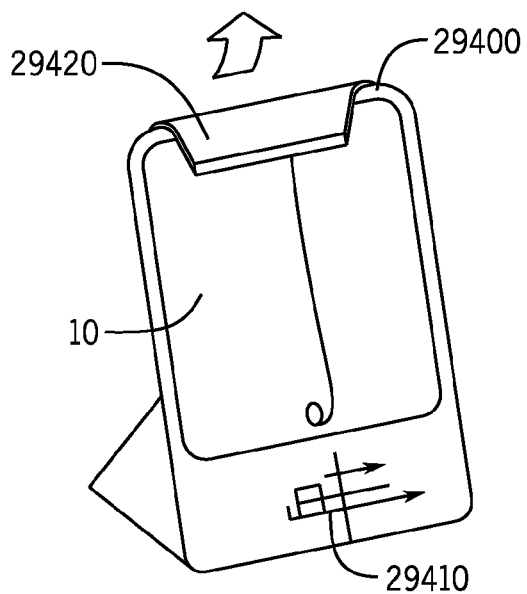


FIG. 294A

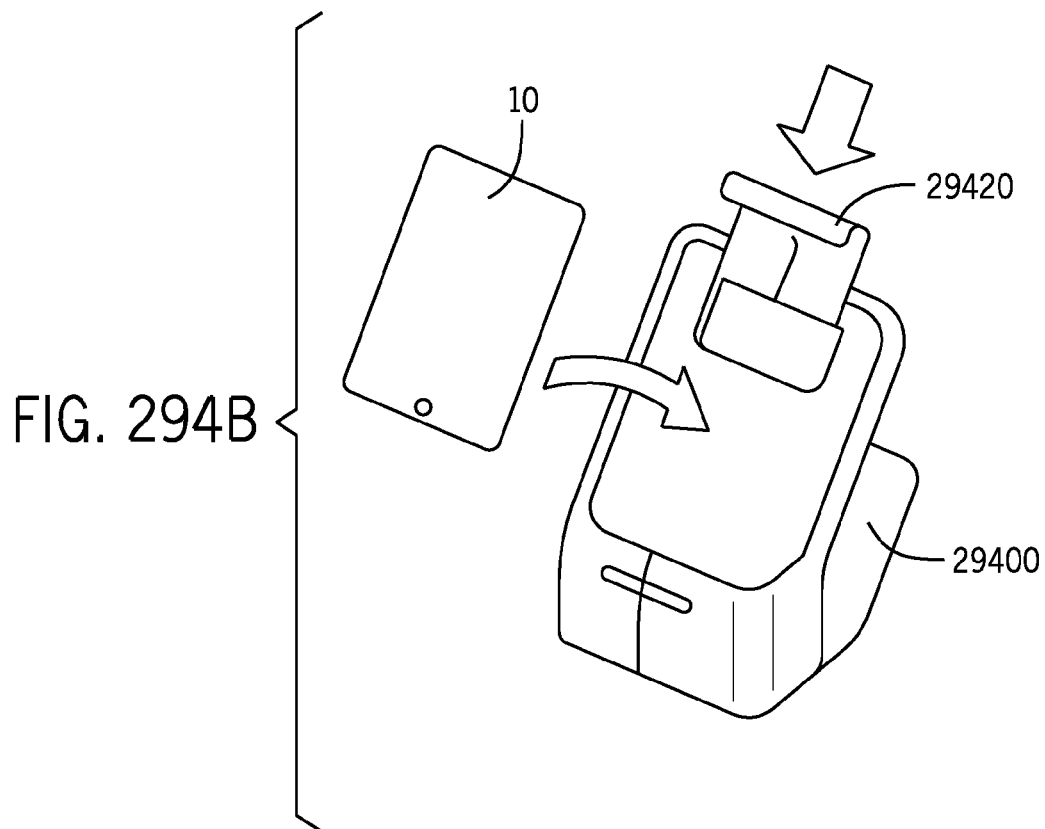


FIG. 294B

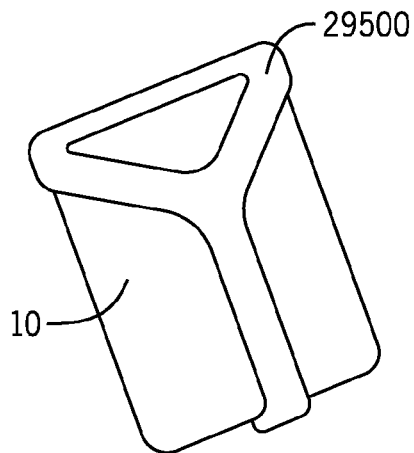


FIG. 295B

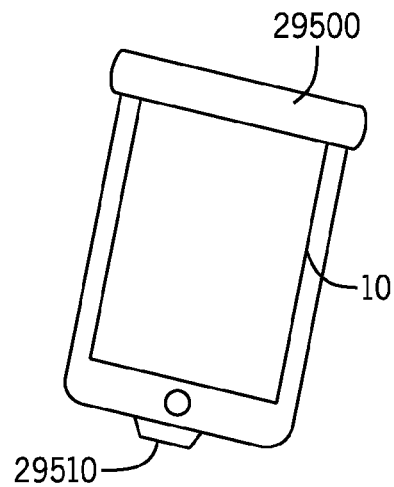


FIG. 295A

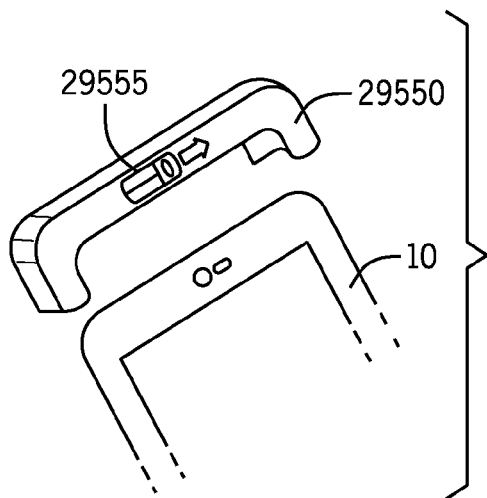


FIG. 295C

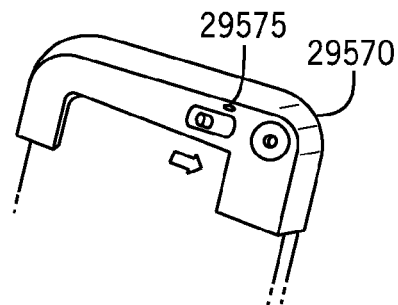


FIG. 295D

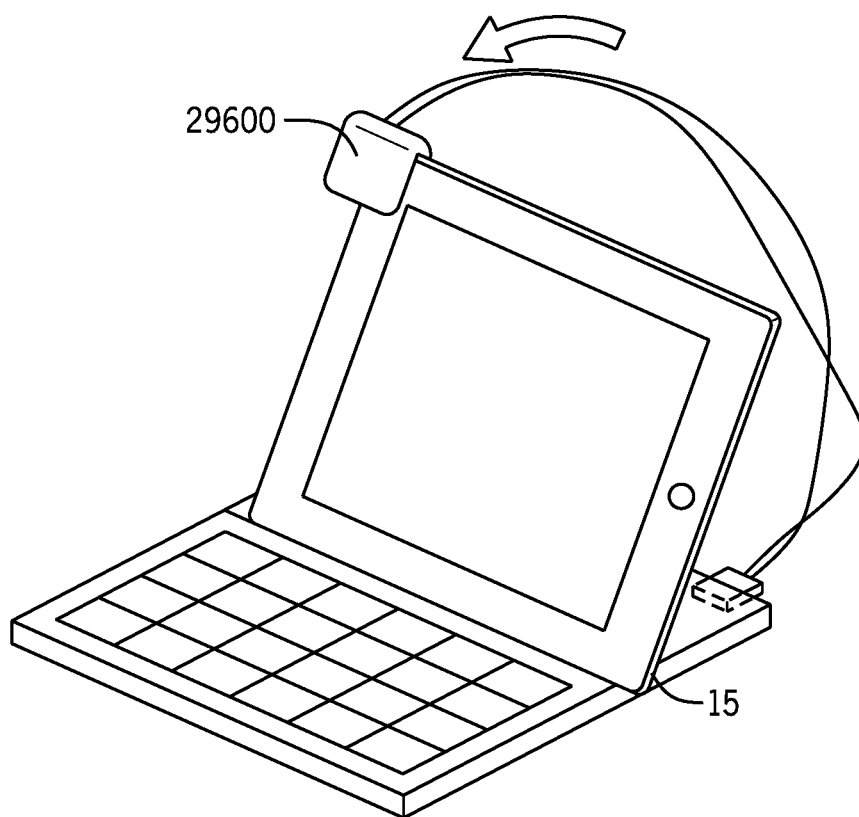
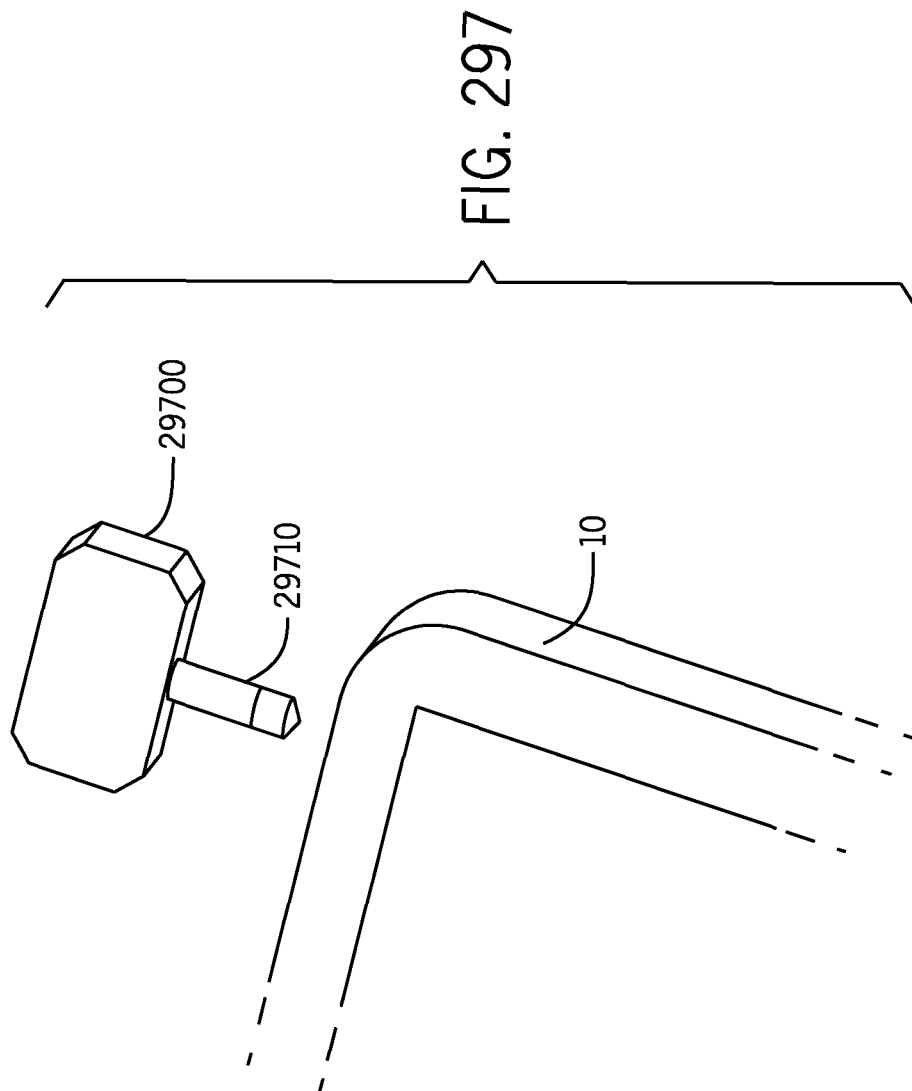


FIG. 296



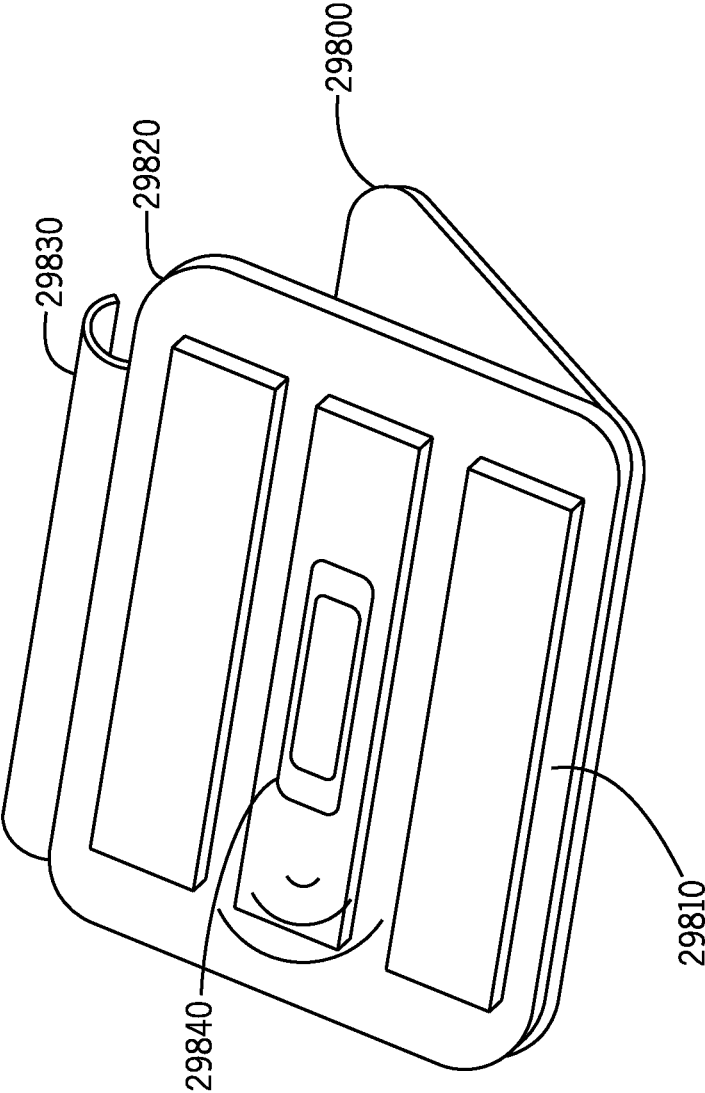


FIG. 298

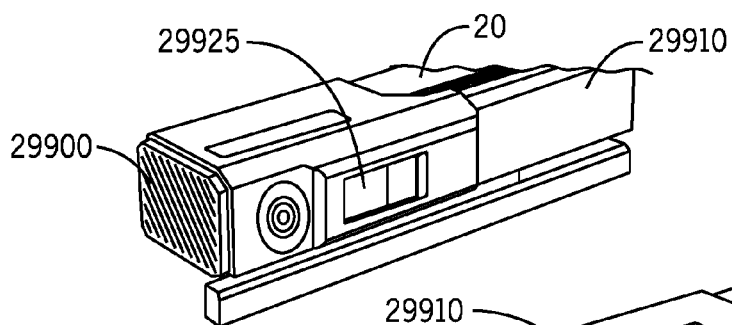


FIG. 299D

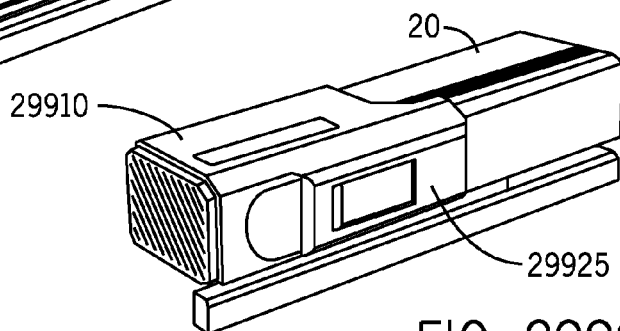


FIG. 299C

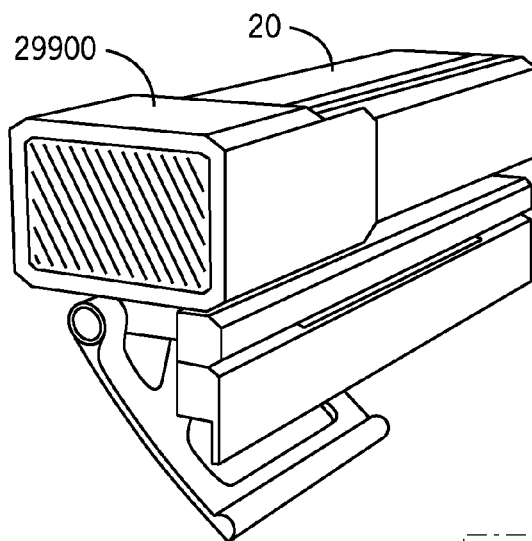


FIG. 299B

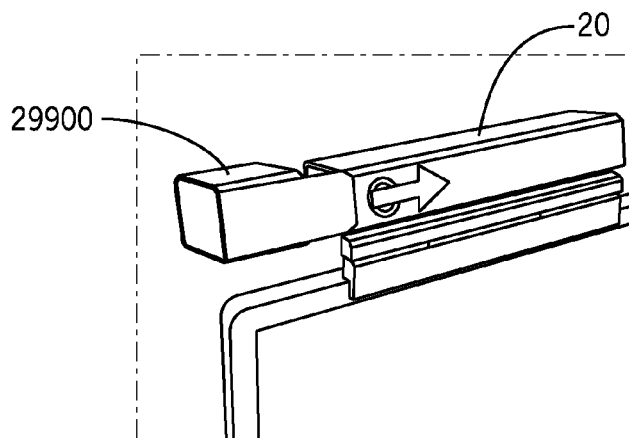


FIG. 299A

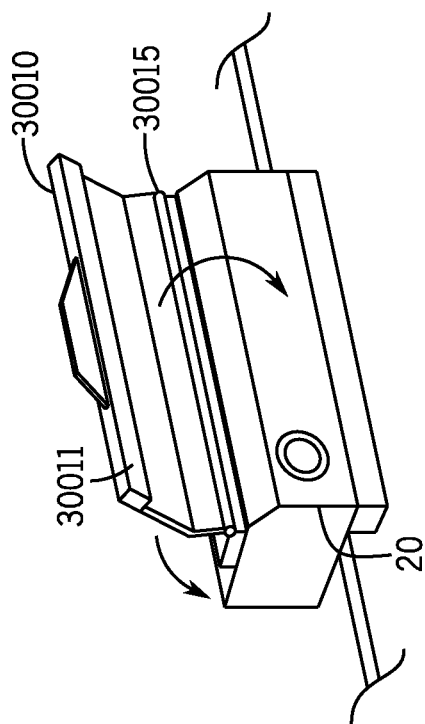


FIG. 300A

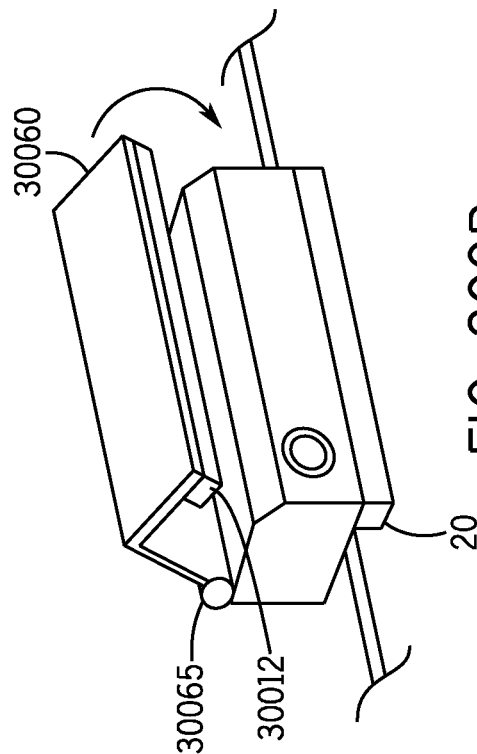


FIG. 300B

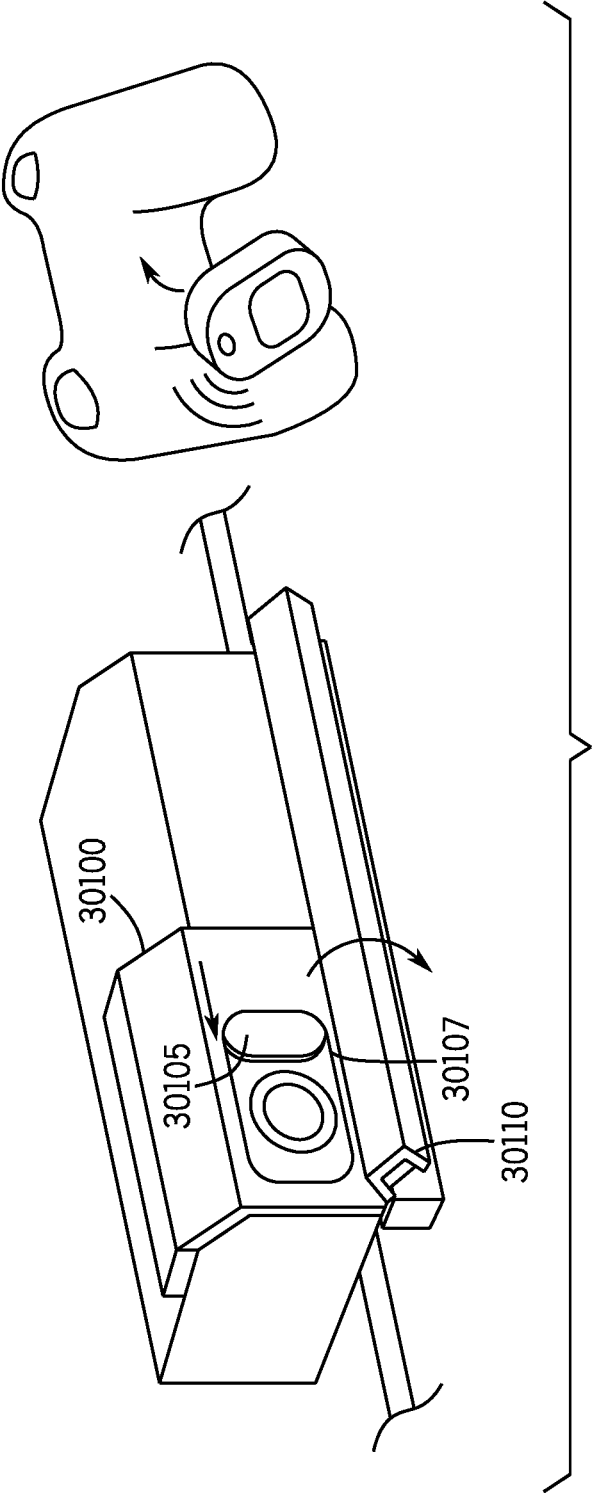


FIG. 301

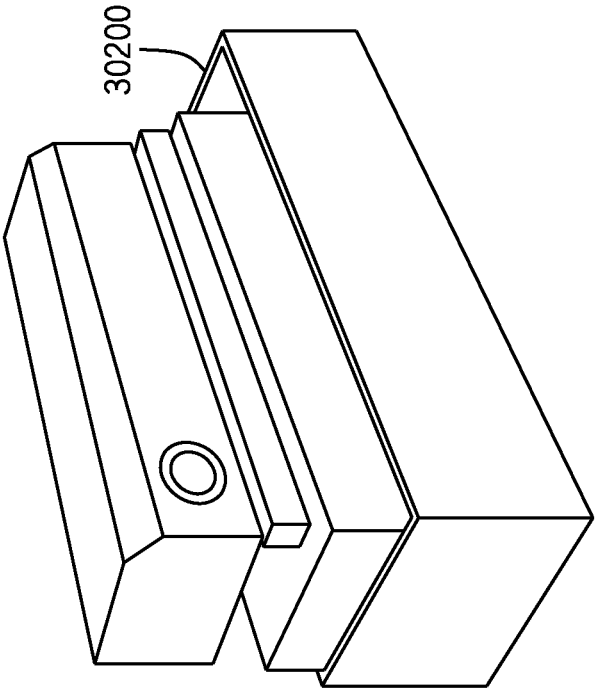


FIG. 302A

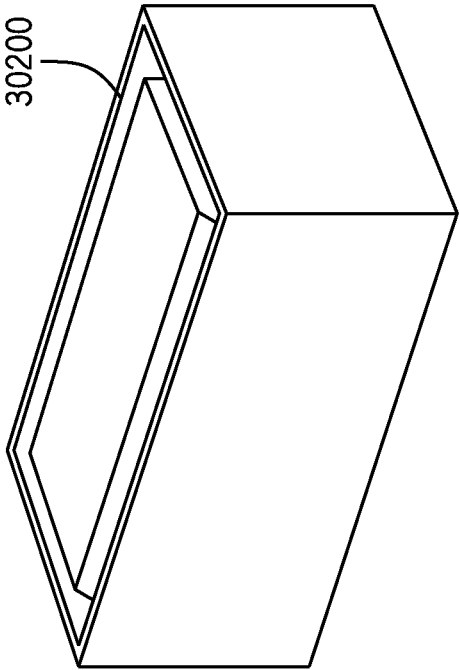
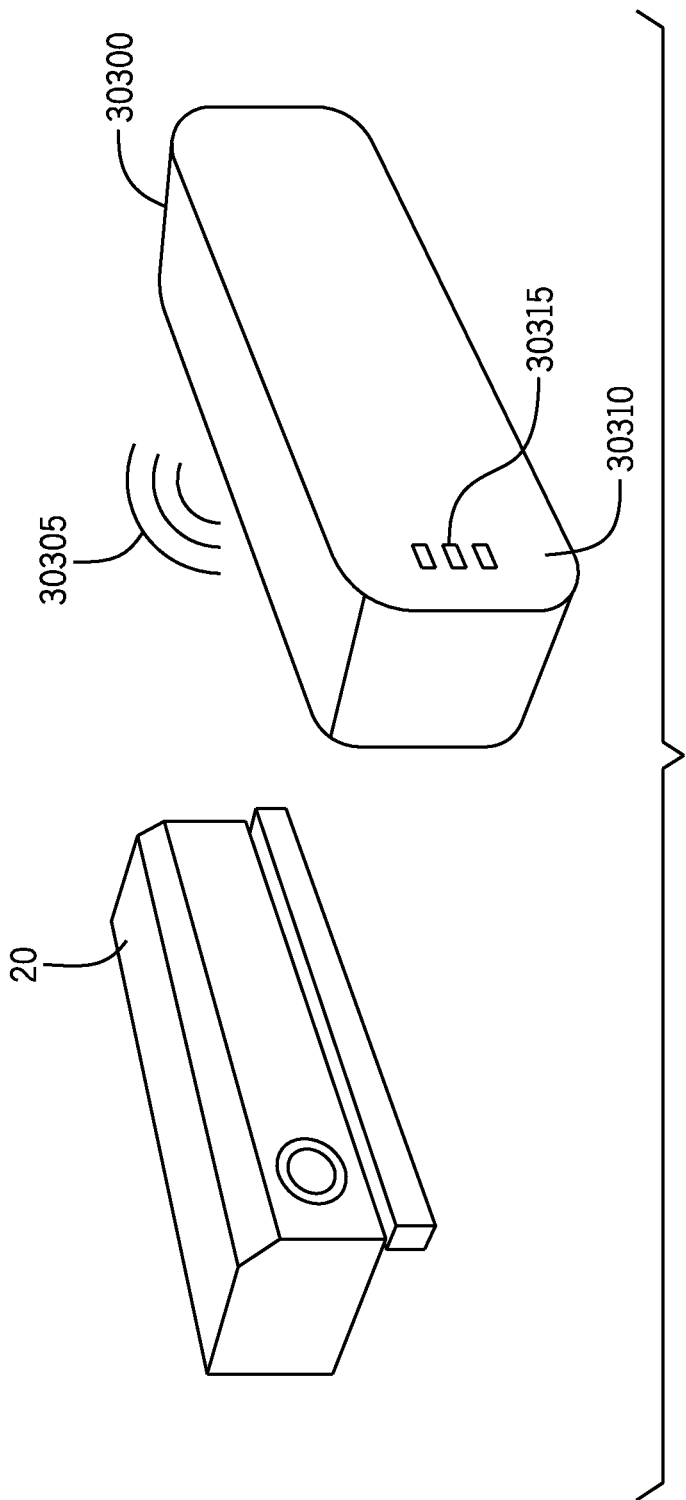


FIG. 302B



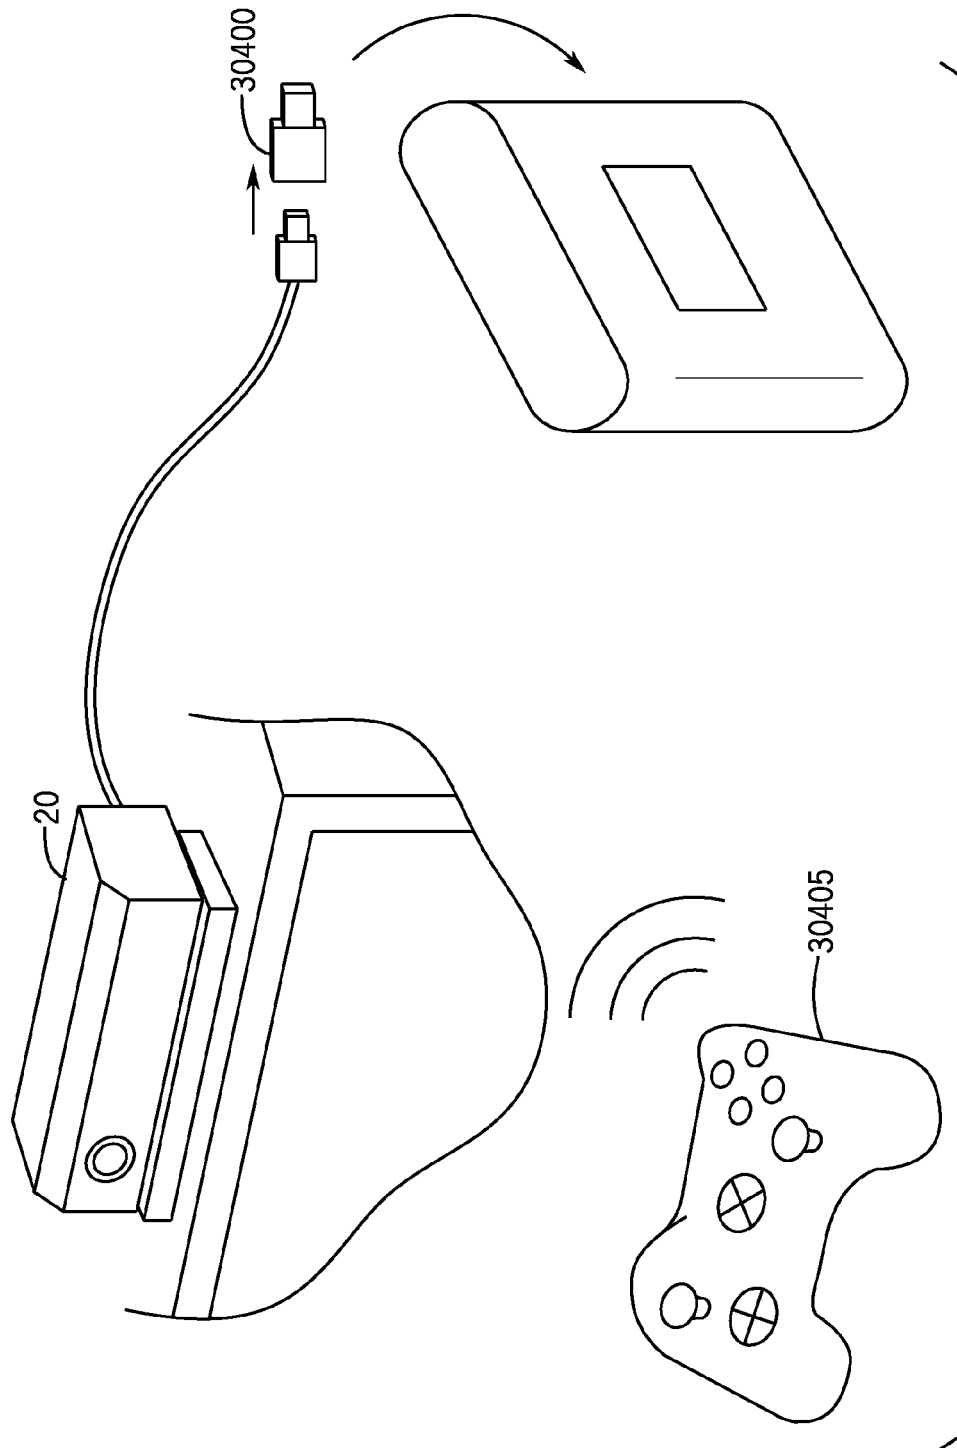
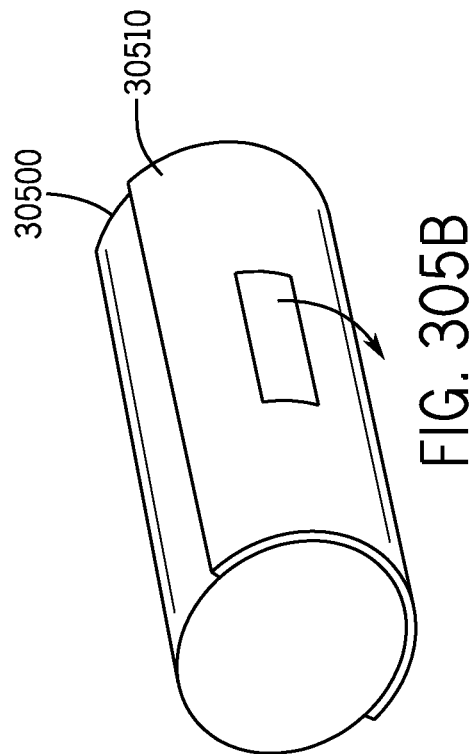
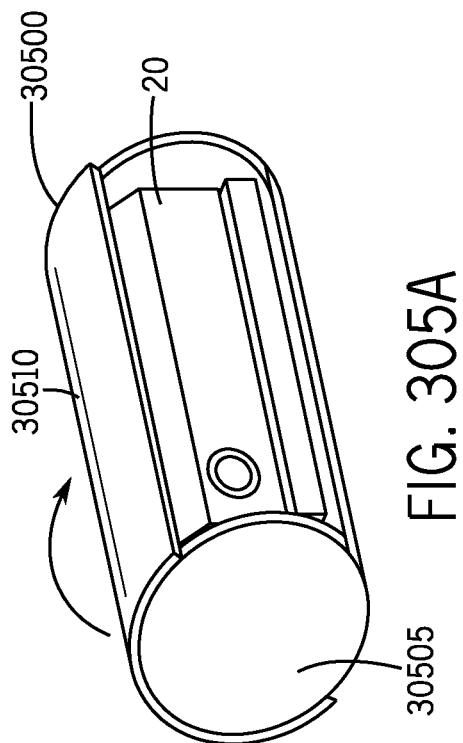
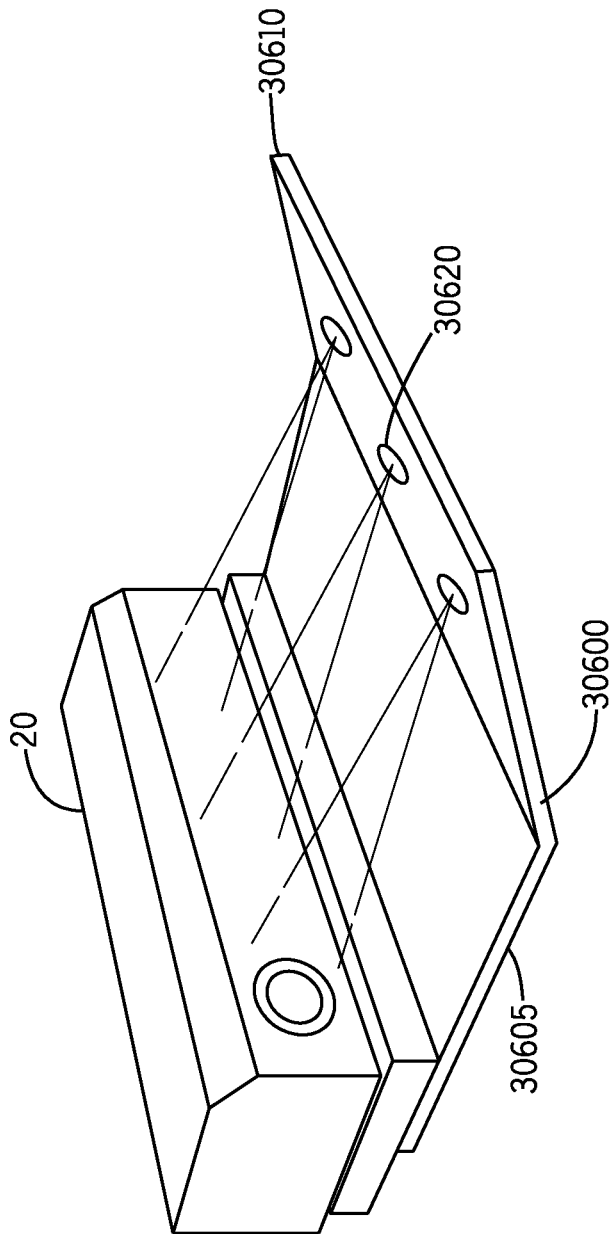
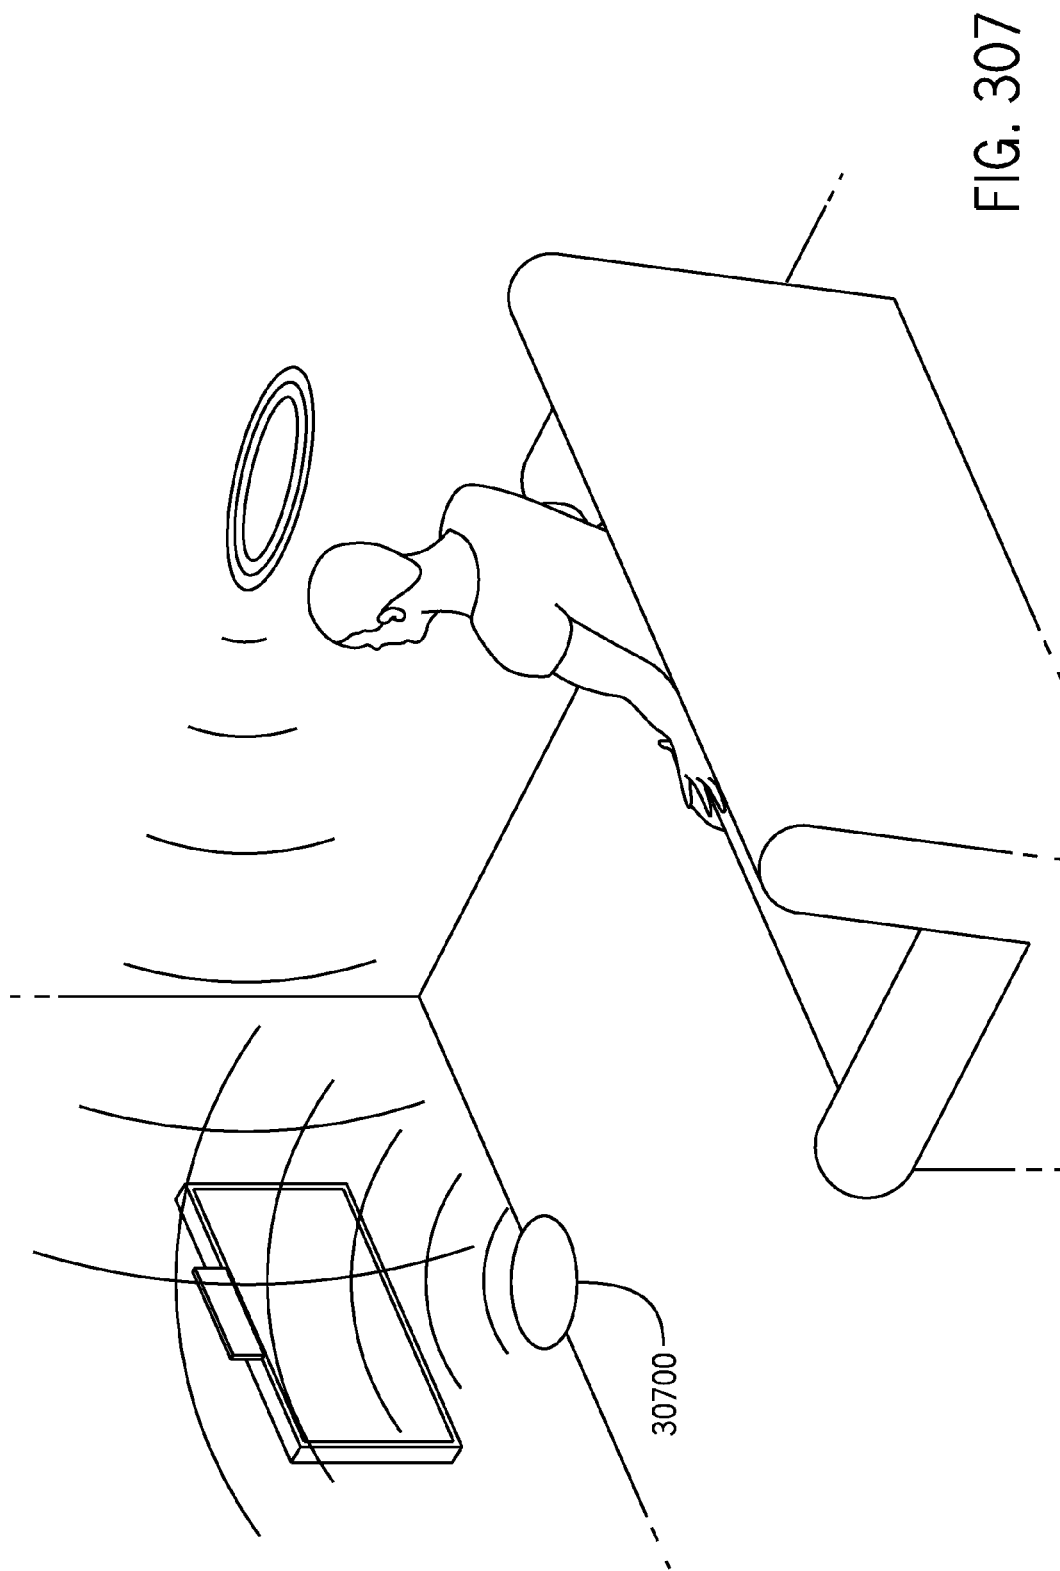
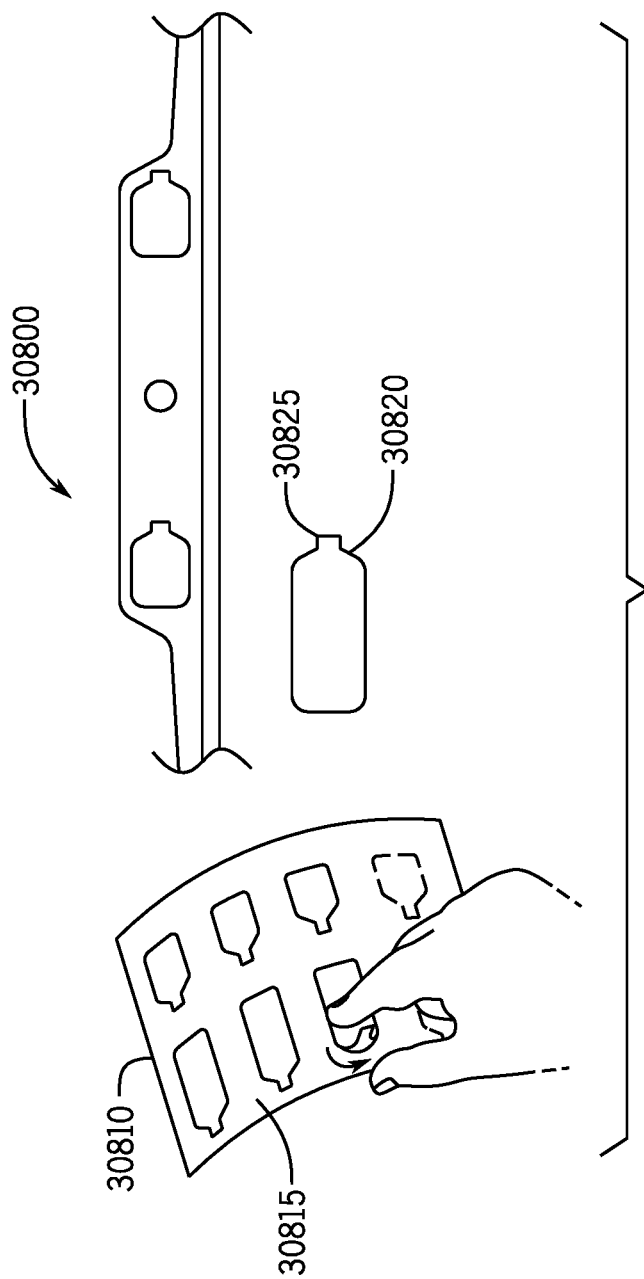


FIG. 304









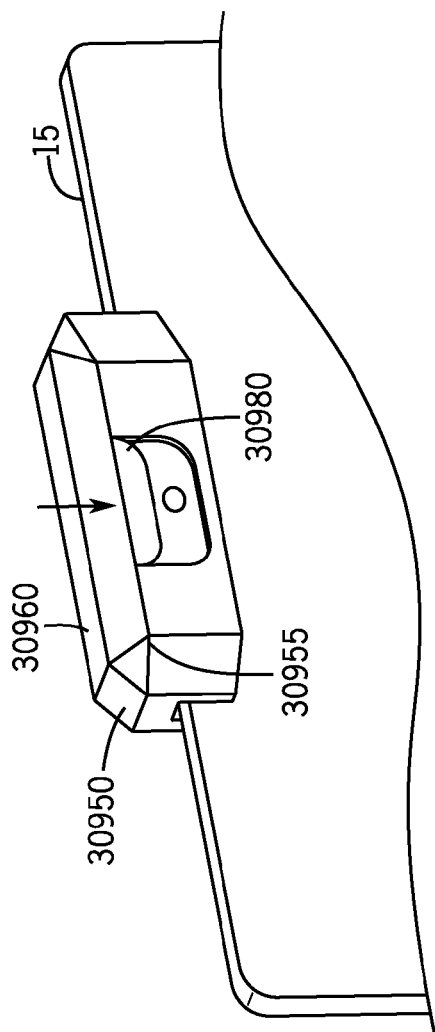


FIG. 309A

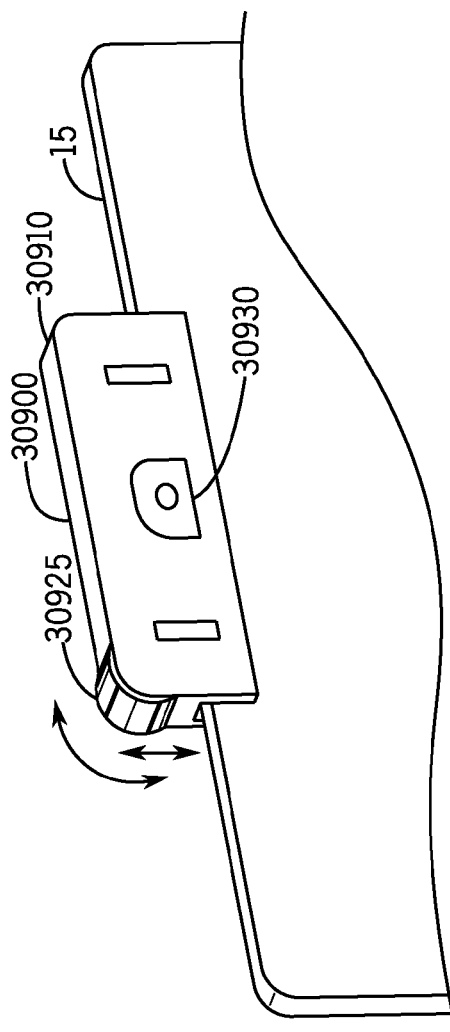
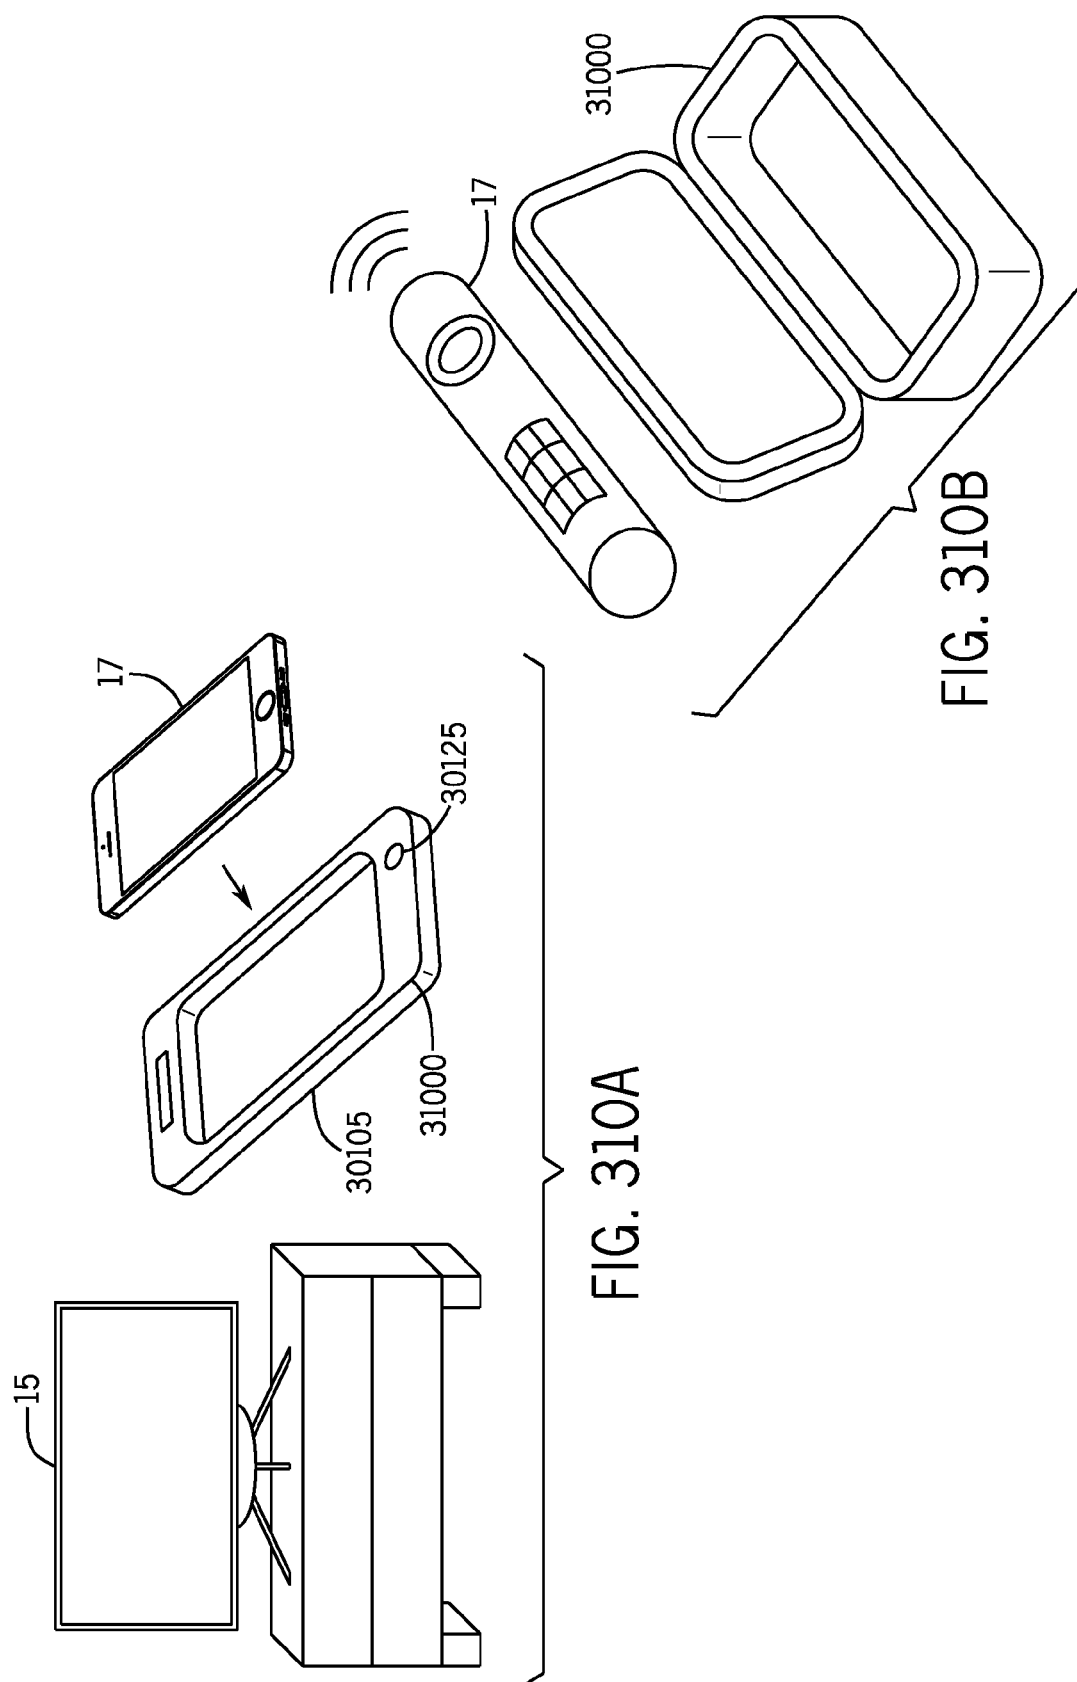


FIG. 309B



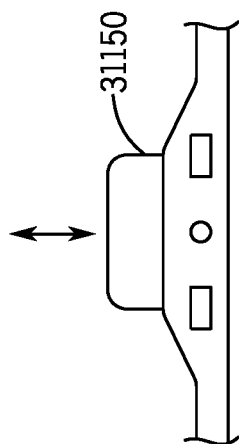


FIG. 311A

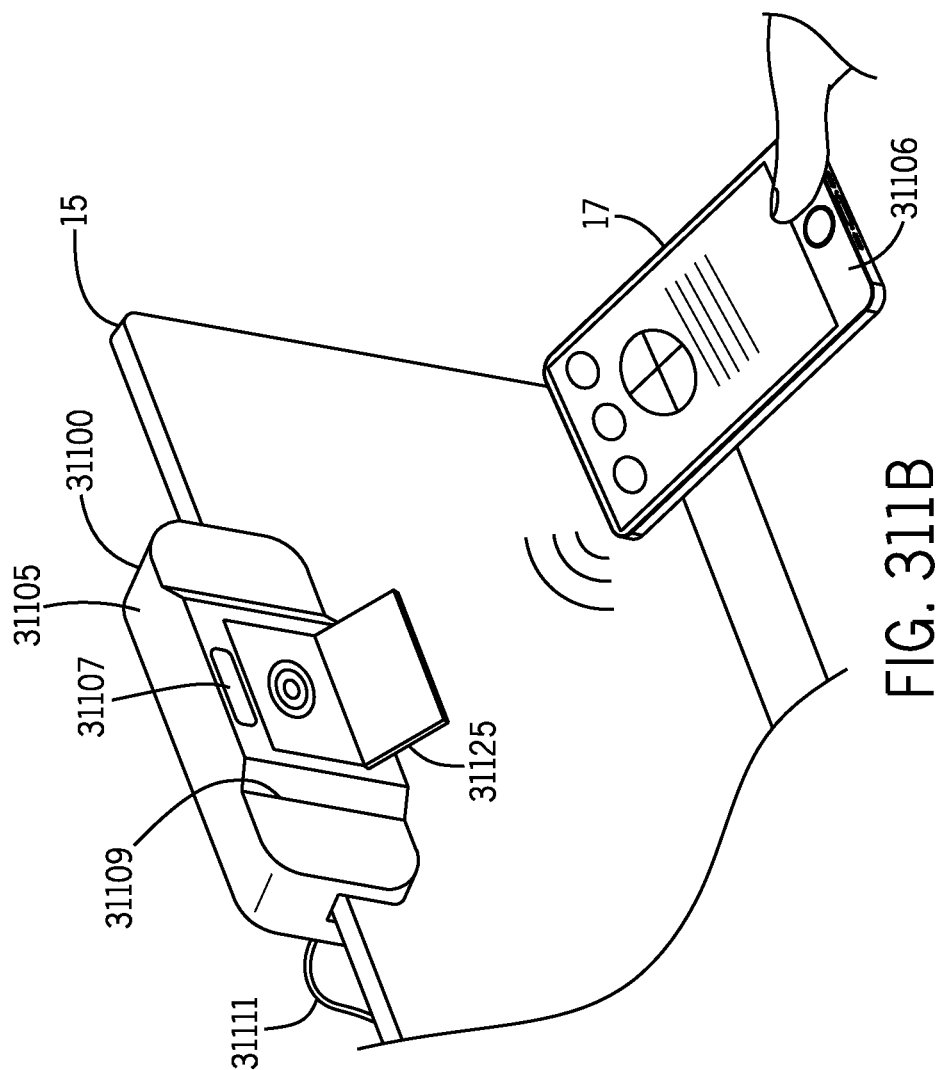
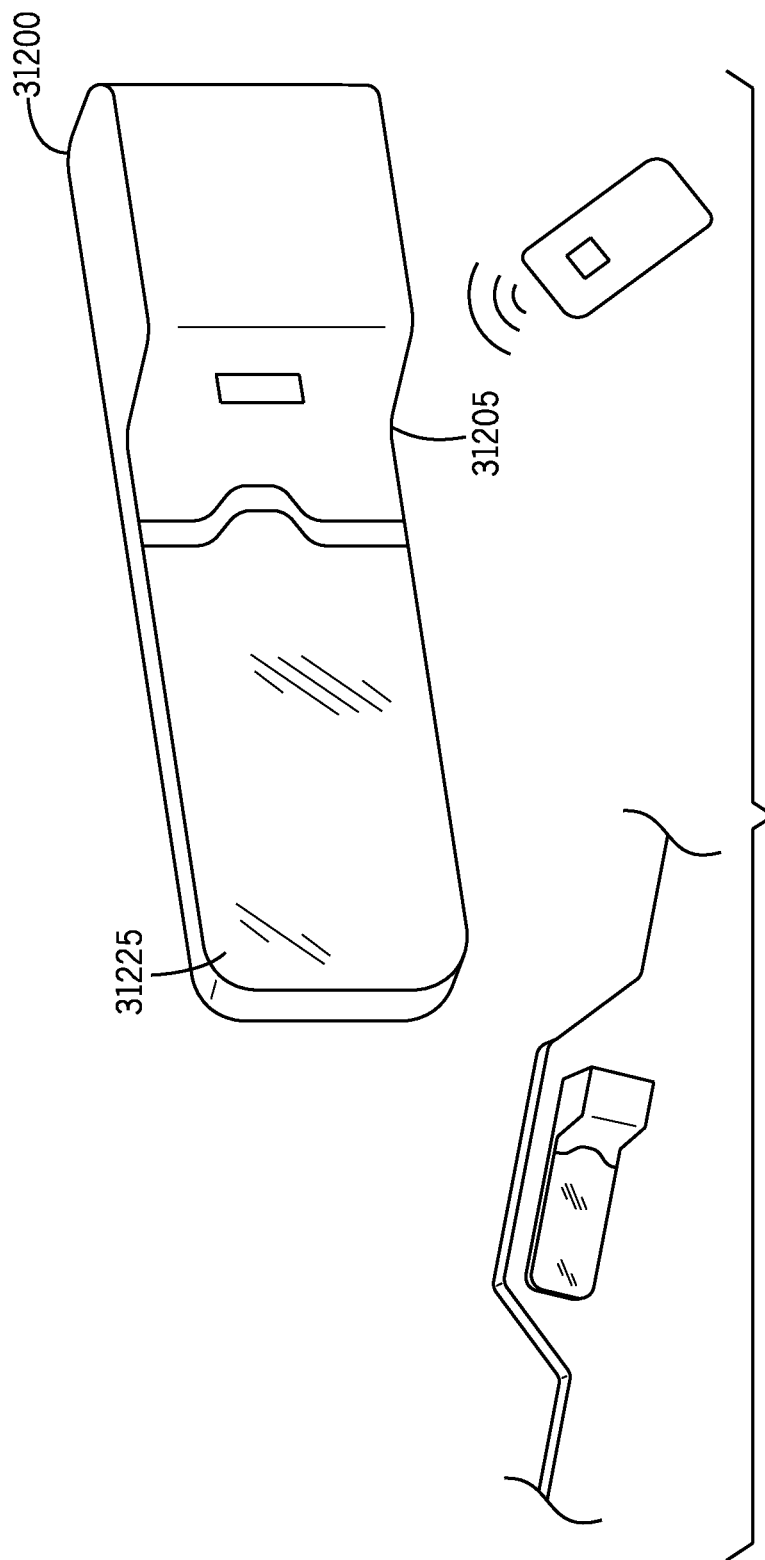
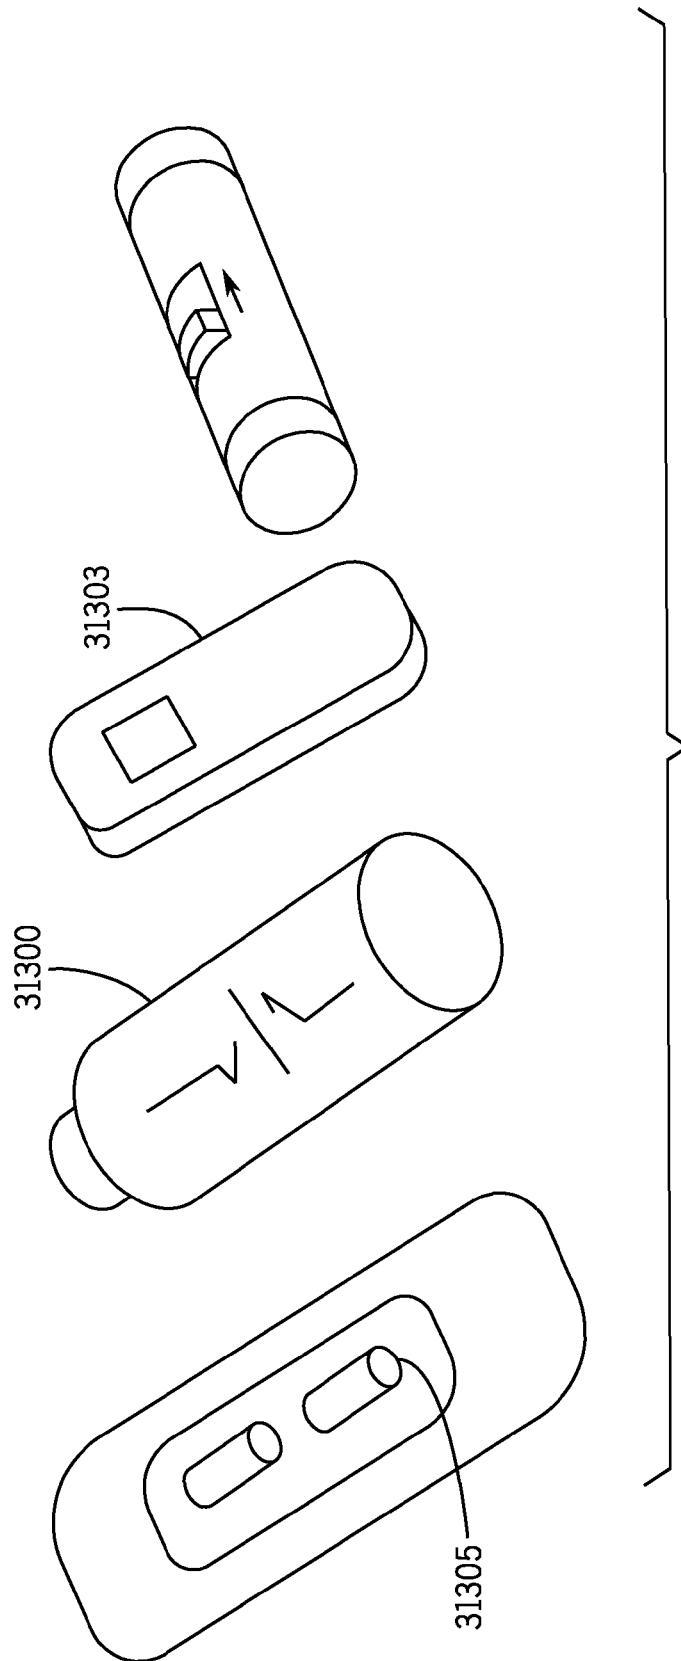


FIG. 311B





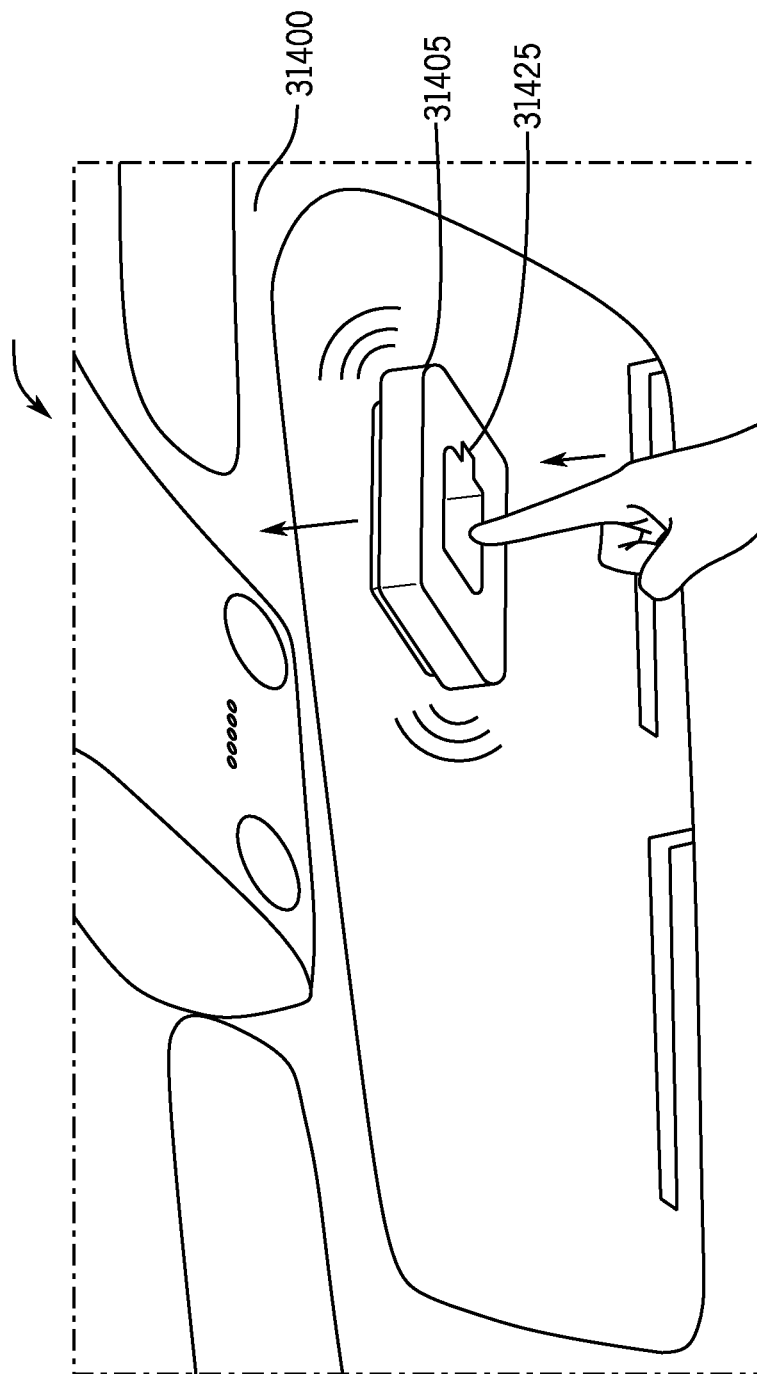


FIG. 314

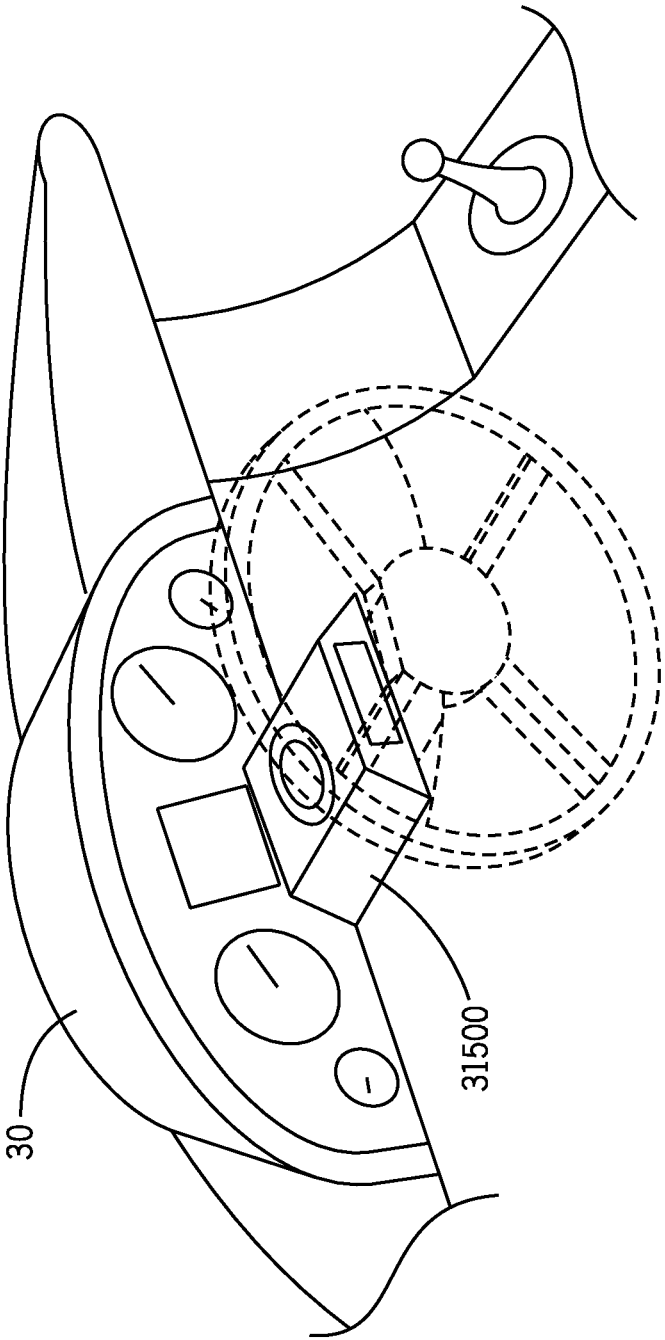


FIG. 315

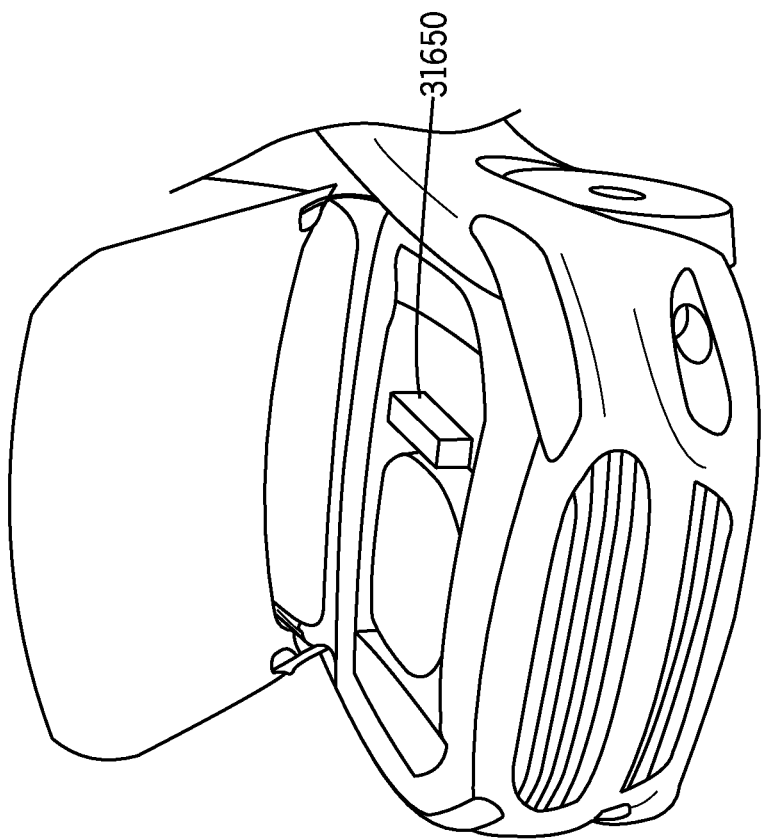


FIG. 316A

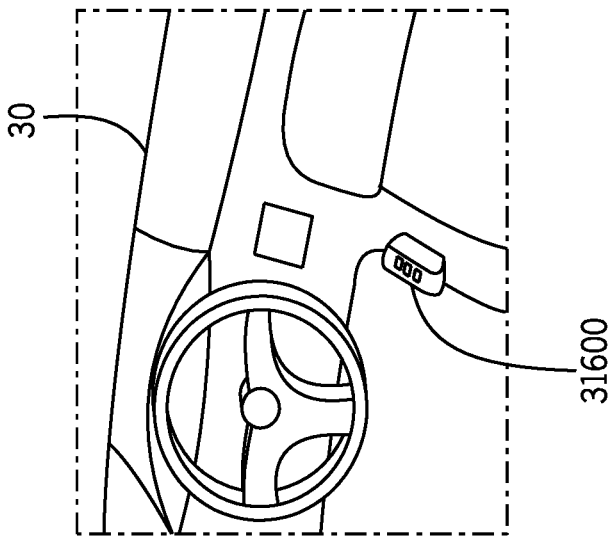


FIG. 316B

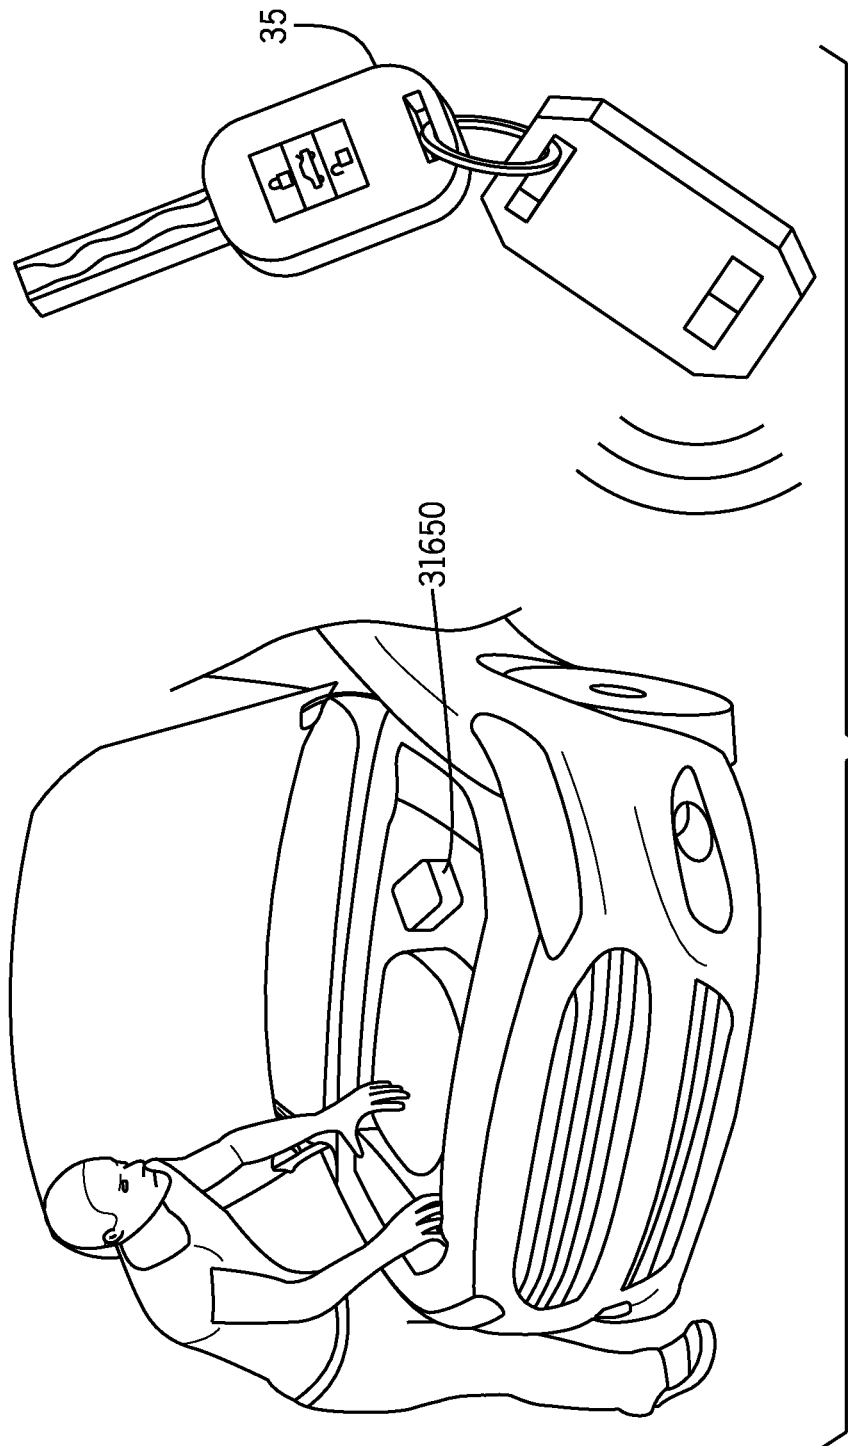


FIG. 317

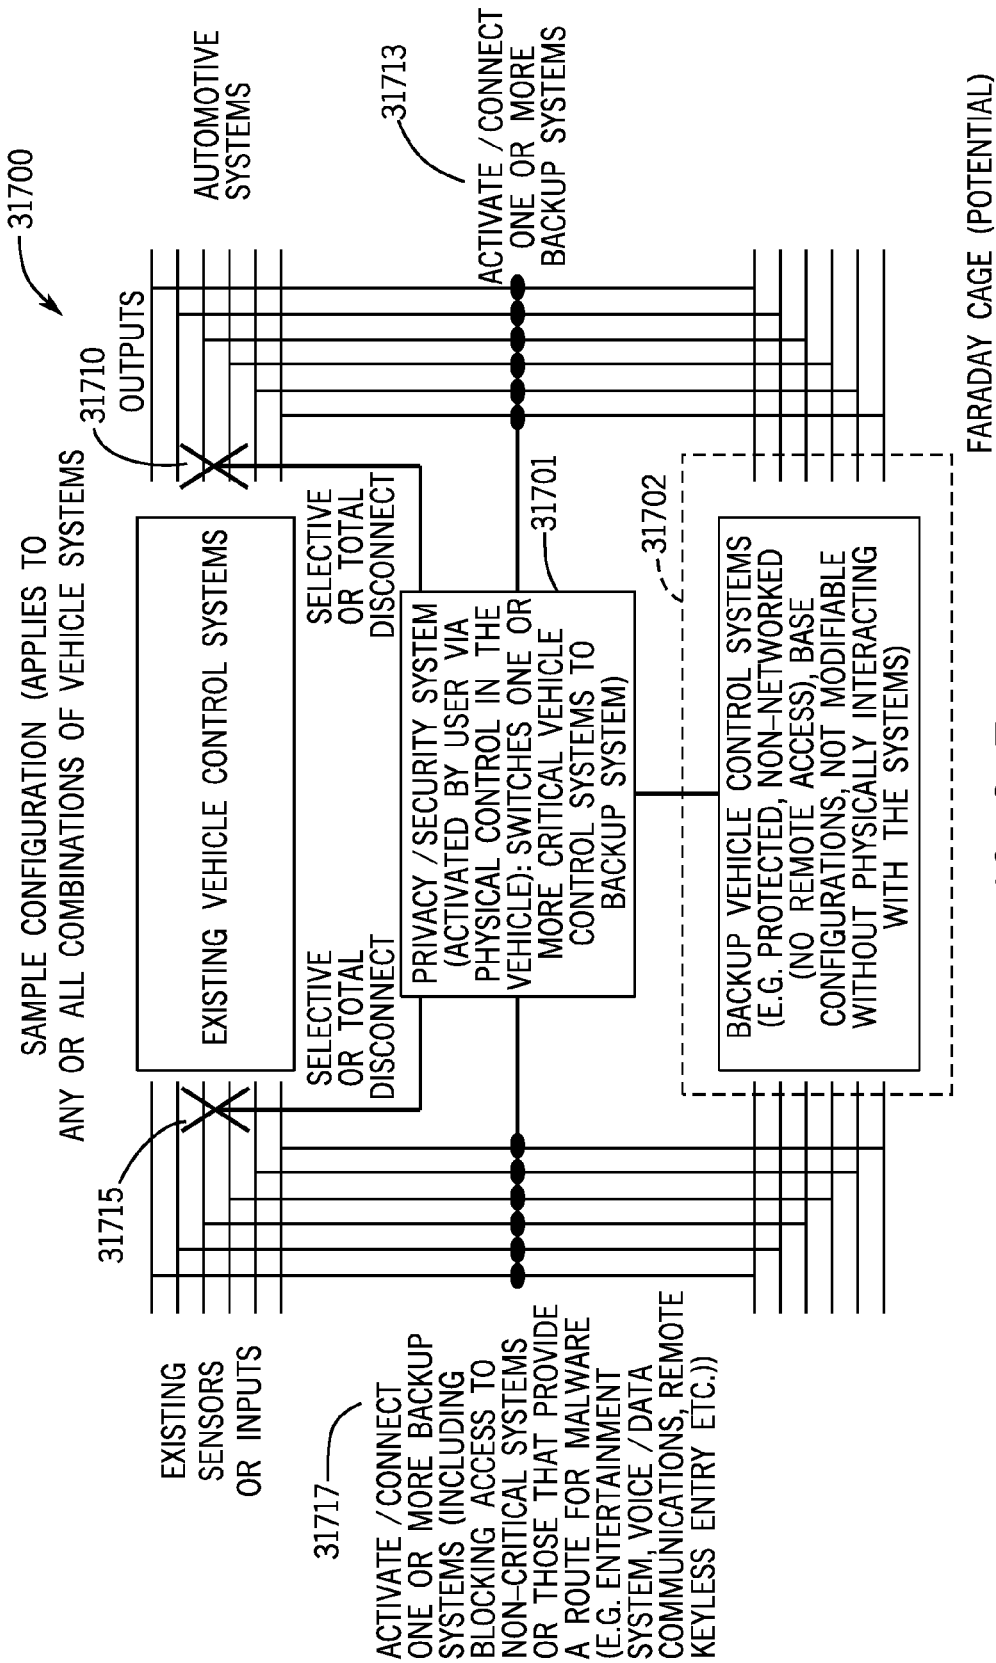


FIG. 317B

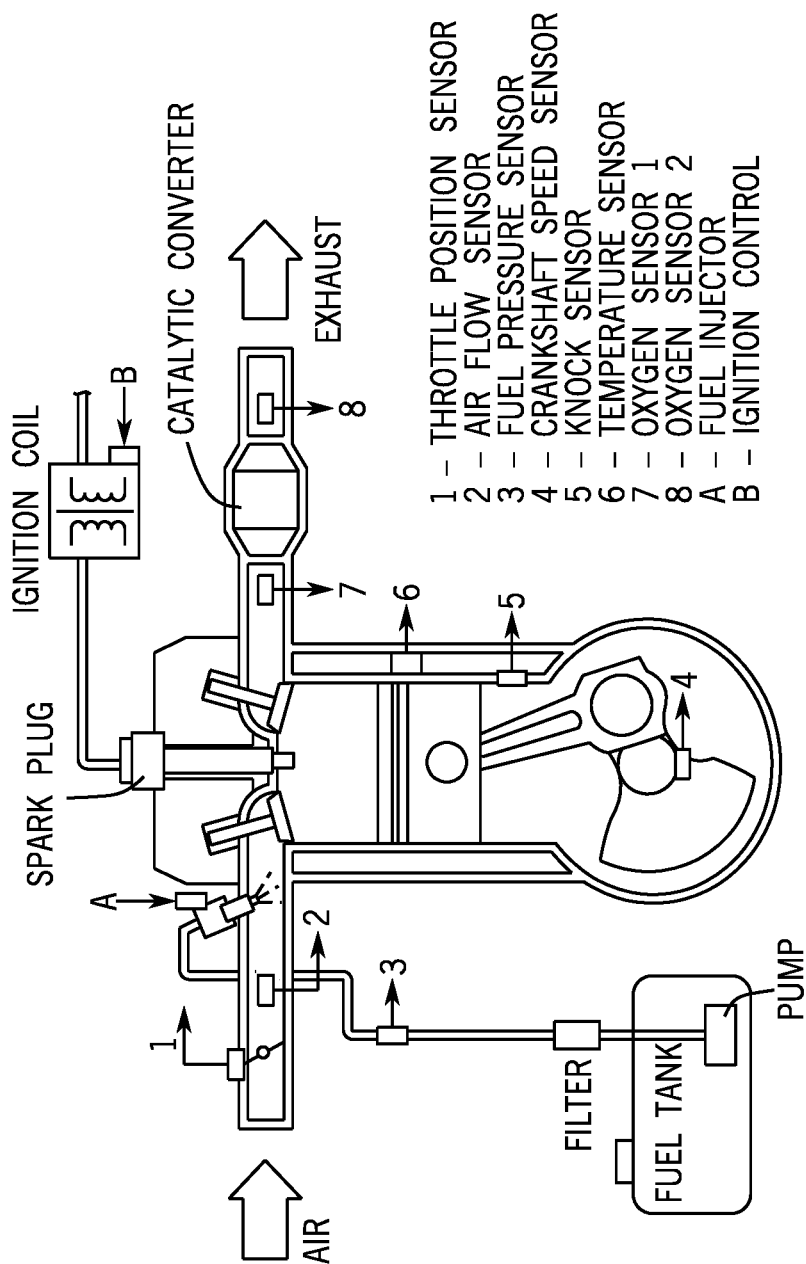


FIG. 317C

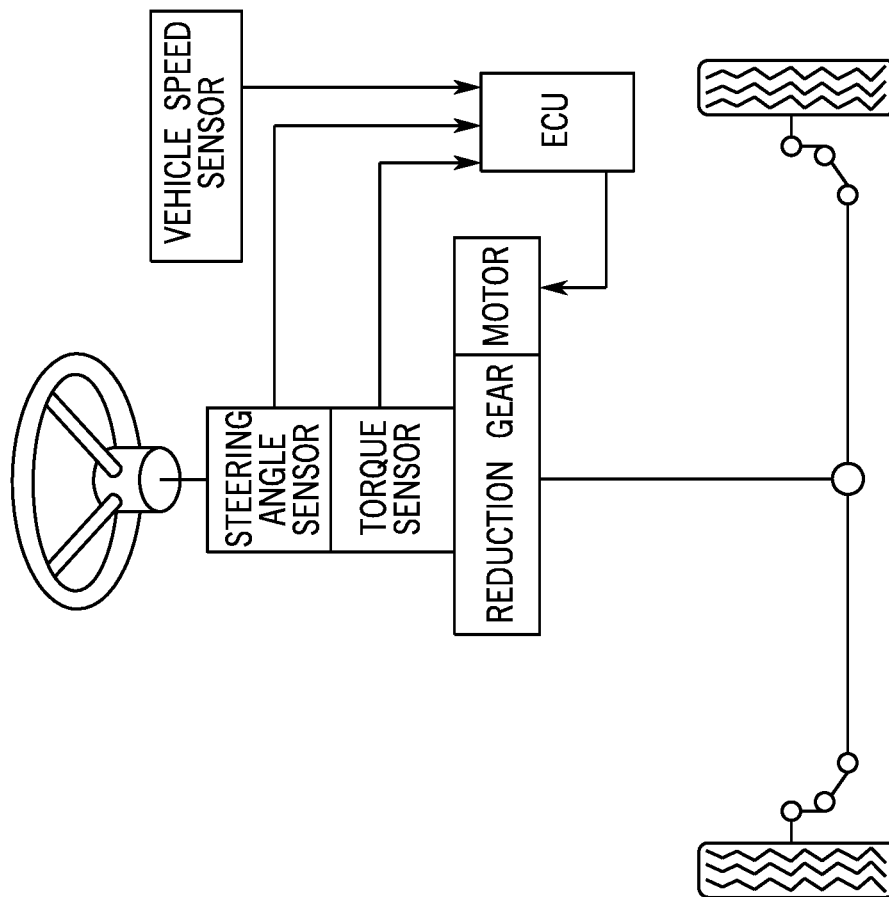
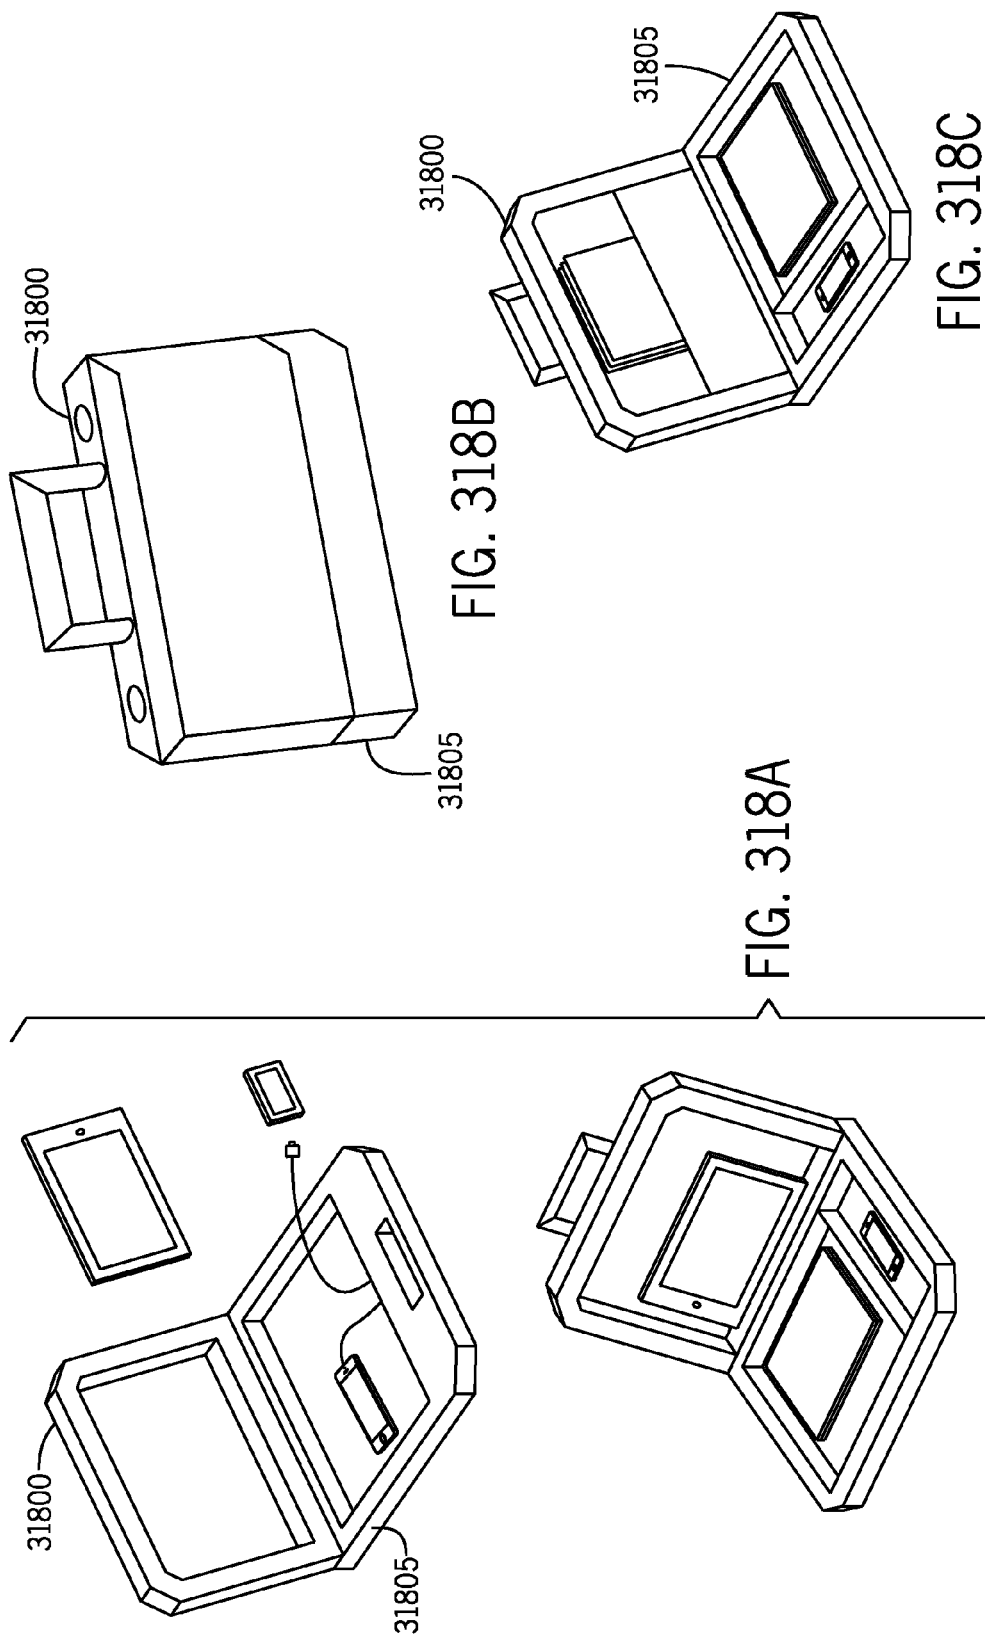


FIG. 317D



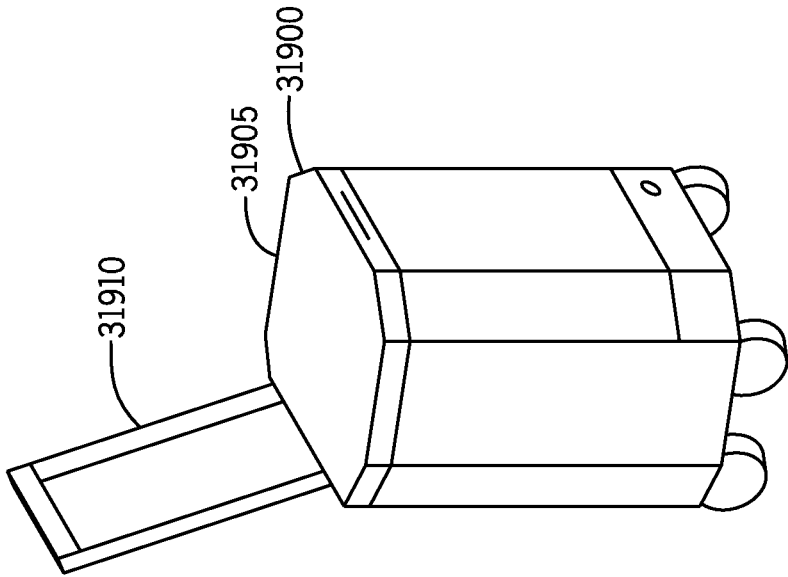


FIG. 319A

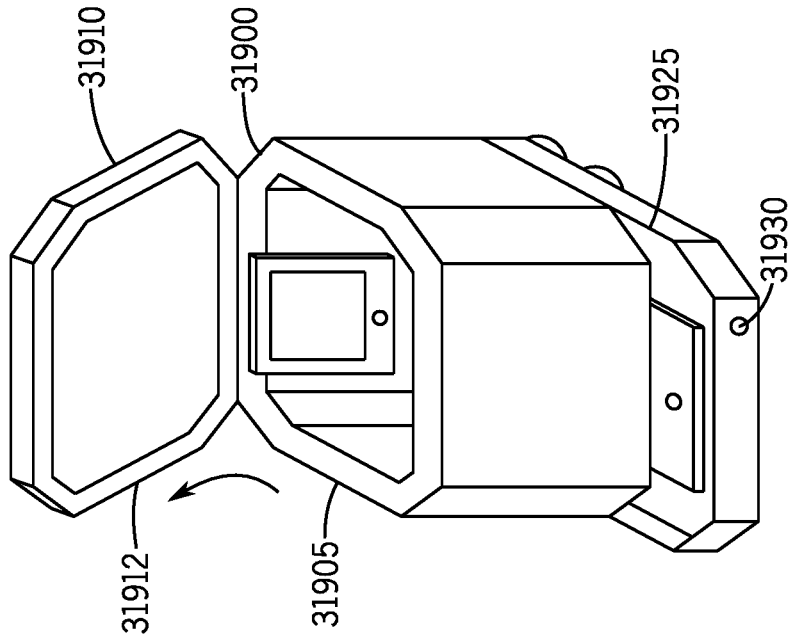


FIG. 319B

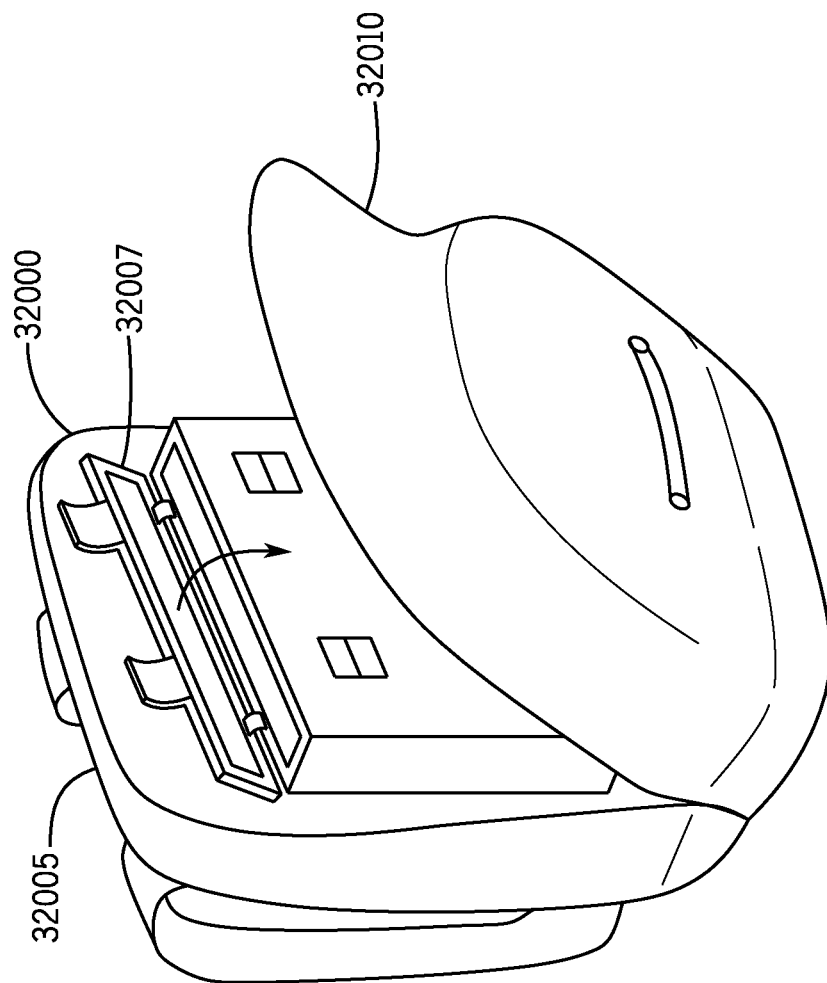


FIG. 320

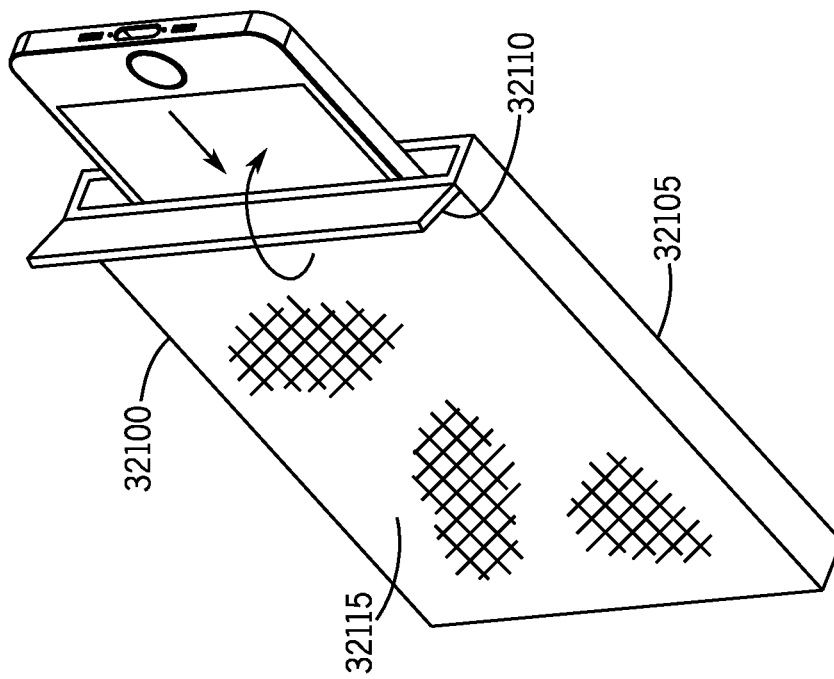
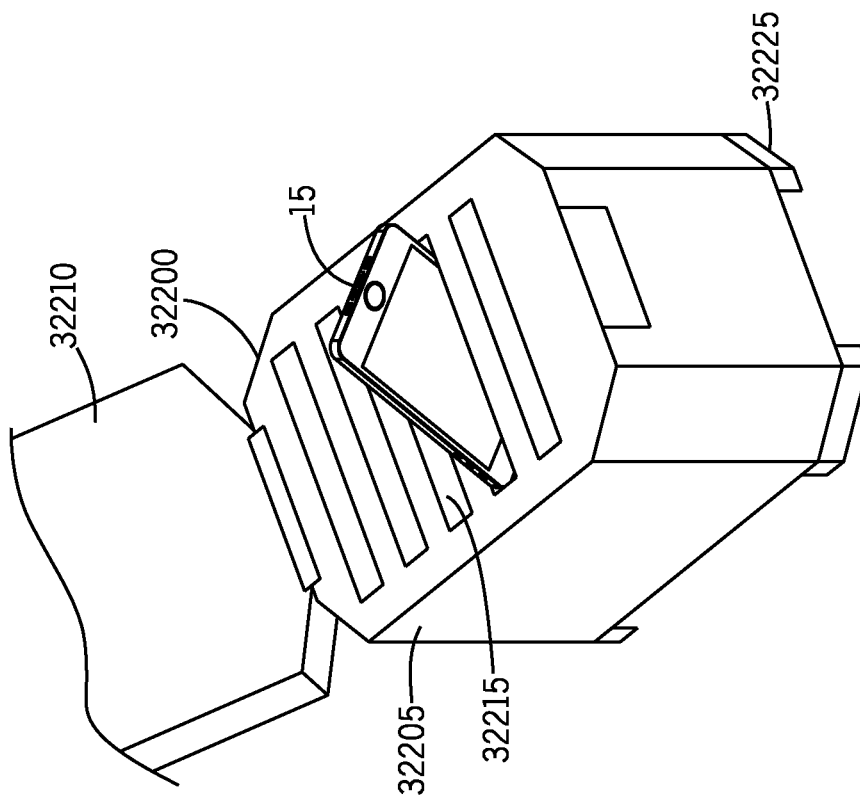


FIG. 321



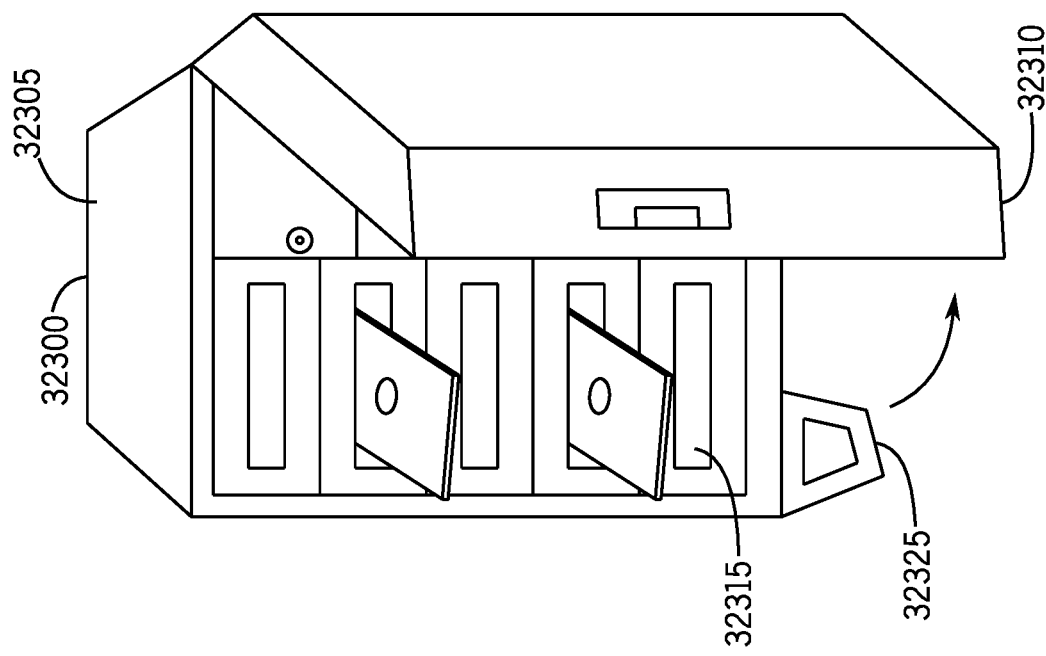


FIG. 323

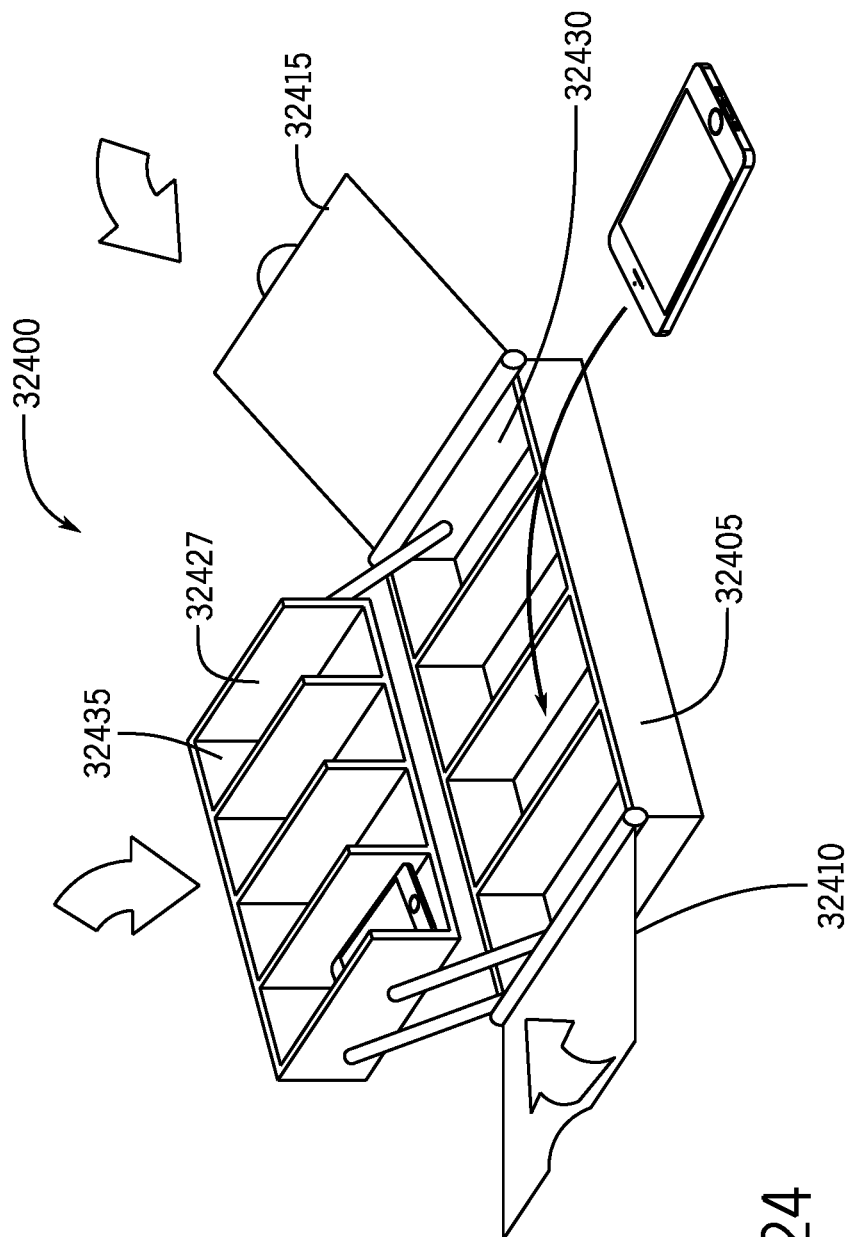


FIG. 324

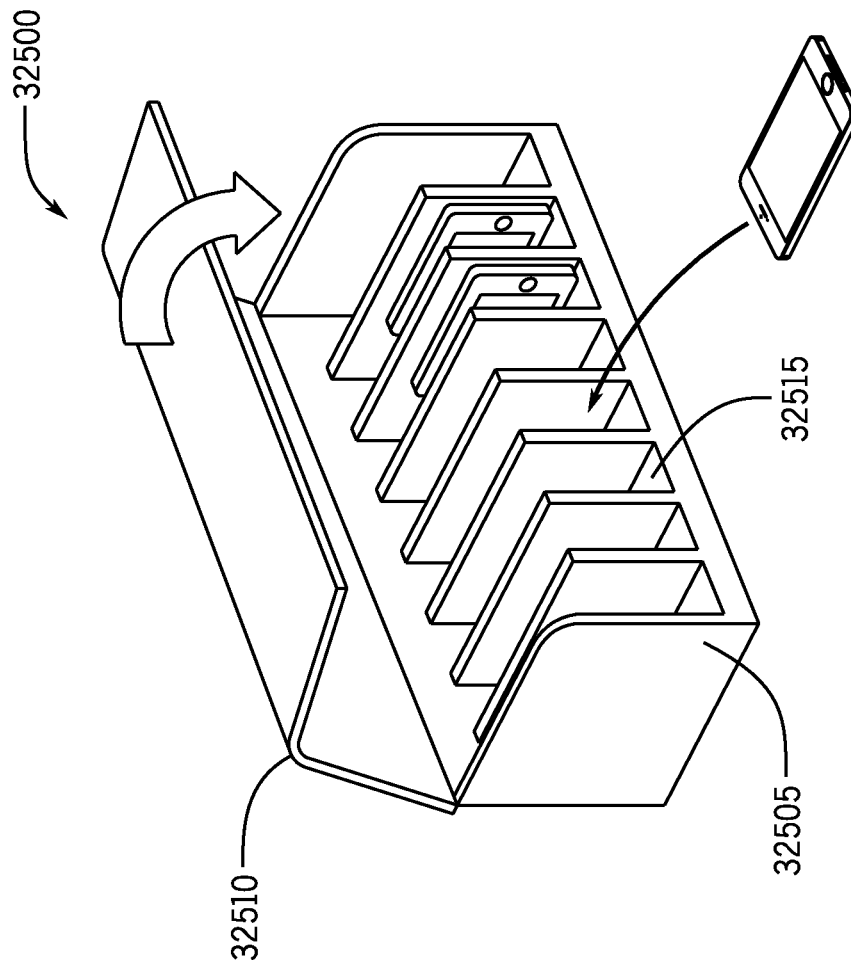


FIG. 325

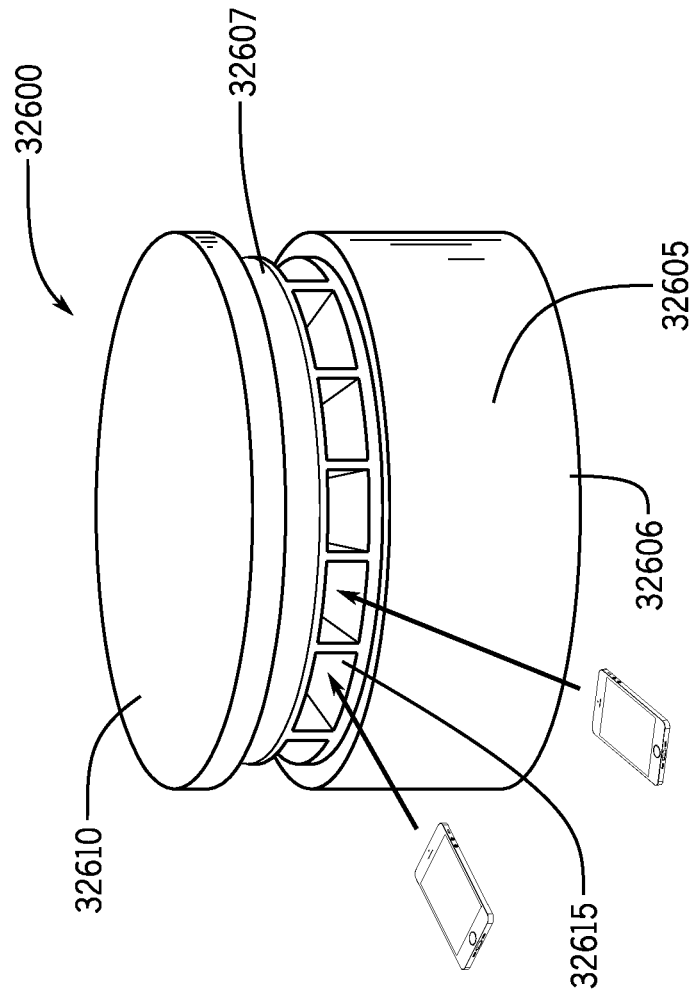
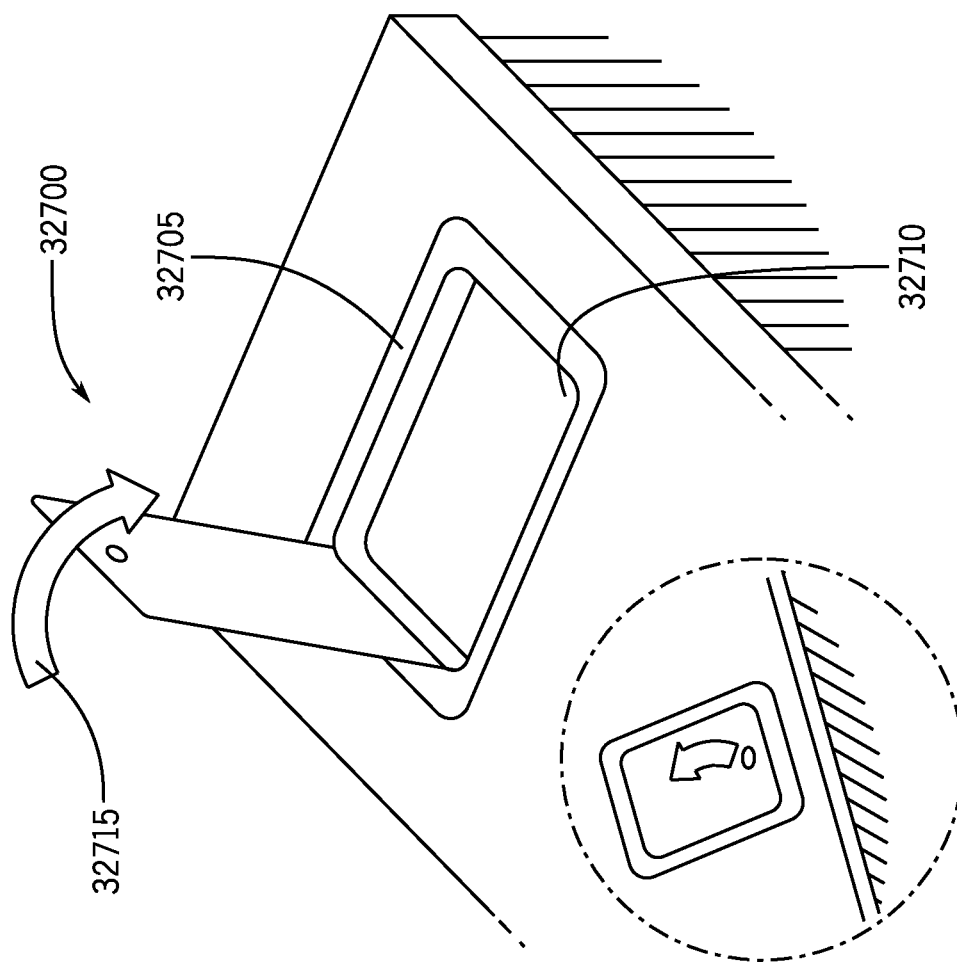


FIG. 326



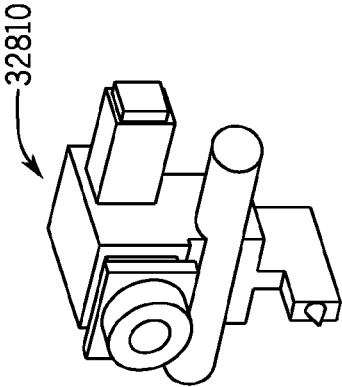


FIG. 328A

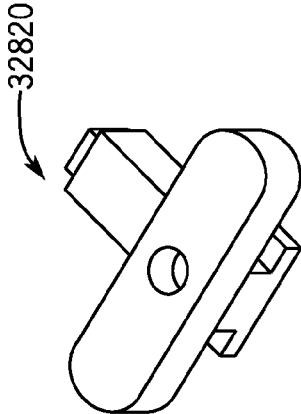


FIG. 328B

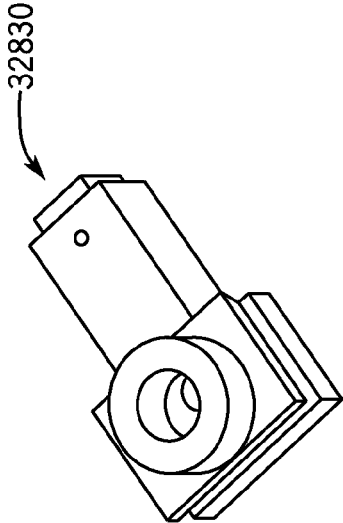


FIG. 328C

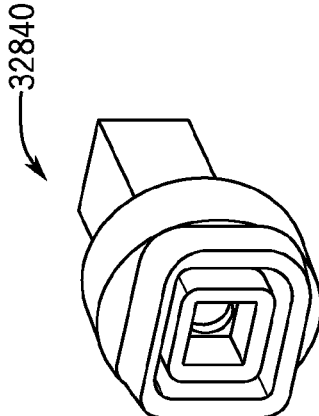


FIG. 328D

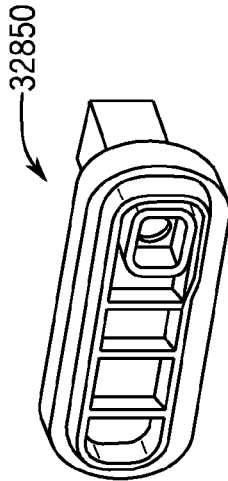


FIG. 328E

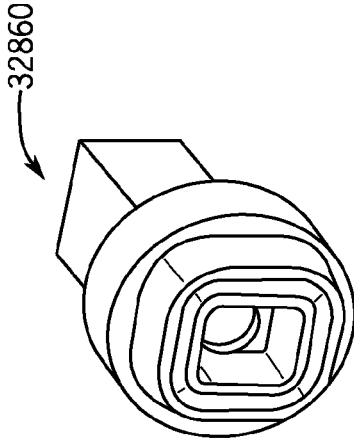


FIG. 328F

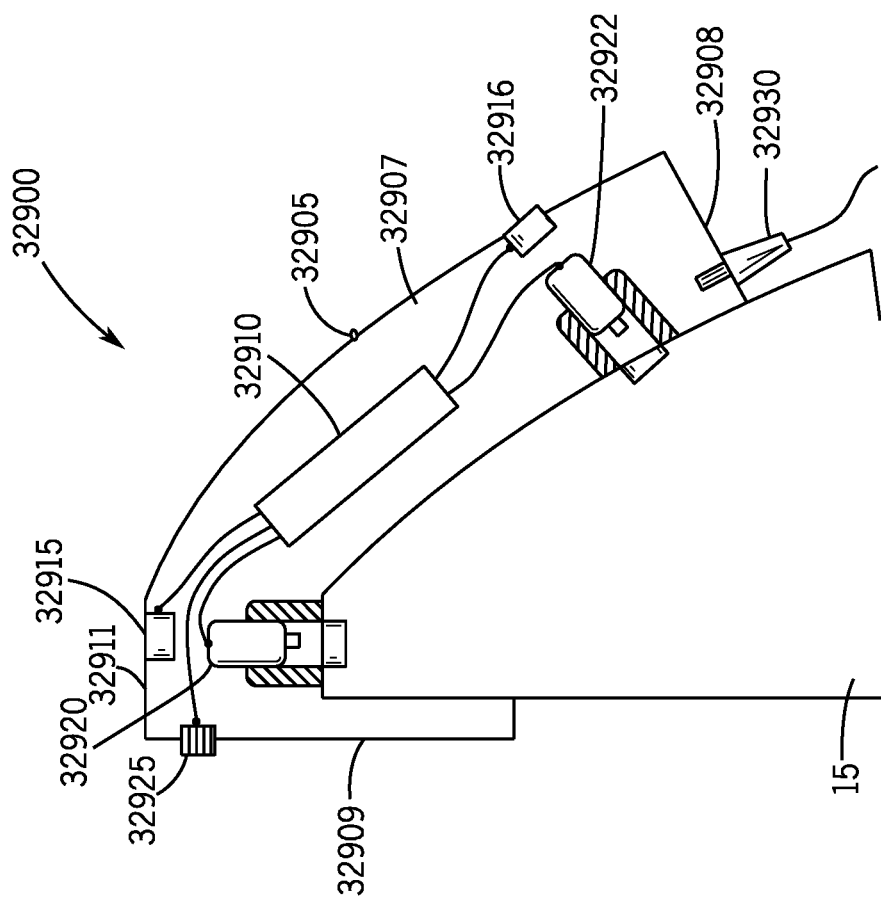


FIG. 329

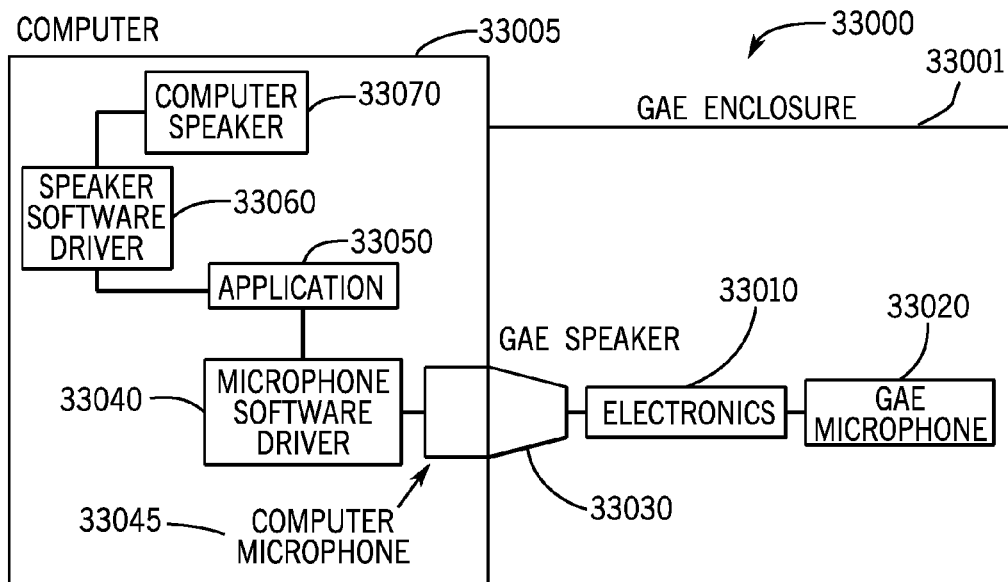


FIG. 330

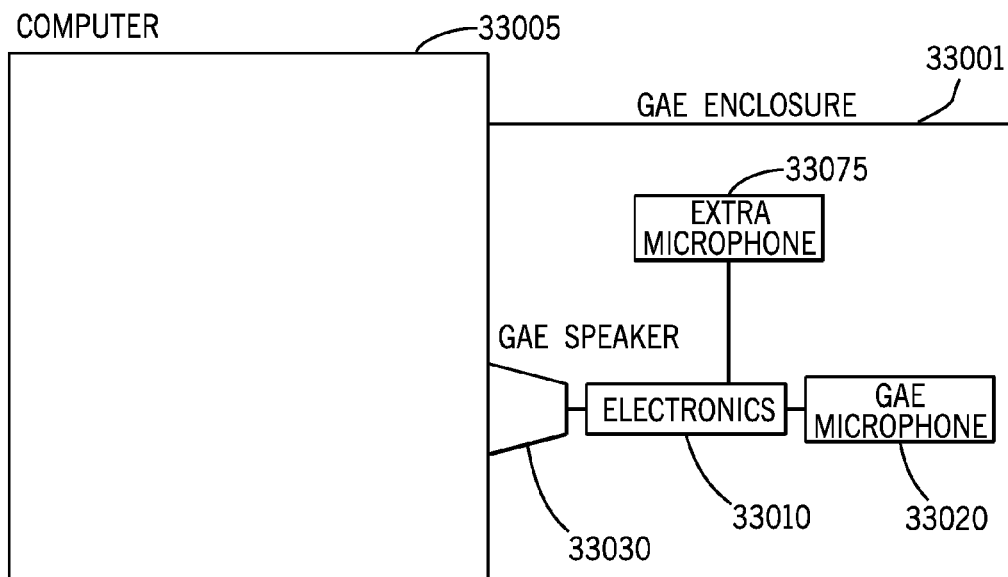
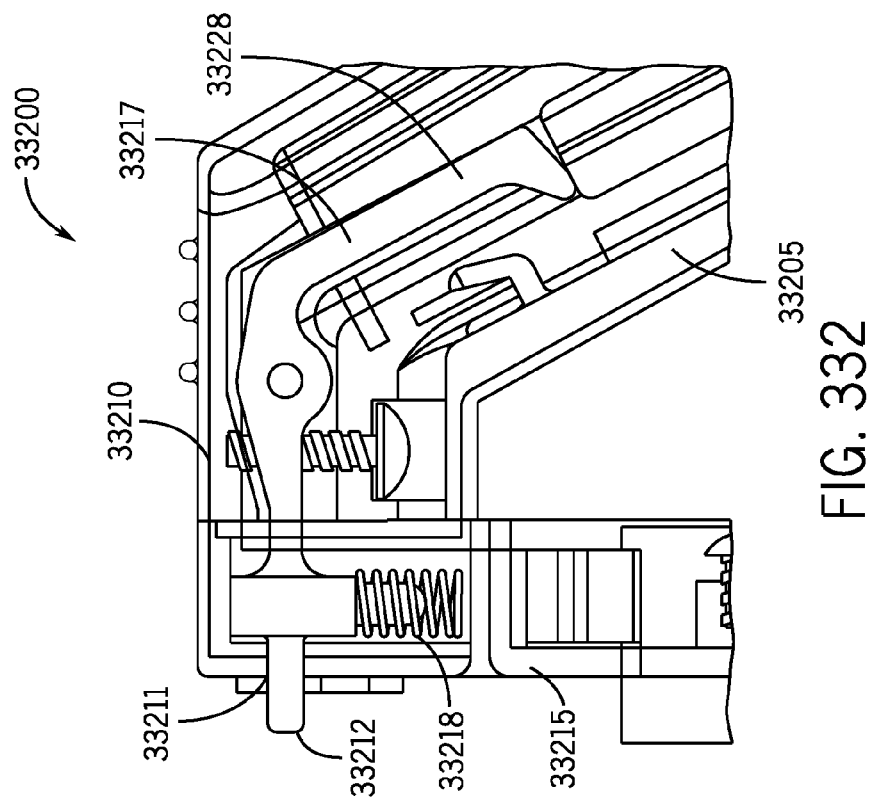
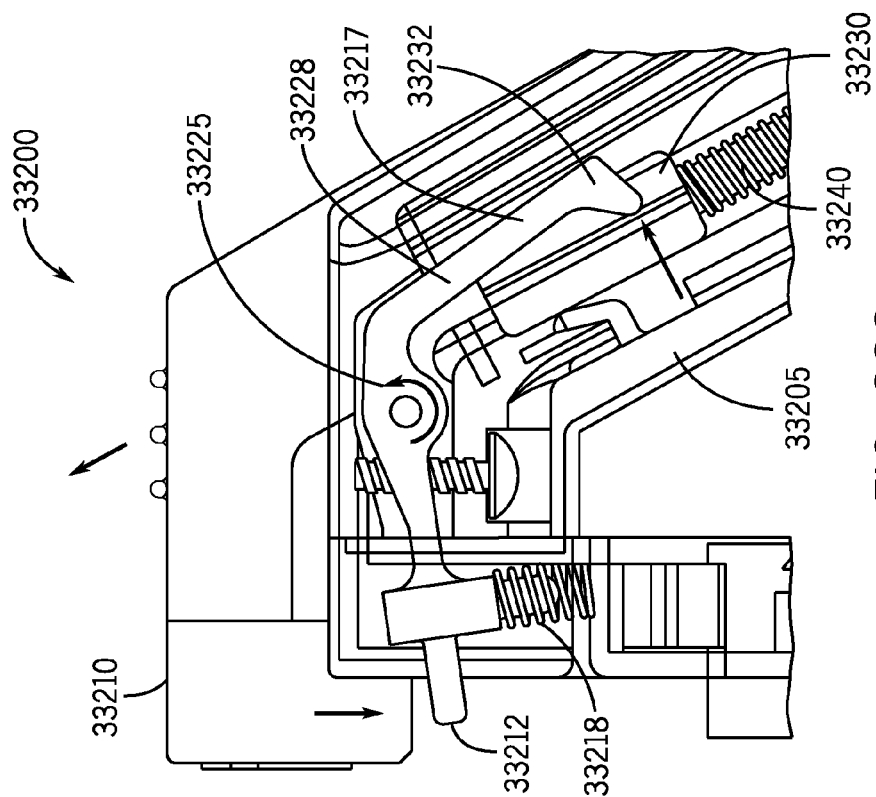


FIG. 331



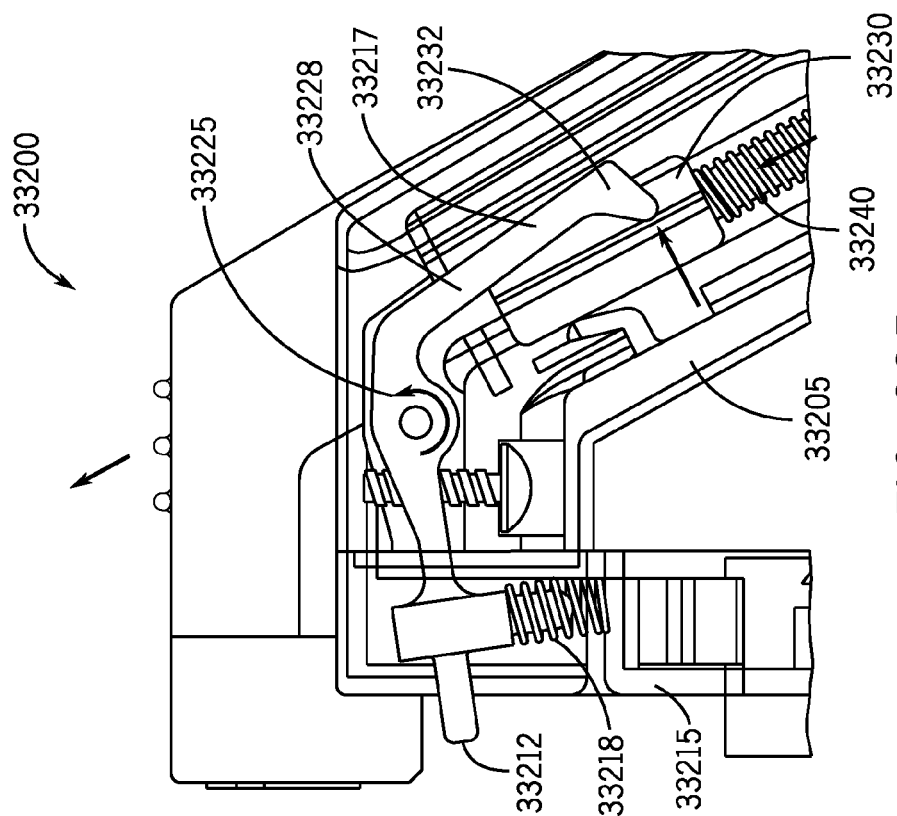


FIG. 335

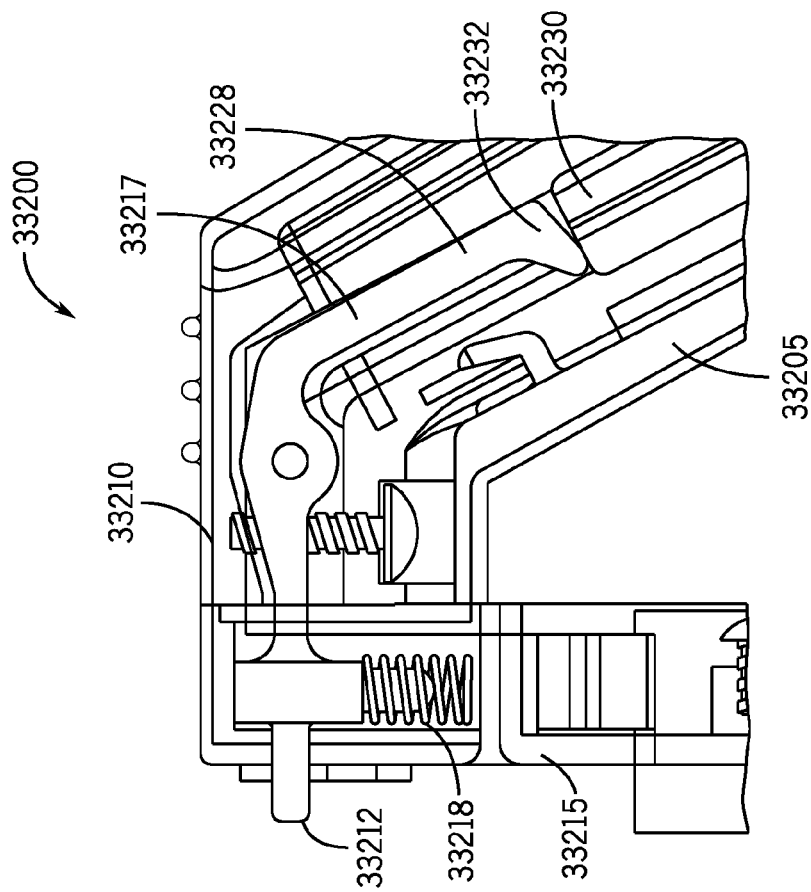


FIG. 334

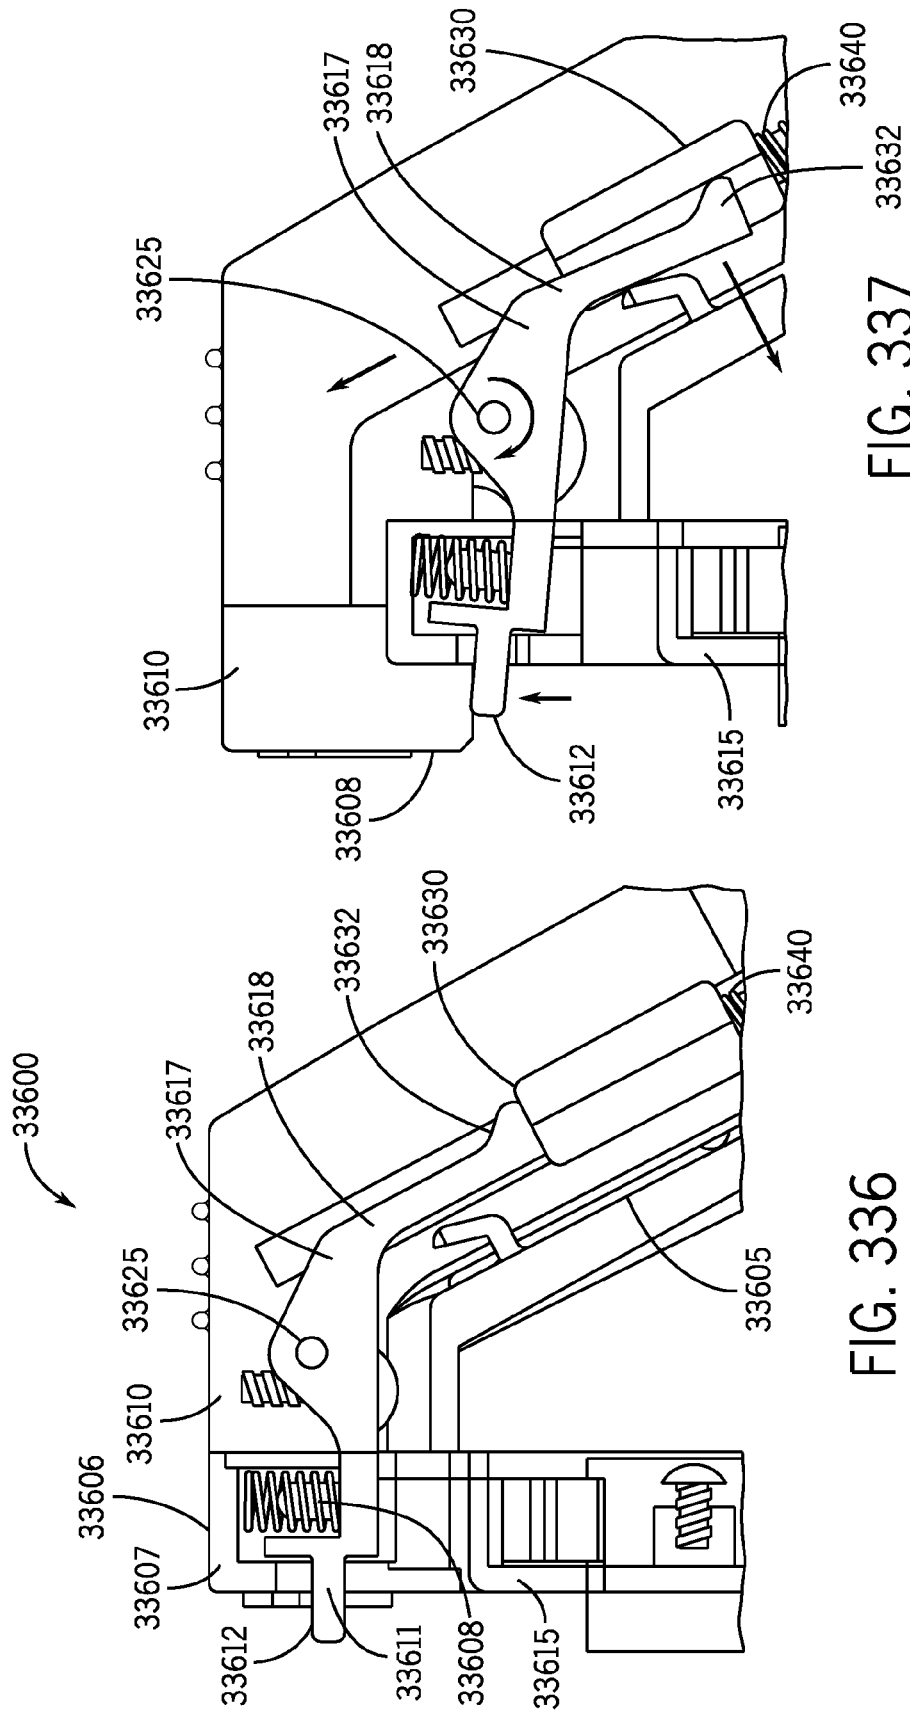


FIG. 336

FIG. 337

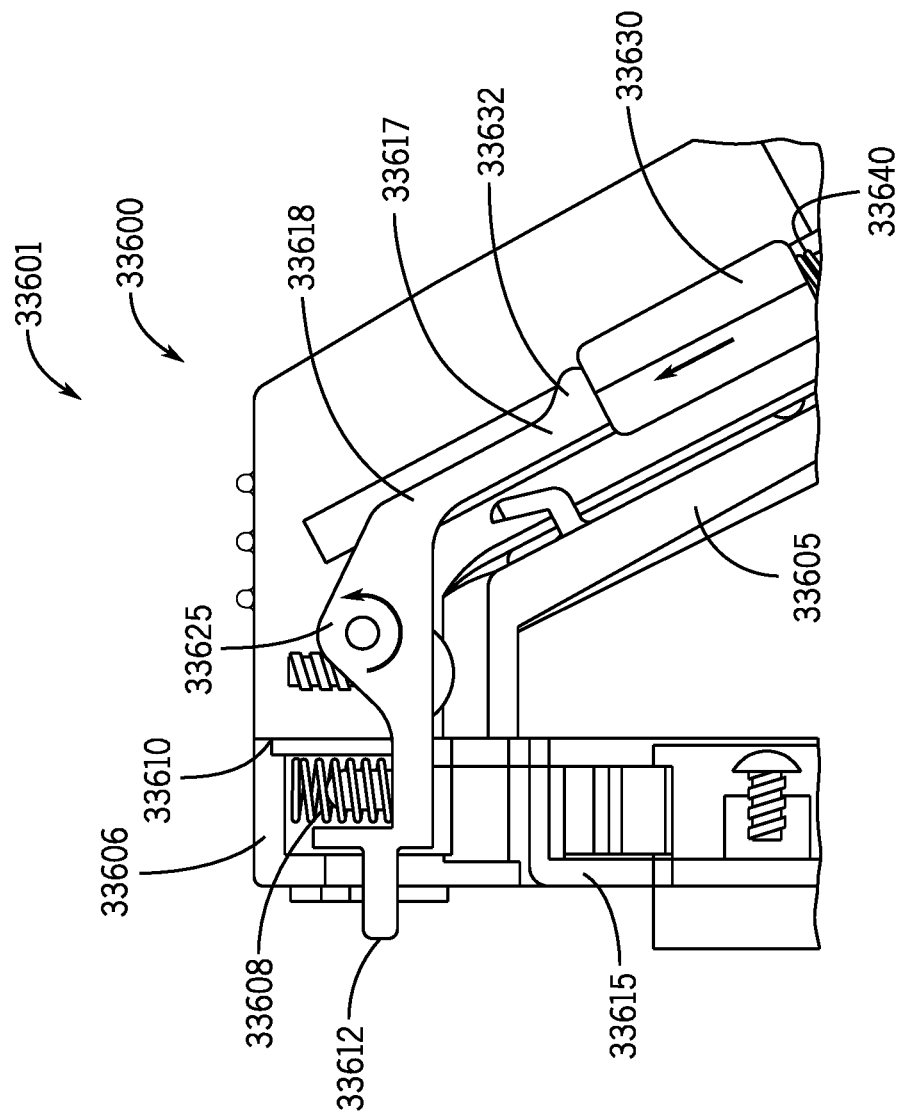


FIG. 338

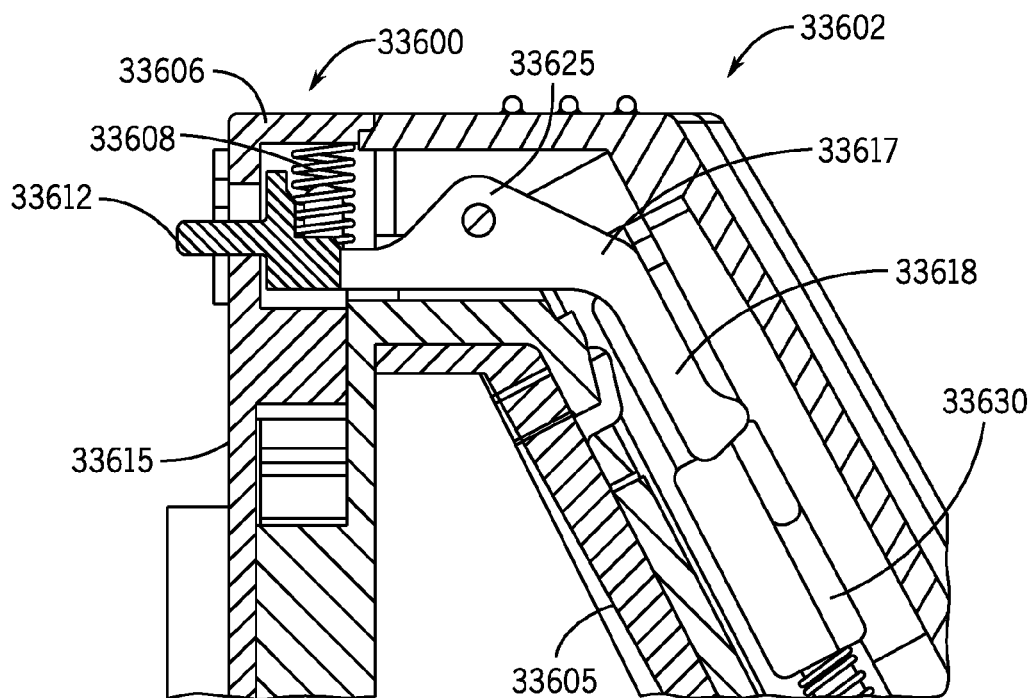


FIG. 339

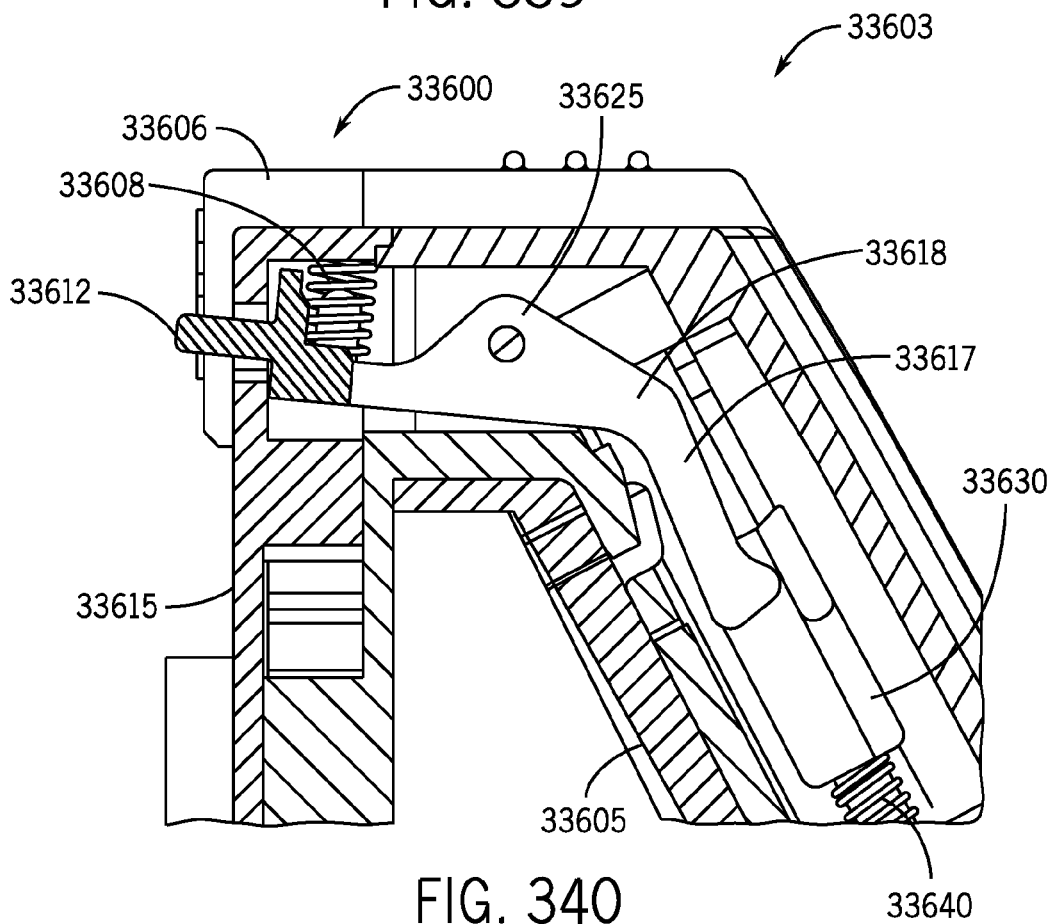


FIG. 340

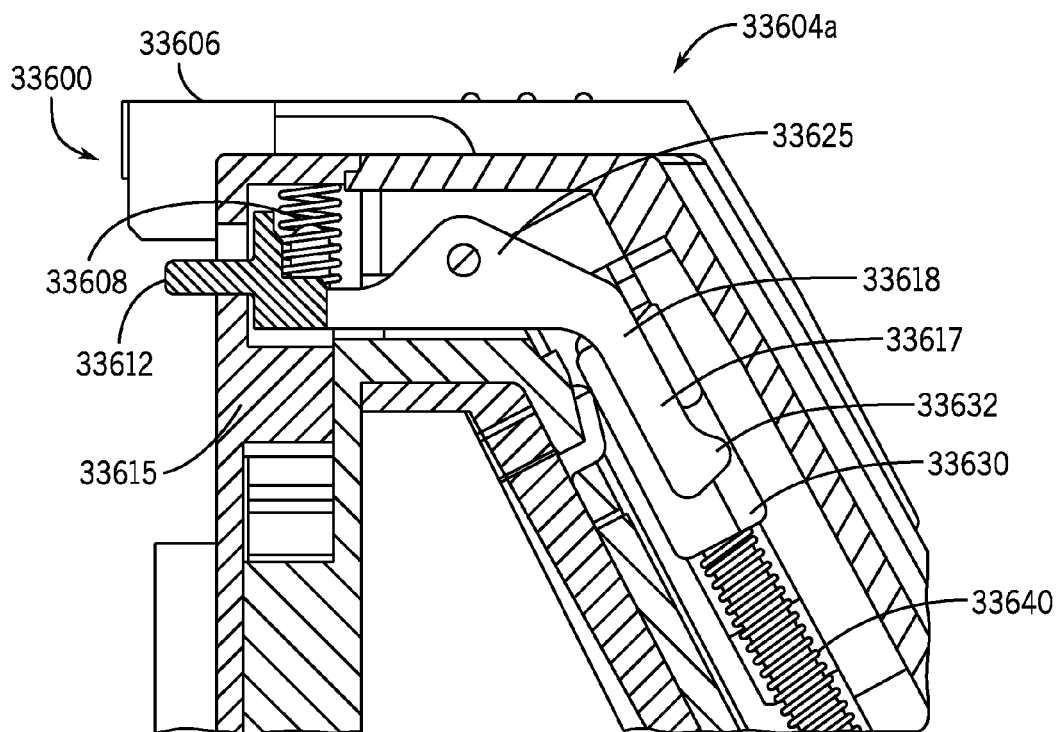


FIG. 341

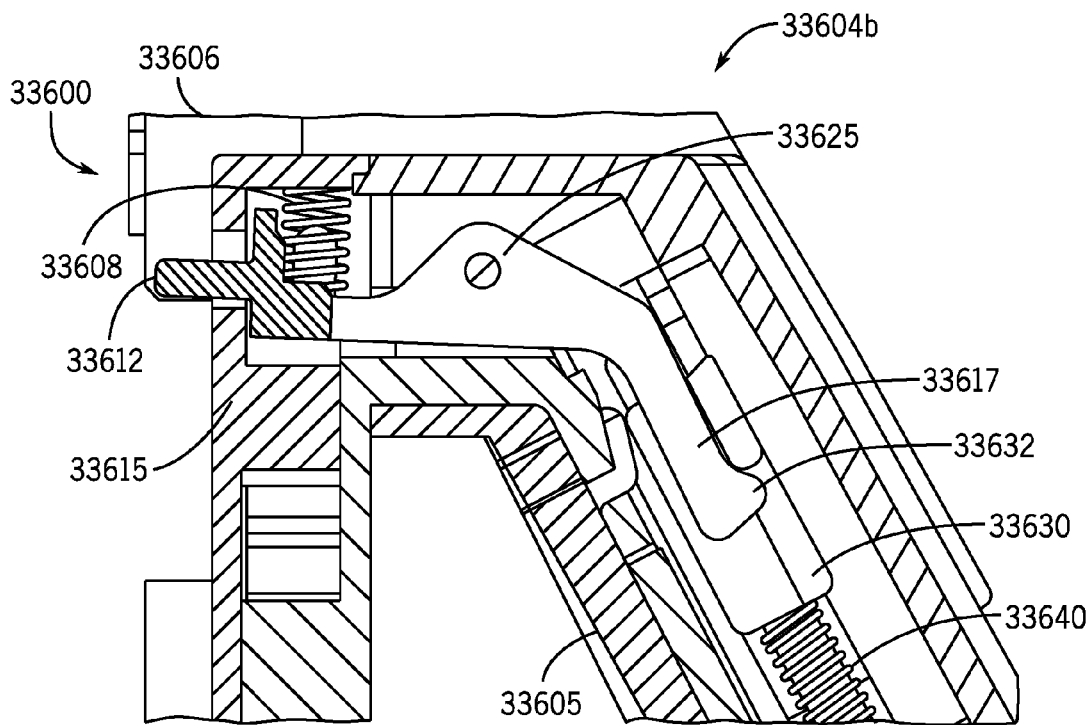


FIG. 342

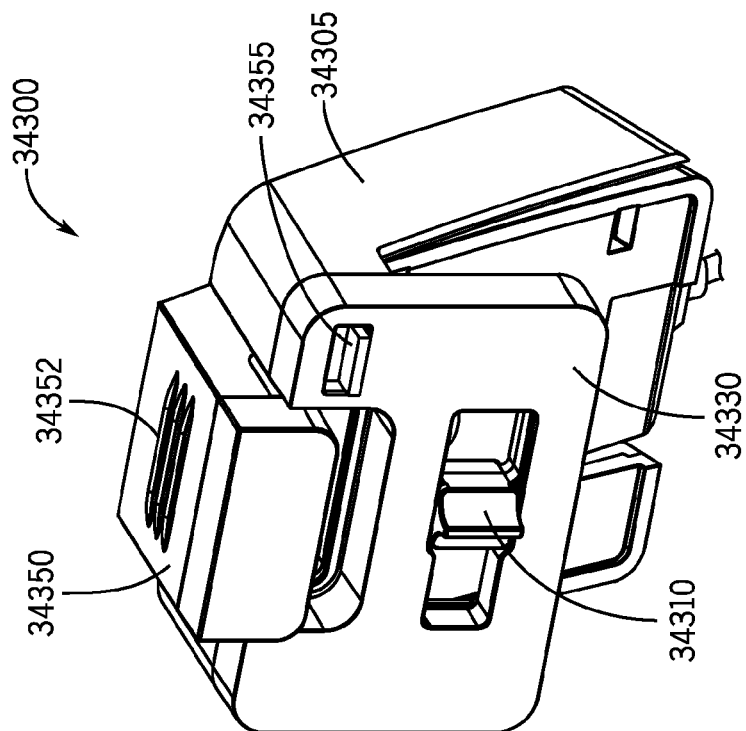


FIG. 344

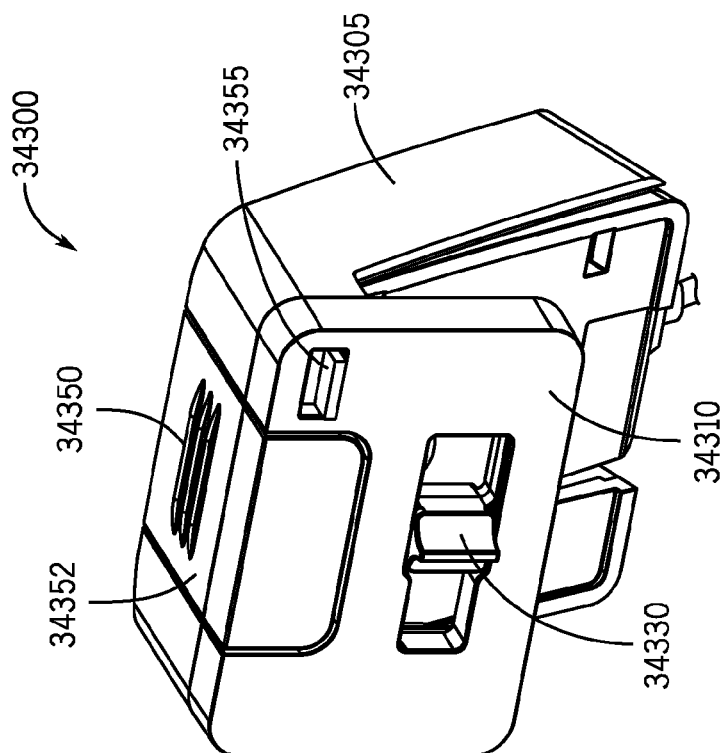


FIG. 343

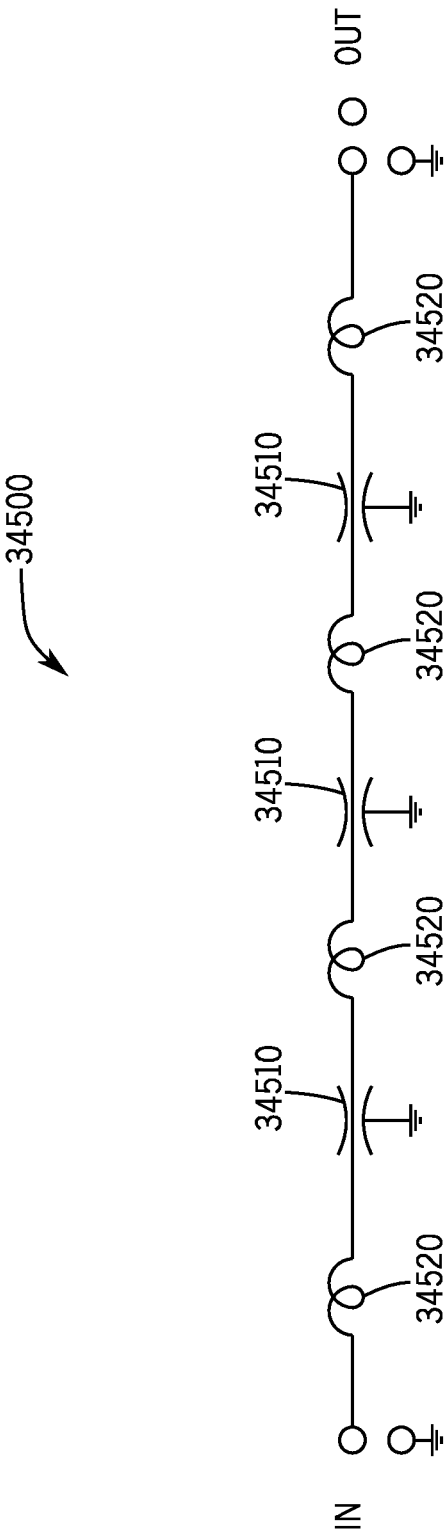


FIG. 345

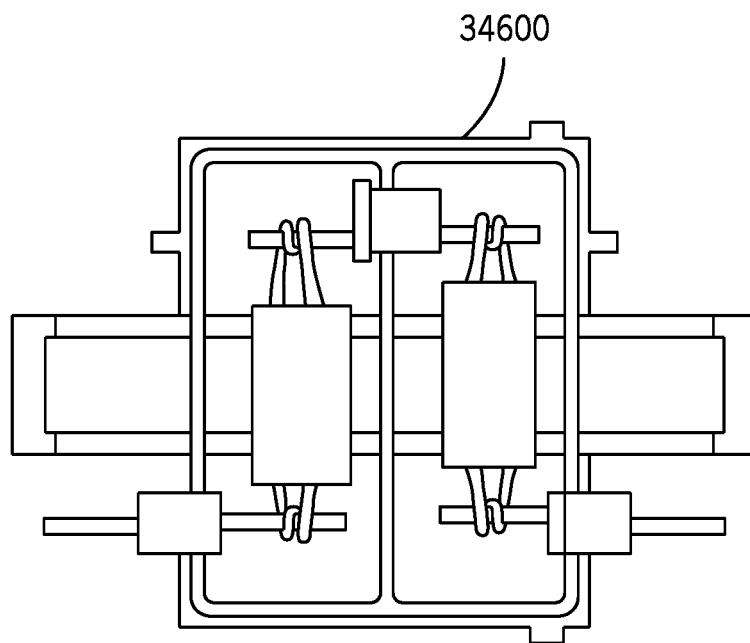


FIG. 346


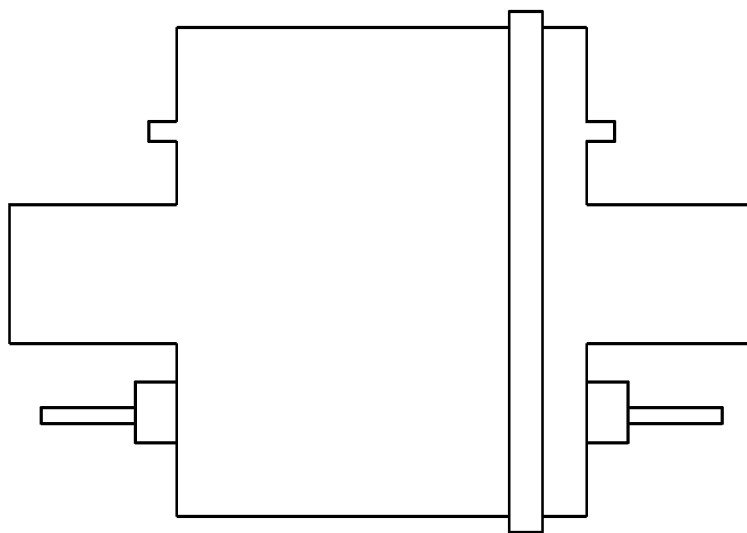


FIG. 347

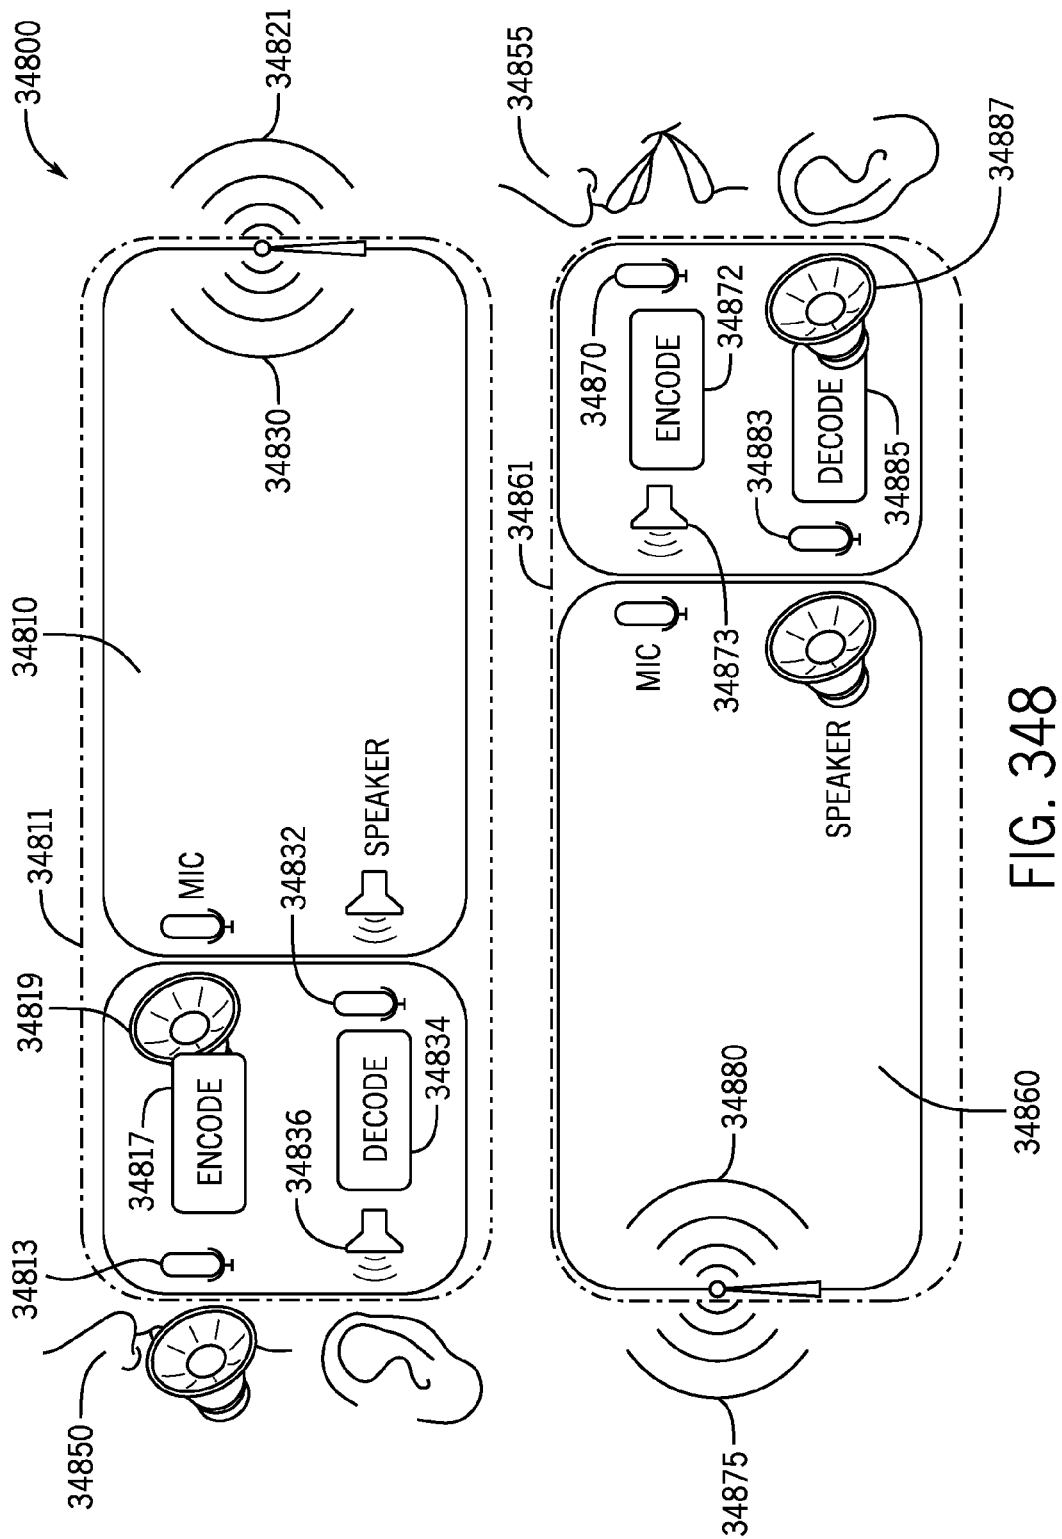

PRIVACY AND SECURITY SYSTEMS AND METHODS OF USE

RELATED APPLICATIONS

This application claims priority from Provisional Application No. 62/048,173, filed on Sep. 9, 2014, Provisional Application No. 62/100,462, filed on Jan. 6, 2015, Provisional Application No. 62/161,759, filed on May 14, 2015, Provisional Application No. 62/195,903, filed on Jul. 23, 2015, Provisional Application No. 62/198,635, filed on Jul. 29, 2015, and Provisional Application No. 62/209,249, filed on Aug. 24, 2015, the entire contents of which are incorporated herein by reference.

BACKGROUND

Mobile communication and computing devices such as cellular phones, smart phones, computer laptops and tablets etc., are becoming essential personal accessories, oftentimes rarely out of sight of the user. Desktop computers, gaming consoles, wearable devices such as “Smart” watches and Google Glass® already have or eventually will have audio and video recording capabilities, as well as a wide variety of RF transmit/receive capabilities for communication. The advent of the “Internet of Things” (or the “Internet of Everything”), in which most every day devices, from thermostats and appliances to food packages, clothing, medical devices and automobiles (to name a few) have or will have audio, video and RF capabilities is also upon us. Moreover, all of the previously mentioned devices have or someday will potentially include other sensors such as gyroscopes, accelerometers, and proximity, temperature, light, pressure, and other sensors. Ongoing improvements in RF transceiver technology and advancements in the miniaturization of audio-visual capabilities and other devices such as microphones, video cameras and displays provide the user with unparalleled ability to receive, process, and transmit large volumes of data. Devices can record audio and visual information from their environment, process the data either locally or remotely (e.g., “cloud” storage and/or processing) for audio and video transfer directly to a user, or to virtually anywhere in the world capable of receiving a wireless and/or internet service.

Increasing publicity regarding surveillance and the steady rise in the capability of mobile communication and other devices has precipitated an increased awareness of privacy/security concerns associated with such device use. Currently, mobile communication and computing devices do not incorporate so-called “intelligent awareness” to automatically alter their audio-video and transceiver behavior based on a user’s environment or requirements, let alone alter behavior to their wishes (such as a user’s desire to turn off any of their device’s specific capabilities). For example, cellular phones do not know when a user is in a movie theater to automatically turn-off or convert to a quiet-alert mode, and are not easily switched to a secure mode to prevent unwanted reception of RF signals or acquisition of audio visual information from their immediate environment. Furthermore, improvements in wireless network infrastructure enabling location through triangulation, proximity, and ubiquitous use of GPS technology within mobile devices have allowed accurate device location detection, potentially allowing the dissemination of confidential user information.

In general, device manufacturers and network providers (cellular, internet, private or public networks WiFi and other such networks) rarely, if ever, allow users to totally control

reception and transmission of RF or a device’s audio-video capabilities. Even with the control that is possible, hackers, malware and other malicious people or code can hijack these functions. Conventional cases or peripheral devices which add features or capabilities or provide protection, aesthetic or other value or do not provide users with full control of their devices’ capabilities

SUMMARY

Some embodiments include a privacy/security apparatus for a portable communication device comprising a housing assembly configured to at least partially attenuate at least one of sound energy, acoustic energy, and electromagnetic energy including light, optical, and IR energy and RF radiation from passing through the housing assembly. The housing assembly comprises a Faraday cage comprising two or more portions, and at least one protective shell coupled to or forming at least one aperture. The at least one aperture is configured and arranged to at least partially enclose the portable communication device so that at least a portion of the portable communication device is positioned within at least one portion of the Faraday cage, and the at least one seal coupled or integrated with the protective shell.

Some embodiments include a privacy/security apparatus where the housing assembly includes an articulating assembly configured and arranged to articulate a portion of the housing assembly to one or more positions to enable a user to insert or enclose and remove the portable communication device. In some other embodiments, the housing assembly includes a sliding assembly configured and arranged to slide a portion of the housing assembly to one or more positions to enable a user to insert, enclose or remove the portable communication device. In some embodiments, the housing assembly includes at least one active acoustic jamming or passive acoustic attenuation element.

In some embodiments of the invention, housing assembly is configured and arranged to be movable between an open and a closed position to enable a user to insert or enclose and remove the portable communication device. In some embodiments, the housing assembly comprises a sheath. In other embodiments, the housing assembly comprises a hood assembly and a base assembly. Further, the base assembly includes a Faraday base assembly forming at least one of the portions of the Faraday cage.

In some embodiments, the at least one seal comprises an environmental seal. In some further embodiments, the at least one seal comprises an RF seal. In some embodiments, the at least one seal comprises at least one of a magnetic seal, an electromagnetic seal, an acoustic seal, and an optical seal. In some embodiments, the at least one seal comprises a fingerstock element. In some further embodiments, the seal includes at least one elastomeric element positioned adjacent to the fingerstock. In some embodiments of the invention, the at least one elastomeric element is positioned within at least a portion of the fingerstock.

Some embodiments of the invention include a housing assembly that includes at least one port configured to couple with the portable communication device. In some embodiments, the at least one port comprises at least one of a sound transfer port, an RF transfer port, a data transfer port, a power transfer port, and an optical port. In some embodiments, the at least one protective shell includes a decorative layer or region. In some embodiments of the invention, the decorative layer or region comprises at least one of a patterned surface, a window, a display, an emblem, and a logo.

Some embodiments of the invention include a privacy/security apparatus where the housing assembly includes at least one controller configured and arranged to modulate at least one privacy/security setting. In some embodiments, the at least one privacy/security setting includes a setting that alters the magnitude of energy reaching the portable communication device through the housing assembly. In some further embodiments, the energy comprises at least one of sound energy, RF energy, electrical energy, electromagnetic energy, and optical and/or IR energy.

In some embodiments of the invention, the housing assembly includes at least one microphone. In some embodiments, the housing assembly includes at least one speaker or sound generator. In some embodiments, the housing assembly includes at least one compression seal configured and arranged to couple with at least one of a microphone, a speaker, a camera, a display, a sensor, and an RF antenna of the portable communication device.

Some embodiments of the invention include a housing assembly that includes active acoustic protection. In some embodiments, the active acoustic protection comprises a random noise generator generating a signal which is acoustically delivered to at least one microphone of the portable communication device.

In some embodiments, the housing assembly includes at least one DC pass-through configured and arranged to pass direct current through the Faraday cage. In some further embodiments, the housing assembly includes an onboard power supply.

Some embodiments of the invention include a privacy/security apparatus where the movement of the hood assembly results in the covering of all of the portable communications device's microphones and cameras in a closed position, and the uncovering of all of the portable communications device's microphones and cameras in an open position.

DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of a partially open privacy/security enclosure according to one embodiment of the invention.

FIG. 2 is a perspective view of an open privacy/security enclosure according to one embodiment of the invention.

FIG. 3 is a partial cross-sectional view of a privacy/security enclosure according to one embodiment of the invention.

FIG. 4 shows a cross-sectional view of passive acoustical attenuation technology according to at least one embodiment of the invention.

FIG. 5 shows an assembly view of passive acoustical attenuation technology according to at least one embodiment of the invention.

FIGS. 6A and 6C shows an assembly view of passive acoustical attenuation technology according to at least one embodiment of the invention.

FIGS. 6B, 7A, 7B, 7C, and 7D show perspective views of passive acoustical attenuation technology according to at least one embodiment of the invention.

FIGS. 8A, 8B, 9A, 9B, and 9C show perspective views of active acoustical attenuation technology according to at least one embodiment of the invention.

FIG. 10 illustrates a perspective view of a privacy/security enclosure according to one embodiment of the invention.

FIG. 11 illustrates a perspective view of a privacy/security enclosure according to another embodiment of the invention.

FIG. 12 illustrates a perspective view of a privacy/security enclosure according to a further embodiment of the invention.

FIG. 13 illustrates a perspective view of a privacy/security enclosure adjacent to smart phone according to one embodiment of the invention.

FIG. 14 illustrates a perspective view of a privacy/security enclosure adjacent to smart phone according to one embodiment of the invention.

FIG. 15 illustrates a perspective view of a privacy/security enclosure adjacent to smart phone according to one embodiment of the invention.

FIG. 16 is a perspective view of an open privacy/security enclosure according to one embodiment of the invention.

FIG. 17 is a cross-sectional view of a privacy/security enclosure lid portion of FIG. 16 according to one embodiment of the invention.

FIG. 18 is a perspective view of an open privacy/security enclosure according to another embodiment of the invention.

FIG. 19 is a cross-sectional view of a privacy/security enclosure lid portion of FIG. 18 according to one embodiment of the invention.

FIG. 20A is a cross-section view through region A of the privacy/security enclosure of FIG. 2 according to one embodiment of the invention.

FIG. 20B is a perspective view of ring seal for use in a privacy/security enclosure according to one embodiment of the invention.

FIG. 21 is a perspective view of a privacy/security enclosure according to another embodiment of the invention.

FIG. 22 is a perspective view of a privacy/security enclosure according to another embodiment of the invention.

FIGS. 23A, 23B, 23C, 24A, 24B, 25A, 25B, 25C, 25D, 26A, 26B, 27A, 27B, 28A, and 28B illustrate active RF attenuating privacy/security enclosure devices in accordance with some embodiments of the invention.

FIGS. 29, 30A-30B, 31-32, and 33A-33B illustrate active acoustical attenuating privacy/security enclosure devices in accordance with some embodiments of the invention.

FIGS. 34A-34D depict assembly and perspective views of a sock assembly and components for a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 35 depicts the sock assembly of FIGS. 34A-34C within a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 36 depicts another embodiment of a sock assembly within a privacy/security enclosure in accordance with some embodiments of the invention.

FIGS. 37A-37C depicts a gel-piston assembly for acoustical control within a privacy/security enclosure in accordance with some embodiments of the invention.

FIGS. 38A-38C depict a cover actuated acoustical control assembly in accordance with some embodiments of the invention.

FIGS. 39A-C show different views of a mechanized foldable sock assembly for a privacy/security enclosure in accordance with some embodiments of the invention.

FIGS. 40A-40C depict a mechanized foldable sock assembly for a privacy/security enclosure in accordance with some embodiments of the invention.

5

FIG. 41 illustrates an internal/external antenna design for a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 42 illustrates an internal/external antenna design for a privacy/security enclosure including an internal antenna ground plane connected to the shield box in accordance with some embodiments of the invention.

FIG. 43 illustrates an internal/external antenna design for a privacy/security enclosure including an internal and external antenna ground plane connected to the shield box in accordance with some embodiments of the invention.

FIG. 44 illustrates a front perspective view of a privacy/security enclosure in a closed position in accordance with some embodiments of the invention.

FIG. 45 illustrates a rear perspective view of a privacy/security enclosure in a closed position in accordance with some embodiments of the invention.

FIG. 46 illustrates a front perspective view of a privacy/security enclosure in a partially open position in accordance with some embodiments of the invention.

FIG. 47 illustrates a rear perspective view of a privacy/security enclosure in an open position in accordance with some embodiments of the invention.

FIG. 48 illustrates a perspective view of a sock assembly for a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 49 illustrates a perspective view of a sock assembly for a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 50 illustrates a rear perspective view of a sock assembly for a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 51 illustrates a top view of a sock assembly for a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 52 illustrates a cross-sectional view of a sock assembly for a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 53 illustrates an exploded assembly view of a sock assembly for a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 54 illustrates a cross-sectional view of a privacy/security enclosure showing gasket seals according to one embodiment of the invention.

FIGS. 55A-55C illustrate views of a privacy/security enclosure lid with a U-channel gasket according to another embodiment of the invention.

FIG. 56 illustrates a perspective view of a privacy/security enclosure with mesh fabric gaskets according to a further embodiment of the invention.

FIGS. 57A-57B illustrate a perspective view of a privacy/security enclosure with mesh fabric gaskets according to a further embodiment of the invention.

FIG. 58 illustrates a cross-sectional view of a privacy/security enclosure according to one embodiment of the invention.

FIG. 59 illustrates a cross-sectional view of an edge of a privacy/security enclosure according to one embodiment of the invention.

FIG. 60A shows a perspective view of a portion of a privacy/security enclosure according to one embodiment of the invention.

FIG. 60B shows a cross-sectional view of a privacy/security enclosure according to one embodiment of the invention.

6

FIG. 60C shows a cross-sectional view of an edge of the privacy/security enclosure shown in FIGS. 60A-60B according to one embodiment of the invention.

FIG. 61A illustrates a cross-sectional view of a privacy/security enclosure according to one embodiment of the invention.

FIG. 61B illustrates a cross-sectional perspective view of a privacy/security enclosure according to one embodiment of the invention.

FIGS. 61C-61F illustrate various alternative embodiments of gasket seals for a privacy/security enclosure according to one embodiment of the invention.

FIGS. 62A-62F illustrate various views of a privacy/security enclosure in progressive stages of opening and device insertion or removal according to one embodiment of the invention.

FIG. 63A illustrates a perspective view of a closed privacy/security enclosure according to one embodiment of the invention.

FIG. 63B illustrates a cross-sectional view of the privacy/security enclosure of FIG. 63A according to one embodiment of the invention.

FIG. 63C illustrates the privacy/security enclosure of FIG. 63A in an open configuration according to one embodiment of the invention.

FIG. 63D illustrates a cross-sectional view of the privacy/security enclosure of FIG. 63C according to one embodiment of the invention.

FIG. 64A illustrates an assembly view of a privacy/security enclosure according to one embodiment of the invention.

FIG. 64B illustrates a base shell assembly view of a privacy/security enclosure according to one embodiment of the invention.

FIG. 64C illustrates a hood sub-assembly view of a privacy/security enclosure according to one embodiment of the invention.

FIGS. 65A-65E depict various views of a privacy/security enclosure in use according to one embodiment of the invention.

FIGS. 66A-66C depict various views of a privacy/security enclosure in use according to one embodiment of the invention.

FIGS. 67A-67F depict various views of a privacy/security enclosure in use according to one embodiment of the invention.

FIG. 68 shows a privacy/security enclosure according to another embodiment of the invention.

FIG. 69 shows a privacy/security enclosure according to another embodiment of the invention.

FIG. 70 shows a privacy/security enclosure according to another embodiment of the invention.

FIGS. 71A-71D show privacy/security enclosures according to various embodiments of the invention.

FIGS. 72A-72D depict a privacy/security enclosure in use in accordance with some embodiments of the invention.

FIGS. 73A-73C depict a privacy/security enclosure in use in accordance with some embodiments of the invention.

FIGS. 74A-74D depict a privacy/security enclosure in use in accordance with some embodiments of the invention.

FIGS. 75A-75F depict a privacy/security enclosure in use in accordance with some embodiments of the invention.

FIGS. 76A-76D depict a privacy/security enclosure in use in accordance with some embodiments of the invention.

FIGS. 77A-77C depict a privacy/security enclosure in use in accordance with some embodiments of the invention.

FIGS. 100A-100C illustrate various views of a privacy/security enclosure according to at least one embodiment of the invention.

FIGS. 125A-125G depict privacy/security enclosure housing cross-sections according to one embodiment of the invention.

FIGS. 126A-126C depict various views of a privacy/security enclosure housing according to one embodiment of the invention.

FIGS. 127A-127D illustrate user device insertion and positioning into a privacy/security enclosure according to one embodiment of the invention.

FIGS. 128A-128H illustrate cross-sectional detail views of privacy/security enclosure housing gasket seals according to one embodiment of the invention.

FIG. 129 illustrates a perspective view of a privacy/security enclosure including a partial cutaway interior view showing RF gaskets according to some embodiments of the invention.

FIG. 130 illustrates an interior view from line 2 of FIG. 129 according to some embodiments of the invention.

FIG. 131 illustrates a cross-sectional view of the privacy/security enclosure of FIG. 129 through cut line 3 of FIG. 130 according to some embodiments of the invention.

FIG. 132 illustrates a fingerstock according to some embodiments of the invention.

FIG. 133 illustrates a close up cross-sectional view of the privacy/security enclosure of FIG. 129 through cut line 5 of FIG. 131 showing a dual fingerstock and base gasket according to some embodiments of the invention.

FIG. 134 illustrates an example of the view of FIG. 133 including a single fingerstock and base gasket according to some embodiments of the invention.

FIG. 135 illustrates an assembly view of FIG. 133 depicting insertion of a lid insertion onto the base of a privacy/security enclosure with the lid comprising fingerstock grooves according to some embodiments of the invention.

FIG. 136 illustrates the assembled view of FIG. 135 according to some embodiments of the invention.

FIG. 137 illustrates a compound gasket assembly according to some embodiments of the invention.

FIG. 138 illustrates a cross sectional view of a compound gasket assembly according to some embodiments of the invention.

FIG. 139 illustrates a rear view of a compound gasket assembly according to one embodiment of the invention.

FIG. 140 illustrates a front view of a compound gasket assembly according to one embodiment of the invention.

FIG. 141 illustrates an example of the view of FIG. 133 including a dual fingerstocks (of FIG. 138) and base gasket according to some embodiments of the invention.

FIG. 142 illustrates an example of the view of FIG. 133 including a dual fingerstocks and base gasket according to some embodiments of the invention.

FIG. 143 illustrates an example of the view of FIG. 133 including dual fingerstocks of FIG. 138 according to some embodiments of the invention.

FIG. 144 illustrates an example of the view of FIG. 133 including dual fingerstocks of FIG. 138 according to some embodiments of the invention.

FIG. 145 illustrates an example of the view of FIG. 133 including a single fingerstock of FIG. 138 according to some embodiments of the invention.

FIG. 146 illustrates an example of the view of FIG. 133 including a single fingerstock of FIG. 138 according to some embodiments of the invention.

FIG. 147 illustrates a compound gasket assembly according to some further embodiments of the invention.

FIG. 148 illustrates a cross sectional view of a compound gasket assembly according to some further embodiments of the invention.

FIG. 149 illustrates a rear view of a compound gasket assembly according to further embodiments of the invention.

FIG. 150 illustrates a front view of a compound gasket assembly according to further embodiments of the invention.

FIG. 151 illustrates an example of the view of FIG. 133 including a dual fingerstocks and base gasket according to some embodiments of the invention.

FIG. 152 illustrates an example of the view of FIG. 133 including a dual fingerstocks and base gasket according to some embodiments of the invention.

FIG. 153 illustrates an example of the view of FIG. 133 including a dual fingerstocks and base gasket according to some embodiments of the invention.

FIG. 154 illustrates an example of the view of FIG. 133 including a dual fingerstocks and base gasket according to some embodiments of the invention.

FIG. 155 illustrates an example of the view of FIG. 133 including a single fingerstock according to some embodiments of the invention.

FIG. 156 illustrates an example of the view of FIG. 133 including a single fingerstock according to some embodiments of the invention.

FIGS. 157A-157C illustrate custom fingerstocks according to some embodiments of the invention.

FIGS. 158A-158C illustrate custom fingerstocks according to some embodiments of the invention.

FIGS. 159A-159C illustrate custom fingerstocks integrated with a privacy/security enclosure according to some embodiments of the invention.

FIG. 160 illustrates RF attenuation behavior of various embodiments of the invention.

FIGS. 161A-161C illustrate perspective views of various embodiments of a privacy/security enclosure.

FIGS. 162A-162C illustrate perspective views of various embodiments of a privacy/security enclosure.

FIGS. 163A-163C illustrate perspective views of various embodiments of a privacy/security enclosure.

FIGS. 164A-164C illustrate perspective views of various embodiments of a privacy/security enclosure.

FIGS. 165A-165C illustrate perspective views of various embodiments of a privacy/security enclosure.

FIGS. 166A-166C illustrate perspective views of various embodiments of a privacy/security enclosure.

FIGS. 167A-167C illustrate perspective views of various embodiments of a privacy/security enclosure.

FIGS. 168A-168C illustrate perspective views of various embodiments of a privacy/security enclosure.

FIGS. 169A-169B illustrate perspective views of various embodiments of a privacy/security enclosure.

FIGS. 170A-170B illustrate perspective views of various embodiments of a privacy/security enclosure.

FIGS. 171A-171B illustrate perspective views of various embodiments of a privacy/security enclosure.

FIGS. 171C-171D illustrate user interfaces and uses of user interfaces of a privacy/security enclosure according to some embodiments of the invention.

FIGS. 172A-172C, and 173-187 illustrate detailed perspective views of various embodiments of a privacy/security enclosure according to some embodiments of the invention.

FIGS. 188-189, and 190A-190D illustrates icon displays of a privacy/security enclosure in accordance with some embodiments of the invention.

11

FIGS. 191A-191F illustrates an overview of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 192 illustrates a circuit system layout of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 193 illustrates an operational state diagram of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 194 illustrates a state cycle diagram of a privacy/security enclosure in accordance with some embodiments of the invention.

FIGS. 195A-195B illustrates partial interior perspective views of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 196 illustrates a partial cut-away view of a privacy/security enclosure in accordance with some embodiments of the invention.

FIGS. 197A-197B illustrates a close-up view of the partial cut-away view in FIG. 196 in accordance with some embodiments of the invention.

FIGS. 198A-198D illustrates partial interior views of portions of a privacy/security enclosure in accordance with some embodiments of the invention.

FIGS. 199A-199E illustrates exterior views of a privacy/security enclosure in accordance with some embodiments of the invention.

FIGS. 200A-200D illustrates exterior views of a privacy/security enclosure in accordance with some embodiments of the invention.

FIGS. 201A-201E illustrates exterior views of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 202A illustrates a privacy/security enclosure including removable Faraday enclosure in accordance with some embodiments of the invention.

FIG. 202B depicts a removable Faraday enclosure in accordance with some embodiments of the invention.

FIG. 203 depicts an assembly view of a privacy/security enclosure including removable Faraday enclosure in accordance with some embodiments of the invention.

FIGS. 204A-204C, and 205A-205F illustrate privacy/security enclosures including removable Faraday enclosures and privacy/security enclosures that can be used with removable Faraday enclosures in accordance with some embodiments of the invention.

FIG. 206 illustrates a frequency profile of pink noise in accordance with some embodiments of the invention.

FIG. 207 illustrates a frequency profile of human voice in accordance with some embodiments of the invention.

FIG. 208 illustrates front view of a computer or display monitor including a mounted privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 209 illustrates a close up view of the privacy/security enclosure of FIG. 208 in accordance with some embodiments of the invention.

FIG. 210 illustrates a close up front perspective view of a privacy/security enclosure in a covered and protected configuration in accordance with some embodiments of the invention.

FIG. 211 illustrates a close up front perspective view of a privacy/security enclosure in an uncovered and unprotected configuration in accordance with some embodiments of the invention.

FIGS. 212A-212C illustrate an internal architecture view of a privacy/security enclosure in accordance with some embodiments of the invention.

12

FIGS. 213A-213B illustrates a front and rear perspective view of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 214 depicts a reconfiguration of a mounted privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 215 depicts a reconfiguration of a mounted privacy/security enclosure in accordance with another embodiment of the invention.

FIG. 216 illustrates architecture views of a privacy/security enclosure in accordance with some embodiments of the invention.

FIGS. 217A-217C illustrates views of a privacy/security enclosure in accordance with some embodiments of the invention.

FIGS. 218A-218C illustrates views of a privacy/security enclosure in accordance with some further embodiments of the invention.

FIG. 219 illustrates an operational view of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 220 illustrates an operational view of a privacy/security enclosure in accordance with some further embodiments of the invention.

FIG. 221 illustrates an operational view of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 222 illustrates an operational view of a privacy/security enclosure in accordance with some further embodiments of the invention.

FIG. 223 illustrates an operational view of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 224 illustrates an operational view of a privacy/security enclosure in accordance with some further embodiments of the invention.

FIG. 225 illustrates an operational view of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 226 illustrates an operational view of a privacy/security enclosure in accordance with some further embodiments of the invention.

FIG. 227 illustrates a rear view of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 228 illustrates a rear view of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 229 illustrates a front view of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 230 illustrates a side view of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 231 illustrates a side internal view of a privacy/security enclosure in accordance with some embodiments of the invention.

FIGS. 232A-232C illustrate perspective views of a privacy/security enclosure in accordance with some embodiments of the invention.

FIGS. 233A-233C illustrate perspective views of a privacy/security enclosure in accordance with some embodiments of the invention.

FIGS. 234A-234C illustrate perspective views of a privacy/security enclosure in accordance with some embodiments of the invention.

13

FIGS. 235A-235C illustrate perspective views of a privacy/security enclosure in accordance with some embodiments of the invention.

FIGS. 236A-236C illustrate perspective views of a privacy/security enclosure in accordance with some embodiments of the invention.

FIGS. 237A-237C illustrate perspective views of a privacy/security enclosure in accordance with some embodiments of the invention.

FIGS. 238A-238D illustrate perspective views of a privacy/security enclosure in accordance with some embodiments of the invention.

FIGS. 239A-239C illustrate perspective views of a privacy/security enclosure in accordance with some embodiments of the invention.

FIGS. 240A-240C illustrates perspective views of a privacy/security enclosure in accordance with some embodiments of the invention.

FIGS. 241A-241C illustrates perspective views of a privacy/security enclosure in accordance with some embodiments of the invention.

FIGS. 242A-242C illustrates perspective views of a privacy/security enclosure in accordance with some embodiments of the invention.

FIGS. 243A-243D illustrates perspective views of a privacy/security enclosure in accordance with some embodiments of the invention.

FIGS. 244A-244C illustrates perspective views of a privacy/security enclosure in accordance with some embodiments of the invention.

FIGS. 245A-245C illustrates perspective views of a privacy/security enclosure in accordance with some embodiments of the invention.

FIGS. 246A-246D illustrate perspective views of a privacy/security enclosure in accordance with some embodiments of the invention in accordance with some embodiments of the invention.

FIG. 247 illustrates a privacy/security enclosure mounting assembly view in accordance with some embodiments of the invention.

FIG. 248 illustrates a front perspective view of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 249 illustrates a rear perspective view of the privacy/security enclosure of FIG. 248 mounted to a display device in accordance with some embodiments of the invention.

FIG. 250 illustrates a front perspective view of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 251 illustrates a rear perspective view of the privacy/security enclosure of FIG. 250 mounted to a computer or display device in accordance with some embodiments of the invention.

FIG. 252 illustrates a front perspective view of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 253 illustrates a rear perspective view of the privacy/security enclosure of FIG. 248 mounted to a computer or display device in accordance with some embodiments of the invention.

FIG. 254 illustrates a front perspective view of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 255 illustrates a rear perspective view of the privacy/security enclosure of FIG. 250 mounted to a computer or display device in accordance with some embodiments of the invention.

14

FIG. 256 illustrates a perspective view of a computer or display mounted privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 257 illustrates a perspective view of a computer or display mounted privacy/security enclosure including a partial internal component view in accordance with some embodiments of the invention.

FIG. 258 illustrates a side view of a computer or display mounted privacy/security enclosure including a partial internal component view in accordance with some embodiments of the invention.

FIGS. 259, 259A, 259B, 260, 260A, 260B, 261, 261A illustrates internal release mechanisms in accordance with some embodiments of the invention.

FIGS. 262-263 illustrate rear perspective views of computer or display mounted privacy/security enclosures in accordance with some embodiments of the invention.

FIGS. 264A-264B illustrates rear perspective views of privacy/security enclosures including textures in accordance with some embodiments of the invention.

FIGS. 265A-265B illustrate rear perspective views of computer or display mounted privacy/security enclosure with cable management in accordance with some embodiments of the invention.

FIG. 266 illustrates a front perspective view of a privacy/security enclosure according to some embodiments of the invention.

FIG. 267 illustrates a front perspective view of a privacy/security enclosure with a hood or cover portion removed according to some embodiments of the invention.

FIG. 268 illustrates an exploded assembly view of portions of the privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 269 illustrates components of the Faraday base assembly of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 270 illustrates an exploded assembly view of portions of the Faraday base assembly in accordance with some embodiments of the invention.

FIG. 271 illustrates an exploded assembly view of portions of the privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 272 illustrates an exploded assembly view of portions of the privacy/security enclosure in accordance with some embodiments of the invention.

FIGS. 273-276 illustrate perspective views of privacy/security enclosures including mechanical isolation in accordance with some embodiments of the invention.

FIG. 277 illustrates an end view of a privacy/security enclosure including broadband vibration in accordance with some embodiments of the invention.

FIG. 278 illustrates an end view of a privacy/security enclosure including active vibration cancellation in accordance with some embodiments of the invention.

FIGS. 279 and 280 illustrate internal cross-sectional views of a privacy/security enclosure with in accordance with some embodiments of the invention.

FIGS. 281-282, and 283-284 illustrate light transmission within a privacy/security enclosure in accordance with some embodiments of the invention.

FIGS. 285A-285E illustrate privacy/security enclosures for device cameras in accordance with some embodiments of the invention.

FIG. 286 illustrates a privacy/security enclosure including a Faraday sleeve in accordance with some embodiments of the invention.

15

FIGS. 287A-287B illustrate privacy/security enclosures for use with device cases in accordance with some embodiments of the invention.

FIG. 288 illustrates a USB-powered active portion of a privacy/security enclosure in accordance with some embodiments of the invention.

FIGS. 289A-289C illustrate tethered privacy/security enclosures in accordance with some embodiments of the invention.

FIG. 290 illustrates an ultrasonic clip-on privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 291 illustrates a vacuum seal over microphone in accordance with some embodiments of the invention.

FIG. 292 illustrates internal air flow acoustic muffling in accordance with some embodiments of the invention.

FIGS. 293A-293B illustrate perspective views of a privacy/security enclosure and method of use in accordance with some embodiments of the invention.

FIGS. 294A-294B illustrate privacy/security enclosures for docked devices in accordance with some embodiments of the invention.

FIGS. 295A-295D illustrate privacy/security enclosures for partial cases in accordance with some embodiments of the invention.

FIG. 296 illustrates a tethered privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 297 illustrates a noise emitter in accordance with some embodiments of the invention.

FIG. 298 illustrates a cover add-on privacy/security enclosure in accordance with some embodiments of the invention.

FIGS. 299A-299D illustrate privacy/security enclosures for a Microsoft Kinect™ system in accordance with some embodiments of the invention.

FIGS. 300A-300B illustrate a fold-down cover privacy/security enclosure for a Microsoft Kinect™ system in accordance with some embodiments of the invention.

FIG. 301 illustrates a remote cover privacy/security enclosure for a Microsoft Kinect™ system in accordance with some embodiments of the invention.

FIGS. 302A-302B illustrate an elevator recess cover privacy/security enclosure for a Microsoft Kinect™ system in accordance with some embodiments of the invention.

FIG. 303 illustrates an attachable cover privacy/security enclosure for a Microsoft Kinect™ system in accordance with some embodiments of the invention.

FIG. 304 illustrates a power interruption privacy/security device in accordance with some embodiments of the invention.

FIGS. 305A-305B illustrate a Faraday cylinder privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 306 illustrates a privacy/security enclosure including optical blinding in accordance with some embodiments of the invention.

FIG. 307 illustrates a Microsoft Kinect™ system audio interference system in accordance with some embodiments of the invention.

FIG. 308 illustrates an IR sticker privacy/security system in accordance with some embodiments of the invention.

FIGS. 309A-309B illustrate manually operated privacy/security enclosures in accordance with some embodiments of the invention.

FIGS. 310A-310B illustrate privacy/security protection of a remote control in accordance with some embodiments of the invention.

16

FIGS. 311A-311B illustrate a remote controlled cover privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 312 illustrates a smart glass privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 313 illustrates an on-off remote battery circuit breaker in accordance with some embodiments of the invention.

FIGS. 314-315, 316A-316B, and 317A illustrate an automobile privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 317B illustrates a privacy/security system in accordance with some embodiments of the invention.

FIGS. 317C and 317D illustrate mechanical, electrical, and electromechanical systems of a vehicle that can be controlled by the privacy/security system of FIG. 317B in accordance with some embodiments of the invention.

FIGS. 318A-318C illustrate a travel case privacy/security system in accordance with some embodiments of the invention.

FIGS. 319A-319B illustrate a protective suitcase privacy/security system in accordance with some embodiments of the invention.

FIG. 320 illustrates a Faraday cage in bag privacy/security system in accordance with some embodiments of the invention.

FIG. 321 illustrates a Faraday sleeve privacy/security system in accordance with some embodiments of the invention.

FIG. 322 illustrates a lockbox privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 323 illustrates a safe-type privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 324 illustrates a tackle box privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 325 illustrates a letter box privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 326 illustrates a roundabout cage-type privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 327 illustrates a built-in type privacy/security enclosure in accordance with some embodiments of the invention.

FIGS. 328A-328F illustrate seals and seal structures in accordance with some embodiments of the invention.

FIG. 329 illustrates privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 330 illustrates a schematic of a privacy/security system in accordance with some embodiments of the invention.

FIG. 331 illustrates a system schematic of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 332 illustrates a cross-sectional view of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 333 illustrates a cross-sectional view of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 334 illustrates a cross-sectional view of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 335 illustrates a cross-sectional view of a privacy/security system in accordance with some embodiments of the invention.

FIG. 336 illustrates a cross-sectional view of a privacy/security enclosure in accordance with some embodiments of the invention.

17

FIG. 337 illustrates a cross-sectional view of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 338 illustrates a cross-sectional view of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 339 illustrates a cross-sectional view of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 340 illustrates a cross-sectional view of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 341 illustrates a cross-sectional view of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 342 illustrates a cross-sectional view of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 343 illustrates a perspective view of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 344 illustrates a perspective view of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 345 illustrates a circuit diagram for a DC pass-through in accordance with some embodiments of the invention.

FIG. 346 illustrates a front view of a DC pass-through assembly implementing the circuit of FIG. 345 in accordance with some embodiments of the invention.

FIG. 347 illustrates a rear view of the DC pass-through assembly of FIG. 346 in accordance with some embodiments of the invention.

FIG. 348 illustrates secure/private communication between user devices secured and protected in privacy/security enclosures in accordance with some embodiments of the invention.

DETAILED DESCRIPTION

Before any embodiments of the invention are explained in detail, it is to be understood that the invention is not limited in its application to the details of construction and the arrangement of components set forth in the following description or illustrated in the following drawings. The invention is capable of other embodiments and of being practiced or of being carried out in various ways. Also, it is to be understood that the phraseology and terminology used herein is for the purpose of description and should not be regarded as limiting. The use of “including,” “comprising,” or “having” and variations thereof herein is meant to encompass the items listed thereafter and equivalents thereof as well as additional items. Unless specified or limited otherwise, the terms “mounted,” “connected,” “supported,” and “coupled” and variations thereof are used broadly and encompass both direct and indirect mountings, connections, supports, and couplings. Further, “connected” and “coupled” are not restricted to physical or mechanical connections or couplings. Unless specified or limited otherwise, the terms “seal,” “seals,” and “sealed” and variations thereof are used to broadly encompass a range of levels of sealing, from at least some or partial sealing, to substantially complete or full sealing with substantially no leakage through the seal. Unless specified or limited otherwise, the term “phone(s),” “smartphone(s),” “tablet(s),” “computer(s),” and figures depicting such devices are intended to be used generically and interchangeably with each other and for any

18

other such device(s) with one or more microphones and/or camera(s) and/or RF transceiver(s) and/or optical transceivers and/or infrared transceivers and/or wired networking capability and/or other sensor(s). Unless specified or limited otherwise, the terms “USB,” and “micro-USB” refer to all standard charging interfaces for consumer electronic devices, including proprietary connectors such as Apple’s Lightning™ connector.

The following discussion is presented to enable a person skilled in the art to make and use embodiments of the invention. Various modifications to the illustrated embodiments will be readily apparent to those skilled in the art, and the generic principles herein can be applied to other embodiments and applications without departing from embodiments of the invention. Thus, embodiments of the invention are not intended to be limited to embodiments shown, but are to be accorded the widest scope consistent with the principles and features disclosed herein. The following detailed description is to be read with reference to the figures, in which like elements in different figures have like reference numerals. The figures, which are not necessarily to scale, depict selected embodiments and are not intended to limit the scope of embodiments of the invention. Skilled artisans will recognize the examples provided herein have many useful alternatives and fall within the scope of embodiments of the invention.

Embodiments of the invention described herein include privacy/security devices, privacy/security systems and methods of use of these devices and systems for providing or facilitating a user’s privacy/security. Unless specified or limited otherwise, the term “privacy/security enclosure” can be used throughout to describe embodiments of a structure forming at least a partial enclosure, chamber, cover, case, sleeve, channel, conduit, window, and variations thereof to broadly encompass rendering a range of levels of privacy/security to a user, from at least some or partial privacy/security, to substantially complete or complete privacy/security with substantially no private information leakage through the privacy/security enclosure. Further, the term “privacy/security enclosure” can be used throughout to describe embodiments of a system providing privacy/security control to a user.

FIG. 1 is a perspective view of a partially open privacy/security enclosure 100 according to at least one embodiment of the invention. The privacy/security enclosure 100 includes structure and functions as described below that can apply to at least one other privacy/security enclosure described herein, including some or all of the privacy/security enclosures disclosed and described and shown the related figures. In some embodiments, the privacy/security enclosure can comprise a structure that can least partially envelop at least one device comprising an RF transceiver and/or an audio device, and/or a video device, and/or an audio/video/RF protection device(s), and/or a near-field communication (hereinafter “NFC”) device, and/or a device comprising a radio-frequency identification (hereinafter “RFID”) device. In some embodiments, the privacy/security enclosure can include a structure that can least partially envelop, wrap, or cover at least a portion of a user device. In some embodiments, the privacy/security enclosure can be used to temporarily, semi-permanently, or permanently block or at least partially attenuate audio or video transmission when positioned adjacent to, proximate to, or coupled to at least a portion of a user device. In some embodiments, the devices protected by the privacy/security enclosure can comprise a mobile or stationary communication device, including, but not limited to, a cellular phone, a smart phone,

a car microphone, a paging device, a wearable device such as a smartwatch and/or a wearable phone, a computing device such as a computer, tablet or laptop, a portable or stationary gaming device, a portable or stationary video or audio device, and/or a combination of two or more of the devices described.

In some embodiments, the privacy/security enclosure can comprise a device including a housing assembly that can comprise a rigid or semi-rigid, structurally self-supporting privacy/security enclosure that can be at least partially opened or closed by a user, and/or can include a portion that can be moved, adjusted, opened or closed by a user to adjust a level of privacy/security. In some embodiments, at least a portion of the housing assembly can be moved with respect to another portion of the housing assembly. In some embodiments, the privacy/security enclosure can include a structure that can least partially envelop at least one user device comprising an RF transceiver and/or an audio device, and/or a video device, and/or an audio/video/RF protection device(s), and/or a near-field communication (hereinafter “NFC”) device, and/or a radio-frequency identification (hereinafter “RFID”) device. For example, in some embodiments, the privacy/security enclosure can be used to cradle, and temporarily or permanently store at least one user device such as a smart phone, or other communication device. In some embodiments, the privacy/security enclosure can include at least one gasket or O-ring (hereinafter referred to as an “RF gasket”) that is capable of at least partially attenuating or blocking at least one transmission or signal comprising radio frequency radiation (hereinafter referred to as “RF”). Further, in some embodiments, the privacy/security enclosure can be formed of a material capable of at least partially attenuating RF radiation emitted to or from any RF antennas or transceivers positioned inside the privacy/security enclosure (e.g., such as those forming part of the user’s smart phone).

In some embodiments, the privacy/security enclosure can comprise a protective enclosure (or shield in other embodiments) that can selectively at least partially block one or more monitoring, sensing and/or surveillance capabilities of the various devices. For example, in some embodiments of the invention, the privacy/security enclosure only covers the audio portion of a desktop computer (or other device with a microphone such as an Xbox Kinect®). In some embodiments, the privacy/security enclosure does not provide RF protection, but reduces or limits the microphone’s ability to capture audio content. In some embodiments, a microphone security portion of the shield can be activated using a button. In some further embodiments, the activation of another button can direct an opaque shield to cover the front of a device’s camera (such as a camera on the Xbox Kinect®). In some embodiments, the invention minimizes or prevents scanning, information insertion, manipulation or retrieval, code insertion, manipulation or retrieval or hacking of protected devices via RF technologies.

In some further embodiments of the invention, the privacy/security enclosure can suppress the ability of various other sensors when enclosed within the privacy/security enclosure. For example, in some embodiments, the privacy/security enclosure can substantially block and/or damp the signals reaching other sensors such as accelerometers, gyroscopes, magnetometers to name a few. In some embodiments, the enclosure can include materials, structures and/or approaches (for example, foams, fabrics, springs, specific shapes and/or materials, suspension and/or isolation systems, vibration dampening techniques etc.), configured to at least partially mask, block, attenuate, distort, confuse and/or

otherwise reduce and/or eliminate the ability of any sensor to perform its primary and/or any other function of which it is capable (for example a gyroscope or accelerometer used to record and/or detect/decipher audio communication). In some embodiments, the enclosure can include active/powered components to at least partially mask, block, attenuate, distort, confuse and/or otherwise reduce and/or eliminate the ability of any sensor to perform its primary and/or any other function of which it is capable (for example, a gyroscope or accelerometer could otherwise be used to record and/or detect/decipher audio communication).

In some embodiments, the privacy/security enclosure can include RF gaskets extending around at least a portion of an interface or housing of the privacy/security enclosure. In some embodiments, the privacy/security enclosure can include RF gaskets extending completely around a region of an upper and/or lower portion of the privacy/security enclosure. In some embodiments, the privacy/security enclosure can comprise a Faraday cage configured to attenuate, or at least partially block, reception or transmission of RF radiation. In some embodiments, the Faraday cage includes and/or is formed by the one or more RF gaskets. In some embodiments of the invention, when used in combination with one or more RF shield layers (coated, embedded, or attached to any portion of the privacy/security enclosure) the combination of the privacy/security seal formed by the one or more of the aforementioned RF gaskets and one or more RF shield layers can form a Faraday cage. In some embodiments, the Faraday cage can substantially attenuate or at least partially block RF transmission into and/or out of the privacy/security enclosure. As used herein, the term RF shield is intended to mean a barrier that is able to partially or substantially attenuate, at least partially prevent transmission through, or at least partially block transmission of RF. For example, in some embodiments, the privacy/security enclosure can include at least one RF gasket positioned within, coupled to, or integrated with the base portion and/or the lid portion of the privacy/security enclosure. In some embodiments, the privacy/security enclosure can include an RF gasket that can attenuate or at least partially block some or all RF transmission including, but not limited to, zero generation wireless signals, first generation wireless signals, second generation wireless signals, third generation wireless signals, fourth generation wireless signals, fifth generation wireless signals, any global positioning satellite signal (such as “GPS” or “GLONASS”), Bluetooth® wireless signals, RFID electromagnetic radiation, WiFi wireless signals, two-way radio RF signals, UHF or VHF signals (such as a citizen’s band radio signal or other radio signal emitted from a ‘walkie-talkie’ type device), high-speed and millimeter wave signals, and/or near-field wireless signals. Bluetooth® is a registered trademark of Bluetooth SIG, Inc.

In some embodiments, the privacy/security enclosure can at least partially attenuate or blocking at least one transmission or signal comprising an optical signal, infrared signal, ultraviolet signal, image or video, and/or acoustic signal. In some embodiments, the privacy/security enclosure can include at least one seal or gasket extending around at least a portion of an interface between the privacy/security enclosure and the user’s device that can at least partially block or attenuate an optical signal, image or video, and/or acoustic signal, and/or an RF signal.

In some embodiments of the invention a combination of one or more grooves within a portion of the privacy/security enclosure can be used with one or more o-rings or gaskets to provide various levels of sealing of the privacy/security enclosure. For example, a dual groove structure or a single

21

groove can be implemented with a tongue structure that can be used with or without an o-ring. In some embodiments, any of the o-rings or gaskets can comprise an RF shield (i.e., can function as an RF attenuating gasket) and therefore can enable a ring seal for use in a privacy/security enclosure. In some embodiments, any o-ring or gasket can comprise a polymer-based matrix material including metal filaments dispersed in a matrix to form a polymer composite material. In some embodiments, the polymer matrix can comprise a homopolymer and/or copolymer, and can comprise an elastomeric polymer such as rubber. In some other embodiments, the o-ring or gasket can comprise a carbon fiber-filled matrix material including metal filaments dispersed in a matrix to form a carbon fiber composite material.

In some embodiments, any o-ring or gasket can be capable of forming a compliant privacy seal between portions of the privacy/security enclosure (e.g., between an upper and a lower portion and/or between two halves of the privacy/security enclosure). Further, in some embodiments, the formed seal can be capable of functioning as an environmental barrier in addition to functioning as an RF shield. For example, in some embodiments, the formed seal can be capable of providing a water and/or moisture barrier in addition to functioning as an RF shield. Further in some embodiments, when used in combination with one or more RF shield layers (coated, embedded, or attached to any portion of the privacy/security enclosure) the combination of the privacy seal and the one or more RF shield layers can form a Faraday cage to substantially attenuate or at least partially block substantially all RF transmission into the privacy/security enclosure and/or substantially attenuate or at least partially block substantially all RF transmission out from the privacy/security enclosure.

In some embodiments, more than one type of o-ring or gasket can be used. In some embodiments, each o-ring or gasket type can be optimized for a specific function (either to at least partially block or attenuate RF, sound, light, moisture, etc.). However, any one o-ring or gasket can function to attenuate or at least partially block a combination of RF, sound, light, etc. For example, in some embodiments, one or more o-rings or gaskets can function to attenuate RF, and one or more o-rings or gaskets can function to attenuate sound, and one or more o-rings or gaskets can function as an environmental barrier. Moreover, in some embodiments, one or more of the o-rings or gaskets can be larger or smaller than one or more other o-rings or gaskets. For example, in some embodiments, one or more of the grooves can be larger or smaller than one or more other groove so as to be capable of cradling a complementarily-sized o-ring.

In some embodiments of the invention, RF protection can be accomplished using a labyrinth and one or more gaskets. In some embodiments, rather than using a double labyrinth, a variety of other options can be deployed to improve manufacturability, space consumption etc., without reducing our performance. Some factors impacting gasket and labyrinth design in some embodiments include the use of gaskets that can be compressed by at least 20% to about 50% of their height in order to provide suitable attenuation.

In some embodiments, depending on the physical architecture of the privacy/security enclosure (e.g., size and/or geometry matched to one or more devices), a double labyrinth around the entire diameter of the privacy/security enclosure may be required. In this instance, some embodiments may require significant force to compress the gaskets. Further, some embodiments may require latches with mechanical advantage that can help the user close the case and hold the lid in position, as well as hinges that can

22

support the force constantly being created by the compressed gaskets. Some further embodiments can deploy architectures that enable the labyrinth and gasket to be shortened. Other embodiments can deploy gaskets that are positioned at the bottom of the labyrinth.

In some embodiments, any of the aforementioned RF gaskets can be configured to form a compliant privacy/security seal between any number of portions of the privacy/security enclosure (e.g., between an upper and a lower portion and/or between two halves of the privacy/security enclosure). Further, in some embodiments, the formed seal can be capable of functioning as an environmental barrier in addition to functioning as an RF shield. For example, in some embodiments of the invention, one or more RF gaskets can provide the secondary benefit of minimizing the transmission of air, water, dust and other such substances from passing into the interior of the privacy/security enclosure when it is closed. In some embodiments, other or additional environmental or sealing gaskets can be included that are more specifically designed for this purpose. Furthermore, the environmental or sealing gaskets can be used with one or more RF gaskets as required. In some embodiments of the invention, a combination of one or more grooves within a portion of the privacy/security enclosure can be used with one or more RF gaskets to provide various levels of coupling, seating, and sealing of the privacy/security enclosure. In some embodiments, at least some portion of the upper and/or lower portions of the privacy/security enclosure can comprise at least one form, cavity, or depression (i.e. forming a groove) for coupling to at least one RF gasket.

In some embodiments, at least some portion of the privacy/security enclosure can comprise a metal or metal alloy. In some embodiments, the privacy/security enclosure can comprise a metal core structure. Some embodiments include a metal or metal alloy that can comprise stainless steel, magnesium, aluminum, titanium, or a titanium-magnesium alloy. In some embodiments, one or more components of the enclosed chamber can comprise a metal or metal alloy that is milled from a solid block. In some further embodiments, one or more components of the enclosed chamber can be stamped from raw sheet stock. For example, in some embodiments, components of the enclosed chamber such as a privacy/security enclosure base and/or a privacy/security enclosure lid can comprise stamped aluminum or magnesium alloy. In some other embodiments, the lid can be formed by other conventional manufacturing processes such as molding (e.g. injection molding or thermoforming), die-cutting, laser cutting, or printed using a three dimensional printer, etc.

In some other embodiments, the lid can be formed by other conventional manufacturing processes such as molding (e.g. injection molding or thermoforming), die-cutting, machining, laser cutting, printed using a three dimensional printer, thixo-forming, impact extruded or deep drawn, etc. In some further embodiments, the Faraday enclosure can be formed from conductive fabric or plastic infused with conductive elements or plastic coated or plated with conductive elements. In some embodiments, the Faraday enclosure and/or any portion of the privacy/security enclosure can be anodized and/or can comprise a polymer.

In some embodiments, at least a portion of any of the components, or sub-assemblies, housings and/or interconnects of the privacy/security enclosures herein can comprise a metal or a metal alloy substrate or coating. In some embodiments, the substrate or coating can comprise a base metal (e.g., such as nickel) with varying thicknesses of plated metals, including, but not limited to gold, palladium

nickel, and titanium blend plating options. In some embodiments, the substrate or coating can comprise a metal or metal alloy (e.g., such as beryllium copper) that can electrically couple the cover to the base, and when closing the case. In some further embodiments, at least a portion of the substrate or coating can comprise copper or a copper alloy. In some other embodiments, at least a portion of the substrate or coating can comprise nickel or a nickel alloy (e.g., a nickel-copper alloy), or an alloy of copper and tin. In some embodiments, a nickel layer can be used as a diffusion barrier for a contact outer layer or surface that comprises gold. In some embodiments, at least a portion of the substrate or coating can comprise iron or steel. In some embodiments, at least a portion of the substrate or coating can comprise aluminum, magnesium, or mixtures or alloys thereof. Other useful coatings or layers can include silver, tin, or palladium.

In some embodiments, any of the aforementioned metals or metal alloy can be selected and used to form one or more electrical contacts of the privacy/security enclosure depending on the required function and/or performance. Examples of such contacts can include electrical contacts for RF shielding such as a rim or other electrical contact of the Faraday cage of the privacy/security enclosure. In some embodiments, one or more contacts can comprise a gold or gold alloy material. In some further embodiments, the contacts can comprise titanium nitride. In some other embodiments, the contacts can comprise palladium, palladium nickel, or some other pure or blended form of noble metal, which at least partially resists corrosion and oxidation. In some embodiments of the invention, various mated surfaces can use the same or different metals or metal alloy combinations for their contact surfaces, to improve or manage characteristics including, but not limited to, RF shielding performance, durability, longevity, mating sound and/or tactile feel/impression, frictional polymerization, contact resistance, conductivity, appearance, strength, fretting, hardness, and/or cost. For contacts including coatings, or modified surfaces of base metals, formation or deposition can proceed by any conventional technique including plating, cladding, electrolytic deposition, electro-less deposition, or vapor deposition among others.

In some embodiments, the privacy/security enclosure can comprise a metal core structure. Some embodiments include a metal or metal alloy that comprises stainless steel, magnesium, aluminum, titanium, or a titanium-magnesium alloy, or combinations thereof. In some embodiments, one or more components of the chamber can comprise a metal or metal alloy that is milled from a solid block. In some further embodiments, one or more components of the cover can be stamped from raw sheet stock. For example, in some embodiments, portions of the privacy/security enclosure can comprise stamped aluminum or magnesium alloy. In some other embodiments, the cover can be formed by other conventional manufacturing processes such as molding (e.g. injection molding or thermoforming), die-cutting, machining, laser cutting, printed using a three dimensional printer, etc.

In some other embodiments, at least a portion of one or more of the privacy/security enclosures described herein can comprise a material such as a polymer, or polymer composite. For example, in some embodiments, at least a portion of one or more of the privacy/security enclosures described herein can comprise an injection molded, extruded, or thermo-form polymer. In some embodiments, the polymer can comprise polyethylene, polypropylene, or polyethylene-polypropylene copolymers. In some further embodiments,

the privacy/security enclosure can comprise at least one polymer comprising aramids (aromatic polyamides), poly(m-xylylene adipamide), poly(p-xylylene sebacamide), poly(2,2,2-trimethyl-hexamethylene terephthalamide), poly(piperazine sebacamide), poly(metaphenylene isophthalamide) (Nomex) and poly(p-phenylene terephthalamide), aliphatic and cycloaliphatic polyamides, including the copolyamide of 30% hexamethylene diammonium isophthalate and 70% hexamethylene diammonium adipate, the copolyamide of up to 30% bis-(-amidocyclohexyl) methylene, terephthalic acid and caprolactam, polyhexamethylene adipamide, poly(butyrolactam), poly(9-aminonanoic acid), poly(enantholactam), poly(caprilactam), polycaprolactam, poly(p-phenylene terephthalamide), polyhexamethylene sebacamide, polyaminoundecanamide, polydodecanolactam, polyhexamethylene isophthalamide, polyhexamethylene terephthalamide, polycaproamide, poly(nonamethylene azelamide), poly(decamethylene azelamide), poly(decamethylenesebacamide), poly[bis-4-aminocyclohexyl)methane-1,10-decanedi-carboxamide](Qiana)(trans), and aliphatic, cycloaliphatic and aromatic polyesters including poly(1,4-cyclohexyldiene dimethyl eneterephthalate) cis and trans, poly(ethylene-2,6-naphthalate), poly(1,4-cyclohexane dimethylene terephthalate) (trans), poly(decamethylene terephthalate), poly(ethylene terephthalate), poly(ethylene isophthalate), poly(ethylene oxybenzoate), poly(para-hydroxy benzoate), poly(beta,beta dimethylpropiolactone), poly(decamethylene adipate), or poly(ethylene succinate), or mixtures thereof.

In some further embodiments, at least a portion of any of the privacy/security enclosures described herein can comprise at least one polymer formed of extended chain polymers by the reaction of beta-unsaturated monomers of the formula $R_1R_2C=CH_2$, where R_1 and R_2 are either identical or different, and are hydrogen, hydroxyl, halogen, alkylcarbonyl, carboxy, alkoxyxycarbonyl, heterocycle or alkyl or aryl, where the alkyl or aryl can be substituted with one or more substituents including alkoxy, cyano, hydroxyl, alkyl or aryl, and extended chain polymers including polystyrene, polyethylene, polypropylene, poly(1-octadecene), polyisobutylene, poly(1-pentene), poly(2-methylstyrene), poly(4-methylstyrene), poly(1-hexene), poly(1-pentene), poly(4-methoxystyrene), poly(5-methyl-1-hexene), poly(4-methylpentene), poly(1-butene), poly(3-methyl-1-butene), poly(3-phenyl-1-propene), polyvinyl chloride, polybutylene, polyacrylonitrile, poly(methyl pentene-1), poly(vinyl alcohol), poly(vinyl-acetate), poly(vinyl butyral), poly(vinyl chloride), poly(vinylidene chloride), vinyl chloride-vinyl acetate chloride copolymer, poly(vinylidene fluoride), poly(methyl acrylate), poly(methylmethacrylate), poly(methacrylonitrile), poly(acrylamide), poly(vinyl fluoride), poly(vinyl formal), poly(3-methyl-1-butene), poly(1-pentene), poly(4-methyl-1-butene), poly(1-pentene), poly(4-methyl-1-pentene), poly(1-hexane), poly(5-methyl-1-hexene), poly(1-octadecene), poly(vinylcyclopentane), poly(vinylcyclohexane), poly(a-vinylnaphthalene), poly(vinylmethylether), poly(vinylethylether), poly(vinylpropylether), poly(vinylcarbazole), poly(vinylpyrrolidone), poly(2-chlorostyrene), poly(4-chlorostyrene), poly(vinylformate), poly(vinylbutylether), poly(vinylloctylether), poly(vinylmethylketone), poly(methylisopropenylketone), or poly(4-phenylstyrene), or mixtures thereof.

In some further embodiments of the invention, at least a portion of the privacy/security enclosure can comprise a polymer thermoset material. For example, in some embodiments of the invention, the thermosetting polymer can

comprise an epoxide-based technology. In some embodiments, epoxies based on saturated or unsaturated aliphatic, cycloaliphatic, aromatic and heterocyclic epoxides can be used to form at least a portion of the privacy/security enclosure. In some further embodiments, useful epoxides can comprise glycidyl ethers derived from epichlorohydrin adducts and polyols, particularly polyhydric phenols. Another useful epoxide is the diglycidyl ether of bisphenol A. Additional examples of useful polyepoxides are resorcinol diglycidyl ether, 3,4-epoxy-6-methylcyclohexylmethyl-9,10-epoxystearate, 1,2-bis(2,3-epoxy-2-methylpropoxy) ethane, diglycidyl ether of 2,2-(p-hydroxyphenyl) propane, butadiene dioxide, dicyclopentadiene dioxide, pentaerythritol tetrakis(3,4-epoxycyclohexanecarboxylate), vinylcyclohexene dioxide, divinylbenzene dioxide, 1,5-pentadiol bis(3,4-epoxycyclohexane carboxylate), ethylene glycol bis(3,4-epoxycyclohexane carboxylate), 2,2-diethyl-1,3-propanediol bis(3,4-epoxycyclohexanecarboxylate), 1,6-hexanediol bis(3,4-epoxycyclohexanecarboxylate), 2-butene-1,4-diol-bis(3,4-epoxy-6-methylcyclohexane carboxylate), 1,1,1-trimethylolpropane-tris-(3,4-epoxycyclohexanecarboxylate), 1,2,3-propanetriol tris(3,4-epoxycyclohexanecarboxylate), dipropylene glycol bis(2-ethylexyl-4,5-epoxycyclohexane-1,2-dicarboxylate), diethyleneglycol-bis(3,4-epoxy-6-methylcyclohexane carboxylate), triethylene glycol bis(3,4-epoxycyclohexanecarboxylate), 3,4-epoxycyclohexyl-methyl-3,4-epoxycyclohexanecarboxylate, 3,4-epoxy-1-methylcyclohexylmethyl-3,4-epoxy-1-methylcyclohexane-carboxylate, bis(3,4-epoxycyclohexylmethyl)pimelate, bis(3,4-epoxy-6-methylenecyclohexylmethyl)maleate, bis(3,4-epoxy-6-methylcyclohexylmethyl) succinate, bis(3,4-epoxycyclohexylmethyl)oxalate, bis(3,4-epoxy-6-methylcyclohexylmethyl)sebacate, bis(3,4-epoxy-6-methylcyclohexylmethyl)adipate, bis(3,4-epoxycyclohexylmethyl) terephthalate, 2,2'-sulfonyldiethanol bis(3,4-epoxycyclohexanecarboxylate), N,N'-ethylene bis(4,5-epoxycyclohexane-1,2-dicarboximide), di(3,4-epoxycyclohexylmethyl)-1,3-tolylenedicarbamate, -3,4-epoxy-6-methylcyclohexanecarboxaldehydeacetal, 3,9-bis(3,4-epoxycyclohexyl) spirobi-(methadioxane), and the like.

In some other embodiments of the invention, thermosetting resins based on aromatic vinyl esters can be used to form at least a portion of the privacy/security enclosure. These can include a condensation product of epoxide resins and unsaturated acids usually diluted in a compound having double bond unsaturation such as vinyl aromatic monomer (e.g., styrene and vinyl toluene, and diallyl phthalate). Illustrative of useful vinyl esters are diglycidyl adipate, diglycidyl isophthalate, di(2,3-epoxybutyl)adipate, di(2,3-epoxybutyl)oxalate, di(2,3-epoxyhexyl)succinate, di(3,4-epoxybutyl)maleate, di(2,3-epoxyoctyl)pimelate, di(2,3-epoxybutyl)phthalate, di(2,3-epoxyoctyl)tetrahydrophthalate, di(4, 5-epoxy-dodecyl)maleate, di(2,3-epoxybutyl)terephthalate, di(2,3-epoxypentyl)thiodipropionate, di(5,6-epoxy-tetradecyl) diphenyldicarboxylate, di(3,4-epoxyheptyl) sulphonyldibutyrate, tri(2,3-epoxybutyl) 1,2,4-butanetricarboxylate, di(5, 6-epoxypentadecyl)maleate, di(2,3-epoxybutyl)azelate, di(3,4-epoxybutyl)citrate, di(5,6-epoxyoctyl)cyclohexane-1,3-dicarboxylate, di(4, 5-epoxyoctadecyl)malonate, bisphenol-A-fumaric acid polyester and the like.

In some embodiments, at least a portion of the privacy/security enclosure can include a filler material. For example, some embodiments can include a thermoplastic or thermosetting resin that includes at least some filler material dispersed through at least a portion of the privacy/security

enclosure. In some embodiments, the filler material can be dispersed substantially homogeneously through at least a portion of at least one layer of the privacy/security enclosure. In some other embodiments, the filler material can be substantially unevenly distributed through at least a portion of the privacy/security enclosure. For example, in some embodiments, the filler material can be dispersed substantially unevenly through at least a portion of at least one layer of the privacy/security enclosure. In some embodiments, the filler material can be amorphous or crystalline, organic or inorganic material. In some other embodiments, the particle size of the filler material can be between 1-10 microns. In some other embodiments, at least some portion of the filler material can be sub-micron. In some other embodiments, at least a portion of the filler can comprise a nano-sized particle filler material. In some embodiments, the filler can comprise a fibrous material. In some embodiments, at least a portion of the filler can be oriented in a preferred direction.

In some further embodiments of the invention, at least a portion of one or more of the privacy/security enclosures described herein can comprise an animal-based material such as leather or suede, and/or a plant derived material cellulosic material such as wood, cork, and/or a wood-based composite material.

Some embodiments of the invention can include one or multiple rows of fingerstock bonded into a cover assembly or any interface between at least two portions of the privacy/security device. In some embodiments, in some or each row of fingerstocks, a hollow or solid conductive elastomer can be used. In some embodiments of the invention, in some or each row of fingerstocks, conductive elastomer can comprise a generally circular cross-section. In some further embodiments of the invention, in some or each row of fingerstocks, conductive elastomer can comprise a generally oval cross-section. In some other embodiments of the invention, in some or each row of fingerstocks, conductive elastomer can comprise a generally square or rectangular cross-section. In some embodiments, the bearing surface on the base can be nickel-plated for conductivity and surface hardness.

In some embodiments, at least some portion of the structurally self-supporting enclosed chamber can comprise a metal or a metal alloy. Some embodiments include a metal or metal alloy that can comprise stainless steel, magnesium, aluminum, titanium, or a titanium-magnesium alloy. In some embodiments, one or more components of the enclosed chamber can comprise a metal or metal alloy that is milled from a solid block. In some further embodiments, one or more components of the enclosed chamber can be stamped from raw sheet stock. For example, in some embodiments, components of the enclosed chamber such as a privacy/security enclosure base and/or a privacy/security enclosure lid can comprise stamped aluminum or magnesium alloy. In some other embodiments, the lid can be formed by other conventional manufacturing processes such as molding (e.g., injection molding or thermoforming), die-cutting, laser cutting, or printed using a three dimensional printer, etc.

In some embodiments, at least some portion of the privacy/security enclosure including the structurally self-supporting enclosed chamber can comprise a polymer or polymer composite. In some other embodiments, at least some portion of the structurally self-supporting enclosed chamber can comprise a composite. In some further embodiments, at least some portion of the structurally self-supporting enclosed chamber can comprise a polymer or polymer composite that includes a metal (such as a metal flake, metal powder, or a metal alloy coating, or other metal dispersion).

Some embodiments include a metal or metal alloy that can comprise stainless steel, aluminum, or magnesium. In some embodiments, numerous other materials can be incorporated into various embodiments of the privacy/security enclosure. For example, some embodiments can use injection molded plastic portions, and a wide variety of other conventional product materials such as wood, composite and/or ceramic. Moreover, in some embodiments, the privacy case can comprise a finished surface such as a polished surface. In some embodiments, the privacy/security enclosure can comprise a box for corporate boardrooms that would encompass multiple devices (similar to any commercial cigar box). In some embodiments, metallic meshes/fabrics and/or conductive metallic paints and finishes can be applied to one or more portions of the privacy/security enclosure (internally or externally) to create the RF shield and/or Faraday cage.

Some embodiments of the invention include a privacy/security enclosure with an inner shell coupled to an outer shell. In some embodiments, the inner shell and outer shell can comprise the same material (e.g., the inner and outer shells can each comprise a metal, or a polymer or a composite, and so on). In some other embodiments, the inner shell and outer shell can comprise different materials. For example, in some embodiments, components of the enclosed chamber such as a privacy/security enclosure base inner shell and/or a privacy/security enclosure lid inner shell can comprise a stamped metal or metal alloy (e.g., such as an aluminum and/or magnesium alloy), and a privacy/security enclosure base outer shell and/or a privacy/security enclosure lid outer shell can comprise a non-metal material such as an injection molded polymer or polymer composite material. In this instance, the inner and outer shells of the base and lid can be coupled by a variety of conventional coupling methods including but not limited to a snap-fit, a latch, a hinge, or combinations thereof.

In some other embodiments, at least some portion of the structurally self-supporting chamber can comprise a flexible and/or compliant material. In some embodiments, the material can include at least one of a cloth or fabric, a polymer or polymer composite film or sheet, or other flexible material. In this instance, the privacy/security enclosure can be structurally supported by one or more enclosed user devices, such as a mobile or stationary communication device. For example, in some embodiments, the privacy/security enclosure can comprise a flexible bag that can lay flat or be folded when empty, but can be configured to expand to accommodate at least one RF transceiver such as a mobile or stationary communication device.

Referring now to FIG. 1, in some embodiments, the privacy/security enclosure 100 can comprise a rigid, structurally self-supporting enclosed chamber. For example, in some embodiments, the privacy/security enclosure 100 can comprise a clam-shell type enclosure including an inner region 105 formed by coupling a lower portion, and an upper portion of a main housing 110. Some embodiments include at least one user device (such as the RF transceiver comprising a smart phone as depicted, and shown as device 10) positioned in the inner region 105. The privacy/security enclosure 100 can cradle the user device, and the upper portion can at least partially enclose one or more devices by at least partially moving and closing a base portion 120 and a lid portion 115.

In some embodiments, the privacy/security enclosure 100 can include a base portion 120 and a lid portion 115 coupled by at least one pivot. For example, in some embodiments, the privacy/security enclosure 100 can include a base portion 120 and a lid portion 115 coupled by at least one

conventional hinge mechanism 107. In some embodiments, the base portion or the lid portion can be shaped to accommodate at least a portion of a hinge mechanism 107. In some embodiments, one or more edges of the base portion 120 can include at least one notch capable of providing clearance for a pivot mechanism. In some embodiments, the base portion 120 or lid portion 115 or both can include a plurality of notches for providing clearance or for attachment of various portions of a pivot mechanism. Further, in some embodiments, the base portion 120 or lid portion 115 or both can include a plurality of apertures for providing attachment of various portions of a pivot mechanism. For example, in some other embodiments, one or more surfaces of the base portion 120 and/or one or more surfaces of the lid portion 115 can include at least one aperture capable of securing one or more components of the privacy/security enclosure 100. In some embodiments, any one of the above-mentioned apertures can include an attachment member (e.g., a screw, rivet or other coupling structure).

Some embodiments include a liner 130 positioned in the base portion 120 and/or the lid portion (not shown). As shown in FIG. 1, in some embodiments, the privacy/security enclosure 100 can include a liner 130 that can be shaped to fit substantially seamlessly from the outer periphery of the base, and can include at least one inner storage cavity. For example, in some embodiments, the liner 130 can include a storage cavity 135 shaped to cradle an RF transceiver (device 10). The example embodiments shown in FIG. 1 includes a storage cavity 130 positioned substantially centrally within the base portion 120, and shaped to cradle and at least partially surround the device 10. In some embodiments, the liner 130 can comprise RF and/or acoustic shielding material forming a sealing interface 125.

In some embodiments, the base portion 120 and lid portion 115 can be coupled and pivoted with respect to each other to enable at least partial access to an inner region 105 of the privacy/security enclosure 100 by opening to an angle of between about 0° to about 90°. Referring to FIG. 2, some embodiments include a privacy/security enclosure 200 that opens to an angle of between about 90° and about 180°.

The privacy/security enclosure 200 comprises a main housing 210 including a base portion 220, and a lid portion 215 coupled by a hinge mechanism 207 shown coupled along a one edge of the base portion 220 and the lid portion 215. The base portion 220 and lid portion 215 can be coupled and pivoted with respect to each other to enable at least partial access to an inner region 205 of the privacy/security enclosure 200 by opening to an angle of between about 90° and about 180°. In some other embodiments, the base portion 220 and lid portion 215 can be pivoted with respect to each other and angled at an angle of greater than about 180° (not shown). For example, in some embodiments, the base portion 220 and lid portion 215 can be pivoted with respect to each other and angled at an angle of about 190°. In some embodiments, this can allow the privacy/security enclosure 200 to lay substantially fully open on a surface (e.g., such as a desk) and accommodate a base portion 220 that is thicker than the lid portion 215. In some embodiments, the privacy/security enclosures 100, 200 can be closed, providing no access to the inner regions 105, 205 and effectively shielding the contents of the privacy/security enclosures 100, 200 from RF signals, and/or preventing sounds outside the enclosure from being monitored. For example, as shown in FIGS. 10-15, showing various views of numerous embodiments of a closed privacy/security enclosures 1000, 1100, 1200, 1300, 1400, 1500, the privacy/security enclosures can include a base and

lid portions where the base portion is substantially parallel to the lid portion, and the base portion and lid portion are substantially matingly coupled and/or engaged.

In some embodiments, the hinge mechanisms **107**, **207** can comprise a conventional friction hinge (such as a conventional friction hinge found in a conventional laptop computer). In some other embodiments, the hinge mechanism can comprise an open hinge mechanism, such as the hinges distributed by Taili Glasses Parts Co., Ltd. (http://www.tailiglassesparts.com/eyeglasses_hinges.html). In some other embodiments, the hinge mechanisms **107**, **207** can comprise a closed hinge mechanism, and can be sourced through Alibaba.com (<http://www.alibaba.com>). ALIBABA" and "ALIBABA.COM" and related icons and logos are registered trademarks or trademarks or service marks of Alibaba Group Holding Limited. In other embodiments, the hinge mechanisms **107**, **207** can comprise other types of coupling members capable of allowing the pivoting portions of the privacy/security enclosures **100**, **200** to pivot and/or rotate with respect to each other. For example, in some embodiments, the hinge mechanisms **107**, **207** can comprise a conventional spring-clip.

In some further embodiments, the base and lid portions of the privacy/security enclosures **100**, **200** can be decoupled. For example, in some embodiments, the privacy/security enclosures **100**, **200** can be configured to enable a user to separate the base and lid portions. For example, in some embodiments, the privacy/security enclosures **100**, **200** can include separate base and lid portions that can be matingly coupled and/or engaged by the user. Consequently, in some embodiments, a user can then choose to open the privacy/security enclosures **100**, **200** by decoupling the base and lid portions.

In some embodiments, at least some portion of the privacy/security enclosure can include a radio-frequency shield (hereinafter referred to as an "RF shield"). As used herein, the term "RF shield" is intended to mean a barrier that is able to substantially attenuate, at least partially prevent transmission through, or at least partially block transmission of RF radiation (hereinafter referred to "RF"). For example, in some embodiments of the invention, the RF shield can attenuate (i.e. reduce in signal strength) an RF signal by about 100 dB. In some other embodiments, the RF shield can provide greater than about 100 dB signal attenuation. In some embodiments, the RF shield can attenuate an RF signal by less than about 100 dB while still disrupting effective communication.

In some embodiments, any privacy/security enclosure described herein can include an RF shield that can be capable of attenuating or at least partially blocking RF radiation from entering or exiting the privacy/security enclosure. In some embodiments, this can allow for bandwidth selectable pass-through capabilities. In some embodiments, the privacy/security enclosure can form a Faraday cage capable of substantially attenuating RF signals (whether emitted from one or more mobile or stationary communication devices, or whether emitted from another source). For example, in some embodiments, at least a portion of the privacy/security enclosure is formed of a material substantially attenuating to RF radiation emitted from one or more mobile or stationary communication devices. In some other embodiments, the privacy/security enclosure can be formed of a material including at least a portion that is capable of substantially attenuating radio-frequency radiation emitted from outside of the privacy/security enclosure. For example, in some embodiments, at least a portion of the RF shield and/or Faraday cage can comprise aluminum, magnesium,

copper, steel, or other conductive metal, metallic paints or coatings, wire mesh fabrics in one or more layers or orientations etc., or plastics infused with conductive elements, conductive compounds, and/or conductive mixtures. In some embodiments, at least a portion of the Faraday cage can be optically translucent or transparent. Some embodiments can include a screen emulator. For example, in instances where the privacy/security enclosure includes substantial portions that are not optically transparent, a screen emulator can be used to replicate the enclosed device's screen on a screen that is outside of the privacy/security enclosure.

In some embodiments, one or more slots, windows, or openings can be formed in any portion of the privacy/security enclosure Faraday cage. In some embodiments, this can allow for features such as connecting internal and external antennas, each or all of which can provide varying levels of attenuation or gain at various frequencies. Further, in some embodiments, this can allow cables or wires to pass into the privacy/security enclosure for various purposes including charging the battery of internal devices, or the battery of the privacy/security enclosure, or to access any other internal component from the outside of the enclosure. Further, in some embodiments, the one or more slots, windows, or openings can be used to allow certain RF transmissions through based on the size and location of the slot/opening (e.g. such as in the case of the use of a slot antenna). Some embodiments of the invention can pass certain frequency ranges (with or without attenuation or gain) while attenuating other frequencies. In some embodiments, this can be achieved using one or more slots, windows, or openings that are configured in an open or partially open position. In some embodiments, when the one or more slots, windows, or openings that are configured in a closed configuration, some or all RF frequencies can be attenuated (thereby minimizing leakage).

Further, some embodiments can comprise mechanical or electro-mechanical switches and cut-offs, band pass filters, and other technologies, alone or in combination with each other and/or with antennas, repeaters, amplifiers and other such technologies.

In some embodiments, at least a portion of the privacy/security enclosure is formed of a material substantially attenuating RF radiation emitted to or from any RF antennas or transceivers when they are positioned inside the privacy/security enclosure. In some embodiments, the privacy/security enclosure can comprise a Faraday cage to substantially attenuate, or at least partially block reception of RF radiation. Some embodiments of the invention can comprise an RF shield layer positioned within or on at least a portion of a base portion, or a lid portion, or both. For example, FIG. 3 shows a partial cross-sectional view of a privacy/security enclosure **300** according to one embodiment of the invention that includes an RF shield layer **305**.

The privacy/security enclosure **300** shown includes an enclosure shell or housing **310** that encloses an inner region **320**. Attached to the housing **310** is an RF shield layer **305**. At least some portion of the RF shield layer **305** can be placed between the enclosure shell **310** (i.e., where the enclosure shell **310** as shown could be at least some portion of the base and/or at least some portion of the lid) and an enclosure liner **315**. In other embodiments, the RF shield layer **305** can be placed in other regions of the privacy/security enclosure **300**. For example, the RF shield layer **305** could be placed on the outside of the enclosure shell **310** (e.g., as a cover material) or embedded in the enclosure shell **310**. In some embodiments, the enclosure shell layer **305** can

31

include layers of metal, alloy, wire, a wire mesh, a pure metallic casing, or some other electrically conductive material. In other embodiments, the enclosure liner 315 can comprise the RF shield (i.e., the enclosure liner 315 performs a function of providing a physical lining of the enclosure and also functions as an RF shield). As shown in FIG. 3, in some embodiments, the RF shield layer 305 can extend across an entire inner surface of the enclosure shell 310 of the privacy/security enclosure 300. The view as shown includes a partial cross-sectional view of a privacy/security enclosure according to some embodiments of the invention. The view is not meant to limit the scope of the invention, and one of ordinary skill in the art would recognize that the view would also be representative of an opposite side of the privacy/security enclosure (i.e., a base portion or a lid portion or both). In this instance, the enclosure shell 310 as shown can be either a base portion or a lid portion (e.g., such as base portion 220 or a lid portion 215 of privacy/security enclosure 200), and the RF shield layer 305 can extend across an entire inner surface of the privacy/security enclosure 300 (wherein the portion 302 as shown could function as a base portion or a lid portion). In some embodiments, the RF shield layer 305 can be substantially continuous. In other embodiments, the RF shield layer 305 can be discontinuous (i.e., it can be patterned and/or can contain gaps or apertures of various sizes).

In some embodiments, materials useful for fabricating an RF shield for at least one embodiment of the invention described herein can include materials comprising of metal, metal alloys, or any other conductive material including ultra-conductive film or coating. For example, some embodiments can include a polymer and/or carbon-fiber based layer (e.g., a film, coating or cover) that can include at least one conductive layer. Some embodiments can utilize LORD® "UltraConductive Film and Coatings for Lightning Strike Protection" products with 121 dB attenuation (found at the following web address: <http://www.lord.com>). In some embodiments, tests have shown that a carbon composite coated with the LORD® "UltraConductive Film" achieved 121 dB of EMI shielding, equivalent to that of a solid 1-mm thick aluminum layer.

Other materials useful for fabricating an RF shield for at least one embodiment of the invention can include materials comprising Lessemf.com, Y-Shield paint with 30 to 40 dB attenuation @ 1 to 18 GHz, <http://www.lessemf.com/paint.html>, an EMP Faraday Bag with 40 db @ 1 to 10 GHz, <http://www.lessemf.com/cellphon.html>, and shielding fabric with 50 to 80 dB @ 10 MHz to 3 GHz, <http://www.lessemf.com/fabric.html>

Still other materials useful for fabricating an RF shield for at least one embodiment of the invention can include materials comprising lbagroup.com RF paint with 30 to 40 dB attenuation, see <http://www.lbagroup.com/products/shielding-paints>, and fabric with 80 to 100 db attenuation @ 200 MHz to 10 GHz, see <http://www.lbagroup.com/products/rf-shielding-fabrics>.

Other materials useful for fabricating an RF shield for at least one embodiment of the invention can include materials comprising an Aaronia RFI shield fabric with 80 to 100 db attenuation @ 1 GHz to 10 GHz, such as those available from Kaltman Creations, llc, see <http://www.kaltmancreationsllc.com/rf-test-equipment-html/rf-sensitive-html/>.

Other materials useful for fabricating an RF shield for at least one embodiment of the invention include 3M™ Dri-Shield (metalized polyester and polyethylene with 45 dB attenuation) available from 3M Company.

32

Still other materials useful for fabricating an RF shield for at least one embodiment of the invention include nickel coated graphite mats, nickel coated steel foils and copper mesh with 70 to 93 dB @ 10 MHz to 17 GHz, available from Fiberforge (<http://www.fiberforge.com>).

In some further embodiments of the invention, materials useful to form an RF shield in one or more embodiments of the invention include a layer of material comprising a polymer-based matrix material including metal filaments dispersed in a matrix to form a polymer composite material. In some embodiments, the polymer matrix can comprise a homopolymer and/or copolymer, and can include at least one ceramic, and/or at least one polymer-ceramic mixture. For example, in some embodiments, the RF shield can comprise a layer of material comprising nickel filaments dispersed in polyethersulfone ("PES") as disclosed in "Nickel Filament Polymer-Matrix Composites With Low Surface Impedance and High Electromagnetic Interference Shielding Effectiveness", Xiaoping Shui and D. D. L. Chung, Journal of Electronic Materials, Vol. 26, No. 8, 1997.

In some other embodiments, materials useful in one or more embodiments of the invention include a layer of material comprising a carbon fiber-based matrix material including metal filaments dispersed in a matrix to form a carbon fiber composite material. In some embodiments, the carbon fiber matrix can comprise a homopolymer and/or copolymer, and can include at least one ceramic, and/or at least one polymer-ceramic mixture. In some embodiments, the metal filaments can comprise nickel filaments. In some further embodiments, the metal filaments can include copper filaments and/or stainless steel filaments.

Some embodiments of the invention can include using fabrics with copper or metallic wire/wire mesh woven into base fabric, with layering and/or crossed fabric layers. In some embodiments, an RF shield can be placed between layers of cloth fabric. For example, in some embodiments, an RF shield layer as described earlier can be formed into or embedded in a cloth fabric. In this example embodiment, the cloth layer can then be used to line at least some portion of the inner region (e.g., the inner region of the base portion, or lid portion or both, and/or at least some portion of the outside of the privacy/security enclosure).

As described earlier, FIGS. 10-15 show perspective views of privacy/security enclosures in which the base portion and lid portion are substantially matingly coupled and/or engaged to form a closed privacy/security enclosure. The mobile communication device (device 10) shown in FIGS. 1-2 or FIGS. 13-15 would be shielded from view by the enclosures shown in FIGS. 10-15. Further, in some embodiments, the shell of the privacy/security enclosure can be non-transparent (i.e., substantially attenuating to visible light) and capable of shielding the inner region of the privacy/security enclosure from view. For example, the privacy/security enclosures 1000, 1100, 1200, 1300, 1400, 1500 shown in FIGS. 10-15 and described herein can completely prevent direct viewing of any enclosed communication device, and can prevent video cameras or other visible light sensors from imaging the enclosed communication device.

In some embodiments, the privacy/security enclosure can include a cover that is capable of at least partially covering at least one video camera within at least one user device. In some embodiments, the cover can be the base or lid portion, and/or can comprise a further structural component integrated within, coupled with, or included within the privacy/security enclosure. For example, in some embodiments, at least some portion of the privacy/security enclosure can

comprise a material that is at least partially or substantially fully attenuating to visible light radiation. For example, in some embodiments, the lid portion can comprise a translucent region or “window”, capable of allowing some light to enter and exit the privacy/security enclosure. In this instance, a user can be able to view the presence or absence of any mobile or stationary communication device within a closed privacy/security enclosure (i.e., the user can understand the presence of the device without opening the privacy/security enclosure). However, in this instance, the translucent region would not enable a user or another individual or imaging device to read and comprehend a visual display of the communication device, or read and comprehend any information printed or inscribed on the communication device. In some other embodiments, other portions of the privacy/security enclosure can include at least one region capable of at least partially attenuating visible light radiation. For example, some embodiments include a base portion and/or a lid with one or more translucent regions. In some embodiments, one or more cameras (i.e., still or moving picture recording apparatus sensitive to the visible light, infra-red light and/or UV light) will be attenuated to an extent that renders video recording devices enclosed within the privacy/security enclosure incapable of recording images outside of the enclosure. In some other embodiments of the invention, other sensors of enclosed devices such as light, proximity, heat/thermal, biometric and other such sensors will be partially or substantially fully blocked by the privacy/security enclosure.

In some further embodiments of the invention, the privacy/security enclosure can suppress sound to substantially eliminate eavesdropping. In some embodiments, the privacy/security enclosure can substantially block and/or damp the signals reaching audio sensors and microphones. For example, in some embodiments, the privacy/security enclosure can include audio blocking so that typical conversation-level audio outside the privacy/security enclosure will not be intelligible or discernible by the enclosed device’s microphone. In some embodiments, the enclosure can include sound dampening layers/materials. For example, in some embodiments, at least a portion of the privacy/security enclosure is formed of a material substantially attenuating sound emitted from one or more mobile or stationary communication devices. In some other embodiments, at least a portion of the privacy/security enclosure is formed of a material substantially attenuating sound emitted from outside of the privacy/security enclosure.

In some further embodiments of the invention, the privacy/security enclosure can suppress the ability of various other sensors when enclosed within the privacy/security enclosure. For example, in some embodiments, the privacy/security enclosure can substantially block and/or damp the signals reaching other sensors such as accelerometers, gyroscopes, magnetometers. In some embodiments, the enclosure can include materials configured to at least partially block or attenuate a signal that would normally be sensed by any accelerometers, gyroscopes, or magnetometers that may be coupled to one or more enclosed devices.

In some embodiments, the privacy/security enclosure can comprise a structure that includes at least one sound attenuation layer. For example, in some embodiments, the privacy/security enclosure can include a sound attenuation layer coupled with the enclosure liner 315 shown in FIG. 3. Further, in some embodiments, the enclosure liner 315 can comprise a sound attenuation layer. In some embodiments, the privacy/security enclosure can include a sound attenu-

ation layer positioned within the privacy/security enclosure so that it is immediately adjacent to a microphone and/or a loudspeaker of a device 10.

In some embodiments, sound attenuation can be accomplished by increasing the thickness of one or more regions of the privacy/security enclosure. For example, in some embodiments, the privacy/security enclosure can comprise a base portion and/or a lid portion with increased thickness to provide a level of sound attenuation that is greater than that provided for base portion and/or a lid portions that are thinner. In some embodiments, when the base portion and/or lid portion comprises an inner and outer shell, either the inner shell or outer shell or both can be made thicker in order to provide increased sound attenuation. Increasing the thickness of any portion of the privacy/security enclosure can increase the mass of the privacy/security enclosure in some embodiments.

By definition, every frequency has a corresponding wavelength (impacted by phase velocity). In some embodiments, for any privacy/security enclosure, there can be a frequency that resonates based at least in part on its dimensions, material of construction, and mass. If the resonant frequency falls within the audible frequency spectrum, it is more likely that the sound pressure wave will pass to the interior of the privacy/security enclosure. However, in some embodiments, the stiffness or shape of the privacy/security enclosure can push these resonant frequencies away and/or out of the audible voice range. In some embodiments, the material used, its mass, formed shape, and any reinforcing structures such as internal ribbing can increase the stiffness for a particular dimension and modify sound resonance within the privacy/security enclosure.

In some embodiments, sound attenuation can be accomplished using at least one low pressure or vacuum region or pocket within the privacy/security enclosure. For example, one or more vacuum pockets can be integrated in a base portion and/or a lid portion of a privacy/security enclosure to provide a sound attenuation function. In some embodiments, the vacuum pocket can be integrated into a wall of the base portion or the lid portion, integrated within an inner shell coupled to an outer shell of the base or lid portions, or formed by coupling an inner shell to an outer shell to form a vacuum pocket between the inner and outer shells. In some embodiments, a vacuum pump can create at least a partial vacuum in at least a portion of the interior of the privacy/security enclosure. In some embodiments, the vacuum pump can be a separate unit or integrated into the privacy/security enclosure in some embodiments, and can be actuated in various known ways including a motor or a manual actuator.

Some embodiments include other sound attenuation that can be used alone, or with those described previously. Some embodiments of the invention can include at least one vibration dampener. For example, in some embodiments, the privacy/security enclosure can include at least one material and/or at least one component capable of attenuating a vibration. In some embodiments, the privacy/security enclosure can include a vibration dampening coating. The coating can be applied to at least some region of a base portion and/or a lid portion (including for example be applied to one or more metal regions or components). In some further embodiments, the vibration dampening coating can comprise a lead-impregnated vinyl. In some other embodiments, the vibration dampening can be achieved using an aerogel material in the form of a coating, sheet, or one or more layers. In other embodiments, the vibration dampening coating can include at least one conventional acoustical dampening material.

In some embodiments, sound attenuation can be enabled using at least one vibration damping structural feature capable of coupling with any surface of any enclosed device. For example, in some embodiments, sound attenuation can be enabled using at least one structural feature capable of coupling with one or more microphones of an enclosed device. In some embodiments, the privacy/security enclosure can include at least one structural sound attenuator (e.g., such as a cap or header or footer) positioned inside the privacy/security enclosure that is capable of pressing against one or more microphones of any enclosed device in order to reduce, muffle, and/or substantially block sound from being picked-up by the one or more microphones.

Some embodiments include a vibration damping structural feature comprising an isolation cage. For example, in some embodiments, one or more regions of the privacy/security enclosure can include a suspended vibration isolation cage. In some embodiments, at least one user device can be placed within the vibration isolation cage, and suspended within the privacy/security enclosure in order to attenuate vibrations reaching or being emitted from one or more enclosed devices. Some embodiments include a suspended vibration isolation cage coupled to an inner surface of the privacy/security enclosure using a conventional suspension mount. For example, in some embodiments, the vibration isolation cage can be coupled to an inner surface of the privacy/security enclosure using a coupler comprising an elastomeric material. In other embodiments, the coupler can comprise a fluid-filled chamber in which the fluid is selected for its attenuation of certain vibration frequency ranges.

FIGS. 4, 5, 6A-6C, and 7A-7D show perspective views of passive acoustical attenuation technology according to at least one embodiment of the invention. For example, FIG. 4 shows one example of a privacy/security enclosure 400 that is filled with vibration damping foam 415 that can exclude (i.e., displace) sound carrier air, while also providing damping of enclosure vibration caused by exterior sound. As shown, in some embodiments, each portion 405, 410 of the privacy/security enclosure 400 can be at least partially filled with vibration damping foam 415 with at least one deformation seal 430 and at least one o-ring seal 435. Further, in some embodiments, the phone side surface of each half of the damping foam can be shaped or otherwise contoured with one or more features 420. For example, in some embodiments, the phone side surface can include a trough and/or depression 425 to accommodate and/or cradle at least a portion of a phone. Some embodiments can include one or more ridges 422 to support and/or suspend a phone. In some embodiments, at least a portion of the phone side surface of the foam 415 can comprise a high deformation material. In some further embodiments, at least some of one or more foam portions 415 can comprise a gel-like material 445 comprising sound absorbing materials.

Some embodiments can include passive acoustical protection using multiple air-to-enclosure boundaries. In this instance, each successive boundary can provide additional attenuation. For example, as depicted in the assembly view of FIG. 5, in some embodiments, at least one enclosure boundary can include an acoustical reflective outer layer with a "dead" inner layer (shown as 550) including latch 555. Some embodiments include an enclosure 500 comprising an adsorptive shell half 510 and shell half 514 with gasket labyrinth interface 575, fuzzy interior 570, and suspension hooks 585. Some embodiments include a suspended frame 515 including an elastomeric enclosure forming an aperture 530 and extension inserts 525 for coupling with the

suspension hooks 585. In some embodiments, the device 10 can be inserted into the frame 515 and supported within the enclosure 500.

In some embodiments, while the assembly shown in FIG. 5 provides a substantially airtight seal (which also provides protection against water and dust etc.), the primary reason for the gasket labyrinth interface 575 is for RF attenuation. In some embodiments, the gasket labyrinth interface 575 can comprise a conductive gasket that can form at least a portion of a Faraday cage capable of providing RF protection. For example, some embodiments can include a gasket portion comprising a soft elastomer that can be shaped to extend at least a partial distance around the interface between two portions of the privacy/security enclosure. In some embodiments, the gasket portion can include inserts that comprise sound dampening foam and/or the aforementioned gel comprising sound dampening foam. In some embodiments, at least some portion of the privacy/security enclosure 500 (e.g., such as at least one enclosure boundary) can include suspension hooks 585, and in some embodiments, at least part of the gasket portion 515 can couple with one or more of the hooks 585. In some further embodiments, the one or more of the inner enclosures (forming a boundary between an outer enclosure) can comprise a sound absorbing shell. In some embodiments, the outer surface of one or more inner enclosures can comprise at least one suspension damper capable of attenuating and isolating one internal enclosure from another (internal or outer) enclosure. In some embodiments, the target microphone can be excited by vibrations caused by sound pressure waves. In some embodiments, an internal suspension system for one or more communication devices (such as a phone) can reduce the amount of vibration that reaches the microphone. Other benefits can include drop and shock protection.

Some embodiments of the invention can enable a user to upgrade and/or customize and/or maintain the acoustical dampening of the privacy/security enclosure. For example, as shown in FIG. 6B, some embodiments of the invention can include a privacy/security enclosure 650 comprising one or more assemblies including an installable microphone sealing material (with assembly 600 shown in FIG. 6A and an embodiment of a seal of the privacy/security enclosure 650 shown in FIG. 6C). In some embodiments, a tight seal applied directly to any microphone within the privacy/security enclosure 650 can further reduce the sound pressure waves that reach the microphone(s). As shown in FIG. 6B, some embodiments include a privacy/security enclosure 650 including an elastomeric trampoline-type suspension assembly 660. In some embodiments, the suspension assembly 660 can be coupled to one portions of the privacy/security enclosure 650, and can be configured to be coupled to a grip an enclosure portion. For example, referring to the assembly view 600 of FIG. 6A, some embodiments include a case 605, trampoline suspension 610, and grip case 615. Further, auxiliary microphone plug 625, foam 620, and main microphone plug 630 can be assembled into the case 605 for sealing one or more microphones of a user's device. In some embodiments, a main microphone plug 630 can be coupled to the grip enclosure portion (grip case 615), and in some further embodiments, the auxiliary microphone plug 625 can be coupled to the grip case 615. In some embodiments, the main microphone plug 630 and/or the auxiliary mic plug 625 can attenuate sound to prevent it being sensed by one or more microphones in the device 10 (shown in FIG. 6B).

In some embodiments, two portions of the privacy/security enclosure 650 can include at least one o-ring capable of sealing at least a portion of the privacy/security enclosure

650. Further, in some embodiments, the at least one sealing o-ring can comprise a substantially airtight or near airtight seal formed substantially around the seam of the privacy/security enclosure 650. In this instance, when the privacy/security enclosure 650 is closed, the airtight seal reduces the sound waves reaching the target microphone. Other benefits include air, water and dust protection. Further, in some embodiments, at least a portion of one or more portions of the privacy/security enclosure can include a copper plated lining and/or layer. For example, FIG. 6B shows a cross-sectional view of the privacy/security enclosure 650 showing a device 10 held within the suspension assembly 660 formed by the assembly 600 shown in FIG. 6A. FIG. 6C shows a partial assembly view of a section of the case 605. For example, the wall section 670 coupled to wall section 680 (forming a case half 605b) can be coupled to the case half 605a as shown. The case half 605b can comprise the sections 670, 680 coupled using a screw 687. The wall section 680 can include a copper plate 685 in some embodiments. Further, the wall section 670 can include a groove 692 containing a sealing o-ring 690 into which a tongue portion 606 of the case half 605a is inserted to form the privacy/security enclosure 650.

Some embodiments of the invention can include a combination of sound attenuation technologies. For example, as shown in FIGS. 7A-7D, some embodiments can utilize elastomeric webs to suspend the phone and vibration damping inserts. In some embodiments, the privacy/security enclosure 700 can include sound dampening foam distributed between one or more elastomeric ribs. For example, FIG. 7A shows the privacy/security enclosure 700 including a case shell form by a base half 705 and a lid half 708. In some embodiments, a foam web 720 can be positioned in one or more of the halves 705, 708. Soft foam 725, 730 can also be integrated as shown. FIG. 7C shows a partial assembly view of a section of the case 705. For example, the wall section 762 (forming a portion of the case half 708b) can be coupled to a wall section 759 (forming a portion of a case half 705a). The wall section 759 is shown including an outer wall 755, which in some embodiments includes a multi-layer steel wall 765. Further, in some embodiments, foam section 750 and rib section 760 can be coupled to the wall section 759. At least one Faraday gasket 770 with air and water tight seal 775 can be coupled to a tongue 785 of the wall section 762 by coupled with the seal formed from gasket or o-ring 780. The wall section 762 can comprise a gasket 790 coupled to an outer wall 795. FIG. 7D shows a close-up view of a device 10 coupled with a portion of the foam frame 796, 798 when positioned in the privacy/security enclosure 700 as described. In some embodiments, the foam 725, 730, 750 can comprise a soft, open cell memory foam that utilizes elastomeric webs (ribs 760) to suspend the phone and vibration damping inserts between the webs that also act as shock absorbers in the case of severe impact. In some embodiments, the case shell (e.g., formed by outer walls 755, 795 shown in FIG. 7C) can also be a composite structure designed for sound blocking, damping, and RF shielding characteristics (as well as video and other shielding characteristics). Further, in some embodiments, foam-faced plungers can be positioned to compress against the microphone ports of a communication device when the enclosure is closed.

Some embodiments of the invention include active acoustical control. For example, some embodiments include active masking of audio listening devices using at least one audio masking device. In some embodiments, active acoustical control can comprise at least one sound generator (such

as a speaker) transmitting audio masking signals such that any enclosed microphone and/or microphone recording of one or more targeted devices is not able to distinguish the masking signals from other audio content that may or may not have been present at the time of the broadcast of the masking signal. In some embodiments, the audio content can comprise babble, chirps, pink noise, or white noise. Thus, in some embodiments sound is recorded but audibly buried with the signals that are broadcast so that the sounds are substantially indistinguishable from the masking signal. A variety of masking sounds can be used for this purpose including, but not limited to high or low frequency sounds (including those outside of unassisted human perception). In some instances, the audio masker can be a standalone feature or device, and can include a powered speaker option. For example, FIGS. 8A-8B show one embodiment of the invention including a privacy/security enclosure 800 comprising an elastomeric suspension portion (810 coupled with 825), and at least one speaker that can emit sound in the general area of one or more communication devices (e.g., such as a phone). In some embodiments, the privacy/security enclosure 800 comprising a housing including a base portion 810 and a lid portion 815. Further, the privacy/security enclosure 800 can include an active sound system 850 positioned within the housing 805 that can utilize one or more piezoelectric transducers 830, 840, 845. In some embodiments, a battery 870 is provided for powering the active sound system 850, and optionally for use as an auxiliary power supply for a phone via conventional electromechanical or inductive coupling technologies.

In some further embodiments, the privacy/security enclosure can include an acoustical attenuation comprising an elastomeric suspension that is removable from the privacy/security enclosure to allow easy fitting of the phone. As illustrated in FIGS. 9A-9C, in some embodiments, the elastomeric suspension 900 can include a vibration isolating portion 955 comprising sound dampening foam that can be located at the microphone ports. Further, some embodiments can also include active/powered acoustical transmission via a speaker 930 coupled through a port 925. For example, in some embodiments, a portion of the foam 960 directly adjacent to the microphone port can include at least one embedded speaker 975 within the foam 985 coupled to a silicone frame portion 980 of the elastomeric suspension 900 (shown in FIG. 9C) capable of introducing noise within the vicinity of the microphone port of a communication device. In some embodiments, embedded speakers 975 can be included based on the geometry of one or more enclosed devices in order to offer the flexibility to be used with different communication devices that can vary in size, quantity, and shape. Moreover, in some embodiments, embedded speakers 975 can be included based on the quantity and/or sizes of microphones. In some embodiments, the broadcast of noise can create a signal that can limit or prevent a microphone in the privacy/security enclosure from detecting the presence and/or intelligibility of voices. In some embodiments, the noise can be deterministic, partly-deterministic, or a random sound envelope. In some embodiments, the noise signal could be chirping (a single tone starting from some frequency and shifting to another frequency that can go over an audible frequency range and repeat). In some embodiments, the noise can comprise a random chirping (e.g., a sequence of random chirps played serially). Further, in some embodiments, each chirp can cover some portion of the audible range. Some further embodiments include a crowd noise and/or babble (e.g., multiple, substantially simultaneous speaking voices). Some

other embodiments can include random and/or colored noise (e.g., random noise with a specific shape in the frequency domain including white noise, pink noise, brown noise, blue noise, gray noise, or other). Some embodiments of the invention can include a speaker driver to produce any one of the above mentioned noise sound envelopes within the privacy/security enclosure **900** or some portion of the privacy/security enclosure **900** (e.g. a sock or other mechanism holding one or more devices). In some embodiments, the sound driver (e.g., a speaker) can be configured for low power consumption, accuracy in reproducing the desired random noise source, and one or more front and back driver volume controls.

Some embodiments include selective activation of acoustic masking. For example, in order to conserve power or to minimize obtrusive noise, some embodiments include a microphone capable of detecting the presence of speech. In some embodiments, when speech is detected, noise is broadcast to at least partially mask the speech (through a process of listening and responding). In some further embodiments, a broadcast tail (e.g. some time period, which may vary based on goal) can be used when speech is no longer detected (to accommodate pauses in conversation). Further, some embodiments include varying the power level of the noise signal being broadcasted based on the volume of speech detected. Further, some embodiments of the invention include broadcasting a low volume of sound substantially all of the time. Some embodiments of the invention can also include various controls (e.g., buttons or some other such interface) that can allow users to either activate or bypass the listen and response and/or other features. In some embodiments, a user can use the controls to selectively broadcast noise continuously at varying power levels, or to turn the device off entirely to allow for calls, or for some other such purpose, including those in which no audio masking is desired.

Some embodiments of the invention include access ports. For example, in some embodiments, the privacy/security enclosure can include at least one slot or aperture configured to allow access to a device port. In some embodiments, at least some portion of the base and/or the lid of the privacy/security enclosure can include one or more apertures or slots that can enable access to an enclosed device. In some embodiments, one or more access ports can enable power, audio, video, or other signals to be transmitted into and out of the privacy/security enclosure. Further, in some embodiments, a power supply, an audio signal, and/or a video signal can be transferred into or from any device within the privacy/security enclosure while substantially attenuating or substantially blocking receipt and transmission of RF signals to and from the privacy/security enclosure.

In some embodiments, the privacy/security enclosure can include at least one accessory pouch. For example, as shown in FIG. 2, in some embodiments, the privacy/security enclosure **200** can include at least one accessory pouch **202** such as an internal sleeve or pocket capable of securing documents, credit or debit cards, driver's license, etc. In some embodiments as shown, the lid portion **215** can include the accessory pouch **202** including a plurality of pockets or compartments **202a**. In some other embodiments, the privacy/security enclosure **200** can include at least one accessory pouch capable of securing an accessory selected from a group consisting of a pen, a pencil, coin currency, paper or plastic currency notes, USB memory sticks, and keys (e.g., house or automobile keys and key fobs). In some embodiments, the pouch **202**, **202a** can comprise a metal mesh wallet.

In some embodiments, at least some portion of the privacy/security enclosure can include a colored covering. For example, in some embodiments, at least some portion of the base portion or lid portion of the privacy/security enclosure can be colored (e.g., the base or lid can be red in color). In some embodiments, at least some portion of the privacy/security enclosure can include a multiple colored covering. For example, in some embodiments, at least some portion of the base or the lid of the privacy/security enclosure can comprise multiple colors.

Some embodiments include a privacy/security enclosure that can include a patterned surface. For example, in some embodiments, at least some portion of the base or the lid of the privacy/security enclosure can include a patterned surface. In some embodiments, at least some portion of the base or the lid of the privacy/security enclosure can include printed text. In some embodiments, at least some portion of the base or the lid of the privacy/security enclosure can be textured.

In some embodiments, the privacy/security enclosure can include a covering layer. For example, in some embodiments, the privacy/security enclosure can comprise a substantially structurally supporting member including for example a base and lid portion, and at least some portion of the base or the lid of the privacy/security enclosure can be covered by at least one covering layer. In some embodiments, the covering layer can comprise carbon fiber. In other embodiments, the covering layer can comprise a polymer film or a fabric-based material. In some embodiments, the shape of the outer surface of the privacy/security enclosure can dictate the material used for the covering layer and the process used to couple the covering layer to the outer surface of the privacy/security enclosure shell (e.g., by coupling to either the base portion or the lid portion).

In some further embodiments, colors, patterns, textures, prints, or inserted materials can be applied to inside of the privacy/security enclosure (e.g., to liners, accessories, socks, and/or blocking foams etc.,) as well as to hinges and/or latches on the outside of the privacy/security enclosure.

FIG. 10 illustrates a perspective view of a privacy/security enclosure **1000** according to one embodiment of the invention including filleted corners. The privacy/security enclosure **1000** can comprise a housing **1005** including a base portion **1020** and lid portion **1010** coupled by a hinge **1030**. As shown, in some embodiments, the corners of the base portion and the lid portion base portion **1020** (shown as **1026**) and lid portion **1010** (shown as **1024**) can be filleted so that the corners are curved, and the outer edge of the base portion and the lid portion can comprise a curved surface.

FIG. 11 illustrates a perspective view of a privacy/security enclosure **1100** according to another embodiment of the invention. The privacy/security enclosure **1100** can comprise a housing **1105** including a base portion **1120** and lid portion **1110** coupled by a hinge **1130**. As shown, in some embodiments, the corners (**1126**) of the base portion **1120** and the corners (**1124**) of the lid portion **1110** can be curved. Further, the edge interfaces of the corners of the base portion and the lid portion can be substantially flat as they meet with the top surfaces of the portions **1110**, **1120**. For example, the edge interface **1128** formed with the top surface **1112** can be substantially flat proximate the corner **1124**). Further, the transition from the top surface of the base portion and to the wall surface **1126a** of the base portion **1120**, and the transition from the top surface **1112** to the wall surface **1124a** of the lid portion **1110** can include a sharp or abrupt edge. Moreover, in some embodiments, the edge can be at least partially curved.

41

FIG. 12 illustrates a perspective view of a privacy/security enclosure according to a further embodiment of the invention. As shown, in some embodiments, the corners of the base portion 1220 (shown as 1224) and the corners of the lid portion 1210 (shown as 1214) can be curved. Further, the base portion 1220 and the lid portion 1210 can include a curved transition region from their respective top surface (top surface 1211 of the lid portion 1210 being visible in the view of FIG. 12) to the wall surface 1216. In some embodiments as shown, the corners 1224, 1214 can include a reduction in the radius of curvature of the corners 1224, 1214 (as compared with the embodiments of FIGS. 10 and 11). In some embodiments, the reduced radius in the corners 1224, 1214 can reduce distortion and wear of the surfaces of the privacy/security enclosure 1200.

Some further embodiments of the invention include a privacy/security enclosure design comprising at least one outside cover feature. For example, FIGS. 13-15 show perspective views of various embodiments of a privacy/security enclosure. FIG. 13 illustrates a perspective view of a privacy/security enclosure 1300 adjacent to user device 10 in which the outer cover 1340 comprises a longitudinal feature 1330. The housing 1305 can comprise a base portion 1320 and lid portion 1310 including an outer cover 1340. The outer cover 1340 can include the feature 1340 that can extend at least a partial length of the housing 1305. In some embodiments, the feature 1340 can comprise any color or texture as described earlier. Further, in some embodiments, the feature 1340 can comprise a window, layer, logo, emblem, display, or other functional or aesthetic feature.

FIG. 14 illustrates a perspective view of a privacy/security enclosure adjacent to smart phone according to one embodiment of the invention in which the outer cover comprises a central feature, and FIG. 15 illustrates a perspective view of a privacy/security enclosure adjacent to smart phone according to one embodiment of the invention that includes a central feature extending across the width of the privacy/security enclosure. For example, referring to FIG. 14, the housing 1405 can comprise a base portion 1410 and lid portion 1415 including an outer cover 1430. The portions 1410, 1415 are shown coupled by a pivot or hinge assembly 1420. The outer cover 1430 can include the centrally located feature 1440 that can extend at least a partial length of the housing 1405. In some embodiments, the feature 1440 can comprise any color or texture as described earlier. Further, in some embodiments, the feature 1440 can comprise a window, layer, logo, emblem, display, or other functional or aesthetic feature. Further, referring to FIG. 15, the housing 1505 can comprise a base portion 1510 and lid portion 1515 including an outer cover 1550. The outer cover 1550 can include the centrally located feature 1555 that can extend at least a partial length of the housing 1505. In some embodiments, the feature 1555 can comprise any color or texture as described earlier. Further, in some embodiments, the feature 1555 can comprise a window, layer, logo, emblem, display, or other functional or aesthetic feature. Further, in some embodiments, a side 1540 of the privacy/security enclosure 1500 can comprise any color or texture as described earlier. The embodiments shown in FIGS. 13-15 depict a user device 10 (e.g., a smart phone) positioned adjacent to the closed privacy/security enclosures, and in each enclosure represent one embodiment of a user device that can be enclosed by the adjacent privacy/security enclosure.

As described earlier, in some embodiments, the privacy/security enclosure can be closed. In some instances, closure and sealing of a base and lid portion of a privacy/security

42

enclosure can be facilitated by the use of at least one tongue and groove. As discussed earlier, FIG. 3 shows a cross-sectional view of at least a portion of an outer rim of a shell enclosure of a privacy/security enclosure that can include a tongue and groove ring (shown as 325). In other embodiments, the privacy/security enclosure can include single tongue and groove architecture. Some embodiments can include a groove positioned on a base portion and a single tongue positioned on a lid portion, configured and arranged to matingly engage when the privacy/security enclosure is closed. In some embodiments, either one or both of a base portion and a lid portion can include an inner surface comprising a tongue and groove structure. Moreover, in some embodiments, the use of a plurality of tongue and grooves, with each tongue and groove including a conductive gasket, can add incremental RF shielding based at least in part on the number of tongues, grooves, and conductive gaskets. For example, FIG. 16 is a perspective view of an open privacy/security enclosure 1600 according to one embodiment of the invention. The privacy/security enclosure 1600 can comprise a main housing 1605 including a base portion 1610 and a lid portion 1615 enclosing an inner region 1602. In some embodiments, a groove 1625 can extend at least partially around the edge 1610a of the base portion 1610, and a groove 1635 can extend at least partially around the edge 1615a of the lid portion 1615.

FIG. 17 is a cross-sectional view of a privacy/security enclosure lid portion 1615 or base portion 1620 of the privacy/security enclosure 1600 of FIG. 16 according to one embodiment of the invention. The wall section 1700 can be coupled to wall section 1710, and surface 1750. The groove 1775 (representing either of the grooves 1625 or 1635 of FIG. 16) is shown at least partially extending into the wall section 1700.

In some embodiments, any privacy/security enclosure described herein can include two closely spaced tongue and groove structures (e.g., as represented by the cross-sectional view of FIG. 3). For example, FIG. 18 is a perspective view of an open privacy/security enclosure 1800 according to another embodiment of the invention. The privacy/security enclosure 1800 can comprise a main housing 1805 including a base portion 1810 and a lid portion 1815 enclosing an inner region 1802. In some embodiments, a groove 1825 can extend at least partially around the edge 1810a of the base portion 1810, and a groove 1835 can extend at least partially around the edge 1815a of the lid portion 1815.

FIG. 19 is a cross-sectional view of a privacy/security enclosure lid portion 1815 or base portion 1820 of the privacy/security enclosure 1800 of FIG. 18 according to one embodiment of the invention. The wall section 1900 can be coupled to wall section 1905, and surface 1915. The grooves 1925, 1935 (representing either of the grooves 1825 or 1835 of FIG. 18) are shown at least partially extending into the wall section 1900.

In some embodiments, the one or more grooves can extend around an outer perimeter of the inner region (e.g., as shown in the example embodiment of FIG. 16), and can be positioned immediately adjacent to the inner region. In some other embodiments, the one or more grooves can extend around an outer perimeter of the inner region (e.g., as shown in FIG. 16), and can be located immediately adjacent to the outer surface of the base or lid portion. In some further embodiments, the one or more grooves can extend around an outer perimeter of the inner region (e.g., as shown in FIG. 16), and can be substantially centrally positioned between the inner region surface and the outer surface.

In some embodiments, any privacy/security enclosure disclosed herein can include an upper ring and a lower ring, in which the upper ring is capable of engaging the lower ring to form a seal. The upper ring can include at least two members capable of engaging a plurality of slots or grooves within the lower ring, and the lower ring can include a plurality of members capable of engaging a plurality of slots or grooves within the upper ring. In some further embodiments, the lower ring can include at least two members capable of engaging a plurality of slots or grooves within the upper ring, and the upper ring can include a plurality of members capable of engaging a plurality of slots or grooves within the lower ring. In some other embodiments, the upper ring can include at least one member capable of engaging a plurality of slots or grooves within the lower ring, and the lower ring can include one or more members capable of engaging one or more slots or grooves within the upper ring. In some further embodiments, the lower ring can include at least one member capable of engaging one or more slots or grooves within the upper ring, and the upper ring can include a plurality of members capable of engaging one or more slots or grooves within the lower ring.

FIG. 20A is a cross-section view through region A of the privacy/security enclosure of FIG. 2 according to one embodiment of the invention. The section 2000 can comprise a lower ring 2010 and an upper ring 2015. The groove assembly 2050 (shown comprising ring seal 2070 in FIG. 20B) can comprise a seal 2025 positioned in the upper ring 2015, and at least one seal 2040 positioned in the lower ring 2010. The seals 2025, 2040 can comprise an RF or EMI o-ring seal in some embodiments. FIG. 20B is a perspective view of ring seal 2070 for use in a privacy/security enclosure according to one embodiment of the invention. The ring seal 2070 can comprise a corrugated frame comprising at least one groove 2080 bounded by at least one extension 2075. In some embodiments, the at least one groove 2080 can be used to house a gasket or o-ring.

Various numbers of grooves can be used in some embodiments. For example, one embodiment of a dual groove structure can be seen in FIG. 19, and a single groove example is illustrated in FIG. 17. In some embodiments, any of these groove structures can be implemented with a tongue structure such as the tongue architecture illustrated in FIG. 20A, and can be used with or without an o-ring. For example, in some embodiments, one or more o-rings can be placed between any of the upper members of the upper ring and the slots of the lower ring, and/or between any of the members of the lower ring and the slots of the upper ring. In some embodiments, any one of the plurality of o-rings (e.g., any one of the o-rings seals 2040, 2050 shown in FIG. 20A) can comprise an RF shield (i.e., can function as an RF attenuating gasket) and therefore, can enable a ring seal for use in a privacy/security enclosure. In some embodiments, any one of the plurality of o-rings can comprise a polymer-based matrix material including metal filaments dispersed in a matrix to form a polymer composite material. In some embodiments, the polymer matrix can comprise a homopolymer and/or copolymer, and can comprise an elastomeric polymer such as rubber. In some other embodiments, any one of the plurality of o-ring can comprise a carbon fiber-filled matrix material including metal filaments dispersed in a matrix to form a carbon fiber composite material. In some embodiments, any one of the plurality of o-rings seals 2050, 2050 shown in FIG. 20A can be capable of forming a compliant privacy seal between an upper ring and lower ring of a privacy/security enclosure.

In some embodiments, the formed seal can be capable of functioning as an environmental barrier in addition to functioning as an RF shield. For example, in some embodiments, the formed seal can be capable of providing a water and/or moisture barrier in addition to function as an RF shield. In some embodiments, the plurality of o-rings seals 2040, 2050 shown in FIG. 20A can be capable of forming a substantially water-resistant or substantially water-proof privacy seal between an upper ring and lower ring of a privacy/security enclosure. Further in some embodiments, when used in combination with the RF shield layer described earlier and shown in FIG. 3, the combination of the privacy seal form by the structure of FIG. 20A and the RF shield layer 305 of FIG. 3 can form a Faraday cage to substantially attenuate or at least partially block substantially all RF transmission into the privacy/security enclosure, and/or substantially attenuate or at least partially block substantially all RF transmission out from the privacy/security enclosure. In this instance, at least a portion of the o-ring seals 2040, 2050 can be electrically conductive.

In some embodiments, more than one type of o-ring can be used with any of the upper members of the upper ring and the slots of the lower ring, and/or between any of the members of the lower ring and the slots of the upper ring structures described above. In some embodiments, each o-ring type can be optimized for a specific function (either to at least partially block or attenuate RF, sound, light, moisture, etc.). However, any one o-ring can function to attenuate or at least partially block a combination of RF, sound, light, etc. For example, in some embodiments, one or more of the o-rings can function to attenuate RF, and one or more o-rings can function to attenuate sound, and one or more o-rings can function as an environmental barrier. Moreover, in some embodiments, one or more of the o-rings can be large or smaller than one or more other o-rings. For example, in some embodiments, one or more of the grooves can be larger or smaller than one or more other groove so as to be capable of cradling a complementarily-sized o-ring.

Some embodiments include alternative arrangements and geometries for providing a configurable privacy/security enclosure. For example, FIG. 21 is a perspective view of a privacy/security enclosure 2110 according to another embodiment of the invention. In some embodiments, the privacy/security enclosure 2110 can include a housing 2105 comprising a bottom enclosure portion 2115 including an inner region 2130, and a lid portion 2110 coupled by at least one hinge mechanism 2105. The lid portion 2110 can also include an inner region 2135 to accommodate an upper portion 10a of a device 10. As depicted in FIG. 21, in some embodiments, the bottom enclosure portion 2115 and the lid portion 2110 can be pivoted with respect to each other by the at least one hinge mechanism 2105. Moreover, as shown, in some embodiments, the privacy/security enclosure 2100 can include a bottom enclosure portion 2115, and a lid portion 2110 coupled along one edge proximate the at least one hinge mechanism 2105. The bottom enclosure portion 2115 and the lid portion 2110 can be pivoted can be positioned and pivoted with respect to each other to enable at least partial access to the inner regions 2130, 2135 of the privacy/security enclosure 2100. Moreover, in some embodiments, the bottom enclosure portion 2115 and the lid portion 2110 can be coupled along one longitudinal side, and angled at an angle of between about 0° and about 90° (shown as pivot angle P). In some further embodiments, the bottom enclosure portion 2115 and the lid portion 2110 can be coupled along one longitudinal side, and angled at an angle greater than about 90°.

In some embodiments, the bottom enclosure portion **2115** and the lid portion **2110** can at least partially enclose and/or cradle one or more mobile or stationary communication devices within their respective inner regions **2130**, **2135**. Moreover, in some embodiments, at least some portion of at least one mobile or stationary communication device can be enclosed by the bottom enclosure portion **2115**, and at least some portion (e.g., an upper portion **10a**) of the mobile or stationary communication device can extend outwardly from the inner region **2130** defined by the bottom enclosure portion **2115**.

In some embodiments, the lid portion **2110** can include a latching mechanism **2127**, and the bottom enclosure portion **2115** can include a latch **2125** coupled to the at least one side of the bottom enclosure portion **2115** of the privacy/security enclosure **2100**. Further, the lid portion **2110** can include a latch coupling **2140** coupled to at least one side of the lid portion **2110** of the privacy/security enclosure **2100**. In some embodiments, the coupling **2140** can be coupled with the latch **2125**. For example, in some embodiments, when the bottom enclosure portion **2115** and the lid portion **2110** are pivoted so as to be coupled together (i.e., the pivot angle P between the bottom enclosure portion **2115** and the lid portion **2110** is about zero), the privacy/security enclosure **2100** is closed and at least some portion of the latch **2125** can couple with the latch coupling **2140** to secure the bottom enclosure portion **2115** to the lid portion **2110**. In some other embodiments, the latch **2125** can include other structures suitable for engaging and securing the bottom enclosure portion **2115** to the lid portion **2110**, including conventional clips, magnetic latches, Velcro latches, etc.

Some embodiments include an alternative arrangement and geometry for providing a configurable privacy/security enclosure. For example, FIG. **22** is a perspective view of a privacy/security enclosure **2200** according to another embodiment of the invention. In some embodiments, the privacy/security enclosure **2200** can include a bottom enclosure portion **2210** including an inner region **2230**, and a lid portion **2215** capable of being coupled to the bottom enclosure portion **2210**. As depicted in FIG. **22**, in some embodiments, the bottom enclosure portion **2210** and the lid portion **2215** can be separated with respect to each other. Moreover, as shown, in some embodiments, the privacy/security enclosure **2200** can include the bottom enclosure portion **2210** and a separate lid portion **2215** capable of being positioned and aligned to allow a user to close the privacy/security enclosure **2200** (to substantially enclosing a mobile or stationary communication device such as the device **10** shown) by sliding the lid portion **2215** onto the bottom portion **2210** (e.g., similar to the operation of a conventional memory stick enclosure). In some embodiments, a user can grasp the lid portion **2215** to slide off and remove the lid portion **2215** from the bottom enclosure portion **2210** so as to enable at least partial access to the inner region **2230** of the privacy/security enclosure **2200**. As illustrated in FIG. **22**, in some embodiments, the bottom enclosure portion **2210** can at least partially enclose and cradle a mobile or stationary communication device or devices (with upper portion **10** extending out of the inner region **2230**). Moreover, in some embodiments, at least some portion of the mobile or stationary communication device can be enclosed by the bottom enclosure portion **2210** and at least some portion (an upper portion **10a**) of the mobile or stationary communication device can extend outwardly and away from the bottom enclosure portion **2210** and into the lid portion **2110** when the lid portion **2110** is position coupled to the bottom enclosure portion **2210**.

In some other embodiments, the bottom enclosure portions **2115**, **2210** can be longer or shorter than shown. For example, in some embodiments, the bottom enclosure portions **2115**, **2210** can be longer to enable a greater proportion of a mobile or stationary communication device to be enclosed and cradled, and to allow a lesser proportion of a mobile or stationary communication device to extend outwardly and away from the bottom portion. In some embodiments, this can provide a user or casual observer reduced access to one or more displays or one or more controls of one or more mobile or stationary communication devices. Conventional optical filters can also be used to limit casual observer observation in some embodiments.

In some other embodiments, at least a portion of the bottom portion or the lid portion of any of the privacy/security enclosures shown in FIGS. **1**, **2**, and **8A**, and **10-12**, can include an access window. In some embodiments, the access window can enable direct viewing access to the inner region of the privacy/security enclosure. In some other embodiments, the access window can comprise RF signal opacity. In some embodiments, one or more mobile or stationary communication devices can be positioned in the privacy/security enclosure so that any conventional antenna can be immediately adjacent to the access window. In some other embodiments, the access window can enable a user to access one or more controls of any mobile or stationary communication device within the privacy/security enclosure.

Some embodiments include an alternative arrangement and geometry for providing a configurable privacy/security enclosure. For example, in some embodiments, the privacy/security enclosure can include an inner region, capable of extending or retracting one or more mobile or stationary communication devices. In some embodiments, a device cradled within the inner region of the privacy/security enclosure can be extended out of the inner region and/or retracted into the inner region.

Some embodiments include other arrangements and geometry for providing a configurable privacy/security enclosure. In some embodiments, the lid portion can be a telescoping and retracting lid. For example, in some embodiments, the lid portions **115**, **215** as shown in FIGS. **1** and **2** can comprise a telescoping and/or retractable lid. In this instance, at least a portion of the telescoping and/or retractable lid can be extended or retracted to at least partially cover or uncover the mobile or stationary communication device.

Some embodiments of the invention include an onboard power source. For example, in some embodiments, the privacy/security enclosure can include at least one power source capable of providing power to the privacy/security enclosure and/or one or more devices within the privacy/security enclosure. Some embodiments of the invention include a rechargeable and/or replaceable battery capable of powering enclosure components such as microcontrollers and processors, speakers, and sound drivers, one or more light sources (such as LED's), switches, power amplifiers, signal generators, and any of numerous other electronic components. Some embodiments of the invention include a rechargeable and/or replaceable battery or another rechargeable and/or replaceable power source such as a power storage capacitor. For example, in some embodiments, any one of the privacy/security enclosures described herein can comprise or include a rechargeable and/or replaceable battery or other rechargeable and/or replaceable power source capable of charging a user device while positioned in the privacy/security enclosure. In this example embodiment,

power can be delivered by plugging into an external power socket such as a wall socket or a car adapter socket. Further, some embodiments include an onboard power source such as a rechargeable and/or replaceable battery or other power source (such as a power storage capacitor) as a sole power source that can be capable of charging a user device while positioned in the privacy/security enclosure. In this instance, the onboard power source can be capable of charging the user device and/or can be capable of powering the user device.

Any of the embodiments depicted in the figures and description above can include passive attenuation or at least partial blocking of at least one of RF, sound, and/or light as described earlier and/or signals detectable by sensors within targeted devices (e.g., gyroscopes, accelerometers, magnetometers, light sensors, proximity sensors, cameras, thermal sensors etc.) Some further embodiments can include an active/powerful attenuating, at least partially blocking, interfering and/or masking of at least one of RF, sound, light and/or signals detectable by sensors within contained devices, some of which are illustrated in FIGS. 23A, 23B, 23C, 24A, 24B, 25A, 25B, 25C, 25D, 26A, 26B, 27A, 27B, 28A, and 28B, and FIGS. 29-33.

In some embodiments, the privacy/security enclosure includes at least one system capable of active/powerful attenuation. In some embodiments, since regulatory requirements may not allow transmission of interfering RF signals at the desired level, positioning one or more RF transmitters along or inside of an RF shield may reduce transmissions to acceptable levels outside of the privacy/security enclosure. In some embodiments, while not a regulatory constraint, the same concept applies to active audio masking, with a benefit of any active audio transmission being less obtrusive because it is attenuated by the passive audio attenuation characteristics of the privacy/security enclosure.

In some further embodiments, the privacy/security enclosure can include at least one system capable of actively attenuating and/or substantially masking or blocking sound and/or vibration. Other embodiments include at least one system capable of passively or actively attenuating or substantially blocking video and/or video or imaging (e.g., by passively or actively blocking a video camera). Other embodiments include at least one system capable of passively or actively attenuating, confusing, altering or substantially blocking data gathered by other sensors contained on a device targeted/within the privacy/security enclosure including, but not limited to, sensors such as thermometers, motion sensors, compass, proximity sensors, magnetic sensors, gyroscopes, gravitational sensors, thermal imaging sensors, humidity sensors, barometric sensors, UV sensors, step counters, orientation sensors, gaming sensors, rotational sensors, molecular sensors, olfactory sensors, accelerometers and others.

In some embodiments, the privacy/security enclosure can actively substantially block or interfere with an electronic communication. For example, the electronic communication can comprise an RF signal (such as a cellular, WiFi, a GPS signal, and a Bluetooth® signal), and/or an RFID or other RF tracking device. In some other embodiments, the privacy/security enclosure can include a conventional RF jammer. In some embodiments of the invention, the privacy/security enclosure can include or comprise a rechargeable and/or replaceable battery enclosure capable of providing power to an RF jammer. In some embodiments, the privacy/security enclosure can passively and/or actively attenuate and/or interfere with or at least partially block substantially all RF transmission including, but not limited to, a zero

generation wireless signal, a first generation wireless signal, a second generation wireless signal, a third generation wireless signal, a fourth generation wireless signal, a fifth generation wireless signal, a global positioning satellite signal, (such as “GPS” or “GLONASS”), a Bluetooth wireless signal, RFID electromagnetic radiation, a WIFI wireless signal, a two-way radio RF signal, a UHF or VHF signal (such as a citizen’s band radio signal or other radio signal emitted from a ‘walkie talkie’ type device), high-speed and millimeter wave signals, and a near-field wireless signal. In some embodiments of the invention, the privacy/security enclosure can include at least one transmitter capable of emitting a blocking or interfering signal. In some embodiments, the blocking or interfering signal can be capable of attenuation, interfering with and/or at least partially blocking a signal from passing through the privacy/security enclosure, and can at least partially block, interfere and/or attenuate a signal confined to an area proximity of device, including inside and outside of the privacy/security enclosure. Further, in some embodiments, the privacy/security enclosure can at least partially block and/or attenuate a signal when the privacy/security enclosure is closed (i.e., when the enclosure is enclosing one or more user devices, or when the privacy/security enclosure is open). In some embodiments, the privacy/security enclosure can emit a blocking or interfering signal when the enclosure is open or when the enclosure is closed.

In some embodiments, noise and/or a ripple is added to the DC power supply or ground inside the communication device. Some embodiments can include capacitive, inductive coupling, antenna coupling, or direct connection introduction of noise. In some embodiments, single tone swept signal sources, band filtered white noise, multiple tones with modulation, or some combination of these techniques across some or all frequency bands can be used. In some embodiments, various tone types or noise sources (or combination thereof) can be generated in non-regulated frequency bands (or within the transmission limits of regulated frequency bands) such that the sources interweave to create interfering signals in restricted regulatory bands. In some embodiments, induced noise and/or a ripple can affect RF subsystems of some communication devices (e.g., such as the frequency synthesizers). In some embodiments, noise and/or a ripple is added that can defeat multiple DC regulators within the communication device.

FIGS. 23A-23C illustrate an active RF attenuation privacy/security enclosure according to another embodiment of the invention. For example, some embodiments can include an interfering signal that can be coupled capacitively to the phone’s circuits (e.g., FIG. 23A, showing privacy/security enclosure 2300 with active noise circuit 2310). In this instance, no wired electrical connection is needed in some embodiments. In some other embodiments, a ground connection can be made through the headphone jack or charging port (FIG. 23B, showing privacy/security enclosure 2325 with active noise circuit 2330). Some further embodiments can include an inductive interference of one or more circuits within the communication device (FIG. 23C with privacy/security enclosure 2350 and active noise circuit 2360). For example, in some embodiments, an interfering signal can be coupled inductively to the phone’s circuits. In this instance, no electrical connection is needed, and various selected areas of the communication device can be targeted. In some other embodiments, a direct connection can relay an interfering signal via the charging port, test ports or multiple ports (headphone and charging port, battery contacts) of a communication device.

In some embodiments, passive components designed to alter a phone's antenna behavior are placed in strategic locations near the phone's antennas. For example, FIGS. 24A-24B illustrates an active RF attenuation using a device positioned adjacent to the phone. In this instance, the phone's antenna efficiency can be reduced so that reception and transmission of signals is disrupted. In some other embodiments, the active components can be positioned near the phone's antenna. For example, as illustrated in FIGS. 24A-24B, including user devices 2400 and 2450, in some embodiments, a parasitic antenna (2410 in FIG. 24A and 2460 in FIG. 24B) can be placed near the phone's antenna(s). In this instance, the parasitic antenna can couple with the phone's antenna. In some embodiments, the parasitic antenna can at least partially change the resonant frequencies and circuit matching of the phone's antenna, and the parasitic antenna can intercept RF power and channel it into a resistor. Some embodiments include a movable/switchable antenna. For example, in some embodiments, in order to disable or enable individual phone functions at will, an external antenna system can be either electrically controllable, or physically moveable so that its functionality can be turned on or substantially turned off.

Some embodiments include the addition of electronic switches or phase shifters that allow more complex antenna structures to be configurable electronically. As depicted in FIGS. 25A-25D, showing systems 200, 2515, 2530, and 2545, in some embodiments, the resonant frequency, spatial layout, and directionality of the phone's antenna can be controlled automatically. In this instance, individual phone systems can be affected, and can provide the ability optimize and/or enhance the antenna's attenuation in a given direction. In some embodiments, a parasitic antenna can be switchable (e.g., electronically), and a parasitic antenna can be tuned for various frequency bands (device 2500 including switchable antenna 2510, shown as antenna 2515 with switch 2520 in FIG. 25B). In some further embodiments, an array of antenna elements (shown as 2545 using the array 2530 shown in FIG. 25C with one or more antennas 2535) can be electrically reconfigured or tuned in order to vary its effect on the phone.

In some embodiments, one or more features of one or more communication devices can be modified. For example, FIGS. 26A-26B illustrate an active RF attenuation privacy/security enclosures 2600, 2650 according to another embodiment of the invention. In some embodiments, an internal RF test port can be used to directly introduce RF signals into one or more receivers of the device (shown as 2610 coupled through port 2615). In some further embodiments, it can be possible to attenuate a received signal by shorting the internal antenna lead at a test port. In some embodiments, it can be possible to connect to RF test points inside the device. For example, in some embodiments, an external RF interference generator can be directly connected to a phone's RF subsystem via a cable that, in some embodiments, can reduce the amount of radiated interference (shown as 2655 with switch 2660). Some further embodiments include modification of the battery of the device to ensure that the device is powered off when desired.

Some embodiments include inductive coupling interference directly into critical circuits inside the communication device. For example, FIGS. 27A-27B illustrate an active RF attenuation privacy/security enclosures 2700, 2750 according to another embodiment of the invention. Using the circuit 2715, it can be possible transmit RF interference through the phone's antenna. In some embodiments, this can be achieved by adding an electromagnetic structure outside

the phone. This structure can induce concentrated and targeted RF interference into vulnerable circuits in the phone. In some further embodiments, an antenna coupling can be utilized to disrupt one or more functions of a communication device. For example, in some embodiments, RF interference can be injected into the phone via an external antenna (shown as 2760 in FIG. 27B) that is designed to optimize coupling to the phone's internal antenna. In some embodiments, inductive coupling is likely to cause less electromagnetic interference than antenna coupling.

Some further embodiments can include the use of a transparent Faraday cage (e.g., as depicted in FIG. 28A showing privacy/security enclosure 2800 including transparent Faraday cage 2810). Referring to FIG. 28B, in some further embodiments, the privacy/security enclosure 2850 can include a very low power base station 2870 coupled to external antenna 2865, and transmitting to/from antenna 2860, which in some embodiments can prevent the communication device from logging or connecting to actual base stations.

Some embodiments include an option to enhance communication when the privacy/security enclosure and/or any enclosed user device is not in a blocking mode. In some embodiments, the privacy/security enclosure and/or the user's device(s) can be controlled to enable or disable communication of RF, sound, and/or light or other signals detectable by sensors within the targeted device. In some embodiments, these features can be activated directly by a control on or within the privacy/security enclosure and/or within the user's device(s), or by a remote device.

Further, in some embodiments, the privacy/security enclosure can include an option to selectively at least partially block or unblock one or more communication frequencies. In this instance, the communication frequency can be an RF frequency, an audio frequency, or a light frequency. In some embodiments, the privacy/security enclosure and/or the user's device(s) can be controlled to partially or substantially fully enable or disable communication of one or more frequencies of RF, sound, light and/or other signals detectable by sensors within the targeted device(s). In some embodiments, these features can be activated directly by a control within the privacy/security enclosure, and/or on or within the user's device, or by a remote device. In some embodiments, attenuation and/or masking and interference of all RF, sound, and/or light frequencies can be turned off or turned on. Further, in some embodiments, frequency selection can be used to control the passage and emission of RF, sound or light frequencies to and from the enclosed user device(s) without affecting other internal functions of the user device (e.g., no disruption of internal function of devices such as smart phones, tablets, or laptops are affected, and calendars, MP3 players, readers, apps, games etc. that do not require the interfered with, masked or blocked signal to function), while positioned within an inner region of the privacy/security enclosure.

Some embodiments of the invention include one or more systems to measure ambient field levels. For example, in some embodiments, ambient field levels of RF, sound, and/or light can be measured for purposes of actively interfering with, masking or blocking RF, sound or light. In some embodiments, measurements can be made by at least one component of the privacy/security enclosure and/or by one or more user devices coupled to the privacy/security enclosure. In some embodiments, ambient field levels can be provided as a function of strength of various frequencies.

In some embodiments, the privacy/security enclosure can include at least one active interfering, masking and/or block-

51

ing control of RF, sound and/or light or other signal whose output is impacted by one or more variables provided by one or more systems to measure ambient field levels. For example, in some embodiments, ambient field levels of RF, sound, and/or light can be measured for purposes of actively interfering, masking and/or at least partially blocking RF, sound or light at an interfering, masking and/or blocking power level required for a specific effect.

In some further embodiments of the invention, a privacy/security enclosure can comprise at least one component or device for active blocking of video devices. For example, in some embodiments, the privacy/security enclosure can include at least one device capable of blinding a camera to prevent unauthorized view. In some embodiments, the privacy/security enclosure can include at least one light source capable of overdriving a camera and/or imaging chip. For example, in some embodiments, at least one light emitting diode can be configured to overdrive an imaging device of a user's device(s) with the privacy/security enclosure. In other embodiments, other light or optical sources can be used to blind and/or overdrive an imaging device.

Some embodiments can include active attenuating, interfering, masking and/or substantially blocking of sound. Further, in some embodiments, active attenuation can be configured to modify how sound is received, processed, and transmitted by the communication device. For example, FIGS. 29, 30A-30B, and 31-33 illustrate active acoustical attenuating privacy/security enclosure devices in accordance with some embodiments of the invention. For example, some embodiments can de-correlate the pressure the microphones see from the sound pressure created by the speech that has to be masked. For example, as shown in FIG. 29 depicting the system 2900, in some embodiments, a sealing gasket 2920 can be installed around each microphone 2915 that creates a sealed chamber 2918 around each microphone 2915. In some embodiments, a gasket or enclosure/shield attached to the gasket can be equipped with at least one speaker in order to generate a masking sound. In some further embodiments, a pneumatic piston 2940 coupled to a motor 2930 can be used. For example, in some embodiments, a gasket 2920 is installed around each microphone 2915 that can create a sealed chamber around each microphone 2915. In some embodiments, each chamber created in part by the gasket 2920 can be coupled to or equipped with a pump that can pressurize and/or depressurize the microphone chamber, thereby degrading microphone capability/performance.

Some embodiments of the invention can utilize parasitic noise. For example, FIG. 30A illustrates an active acoustical attenuation privacy/security enclosure 3000 according to another embodiment of the invention. In this instance, mechanical motion can be used to create a noise that will be superimposed to the speech that has to be masked. If the level of this parasitic noise is high enough compared to the speech level, the resulting sound will not be understandable. The parasitic noise can be induced using a variety of methods. For example, in some embodiments, a vibrator 3010 can be leaned against the phone (e.g., close to each microphone) and a parasitic sound can be produced by vibration of the vibrator through impacts against a surface coupled to the microphone. Referring to FIG. 30B, in some further embodiments, a cymbal or a bell assembly 3050 can be used adjacent to the microphones. In this instance, sound can be directed to the microphone (within privacy/security enclosure 3015) from the cymbal or a bell 3020 and/or from sound produced by impact of the cymbal or a bell with an adjacent structure 3055. In some further embodiments, the

52

vibrator can be an electromechanical component (piezoelectric actuator) or a clock-style wind up mechanism (shown as 3025). In some other embodiments, the vibrator can be a brush with multiple hairs that are pushed and rotated against a hard surface to create multiple friction sounds.

Some embodiments of the invention can deploy electrically produced noise. Some embodiments can use electrically produced noise (via a speaker for example) to mask the sound picked up by the microphone. For example, some embodiments include a chirp or warble noise that can be a single tone with a frequency that evolves with time (see for example FIG. 31 showing a plot 3100 including noise profile 3105). Some other embodiments can include an envelope of noise, where the noise's frequency content is shaped to the typical human speech frequency content in order to efficiently mask it. Some embodiments include a self-babble. In this instance, speech is recorded with the enclosure, then processed (played backwards, mixed, filtered, etc.). Some further embodiments include a speech shaped noise. In this instance, the noise's frequency content is real-time amplitude shaped to the speech to match in order to efficiently mask it. Some other embodiments include saturating noise. In this instance, a single frequency tune is played at the most sensitive frequency of the microphones in order to saturate the signal.

Some embodiments include an electromagnetic source to produce a parasitic signal close to the phone (source 3205 directed to privacy/security enclosure 3200 depicted in FIG. 32). This signal will induce an electrical signal in the system which will be superposed to the electrical signal given by the microphones (depending on the susceptibility of the system).

In some further embodiments, a physical barrier can be used to attenuate sound. For example, FIG. 33A-B illustrates active acoustical attenuation privacy/security enclosures 3300, 3325 according to another embodiment of the invention. Referring to FIG. 33A, in this example, a physical shield 3300 can be positioned very close the microphones in order to attenuate the sound and pressure at the microphones. In some embodiments, the physical barrier can comprise a switchable shield. In this example, a shield can be mounted on rails, and can be placed in front of the microphones whenever sound masking is required. Some embodiments can include a horn, or trumpet, or pipe shaped shield. In this example, a shield is shaped to attenuate external speech signal and to amplify a generated parasitic signal. Some other embodiments can include an audio conductive material. Referring to FIG. 33B, showing a cross-section of a privacy/security enclosure 3325, in some embodiments, a conduit 3330 can be installed between an additional speaker and the microphones. The conduit 3330 can be filled with a sound conductor, and one of its extremities can be mechanically coupled to the speaker 3340. The other extremity can be placed as closed as possible to the microphones of a user's device within the privacy/security enclosure 3325 in order to deliver a parasitic sound as efficiently as possible. The shell 3332 of the conduit 3330 can act as a physical shield, while the sound conductor material 3335 can act as an amplifier for the parasitic sound. In this instance, the sound conductor 3335 can be aluminum, brass, glass, or other material that can conduct sound to a greater degree than air.

In some embodiments, an assembly of acoustical attenuation covers can form an envelope covering a portion of one or more communication devices (such as a smart phone). For example, some embodiments can comprise a sock-like enclosure that can cover all or a partial portion of one or

53

more communication devices. In some embodiments, the sock-like enclosure can include or be coupled to one or more acoustical attenuation materials or structures capable of muffling one or more microphones within the communication device. For example, FIGS. 34A-34D illustrates assembly and perspective views of a sock assembly 3400 and components for a privacy/security enclosure in accordance with some embodiments of the invention, and FIG. 35 depicts the sock assembly 3400 of FIGS. 34A-34C within a privacy/security enclosure 3500 in accordance with some embodiments of the invention. For example, FIG. 34A depicts a sock assembly 3400 including an enclosure 3405 comprising a base cap 3415, hood cap 3410, and a strap 3420 for coupling the caps 3415, 3410. FIG. 34B shows a cross-section of a privacy/security enclosure 3450 that includes a sock assembly portion 3460 supporting a user device 10, and FIG. 34C shows a cross-section of a privacy/security enclosure 3465 including an enclosure 3455 that includes a sock assembly portion 3475 including blocking foam pads 3470 supporting a user device 10. In some embodiments, the end cap assembly 3425 including upper and lower blocking foam pads 3427, 3429 shown in FIG. 34D can be used for sock assembly portion 3460 shown in FIG. 34B and/or sock assembly portion 3475 shown in FIG. 34C. Referring to FIG. 35, the privacy/security enclosure 3500 is shown comprising 3505 including a base portion 3510 and lid portion 3515. The sock assembly 3400 is shown positioned in the base portion 3510 of the privacy/security enclosure 3500 enclosing user device 10.

Some embodiments of the invention can comprise a double sock design that uses two end covers that are connected with an elastic band. Further, in some embodiments, the upper and/or lower sock covering can apply blocking material (such as a foam material) against microphone ports covered by or adjacent to the respective sock. In this instance, an axial force applied by the elastic band and the upper sock can force the blocking material against the lower microphone port to increase sound attenuation. In other embodiments, the axial force applying the blocking material to microphones covered by or adjacent to a respective sock can be generated by springs, friction springs, ratchets, or any of a variety of other mechanisms. In some further embodiments, the upper sock or interior linings or other portions of the interior of the enclosure (or blockers attached to or part of the base or lid of the enclosure) can apply the blocking material to one or more microphone ports located on the top and bottom of the enclosed device(s). In this instance, the sock assembly enclosing one or more communication devices can float inside the enclosure or can include clearance holes. In this instance, blocking material pads located on the top and bottom covers can squeeze the phone between the privacy/security enclosure halves only when the privacy/security enclosure is closed, nearly closed or when the sock is in a down position (regardless of the open/close status of the enclosure itself). Moreover, in this configuration, the upper and lower sock can provide vibration isolation to one or more enclosed communication devices.

In some embodiments, the sock-like enclosure can comprise a single piece, and in other embodiments, the sock-like enclosure can comprise a plurality of coupled pieces. Some embodiments can include one or more gaps or apertures in the sock. In some embodiments, the sock-like enclosure can include portions that are disposable or re-useable. In some embodiments, various portions of the sock-like enclosure can be approximately equal in size. In other embodiments, portions of the sock-like enclosure can be smaller or larger

54

than other portions. For example, FIG. 36 depicts another embodiment of a sock assembly 3625 within a privacy/security enclosure 3600 in which the upper sock portion (shown as 3627) has a reduced size over the example provided in FIGS. 34A-34D and 35. This example embodiment shows the privacy/security enclosure 3600 comprising a main housing 3605 including a base portion 3610 coupled to a lid portion 3615. The sock assembly 3625 is shown enclosing a user device 10 and positioned in the base portion 3610. In this instance, the smaller upper sock portion 3627 can apply clamping force to the lower microphone blocking foam (not shown), and in some embodiments, can be positioned in the privacy/security enclosure so that the blocking foam pads in the two enclosure portions (i.e., halves) can be positioned against the front and rear microphone ports on the communication device (i.e., such as on an Apple iPhone®). In this example, the upper blocking foam pad 3631 is shown coupled to the lid portion 3615, and can be positioned to couple or cover a microphone of the user device 10 when the lid portion 3610 is closed. iPhone® is a trademark of Apple Inc., registered in the U.S. and other countries.

Some embodiments of the privacy/security enclosure can include other vibration and/or acoustical attenuation materials such as gels and gel-like materials. For example, FIGS. 37A-37C depict a gel-piston assembly for acoustical control within a privacy/security enclosure 3700 in accordance with some embodiments of the invention. In some embodiments, the privacy/security enclosure 3700 (shown as including main housing 3705 enclosing user device 10) can include a gel-like material 3725 constrained on at least five sides which, when deformed by the top enclosure half during closure, can press blocking foam against the bottom microphone port. In some embodiments, the gel-like material 3725 can be gel like in that it is incompressible, cohesive, viscous, and mechanically robust, capable of repeated opening and closing operations of the privacy/security enclosure. This can allow the gel-like material 3725 to perform its own foam retraction function when the privacy/security enclosure is opened. For example, in some embodiments, the user can set the phone in a pocket with clearance, and the gel-like material 3725 can then remove that clearance and compress the blocking foam when the enclosure is closed. FIG. 37B shows a cross-sectional view of a privacy/security enclosure 3750 including the gel-like material portion 3755 coupled at an interface 3756 with an end of the user device 10 and an interface 3757 at the end of the main housing 3752.

Some embodiments include other mechanical assemblies to assist in one or more sealing operations within the privacy/security enclosure. For example, FIGS. 38A-38C depict a cover actuated acoustical control assembly 3800 in accordance with some embodiments of the invention. FIG. 38a shows a perspective view of the cover actuated acoustical control assembly 3800 with a main housing 3805 enclosing a user device 10. In this example embodiment, a privacy/security enclosure 3800 cover mechanism 3825 can comprise a leaf spring or two-link assembly 3827 which can be displaced in a downward direction by the closing upper portion of the privacy/security enclosure (not shown). FIG. 38B shows a partial front view of the privacy/security enclosure 3800 cover mechanism 3825, and FIG. 38C shows a partial cross-sectional view of the privacy/security enclosure 3800 cover mechanism 3825. In some embodiments, the structure can act on another leaf or linkage pair to translate the lateral force to a longitudinal force thus removing clearance between the communication device and blocker, and can apply sealing force against the bottom

55

microphone port. In some embodiments, the privacy/security enclosure cover mechanism **3825** can comprise a leaf spring or two-link assembly **3827** which can include a controllable stroke. In some further embodiments, the privacy/security enclosure cover mechanism **3825** can comprise a leaf spring or two link assembly **3827** which can include force cover actuation or a user button actuation.

In some embodiments, the privacy/security enclosure can include at least one sock-like enclosure that is at least partially mechanized. For example, FIGS. **39A-C** show different views of a mechanized foldable sock assembly **3900** for a privacy/security enclosure in accordance with some embodiments of the invention. In some embodiments, one or more communication devices (user device **10**) can be placed in the mechanized foldable sock assembly **3900** that includes one or more articulating members **3925** that can be configured to move a portion **3910** of a sock-like enclosure **3905** to at least partially enclose at least one communication device (such as a user device **10**). In some embodiments, the user can press down on the upper portion **3910** of the mechanized foldable sock assembly **3900** to induce the collapsing of the cradle **3907** in a longitudinal direction as well as a folding of the cradle **3907** down into the lower enclosure half (**3915**). In some embodiments, the mechanized foldable sock assembly **3900** can latch in this state with the privacy/security enclosure closed. Further, in some embodiments, the upper portion **3910** can include clearance holes **3912** for blocking foam to be attached to the top and bottom portions of the privacy/security enclosure. Moreover, the mechanized foldable sock assembly **3900** can enable a controlled force to be applied to the blocking foam. FIG. **39C** shows a partial cross-section of the mechanized foldable sock assembly **3900** enclosed within a case or shell **3945** including case halves **3950**, **3955**. The cross-sectional view of the upper portion **3910** shows blocking foam **3902** in position. In some embodiments, the mechanized foldable sock assembly **3900** can enable a user to control the position of one or more sock-like enclosures, and control any portion of the communication device that can extend from and/or be visible from any vantage point.

FIGS. **40A-40C** illustrates further embodiments of the invention including a mechanized foldable sock assembly **4000** for a privacy/security enclosure in accordance with some embodiments of the invention. FIG. **40B** shows the cradle assembly **4001** with upper and lower enclosure portions **4005**, **4010** and articulating assembly **4003** including upper and lower rocker arms **4025**, **4020**. FIG. **40A** shows a partial view of the mechanized foldable sock assembly **4000** in an upright configuration. As shown, in some embodiments, as the communication device (user device **10**) reaches its final location within the cradle assembly **4001**, two rockers **4070**, **4080** can actuate which in turn press blocking foam **4040** against microphone ports (shown in FIG. **40C**). In some embodiments, the block foam mechanism can include a vibration isolation feature because the communication device lacks direct contact with either of the privacy/security enclosure portions. Further, by using an articulating cradle and/or integrated rockers, the blocking foam application force can be relatively high with little effort from the user due to the trigonometric advantage of the linkage arrangement.

FIGS. **48-52** illustrate various views of a sock assembly **4800** including a device cradle assembly **4805** and various device positioning assemblies for raising and lowering the position of at least one device within the cradle assembly **4805**. FIG. **53** depicts an assembly view of the sock assembly **4800** of FIGS. **48-52**. For example, FIGS. **48** and **49**

56

illustrate perspective views of a sock assembly **4800** for a privacy/security enclosure in accordance with some embodiments of the invention. In some embodiments, the sock assembly **4800** can comprise a cradle assembly **4838** comprising a moveable cradle **4840** and a fixed cradle **4830** coupled to a base portion **4810**. In some embodiments, the base portion **4810** can include one or more elements **4835** for interfacing with a cradled device (such as a user device **10**). In some embodiments, the element **4835** can comprise a foam, or other suspension component. Some embodiments of the invention include a cradle assembly **4805** structured to guide and facilitate capture and fixation of a cradle device. In some embodiments, the moveable cradle **4840** can be slidably positioned in the sock assembly **4800** from a first end **4805a** towards a second end **4805b** of the sock assembly **4800**. In some embodiments, the moveable cradle **4840** can include a cavity **4841** for positioning at least one device (such as a user device **10**) within the sock assembly **4800**. Further, in some embodiments, when positioned in the cavity **4841** of the moveable cradle **4840**, any cradled device can be moveably positioned within the sock assembly **4800** by slidably moving the moveable cradle **4840** in the sock assembly **4800** from the first end towards **4805a** the second end **4805b** of the sock assembly **4800**. Movement of the cradle **4840** can be facilitated using a guide cavity **4825** positioned in the guide base **4820** that is coupled to the fixed cradle **4830** and the base **4810** (see FIG. **53**).

In some embodiments, the moveable cradle **4840** can include one or more apertures or slotted portions to facilitate access to one or more functions of a cradled device. For example, as shown in at least FIGS. **48** and **49**, in some embodiments, an upper side of the moveable cradle **4840** can include a slot portion **4840a**. In some embodiments, a user can reach into the sock assembly **4800** to access one or more functions of a cradled device by accessing the device through the slot portion **4840a**. Moreover, in some embodiments, the slot portion **4840a** can facilitate a user creating grip and/or leverage to position the cradle **4840** and any cradled devices in a fixed position.

In further embodiments, the moveable cradle **4840** can comprise one or more holes **4840b** (and clustered into groups in some embodiments) in specific areas of the upper and/or lower sock assembly **4800**. In some embodiments, this can allow sound to pass to or from the interior of the sock assembly **4800** (i.e. to allow use of the speakerphone microphone and speaker while the phone or other device is in the sock assembly **4800**). In some embodiments, a device positioned in the cradle and sock assembly **4800** while it is in a fixed position may have audio blocking material applied to a microphone(s) enclosed by or adjacent to a sock. In some embodiments, when the device is released from the fixed position, mechanisms to push the device away from such audio blocking material can be included in the sock assembly **4800**. For example, in some embodiments, the mechanisms can be one or more springs or material that reverts to an expanded volume when not under some level of pressure or any other such typical mechanism. In some embodiments, a construct attached to a portion of the interior, interior lining or privacy/security enclosure base or lid can be used to ensure that sock assemblies **4800** are pushed to a downward position (regardless of whether or not they are enclosing a transmission device), when the enclosure is being closed. In some embodiments, this configuration can prevent damage occurring to interior mechanisms, assemblies, and other such contents by the closing and/or latching of the enclosure. In some embodiments of the invention, the privacy/security enclosure can include one or

more mating plugs for headphone, power, and other such ports can be included in various sock mechanisms to assist users with the proper orientation of their device in the sock. In some further embodiments, privacy/security enclosure sock assemblies can provide pass through holes for charging cables or other features, enabling charging or other functions while the communication device is in the sock and the enclosure is open or closed. Other embodiments of the invention can comprise a privacy/security enclosure that can provide for charging devices (or other such functions) while one or more devices are in the sock (regardless of whether open or closed). In some embodiments, this can be achieved via mating connectors (i.e. male connectors on the interior of the sock assembly 4800 plugged into the device itself while in the sock). In some embodiments, the male connectors can then be connected through the sock assembly 4800 to female connectors on the exterior of the sock assembly 4800. In some embodiments, native power and other such cables (e.g. for headsets etc.) can be plugged, mimicking the functionality of being plugged directly into the device itself, and enabling power cables (or other functions) to connect to the sock (and thus through to the enclosed device) at angles and in positions no longer constrained by the device's position within the sock or privacy/security enclosure.

In some embodiments of the invention, the privacy/security enclosure including a sock assembly 4800 can have the ability to handle multiple makes, models, and types of devices, while still providing levels of audio, video, RF and other forms of protections. For example, in some embodiments, the sock assembly 4800 can be sized to house the largest of the supported devices and have mechanisms that guide and/or secure or grip a varying number of smaller devices via clamping, springing, elastic or other such mechanisms.

In some embodiments of the enclosure, the positioning of blocking foams, tuning of speaker volumes, and placement of active audio protection speakers and/or microphones can be tuned to be able to handle multiple supported devices within the same enclosure. In some embodiments of the invention, the privacy/security enclosure can include active audio components broadcasting masking sounds into a sock assembly 4800, regardless of whether the enclosure is open or closed, and adjustable seals can be used at the entry of the sock assembly 4800 in order to reduce masking audio sounds leaving the interior of the sock.

In some embodiments, the cradle assembly 4805 can be slidably moved in the sock assembly 4800. FIG. 53 illustrates an exploded assembly view of a sock assembly 4800 for a privacy/security enclosure in accordance with some embodiments of the invention. In some embodiments, the sock assembly 4800 can comprise at least one rail 4880 and at least one rail slot 4825. In some embodiments, the cradle assembly 4805 can be coupled to the at least one rail 4880. In some embodiments, the at least one rail 4880 can couple to the at least one rail slot 4825. Further, in some embodiments, the cradle assembly 4805 can be slidably moved in the sock assembly 4800 by sliding the cradle assembly 4805 coupled to the at least one rail 4880 that is slideably coupled to the at least one rail slot 4825 by a pivot 4860.

In some embodiments, the cradle assembly 4805 can be slidably moved between defined positions defined a position ladder 4850 within the guide base 4820 of the sock assembly 4800. For example, FIG. 50 illustrates a rear perspective view of a sock assembly 4800 for a privacy/security enclosure showing a plurality of position notches 4855 within the position ladder 4850, and FIG. 52 illustrates a cross-sectional view of a sock assembly 4800 for a privacy/security

enclosure taken through the cross-section line shown in FIG. 52 showing the position notches 4855 in accordance with some embodiments of the invention. In some embodiments, the position notches 4855 can be formed within a portion of the guide base 4820. For example, in some embodiments, the position notches 4855 can be formed in a lower side of the sock assembly 4800 as part of the position ladder 4850. In some embodiments, the base portion 4810 can comprise a notch aperture 4812. In some embodiments, the notch aperture 4812 can be positioned adjacent one or more of the position notches 4855 so that the notches 4855 are visible through the rear of the sock assembly 4800. In some embodiments, a spring 4870 can be coupled to the pivot 4860 at one end and to a fixed point 4875 of the guide base 4820. To enable movement of the cradle 4840, a stop 4885 coupled to the at least one rail 4880 can incrementally move between one or more of the notches 4855 under tension of the spring 4870. The movement of the cradle 4840 is bounded by the end 4822 coupled to the guide base 4820 at the first end 4805a of the sock assembly 4800, and towards a second end 4805b of the sock assembly 4800 by coupling of the stop 4885 to the end 4852 of the position ladder 4850.

Some embodiments of the previously mentioned sock assembly 4800 can include one or more defined positions, which in some embodiments can enable an enclosed device to be positioned up to an angle of about 90° with a level surface. In some embodiments, the device can be moved from an elevated position in the sock assembly 4800 to a substantially flat position (i.e., substantially parallel with the surface that is supporting the privacy/security enclosure). Some embodiments can use a tensioner such as a spring 4870, multiple springs, a dampened spring, a spring-loaded or biased peg, or other conventional biasing element to apply a force to the device in one or more elevated or angled positions and when moving the device from one defined position to another defined position.

For example, in some embodiments, the cradle 4840 can be pivotally positioned in the sock assembly 4800. In some embodiments, the cradle 4840 can include a pivot mechanism (pivot 4860) for pivotally positioning at least one device within the sock assembly 4800. Further, in some embodiments, when pivotally positioned in the cavity of the sock assembly 4800, a cradled device can be pivotally positioned toward or away and/or at least partially out of the sock assembly 4800 by pivotally moving the cradle 4840 in the sock assembly 4800 using the pivot mechanism 4860. For example, FIG. 51 illustrates a top view of a sock assembly 4800 for a privacy/security enclosure in accordance with some embodiments of the invention, and shows a pivot mechanism 4860 positioned at the base 4841 of the cradle 4840 within the sock assembly 4800. Further, the cross-sectional view and exploded assembly view shown in FIGS. 52 and 53 illustrate the pivot mechanism 4860 coupled the cradle 4840 in accordance with some embodiments of the invention. As shown, in some embodiments, the pivot mechanism 4860 can comprise a plurality of position ridges 4861 positioned on a pivot gear 4865 and configured to couple with a position stop 4862. Furthermore, in some embodiments, the pivot mechanism 4860 can be coupled to at least one tensioner, such as a spring 4870, multiple springs, a dampened spring, a spring-loaded or biased peg, or other conventional biasing element to apply a force to the cradle assembly and any object nestled within the cradle assembly.

In some embodiments, the cradle 4840 can be pivotally rotated using the pivot mechanism 4860 by rotating the pivot gear 4865 to engage at least one of the plurality of position

ridges **4861** with the position stop **4862**. In some embodiments, as the cradle **4840** is pivoted out away from the sock assembly **4800**, the tensioner (spring **4870**) can extend and store potential energy. Moreover, in some embodiments, any stored potential energy within the tensioner can be used to at least partially move the cradle **4840**. For example, in some embodiments, an extended tensioner can be used to reversibly pivot the cradle **4840** and move the cradle **4840** towards the sock assembly **4800** housing and/or return the cradle **4840** to a prior position adjacent or within the sock assembly **4800** housing. Further, in some embodiments, at least a portion of the tensioner can be viewed and/or accessed through the rear of the sock assembly **4800**.

In some embodiments, any device positioned within the cradle assembly can be rotated away from the sock assembly **4800** and/or rotated towards the sock assembly **4800**. For example, in some embodiments, a device (such as a phone) can be positioned into the cradle **4840** and pivoted towards and away from the sock assembly **4800** using the pivot mechanism **4860** as described above. In some embodiments, a user can rotate the cradle **4840** to facilitate positioning or using a device within the cradle **4840**. For example, in some embodiments, the cradle **4840** can be pivoted away from the sock assembly **4800** housing using the pivot mechanism, and a device (such as a phone) can be positioned into the cradle **4840**. In some embodiments, a user can use the pivot gear **4865** to engage at least one of the plurality of position ridges/position stops (or infinite positions with pivot mechanisms using a tensioned spring or other such mechanism) such that a device can be more easily loaded into the cradle **4840** or used/operated while within the cradle **4840**. In some embodiments, the position (flat or elevated to any degree) of the device (such as a phone) can modify the security level applied by the privacy/security enclosure. For example, in some embodiments, when the device is lying flat in the privacy/security enclosure, a basic level of audio security can include the device operating normally except for using one or more of the microphones enclosed by or adjacent to any of the sock assemblies (e.g. via the application of attenuating technologies such as blocking foam or speakers transmitting a masking signal) or being compressed against blocking foam on the bottom side of the enclosure or enclosure liner or interior. In other embodiments of the invention, the privacy/security enclosure can be configured so that one or more microphones covered by any portion of the sock mechanism can include an audio masking signal applied within or near to the sock, and interfering with the microphone's ability to record and recover non-masking audio content, regardless of sock position/elevation.

In some embodiments, one or more antennas can be positioned on the outside of the Faraday cage of a privacy/security enclosure, and tuned to one or more frequencies (e.g., wideband frequencies). In some embodiments, the one or more antennas can be coupled to one or more antennas internal to the Faraday cage. In some embodiments, the antennas can be permanent or switchable (e.g., switchable using a mechanical or electro-mechanical switch). The antenna gain, directionality, radiation pattern, and coupling characteristics to other antennas can be changed and modified to meet any specific performance standard.

In some embodiments, the performance characteristics can be modified by a variety of parameters including the distance to the Faraday cage (which can detune antennas), the type of dielectric material used in the antenna, and the choice of electromagnetic band gap structures or other such materials or devices to optimize antenna performance. In some embodiments, the combination of these capabilities

are used to allow all or a specific subset of frequencies into the privacy/security enclosure, and through to the housed device. In some embodiments, examples of selective frequency antenna use can include for example, allowing Bluetooth® through to play music in the car on the car's speakers, allowing cellular signals through to receive calls, allowing NFC/RFID through for mobile payments/checkout while at least partially blocking all other frequencies etc., and not attenuating WiFi, GPS or Bluetooth® such that retail stores or other entities, devices, or people cannot or have more difficulty tracking movement and/or location.

Some embodiments of the invention include a privacy/security enclosure including one or more external antennas that can comprise of one more antennas with a wide bandwidth to cover cellular, GPS, WIFI/BT (700 M-2.7 GHz+ margin) and/or one or more antennas to operate within narrow, more specific frequency bands (e.g. Bluetooth). In some embodiments, the external antenna(s) can include a high antenna gain (to compensate for coupling and connection loss). In some further embodiments, the external antenna(s) can preserve the cellular antenna pattern, and in some embodiments, the antenna(s) can be omni-directional. In some embodiments, the external antenna(s) can be configured to function near a metal surface (e.g., such as a shield box).

Some embodiments of the invention include a privacy/security enclosure including one or more internal/coupling antenna. In some embodiments, the one or more internal/coupling antenna can be capable of operating at a wide bandwidth to cover cellular, GPS, WIFI/BT (700 M-2.7 GHz+margin) and/or be tuned to best operate within narrow, more specific frequency bands (e.g. Bluetooth® etc.). In some embodiments, the internal/coupling antenna can include a high coupling efficiency, and be capable of functioning near a metal surface (e.g., such as a shield box). In some embodiments, the internal/coupling antenna can be compatible with multiple cell phones. In some embodiments, the internal/coupling antenna can enable selectivity options for cellular and connectivity (GPS, WIFI/BT) (i.e. through filtering technologies, antenna tuning, etc.)

Some embodiments of the invention can include a privacy/security enclosure comprising an internal/coupling antenna(s) and an external antenna(s). For example, FIG. **41** illustrates an internal/external antenna design for a privacy/security enclosure in accordance with some embodiments of the invention. Further, FIG. **42** illustrates an internal/external antenna design for a privacy/security enclosure including an internal antenna ground plane connected to the shield box, and FIG. **43** illustrates an internal/external antenna design for a privacy/security enclosure including an internal and external antenna ground plane connected to the shield box in accordance with some embodiments of the invention. As illustrated in FIG. **41**, in some embodiments, the privacy/security enclosure **4101** can enclosed a cell phone comprising cellular, GPS, and/or WIFI/BT antennas (shown as **4100**). The privacy/security enclosure **4101** can comprise a shield box **4110** enclosing the device, and two coupled antennas. Further, in some embodiments, the privacy/security enclosure **4101** can comprise a ground plane externally coupled to the external antenna, and a ground plane enclosed within the shield box, coupled to the internal antenna. For example, FIG. **41** shows the privacy/security enclosure **4101** with an internal and an external antenna radiating element (shown as antenna radiating element **4150** with antenna ground plane **4160**, and antenna radiating element **4130** with antenna ground plane **4140**) including a coupling **4120** between the antennas.

61

As illustrated in FIG. 42, in some embodiments, the privacy/security enclosure 4201 can enclosed a cell phone comprising cellular, GPS, and/or WIFI/BT antennas (shown as 4200). The privacy/security enclosure 4201 can comprise a shield box 4210 enclosing the device, and two coupled 5 antennas. In some embodiments, the internal ground plane of the internal antenna can be coupled to the shield box. The privacy/security enclosure 4201 includes an internal and an external antenna radiating element (shown as antenna radiating element 4250 with antenna ground plane 4260, and antenna radiating element 4230 with antenna ground plane 4240), with a coupling 4220 between the antennas.

Further, as shown in FIG. 43, in some embodiments, both the external ground plane and the internal ground plane can be coupled to the shield box. As illustrated in FIG. 43, in some embodiments, the privacy/security enclosure 4301 can enclosed a cell phone comprising cellular, GPS, and/or WIFI/BT antennas (shown as 4300). The privacy/security enclosure 4301 can comprise a shield box 4310 enclosing the device, and two coupled antennas each coupled to the shield box 4310. In some embodiments, the internal ground plane of the internal antenna and the external antenna can be coupled to the shield box. For example, the privacy/security enclosure 4301 includes an internal and an external antenna radiating element (shown as antenna radiating element 4350 with antenna ground plane 4360, and antenna radiating element 4330 with antenna ground plane 4340), with a coupling 4320 between the antennas.

In some embodiments, any number of the features described earlier can be implemented in the privacy/security enclosure 4400 illustrated in FIGS. 44-47. Further, in some embodiments, any number of the features described earlier can function based at least in part on the relative position of the base portion 4410 with respect to the lid portion 4415 of the main housing 4405. In some embodiments, the base portion 4410 and/or lid portion 4415 or both can include at least one extended portion for at least partially housing and providing attachment for various portions of a pivot mechanism. For example, FIG. 44 illustrates a front perspective view of a privacy/security enclosure 4400 in a closed position (i.e., the base portion 4410 and lid portion 4415 are coupled, and positioned substantially parallel with respect to each other. As can be seen in FIG. 45, illustrating a rear perspective view of the privacy/security enclosure 4400 of FIG. 44, in some embodiments, the privacy/security enclosure 4400 can include a contoured region 4427 comprising an outward extension of the lid portion 4415 coupling to an outward extension of the base portion 4410. In some embodiments, at least a portion of the outwardly extending portions of the base and lid portion 4415 can at least partially house a pivot mechanism 4425. In some embodiments of the invention, the privacy/security enclosure 4400 can comprise an extended portion formed from portions of an outward extension of the lid portion 4415 coupling to an outward extension of the base portion 4410.

In some embodiments, the extended portion can be comprise a substantially rounded and contoured shape, extending gradually outward from each end of the privacy/security enclosure 4400 to generally centrally positioned region extending along at least a partial length of the privacy/security enclosure 4400. In some embodiments as shown, the central region of the extended portion can be positioned substantially equidistant from each end of the privacy/security enclosure 4400. Further, in some embodiments as shown, the extended central portion can be comprise a substantially rounded and contoured shape, generally smoothly integrated with portions of the extended portion at

62

each end of the privacy/security enclosure 4400. In some other embodiments, the extended portion can comprise other shapes than those illustrated. For example, in some embodiments, the extended portion can comprise substantially rounded and contoured portions, and/or angular, square, or rectangular portions.

In some embodiments of the invention, the base and lid portions 4410, 4415 of the privacy/security enclosure 4400 shown in FIGS. 44-45 can be moved with respect to each to provide access to the inner region 4402 of the privacy/security enclosure 4400. Moreover, as shown, in some embodiments, the privacy/security enclosure 4400 can include a bottom enclosure portion (comprising the base portion 4410), and a lid portion 4415 coupled along one edge. In some embodiments, each portion 4410, 4415 can be positioned and pivoted with respect to each other to enable at least partial access to the inner region 4402 of the privacy/security enclosure 4400. For example, in some embodiments, the base portion 4410 and a lid portion 4415 can be pivotally moved with respect to each other to open and close the privacy/security enclosure 4400. In some embodiments, the privacy/security enclosure 4400 can include a base portion 4410 and a lid portion 4415 coupled by at least one pivot mechanism 4425. For example, in some embodiments, the privacy/security enclosure 4400 can include a base portion 4410 and a lid portion 4415 coupled by at least one conventional hinge mechanism 4425. In some embodiments, the hinge mechanism 4425 can comprise any of the aforementioned hinge mechanisms. Further, in some embodiments, the base portion 4410 or lid portion 4415 or both can include one or more apertures for providing attachment of various portions of a pivot mechanism within the extended portion (not shown). Moreover, in some embodiments, the hinge mechanism 4425 can be at least partially shielded from view by integrating at least partial portions of the hinge mechanism within portions of the extended portion (e.g., the outwardly extending portions of the base and lid portions 4410, 4415 can at least partially housing a pivot mechanism as described earlier). In some embodiments, the inner region 4402 can include a base enclosure 4430 that can be used to cradle or enclose a user's device.

In some embodiments, the lid portion 4415 can be moved to a partially open position. For example, FIG. 46 illustrates a front perspective view of a privacy/security enclosure 4400 in a partially open position. In some embodiments, the lid portion 4415 can be moved to a partially open position so that the lid portion 4415 is pivoted about the base portion 4410 and positioned to about 45° with respect to the base portion 4410. In some further embodiments, the lid portion 4415 can be pivoted about the base portion 4410 and positioned between about a 0° (i.e., the lid is closed) to about 190° or higher with respect to the base portion 4410.

In some further embodiments, the lid portion 4415 can be moved so that the lid portion 4415 is pivoted about the base portion 4410 and positioned at other angles with respect to the base portion 4410. For example, in some further embodiments, the lid portion 4415 can be moved to a partially open position so that the lid portion 4415 is pivoted about the base portion 4410 and positioned to about 90° with respect to the base portion 4410.

In some other embodiments, the lid portion 4415 can be moved further from the aforementioned partially open positions so that the lid portion 4415 is pivoted about the base portion 4410 and positioned to other angles with respect to the base portion 4410. For example, in some other embodiments, the lid portion 4415 can be moved further from the aforementioned partially open positions so that the lid

portion **4415** is pivoted about the base portion **4410** and positioned to about 190° so that the privacy/security enclosure **4400** lid portion **4415** can rest against a supporting surface when substantially fully open and be stable (i.e., not tip) with respect to the base portion **4410**. Further, FIG. **47** illustrates a bottom rear perspective view of a privacy/security enclosure **4400** in a similar open position.

In some other embodiments, the lid portion **4415** can be moved to other positions from the aforementioned partially open positions so that the lid portion **4415** is pivoted about the base portion **4410** and positioned to other angles with respect to the base portion **4410**. For example, in some embodiments, the lid portion **4415** can be moved by a user to open positions so that the lid portion **4415** is pivoted about the base portion **4410** and positioned to at angles between greater than about 0° and less than about 45° with respect to the base portion **4410**. In some embodiments, the lid portion **4415** can be moved to open positions so that the lid portion **4415** is pivoted about the base portion **4410** and positioned to at angles between greater than about 45° and less than 90° with respect to the base portion **4410**. In some embodiments, the lid portion **4415** can be moved to open positions so that the lid portion **4415** is pivoted about the base portion **4410** and positioned to at angles greater than about 90° and less than about 180° with respect to the base portion **4410**. In some other embodiments, the lid portion **4415** can be moved to extended open positions so that the lid portion **4415** is pivoted about the base portion **4410** and positioned to at angles greater than about 180° and less than about 360° with respect to the base portion **4410**.

In some embodiments, the base portion **4410** of the privacy/security enclosure **4400** shown in FIGS. **44-47** can comprise a base housing **4411** comprising a bottom side coupled to four base sides. In some embodiments as shown, the base sides can comprise a generally curved side wall extending from the bottom side to a generally curved outer base edge. Further, in some embodiments, the lid portion **4415** can comprise a lid housing **4416** comprising a top side coupled to four lid sides. In some embodiments as shown, the lid sides can comprise a generally curved side wall extending from the top side to a generally curved outer lid edge. In some embodiments, the lid side can comprise a generally curved surface. In some other embodiments, at least a portion of the lid side can be generally flat. Further, in some embodiments, the generally curved outer lid edge can be shaped to generally or substantially complement the generally curved outer base edge. Therefore, in some embodiments, when the privacy/security enclosure **4400** is closed so the privacy/security enclosure **4400** can include the base portion **4410** and the lid portion **4415** coupled substantially continuous along one edge by coupling the generally curved outer lid edge to substantially complement the generally curved outer base edge to form a substantially sealed enclosure.

In some embodiments, privacy can be enhanced by disabling or making less effective one or more of the following sensors or systems through the use of motors, magnets or known signal blocking or attenuating techniques: accelerometers, magnetometers, gyroscopes, Near Field Communication systems, humidity sensors, infrared or other light sensors, orientation sensors, pressure sensors, force sensors, proximity sensors, rotational or vector sensors, significant motion sensors, pedometers and any other sensors or systems.

Within the FIGS. **54-128H**, details of various labyrinth and gasket architectures are provided. For example, as shown, in FIG. **54**, the privacy/security enclosure **5400**

include a “knife edge” **5415** where the edge **5410** of the lid portion **5408** of the privacy/security enclosure **5400** can be positioned and wedged between two or more gaskets **5240** positioned within a groove **5407** of a base portion **5405** of the privacy/security enclosure **5400**.

Some further embodiments of the invention include privacy/security enclosures that allow RF pass through capabilities, where specific frequencies can be allowed to pass through the Faraday cage while maintaining protection against other frequencies (i.e. while maintaining privacy protection of the device). Some embodiments include privacy/security enclosures that allow an RF pathway to be closed to reinstate a RF protection via an RF/Antenna cut-off switch.

Some embodiments of the invention include privacy/security enclosures that include RF filtering and/or RF band selection. In some embodiments, RF bands that can pass through the enclosures are adjacent to other bands that can be blocked or attenuated. For example, band **40** and **41** of the cellular spectrum are adjacent to the bands that carry WiFi and Bluetooth (which overlap). In order to pass WiFi and Bluetooth while still providing protection against cellular bands, some embodiments include a series of filter that allow this to happen.

Some embodiments of the invention include a privacy/security enclosure that includes at least one external to internal interface and communication apparatus. In some embodiments, the privacy/security enclosure can enable passing certain types of information from inside to outside the Faraday cage without compromising its protection (i.e., information can be transmitted from the enclosed device while maintaining privacy protection of the device).

Some embodiments of the invention include privacy/security enclosures that enable DC power pass-through. In some embodiments, the privacy/security enclosure can enable charging of one or more batteries within the privacy/security enclosure. Further, some embodiments also enable charging of batteries of one or more enclosed devices. Moreover, in some embodiments, charging of one or more batteries in the privacy/security enclosure and one or more batteries of at least one enclosed device can occur substantially at the same time. In some embodiments, the privacy/security enclosure can comprise one or more charging conductors or wires that pass through the Faraday cage of the privacy/security enclosure for purposes such as charging. Prior art designs would be akin to putting one or more antennas through the Faraday cage, but some embodiments of the invention allows charging to take place without materially degrading the enclosure’s RF protection. Further, in some embodiments, the privacy/security enclosure can comprise one or more charging conductors or wires that pass through the Faraday cage of the privacy/security enclosure for purposes such as charging that do not require a user to connect and disconnect separate leads on the inside and/or outside of the privacy/security enclosure.

Some embodiments of the invention include privacy/security enclosures that comprise one or more optical pass-through components, regions, or structures. In some embodiments, the privacy/security enclosure can include one or more micro-controllers on both the inside and outside of the Faraday cage. In some embodiments, in order to allow the microcontrollers to communicate with each other without including additional holes for additional conductors/wires, holes can be included to allow communication via optical signaling without materially degrading the performance of the Faraday cage.

In some embodiments, power (e.g., for one or more LED's), data, or other information and/or electromagnetic radiation can be passed through the Faraday cage while maintaining privacy protection for the enclosed device. Some embodiments of the invention can enable a head set pass-through. For example, in some embodiments, a user can plug a headset into the outside of the privacy/security enclosure (through the Faraday cage) to access a corresponding feature or port on the device enclosed inside the Faraday cage in the privacy/security enclosure while maintaining privacy protection of the enclosed device.

Some embodiments of the invention include at least one form of audio protection. Some embodiments of the invention include an open case audio protection ("OCAP"). For example, in some embodiments, audio protection can be enabled while the privacy/security enclosure is open. In this instance, a user can use at least a portion of the functionality of the device while maintaining audio protection. For example, where the enclosed device is a phone, the privacy/security enclosure can provide a user with at RF functionality (e.g., to check if calls are coming in and/or to receive and/or respond to text messages). The privacy/security enclosure can also provide a user with screen access (e.g. to send and/or receive emails, check calendars, notes, To Do's, play games, use apps etc.). Further, the privacy/security enclosure can provide a user with access to the use of a front and rear facing camera, and use of various buttons and device functions requiring physical access by the user.

Some embodiments of the invention include listen and respond capabilities. Some embodiments enable a user to use one or more microphones to listen to the environment and play one or more masking signals when sound is detected. Some embodiments include a privacy/security enclosure that comprises one or more microphones that are band limited to specific frequencies that are associated with voice. In this instance, the microphones have a lowered noise floor that is below the threshold of microphones in enclosed user devices (e.g. the enclosed, phone, computer, tablet etc.) For example, in some embodiments, the privacy/security enclosure can comprise one mic in the middle of the low frequency of the common voice frequency band and another in the middle of the medium frequency voice band. In some embodiments, by being very deep (in terms of noise floor) in each of these areas, the presence of speech can be detected (while not capturing the voice content) while ensuring privacy/security enclosure protection is activated.

Some embodiments of the invention include speaker and/or speaker driver selection specifically for masking. Some embodiments include a privacy/security enclosure that can produce one or more specific waveforms to mask human speech. Moreover, some embodiments include speakers that can produce the masking signal with minimal power consumption.

In some embodiments, the privacy/security enclosure can change and/or delay a starting time for the masking signal. For example, in some embodiments, the privacy/security enclosure includes a control system that enables the system and/or the user to select and vary the amount of time between speech detection and masking signal activation.

In some embodiments, the privacy/security enclosure can change the masking signal tail time. For example, after speech ceases, the control system can stop the transmission of the masking signal substantially immediately. In some further embodiments, after speech ceases, the control system can include a transmission of the masking signal that comprises a tail (i.e. a transmission for a certain period of time after speech ceases). In some embodiments, this can mini-

mize obtrusiveness as testing indicates that a constant start/stop is more obtrusive than continuous transmission. In some embodiments, tuning the tail can allow substantially continuous broadcast through the normal starts and stops and pauses that are a part of human conversation. Further, in some other embodiments, the volume of the masking signal can be varying. In some embodiments, the control system or the user can vary the volume of the masking signal based on the volume of the detected sound (e.g. such as a human voice).

In some embodiments of the invention, the privacy/security enclosure can include an obfuscation and/or randomness setting. In some embodiments, for a variety of reasons, the privacy/security enclosure can prevent an unauthorized listener from detecting the presence of speech. In some embodiments, in the obfuscation and/or randomness mode, the privacy/security enclosure can randomly broadcast to simulate protection even if no one is speaking, thereby diminishing the ability of an unauthorized listener of detecting when there is actual speech by a user using the system.

Some embodiments of the invention include an always on mode. In this instance, the privacy/security enclosure includes active audio masking that is always on. In this mode, the privacy/security enclosure can maintain privacy protection substantially constantly.

Some embodiments of the invention include user signaling. In some embodiments, the privacy/security enclosure can include one or more LED's or other forms of communication to indicate when the privacy/security enclosure is providing protection, which mode the privacy/security enclosure is in (always on, obfuscation and/or randomness mode setting, etc.), and/or can be configured to flash anytime the privacy/security enclosure is broadcasting.

Some embodiments of the invention include remote activation. In some embodiments of the invention, a privacy/security enclosure can include audio technologies that can be used independently of RF and other protection technologies. For example, some embodiments include the capability to remotely activate various modes of audio protection. For example, some embodiments can include a remote control that activates audio protection in the privacy/security enclosure that can attach to a smart TV or gaming console that can include built-in microphones. Other examples include cars and any other electronic device with a microphone. This can capture three concepts: 1) The audio protection can be used/applied independent of any other type of protection (RF, etc.); 2) The audio protection can be packaged to protect against any device that has microphone (car, TV, etc.) and 3) Any audio protection can be activated in one or more ways: a.) automatically by some sensing and/or control mechanism built into the product; b.) by physical user interaction/activation (some type of physical button or switch etc.) and c.) a remote activation capability that uses a non-physical interface (RF, infrared/light based, sound (perhaps voice or sound activated by saying a keyword, clapping or something similar.)

Some embodiments of the invention include a noise delivery system that takes the masking signal generated by one or more speakers within the privacy/security enclosure and delivers it to the various microphones that are being protected by the privacy/security enclosure. Some embodiments of the invention include a privacy/security enclosure that comprises a collection point. This is the point at which signals generated by the speakers are captured and are coupled to the delivery system. Some example embodiments include an open port near a privacy/security enclosure

67

speaker or a shaped capture point that changes or impacts capture and delivered signals.

Some embodiments of the invention include a delivery system. In some embodiments, the privacy/security enclosure can comprise a system that channels a signal through at least a portion of the physical architecture of the privacy/ security enclosure and delivers it proximate the microphones of the device against which are being protected. Some example embodiments can include tubes (e.g. similar to tubes used to deliver sound to the ear in a conventional hearing aid). Some example embodiments include channels or paths that are built into the privacy/security enclosure. In some embodiments, depending on the location and proximity of the microphones being delivered a signal, the transmission of the speaker can be propagated to the microphone. In some embodiments, the length, diameter, shape, material and stiffness of the tubes and channels can vary and can impact the signal that is being delivered by the privacy/ security enclosure.

Some embodiments of the invention can include one or more microphone attachment and/or sealing mechanisms. In some embodiments, a physical element of the privacy/ security enclosure architecture can be placed against the surface of the device against microphones that are being protected. In some embodiments, this physical element can comprise a seal or gasket that minimizes the escape of our masking signal to the surrounding environment, and thereby can reduce the noise detected by people nearby. For example, in some embodiments, the tube delivering the sound can open to a hole which is greater than the location of the microphone so that when it is sealed and/or attached, a substantial majority of the signal can be delivered to the microphone rather than to the environment.

Some embodiments of the invention include an extensible design. In some embodiments, in order to facilitate reusing one design to be able to protect against multiple devices, embodiments of the invention include a privacy device that includes be the ability to slide or move the delivery point in order to accommodate devices with different microphone locations.

Some embodiments of the invention include an audio pass-through. In some embodiments, if a user receives a phone call that they want to take, they can be provided with the option to remove the sealed delivery element such that they can take the call (including if they want to do so on speakerphone, for a video call etc.) Some embodiments can improve audio clarity depending on the physical architecture of the privacy/security enclosure. Some embodiments include holes that are placed on the mechanism that holds the protected device in place. In this instance, if the holding mechanism overlaps with a microphone and/or speaker, audio pass-through applies in both directions, listening to the caller and passing through the audio content of the speaker. In some embodiments, the sealing can attenuate an external audio signal coming from outside the seal to the microphone as well as attenuate a masking signal going from inside the seal to outside (that can reduce obtrusiveness). In some embodiments, depending on the degree of external audio attenuation, the level of the masking signal can be lower on one microphone position versus another.

In some embodiments, using any of the previously mentioned protection technologies, other sensor protection can be provided by a privacy/security enclosure. Some embodiments can provide protection and/or degradation of the performance of all sensors contained within various electronic devices as disclosed herein.

68

Some embodiments of the invention include shock absorption features. These features help protect against falls, but also can act as a shock absorber that helps minimize vibrations caused by sound from reaching the IMU's within specific devices.

In some embodiments of the invention, RF gasketing can provide the secondary benefit of minimizing the transmission of air, water, dust and other such substances from passing into the interior of the case when it is closed. In some embodiments, other environmental gaskets can be added to that are more specifically designed for this purpose.

Some embodiments of the invention enable the user to select different levels or types of protection provided any given time. Some embodiments provide multiple selectable states, each of which provides different types or levels of protection.

For embodiments of the invention that include cases that can close, ramps or other features can be provided that prevent damage to interior portions of the case in the event the user is closing the case without having put at least one portion of the interior in the optimal state. In some embodiments of the invention that do not include a sock or lifting mechanism that allows the enclosed device to be elevated, kickstands can be built into or on top of the back of such products to provide similar functionality. Tacky or soft elements can be added to cases or housings to minimize slipping and sliding of products when they are on slippery surfaces.

Some embodiments of the invention allow users to use as much of their native device functionality as possible. Accordingly, some embodiments of the invention provide access to both front and rear facing cameras, side buttons, and other device controls.

Some embodiments of the invention do not use the previously described sock mechanisms. Accordingly, some embodiments utilize different ways of loading, unloading and holding protected devices within the case. Some embodiments include different ways to interface with various ports and plugs on the phone (i.e. power, headset etc.) In some embodiments, access is not provided to some or all of these capabilities while the device is within the case (even if the case is closed to provide RF protection).

Some embodiments of the invention include passive RF protection and passive audio protection. Some of these embodiments include a microphone blocker and a corresponding release function. In some embodiments, when a user takes a sock out of down mode (wherein passive audio protection is provided while the case is open) and the phone is sprung up to an angled position within the case, ready for use, a lift mechanism lifts the phone from the audio sealing material inside the bottom of the sock. These embodiments allow speakerphone and video calls to be made without muffling the clarity of the speaker at the other end of the call as well as the clarity of the speaker using the case. Some of these embodiments use foam (or springs or other such mechanisms) that lift the phone when the phone is not in the compressed or "down" mode. Some embodiments include holes drilled or otherwise formed into the bottom of the sock (or include a grill or some other such pass through method) that allow sound to pass through more easily.

Some embodiments of the invention include passive RF protection and active audio protection. Some of these embodiments of the invention can include shapes that are dissimilar from a bathtub type of design. These alternative embodiments can leverage knife edge labyrinth and gasket designs etc. in order to provide a compact and effective device.

Some embodiments of the invention include different Faraday cage designs. While some embodiments include one piece cases with a book-type of hinge, other embodiments use vertical hinges, two-piece or multi-piece products with removable pieces that both do and do not attach to the pieces that were not removed from the protected or enclosed device.

Some embodiments of the invention include a user interface comprising controls and status indicators. The user interface can display different modes and status using LED's or other visual or audio features. Embodiments of the invention that use active audio masking technology can include a user interface which users to turn the device on/off and/or activate different modes, provide battery and other status, etc.

Further embodiments of privacy/security enclosures including components, assemblies, and methods of use are shown in FIGS. 55A-128H. For example, FIGS. 55A-55C illustrates views of a privacy/security enclosure lid with a U-channel gasket according to another embodiment of the invention. The main housing 5505 can include at least one peripheral u-shaped channel or groove 5520 into which a portion of a lid 5510 can be inserted. The u-shaped channel or groove 5520 can include a gasket 5530 that at least partially fills the u-shaped channel or groove 5520 and the enclosed portion of the lid 5510.

FIG. 56 illustrates a perspective view of a privacy/security enclosure 5600 with mesh fabric gaskets 5625 according to a further embodiment of the invention. In some embodiments, two rows of mesh fabric gaskets 5625 can be formed into a u-shaped channel or groove of the privacy/security enclosure 5600. FIGS. 57A-57B illustrates a perspective view of a privacy/security enclosure 5600 with mesh fabric gaskets according to a further embodiment of the invention. For example, the main housing 5605 can include at least one channel 5608 into which a lid portion 5610 can be inserted between gaskets 5620 comprising an upper gasket 5625a and a lower gasket 5625b.

Further gasket configurations can be seen in FIG. 58 illustrating a cross-sectional view of a privacy/security enclosure 5800 according to one embodiment of the invention. A lid or gasket portion 5810 can be positioned between an interface 5815 formed between an upper portion 5805 and lower portion 5808 of the privacy/security enclosure 5800. In some embodiments, gaskets 5820 can be positioned in the interface 5815 between the upper and lower portions 5805, 5808. In some embodiments, a single gasket can be used placed in the interface 5815 between the lid or gasket portion 5810 and the upper portion 5805, or between the lid or gasket portion 5810 and the lower portion 5808.

FIG. 59 illustrates a cross-sectional view of an edge of a privacy/security enclosure 5900 according to one embodiment of the invention. In some embodiments, the privacy/security enclosure 5900 can comprise a lower portion 5905 including a groove 5907, and an upper portion 5910 including a tongue 5912. In some embodiments, tongue 5912 can be positioned in the groove 5907 and one or more gaskets 5925 can be placed between the tongue 5912 and the lower portion 5905 (e.g., on one or both sides of the tongue 5912 as described for the example embodiment of FIG. 58).

FIG. 60A shows a partial perspective view of a portion of a privacy/security enclosure 6000 according to one embodiment of the invention. FIG. 60B shows a cross-sectional view of a privacy/security enclosure 6000 according to one embodiment of the invention. FIG. 60C shows a cross-sectional view of an edge of the privacy/security enclosure 6000 shown in FIGS. 60A-60B according to one embodi-

ment of the invention. In some embodiments the privacy/security enclosure can comprise lid portion 6005 positioned engaged with a base portion 6015 with a gasket 6010. Referring to FIGS. 60B and 60C, in some embodiments, the base portion 6015 can comprise first groove 6025 and second groove 6027, and the lid portion 6005 can comprise first tongue 6030 and second tongue 6035. The base portion can also comprise a base tongue 6020 between the grooves 6025, 6027, and the lid portion 6005 can comprise a groove 6033 between the tongues 6030, 6035. In some embodiments, the privacy/security enclosure 6000 can comprise a gasket seal 6007 including gasket 6010 comprising the second tongue 6035 positioned in the second groove 6027, the tongue 6020 positioned in the groove 6033, and the first tongue 6030 positioned in the first groove 6025.

FIG. 61A illustrates a cross-sectional view of a privacy/security enclosure 6100 according to one embodiment of the invention. FIG. 61B illustrates a cross-sectional perspective view of a privacy/security enclosure 6100 according to one embodiment of the invention. Referring to FIGS. 61A-61B, in some embodiments, the main housing 6105 of a privacy/security enclosure 6100 can comprise a base portion 6110 coupled to a lid portion 6115, and a gasket seal 6120 can be formed within the wall 6112 of the base portion 6110. FIGS. 61C-61F illustrate various alternative embodiments of the gasket seals 6120 for a privacy/security enclosure 6100 according to one embodiment of the invention. For example, referring to FIG. 61C, some embodiments include a gasket seal 6120a comprising a tongue and groove architecture comprising a groove 6130 and a tongue 6140 at least partially inserted in the groove 6130. In some embodiments, an inner gasket 6150 (e.g., such as a fabric gasket as described earlier) can be positioned in the groove 6130 between the inner wall 6112a of the wall 6112 and the tongue 6140. Referring to FIG. 61D, in some embodiments, the gasket seal 6120 can comprise a gasket seal 6120b. In this example embodiments, groove 6130 can include tongue 6140 positioned between an inner and outer gasket 6150, 6151. In this instance, the inner gasket 6150 can be positioned in the groove 6130 between the inner wall 6112a of the wall 6112 and the tongue 6140, and the outer gasket 6151 can be positioned in the groove 6130 between the outer wall 6112b of the wall 6112 and the tongue 6140.

Referring to FIG. 61E, some embodiments include a gasket seal 6120c comprising a tongue and groove architecture comprising a groove 6130 and a tongue 6140 at least partially inserted in the groove 6130. In some embodiments, an inner gasket 6150 can be positioned in the groove 6130 between the inner wall 6112a of the wall 6112 and the tongue 6140, and a base gasket 6152 (e.g., such as a mesh gasket) can be positioned at the bottom of the groove 6130 between the tip of the tongue and the bottom of the groove 6130. Referring to FIG. 61F, in some embodiments, the gasket seal 6120 can comprise a gasket seal 6120d. In this example embodiments, groove 6130 can include tongue 6140 positioned between an inner and outer gasket 6150, 6151. In this instance, the inner gasket 6150 can be positioned in the groove 6130 between the inner wall 6112a of the wall 6112 and the tongue 6140, and the outer gasket 6151 can be positioned in the groove 6130 between the outer wall 6112b of the wall 6112 and the tongue 6140. Further, an inner gasket 6150 can be positioned in the groove 6130 between the inner wall 6112a of the wall 6112 and the tongue 6140, and a base gasket 6152 (e.g., such as a mesh gasket) can be positioned at the bottom of the groove 6130 between the tip of the tongue and the bottom of the groove 6130.

71

Some embodiments include pivoting and/or articulating privacy/security enclosures that can enable functional and elegant options for a user to insert or remove a device (e.g., such as user device 10). For example, FIGS. 62A-62F various views of a privacy/security enclosure 6200 in progressive stages of opening and device insertion or removal according to one embodiment of the invention. In some embodiments, the privacy/security enclosure 6200 can comprise a lower case 6210, coupled to an inner enclosure 6245 and an articulating enclosure 6240. In some embodiments, an outer case or shell 6250 can at least partially enclose the inner enclosure 6245. In some embodiments, a user can use a latch 6260 to open the privacy/security enclosure 6200 enabling the articulating enclosure 6240 to pivot, and for the case or shell 6250 to be removed (shown progressively in FIGS. 62A-62D).

FIG. 63A illustrates a perspective view of a closed privacy/security enclosure 6300 according to one embodiment of the invention. FIG. 63B illustrates a cross-sectional view of the privacy/security enclosure of FIG. 63A according to one embodiment of the invention. FIG. 63C illustrates the privacy/security enclosure of FIG. 63A in an open configuration according to one embodiment of the invention. FIG. 63D illustrates a cross-sectional view of the privacy/security enclosure of FIG. 63C according to one embodiment of the invention. Some embodiments include a main housing 6305 comprising a base assembly 6310, a case or cover 6315, a base cover 6325, and a hood 6335. In some embodiments, an articulation assembly 6360 can be used to extend the enclosure 6340 including an inside RF shield 6375 from the base assembly 6310.

FIG. 64A illustrates an assembly view of an example embodiment of a privacy/security enclosure according to one embodiment of the invention. FIG. 64B illustrates a base shell assembly view of a privacy/security enclosure according to one embodiment of the invention. Some embodiments include a cover 6310a and a base shell 6310b including a gasket 6311 coupled to a base shell bezel 6312. Some embodiments include a base assembly 6370 coupled to base shell 6310b. Embodiments of the assembly can comprise a lower gasket lever 6372, electronics/PCB (inside RF case) 6375. Some embodiments include phone bed 6380, hood 6385, and masking speaker 6388. Referring to FIG. 64C illustrating a hood sub-assembly view of a privacy/security enclosure according to one embodiment of the invention, some embodiments include a hood exterior 6335 coupled to a hood interior 6335a, with coupled gasket 6335b. Some embodiments include one or more indicators of function and/or privacy such as an integrated hood—LED beacon 6335c. FIGS. 65A-65E depicts various views of a privacy/security enclosure 6300 in use according to one embodiment of the invention. For example, some embodiments include a privacy/security enclosure 6300 including a base assembly 6325 coupled to a user device 10. As shown in FIG. 65E, the hood exterior 6335 can enable a device camera 13 of the user device 10 to have viewing access when extended from the main housing.

Referring to FIGS. 66A-66C depicts various views of a privacy/security enclosure 6300 in use according to one embodiment of the invention. In some embodiments, the enclosure 6305 can be positioned in or on the case or shell 6315. For example, in some embodiments, the enclosure 6305 including hood 6335 and Faraday base 6370 can be removed from the case or shell 6315 (shown in removal process FIG. 66B and FIG. 66C), and turned over and reversed in position to enable the enclosure 6305 including hood 6335 and Faraday base 6370 to be placed in an

72

elevated position on the case or shell 6315. FIGS. 67A-67F depicts various views of a privacy/security enclosure 6300 in use according to one embodiment of the invention, and show views of the interaction between the enclosure 6305 and the case or shell 6315 (shown as 6310a in FIG. 67E). Further, as shown in FIG. 67E, the hood 6335 can be extended away from the user device 10 to enable insertion and removal of the user device 10.

FIG. 68 shows a privacy/security enclosure 6800 according to another embodiment of the invention. Some embodiments include a main housing 6805 comprising a base portion 6810 and lid portion 6815. In some embodiments, the hinge mechanism 6820 main housing 6805 can be pivoted with respect to the base portion 6810. FIG. 69 shows a further example of a privacy/security enclosure 6900 according to another embodiment of the invention. Some embodiments include a main housing 6905 comprising a lid portion 6910 and base portion 6915. FIG. 70 shows another example of a privacy/security enclosure 7000 according to another embodiment of the invention. Some embodiments include a case or shell 7005 enveloping an enclosure 7010. In some embodiments, the main housing 7010 can be removed from the case or shell 7005 to enable access to a user's device.

FIGS. 71A-71D shows privacy/security enclosures according to various embodiments of the invention. FIG. 71A shows a privacy/security enclosure 7100 comprising a main housing 7105 including a base portion 7110 pivotably coupled to a lid portion 7115 using a hinge 7108. The enclosure 7120 shown within the privacy/security enclosure 7100 can comprise a base enclosure 7130 and hood enclosure 7140 that can be accessed by opening the privacy/security enclosure 7100 using a latch 7125. Further, FIG. 71B shows a privacy/security enclosure 7150 including a base portion 7147 coupled to a lid portion 7145 using a hinge 7148. The base enclosure 7155 shown can be accessed by opening the privacy/security enclosure 7150 using a latch 7158. FIG. 71C shows enclosure 7160 comprising a main cover or shell 7165 that can enclose enclosure 7167 comprising a base enclosure 7175 and hood enclosure 7170. FIG. 71D shows enclosure 7180 including base enclosure 7185 and hood enclosure 7198, and a cover or shell 7190 comprising an inner region 7195 into which the enclosure 7180 can be inserted.

FIGS. 72A-72D depicts a privacy/security enclosure 7200 in use in accordance with some embodiments of the invention. Referring to FIG. 72A, the privacy/security enclosure 7200 can comprise a main housing 7205 including a cover or shell 7210 enclosing an enclosure 7215 and including a latch 7230. As shown in FIG. 72B, the user device 10 can be positioned in the enclosure 7215 to provide some privacy while the cover or shell is removed and/or folded away from the enclosure 7215. The user device 10 can be removed from the privacy/security enclosure 7200 for use by a user (as depicted in FIG. 72C showing user 25). The user device 10 can also be mounted in the privacy/security enclosure 7200 using a standing feature (shown in FIG. 72D). Further views of the privacy/security enclosure 7200 are shown in FIGS. 73A-73C, FIGS. 74A-74D, and FIGS. 75A-75F depicting a privacy/security enclosure 7200 in use in accordance with some embodiments of the invention.

FIGS. 76A-76D depicts a privacy/security enclosure 7600 in use in accordance with some embodiments of the invention, and FIGS. 77A-77C depicts a privacy/security enclosure 7600 in use in accordance with some embodiments of the invention. In some embodiments, the privacy/security enclosure 7600 includes main housing 7605, cover or shell

73

7608, and enclosure 7610 including base enclosure 7630, enclosure support 7635, hood cap 7640, and hood 7650. In some embodiments, the enclosure 7610 can be removed from the cover or shell 7608. Further, in some embodiments, the hood 7650 and/or hood cap 7640 can be extend and retracted to facilitate insertion and removal of a user device 10.

FIGS. 78A-78C depicts a privacy/security enclosure 7800 in use in accordance with some embodiments of the invention, and FIGS. 79A-79C depicts a privacy/security enclosure 7800 in use in accordance with some embodiments of the invention. Some embodiments include main housing 7805 including a cover or shell 7808 and enclosed enclosure 7810 comprising an enclosure base 7815 and hood 7825. Referring to FIG. 79C, in some embodiments, proximate the hood wall 7815, and aperture 7818 can be included to enable access to one or more controls of the user device 10. Further, referring to FIG. 79B, in some embodiments, the hood cap 7830 can be pivoted from an open position (shown as 7802) to a closed position (shown as 7804) to enable the enclosure 7810 to enclose and clasp the user device 10.

FIGS. 80A-80F illustrate various views of a privacy/security enclosure 8000 according to at least one embodiment of the invention. Some embodiments include a main housing 8005 including a removable outer cover 8007, a rear outer enclosure 8010, a front outer enclosure 8030, and a base enclosure 8040. Some embodiments include an LED or button 8042 positioned in the base enclosure. Some embodiments include an extendible hood 8050 including a hood cap 8055. In some embodiments, the hood cap 8055 can comprise at least one function, status, and/or privacy indicator comprising an indicator LED 8070. In some embodiments, logo 8088 can be including on at least a portion of the main housing.

FIG. 81A-81D illustrate various views of a privacy/security enclosure 8100 according to at least one embodiment of the invention. In some embodiments, the privacy/security enclosure 8100 can include a main housing 8105 comprising an enclosure 8110, cover or shell 8115, base enclosure 8112, and hood 8114. In some embodiments, the enclosure 8110 can be removed from the cover or shell 8115. FIG. 81D shows a user device 10 in a standing mode. FIGS. 82A-82D illustrate various views of a privacy/security enclosure 8100 according to at least one embodiment of the invention. In some embodiments, the enclosure 8110 can comprise a support 8215 coupled to the base enclosure 8112 and hood 8114. As shown in FIG. 82C, in some embodiments, the hood 8114 can comprise a clip portion 8114b that can be pivoting about a pivot 8114a to enable the clip portion 8114b to grip a user device 10 or to enable a user to remove a user device 10 from the enclosure 8110.

FIGS. 83A-83D illustrate various views of a privacy/security enclosure 8300 according to at least one embodiment of the invention. Some embodiments include a main housing 8305 comprising an enclosure 8310 and a cover or shell 8315, and base enclosure 8312. In some embodiments, the enclosure 8310 can be removed from the cover or shell 8315 (removal process shown in FIG. 83B and removed cover or shell 8315 shown removed in FIG. 83C). Referring to FIG. 83D, some embodiments, the hood 8316 with a hood clip 8314 can be moved from a closed position (shown as 8314a in FIG. 83C) to an open position (shown as 8314b in FIG. 83D). This is further illustrated in FIGS. 84A-84D, illustrating various views of a privacy/security enclosure 8300 according to at least one embodiment of the invention. FIG. 84A shows the closed position 8314a, and FIG. 84B shows a user 25 in the process of opening the hood 8314.

74

FIG. 84C shows the open position 8314b of the hood 8314. This view also shows the aperture 8307 enabling access to the user device 10 as described for another embodiment earlier. Further, FIG. 84D shows the hood 8316 can be extended away from the enclosed user device 10 forming a gap 8303 and enabling access to one end of the user device 10.

FIGS. 85A-85C illustrate various views of a privacy/security enclosure 8500 according to at least one embodiment of the invention. In some embodiments of the invention, the privacy/security enclosure 8500 can include a main housing 8505 comprising a cover 8507, enclosure 8510, coupled base enclosure 8515 and hood 8540 including hood cap 8545. A user device 10 is shown cradled in the enclosure 8510 with one end positioned in the base enclosure 8515, and another end clasped in the hood 8540 with the hood cap 8545. An access aperture 8517 is shown in the base enclosure 8515 to enable user access to one or more controls of the user device 10. Further views of the privacy/security enclosure 8500 are shown in FIGS. 86A-86D including various positions of the cover 8507 with respect to the enclosure 8510 in accordance with some embodiments of the invention.

FIGS. 87A-87E illustrate various views of a privacy/security enclosure 8700 according to at least one embodiment of the invention. The privacy/security enclosure 8700 is shown comprising a main housing 8705 including a cover 8707, base enclosure 8715, hood enclosure 8740, and removable cover 8750a. As depicted in FIGS. 87C-87E, the removable cover 8750 positioned coupled to the base enclosure 8715 can be rotated to a rotated position 8750b, and removed (shown as removed cover 8750c).

FIGS. 88A-88C illustrate various views of a privacy/security enclosure 8800 according to at least one embodiment of the invention. Some embodiments include a privacy/security enclosure 8800 comprising a main housing 8805 including a cover 8807 positioned at least partially covering an enclosure 8810 and coupled to a base assembly 8815. The enclosure 8810 can comprise a hood 8830 including a cap 8840. FIGS. 89A-89E illustrate various views of a privacy/security enclosure 8800 including some an assembly view (shown in FIG. 89C). In some embodiments, a removable cover 8802 can couple to the main housing 8805 including base enclosure 8815, hood 8830, and cap 8840.

FIGS. 90A-90F illustrate various views of a privacy/security enclosure 9000 according to at least one embodiment of the invention. In some embodiments, the privacy/security enclosure 9000 can comprise a cover or shell 9010 at least partially enclosing an enclosure assembly 9015 including enclosure 9040, pivot assembly 9050, pivot 9060, and blocker 9065. In some embodiments, the enclosure 9040 can pivot using the pivot assembly 9050 about the pivot to couple the blocker 9065 with a microphone, speaker, camera, or other sensor of the user device.

FIGS. 91A-91C illustrate various views of a privacy/security enclosure 9100 according to at least one embodiment of the invention. In some embodiments, the privacy/security enclosure 9100 can include the main housing 9105 comprising the enclosure 9110 and frame 9115, hood 9130, and base assembly 9020.

FIGS. 92A-92E illustrate various views of a privacy/security enclosure 9200 according to at least one embodiment of the invention. In some embodiments, the privacy/security enclosure 9200 can include main housing 9205 comprising enclosure 9215 and frame 9235, hood 9225. FIG. 92D shows an assembly view showing frame 9235 positioned to accept a user device 10 and/or for insertion into

75

the main housing **9205**. FIG. **92C** shows the hood **9225** in a closed position **9225a**, and FIG. **92D** shows the hood **9225** in an open position **9225b**. FIGS. **93A-93C** illustrate various views of a privacy/security enclosure **9200** according to at least one embodiment of the invention, where FIG. **93A** shows the closed position **9225a** of the hood **9225** (enclosing a user device **10**) and FIG. **93B** shows the hood **9225** in an open position **9225b** in preparation for a user **25** to remove the user device.

FIGS. **94A-94D** illustrate various views of a privacy/security enclosure **9400** according to at least one embodiment of the invention. In some embodiments, the privacy/security enclosure **9400** includes main housing **9405** with covers **9407**, **9420** (shown in the assembly view of FIG. **94A**), removable cover **9410**, aperture **9415** (shown in FIG. **94D** with cover **9410** removed). In some embodiments, removable cover **9410** can be separated from the privacy/security enclosure **9400** to change the privacy of an enclosed device.

FIGS. **95A-95C** illustrate various views of a privacy/security enclosure **9500** according to at least one embodiment of the invention. Some embodiments include a main housing **9505** with slidable cover **9525**. In some embodiments, the cover **9525** can be rolled beneath the main housing **9505** to uncover an enclosed user device **10** (shown depicted in FIG. **95C**).

FIGS. **96A-96B** illustrate various views of a privacy/security enclosure **9600** according to at least one embodiment of the invention. Some embodiments include a housing **9605** enclosing an enclosure **9610** and base enclosure **9615**. The assembly view of FIG. **96A** shows the removal of a user device **10** within enclosure **9610** by removal from the housing **9605**, and assembly of the enclosure **9610** on the exterior of the housing **9605**. Further, FIG. **96B** shows the separation of the housing **9605** and the enclosure **9610**.

FIGS. **97A-97C** illustrate various views of a privacy/security enclosure **9700** according to at least one embodiment of the invention. Some embodiments include a housing **9705** and enclosure **9710** with hood cover **9725**. The assembly view of FIG. **97A** shows the partial removal of a user device **10** within enclosure **9710** by partial separation of the cover portion **9725** from the housing **9705**. Further, FIG. **97B** shows the assembly view of the separation of the cover portion **9725**, and FIG. **97C** shows the stand configuration **9726** using fold **9725a** of the cover portion **9725**.

FIGS. **98A-98B** illustrate various views of a privacy/security enclosure **9800** according to at least one embodiment of the invention. In some embodiments, the privacy/security enclosure **9800** can comprise a main housing **9805**, enclosure **9810**, coupled base assembly **9815**, and foldable cover **9825**. FIG. **98B** shows the separation and folding or flipping of the cover **9825**, and FIG. **98C** shows the flipped cover **9825** with bend **9825a**.

FIGS. **99A-99C** illustrate various views of a privacy/security enclosure **9900** according to at least one embodiment of the invention. In some embodiments, the privacy/security enclosure **9900** can comprise a main housing **9905** including a pivoting cover **9910** and enclosure **9915**. FIG. **99A** shows the assembly view of the pivoting cover **9910**, FIG. **99B** shows the privacy/security enclosure **9900** with the pivoting cover **9910** at least partially rotated from the user device **10**, and FIG. **99C** shows the assembly view with removal of the cover **9910**.

FIGS. **100A-100C** illustrate various views of a privacy/security enclosure **10000** according to at least one embodiment of the invention. In some embodiments, the privacy/security enclosure **10000** can comprise main housing **10005**

76

including a first half **10010** and a second half **10020** that can enclose an enclosure **10025** comprising a base assembly **10045** and hood **10035**. FIG. **100B** shows the action view of the halves **10010**, **10020** pivoting apart from each other. Further, FIG. **100C** shows an assembly view of the insertion or removal of the enclosure **10025** including user device **10** from the main housing **10005**.

FIGS. **101A-101C** illustrate various views of a privacy/security enclosure **10100** according to at least one embodiment of the invention. In some embodiments, the privacy/security enclosure **10100** can include an enclosure **10105** and reversible removable cover **10110**. For example, FIG. **101A** shows the reversible removable cover **10110** coupled to the enclosure **10105**. FIG. **101B** depicts separation of the reversible removable cover **10110** from the enclosure **10105**. FIG. **101C** shows removal of the enclosure **10105** from the reversible removable cover **10110** that has been reversed to function as a tray or holder.

FIGS. **102A-102C** illustrate various views of a privacy/security enclosure **10200** according to at least one embodiment of the invention. In some embodiments, the privacy/security enclosure **10200** can include an enclosure **10205** with base portion **10220** and hood **10230** and reversible removable cover **10210**. For example, FIG. **102A** shows the reversible removable cover **10210** on the enclosure **10205**. FIG. **102B** depicts separation of the reversible removable cover **10210** from the enclosure **10205**. FIG. **102C** shows removal or insertion of the enclosure **10205** from or to the reversible removable cover **10210**.

FIGS. **103A-103B** illustrate various views of a privacy/security enclosure **10300** according to at least one embodiment of the invention. The enclosure **10305** includes hood **10310** and a removable wallet enclosure **10315**. In some embodiments, the latch **10325** can be coupled or decoupled from the foldable access flap **10335** portion of the removable wallet enclosure **10315** to enable insertion, removal, or access to a user device **10**.

FIGS. **104A-104B** illustrate various views of a privacy/security enclosure **10400** according to at least one embodiment of the invention. In some embodiments, the privacy/security enclosure **10400** can comprise a main housing **10405** appearing and/or functioning as a shoe. In some embodiments, the privacy/security enclosure **10400** can comprise an enclosure **10410** with a pivoting shoe cover **10415** (shown in action view from closed to open in FIG. **104A**, and in use in FIG. **104B**).

FIGS. **105A-105C** illustrate various views of a privacy/security enclosure **10500** according to at least one embodiment of the invention. For example, privacy/security enclosure **10500** can comprise main housing **10505** with enclosure **10510** as shown in FIG. **105A**. The assembly view of FIG. **105B** shows the removal or insertion of the enclosure **10510** from the main housing **10505**. FIG. **105C** shows the removal of the enclosure **10510** from the main housing **10505** and the subsequent partial collapse of the main housing **10505** to a lower profile (shown progressively as **10515a** to **10515b** to **10515c**.)

FIGS. **106A-106C** illustrate various views of a privacy/security enclosure **10600** according to at least one embodiment of the invention. In some embodiments, the privacy/security enclosure **10600** can include an enclosure **10605** and reversible removable cover **10615**. For example, FIG. **106A** shows the reversible removable cover **10615** coupled to the enclosure **10605**. FIG. **106B** depicts separation of the reversible removable cover **10610** from the enclosure **10605**. FIG. **106C** shows removal of the enclosure **10605**

77

from the reversible removable cover **10610** that has been reversed to function as a tray or holder.

FIGS. **107A-107D** illustrate various views of a privacy/security enclosure **10700** according to at least one embodiment of the invention. In some embodiments, the enclosure **10705** can comprise a base assembly **10715** and rotatable hood **10710**. Referring to FIG. **107B**, in some embodiments, the rotatable hood **10710** can be extended and rotated via a tensioner **10712**. Referring to FIG. **107C**, in some embodiments, the rotatable hood **10710** can be extended and rotated from a first or closed position **10710a** (clamping a user device **10**) to a second or open position **10710b** to enable a user to access and/or remove the user device **10** from the enclosure **10705**.

FIGS. **108A-108C** illustrate various views of a privacy/security enclosure **10800** according to at least one embodiment of the invention. In some embodiments, the privacy/security enclosure **10800** comprises a main housing **10805** including an enclosure **10810**, coupled hood **10815**, and base enclosure **10820**. In some embodiments, the base enclosure **10820** can include a sliding plug **10825** movable from a first position (shown as **10825a** in FIG. **108A**) to a second position (shown as **10825b** in FIG. **108B**). In some embodiments, the sliding plug **10825** can be used to modify the privacy of an enclosed user device **10**.

FIGS. **109A-109C** illustrate various views of a privacy/security enclosure **10900** according to at least one embodiment of the invention. Some embodiments of the invention include a main housing **10905** comprising a rotatable hood **10915** pivotably coupled to a base support **10917** about a pivot **10918**. The base support **10917** is further coupled to a base enclosure **10920**. In some embodiments, a user can open and remove a user device by rotating the rotatable hood **10915** by pivoting the hood **10915** from the base support **10917** about the pivot **10918** (shown rotated in FIGS. **109B-109C**).

FIGS. **110A-110C** illustrate various views of a privacy/security enclosure **11000** according to at least one embodiment of the invention. In some embodiments, the privacy/security enclosure **11000** can comprise an enclosure **11005** including a base assembly **11020**, and including an extendible hood **11015** coupled to an extender **11017**. In some embodiments, the hood **11015** can be extended or moved upwards away from the base assembly **11020** to enable access to an enclosed user device **10**, or to enable a user to insert a user device **10** in the enclosure **11005** (see FIG. **110B**). Referring to FIG. **110C**, in some embodiments, the user device **10** can be inserted or removed into or from the enclosure **11005** with the hood **11015** extended outward coupled to the extender **11017**.

FIGS. **111A-111B** illustrate various views of a privacy/security enclosure **11100** according to at least one embodiment of the invention. In some embodiments, the enclosure **11105** can comprise a base assembly **11120** with a base extension spring **11125**, and a rotatable hood **11115** coupled to a hood pivot **11117**. In some embodiments, access to a user device **10** and/or insertion or removal of the user device **10** can be facilitated by rotating the hood **11115** about the pivot **11117** to move the hood **11115** from a closed position (**11115a**) to an open position (**11115b**), and/or by extending the base assembly **11120** on the base extension spring **11125** (see the assembly view of FIG. **111B**).

FIGS. **112A-112B** illustrate various views of a privacy/security enclosure **11200** according to at least one embodiment of the invention. In some embodiments, the enclosure **11205** can comprise a base assembly **11220**, and a rotatable hood **11215** coupled to a hood pivot **11217**. In some embodi-

78

ments, access to a user device **10** and/or insertion or removal of the user device **10** can be facilitated by rotating the hood **11215** about the pivot **11217** to move the hood **11215** from a closed position (**11215a**) to an open position (**11215b**) (see the assembly view of FIG. **112B**).

FIGS. **113A-113B** illustrate various views of a privacy/security enclosure **11300** according to at least one embodiment of the invention. In some embodiments, the enclosure **11305** can comprise a base assembly **11320** with a base pivot **11325**, and a rotatable hood **11315** coupled to a hood pivot **11317**. In some embodiments, insertion or removal of the user device **10** can be facilitated by rotating the hood **11315** about the pivot **11317** to move the hood **11315** from an open position (**11315a**) to a closed position (**11315b**), and/or by rotating a portion of the base assembly **11320** and/or a clamp on the base pivot **11325** (see the assembly view of FIG. **113B**).

FIGS. **114A-114B** illustrate various views of a privacy/security enclosure **11400** according to at least one embodiment of the invention. In some embodiments, the privacy/security enclosure **11400** can include the enclosure **11405** comprising a hood **11415** and base assembly **11420**. In some embodiments, the user device **10** can be removed from the privacy/security enclosure **11400** (shown in the assembly view of FIGS. **114A** and **114B**).

FIGS. **115A-115B** illustrate various views of a privacy/security enclosure **11500** according to at least one embodiment of the invention. In some embodiments, the privacy/security enclosure **11500** comprises a main housing **11505**, a coupled flip cover **11510**, pivotable coupled to an enclosure **11515** including a base assembly **11520** and lever assembly **11530**. In some embodiments, the upper cover **11550** of the flip cover **11510** can pivot about the pivot **11512** to open or close the cover **11510**. In some embodiments, the lever assembly **11530** can into and out of the base assembly as the upper cover **11550** is opened and closed.

FIGS. **116A-116B** illustrate various views of a privacy/security enclosure **11600** according to at least one embodiment of the invention. In some embodiments, the privacy/security enclosure **11600** can comprise an enclosure **11605** including a hood **11615** and base assembly **11620**. In some embodiments, the enclosure **11605** including the hood **11615** can be extended or retracted using a gear **11630** coupled to teeth **11635**. Using the action shown in FIG. **116B**, the inner region **11606** can be enlarged (to enable a user to access a user device **10** or to place a user device **10** in the enclosure **11605**).

FIGS. **117A-117B** illustrate various views of a privacy/security enclosure **11700** according to at least one embodiment of the invention. In some embodiments, the privacy/security enclosure **11700** can comprise an enclosure **11705** including a hood **11715** movable from a closed hood **11715a** to an open hood **11715b** using a pivot **11717** (shown in action view of FIG. **117B**). Further, in some embodiments, the base assembly **11720** can include a lever or plug **11735** coupled to the hood **11715** by a cable **11730** and spring or tensioner **11740**. In some embodiments, actuation of the hood **11715** to a closed position (**11715a**) can cause the lever or plug **11735** to extend into or against a portion of the user device **10**. Further, actuation of the hood **11715** to an open position (**11715b**) can cause the lever or plug **11735** to extend out or away from a portion of the user device **10**.

FIG. **118** depicts a microphone blocking assembly **11800** according to one embodiment of the invention. In some embodiments, a user can use a switch **11810** coupled to a belt assembly **11820** including a belt **11840** and pulley

79

assembly **1850** to block (sealing position **11830**) or unblock a microphone of a user device **10**.

FIG. **119** depicts a microphone blocking assembly **11900** according to one embodiment of the invention. In some embodiments, the enclosure **11905** can comprise a roller **11915**, base enclosure **11920**, microphone blocker **11928**, gear assembly **11932**, and teeth **11934**. In some embodiments, the microphone blocker **11928** can be rotated onto one or more microphones of an enclosed user device **10** by rotation of the gear assembly **11932** on the teeth **11934**.

FIG. **120** depicts a microphone blocking assembly **12000** according to one embodiment of the invention. In some embodiments, a main housing **12005** can comprise an enclosure **12010** with coupled door **12015** including a coupled microphone blocker **12017**. In some embodiments, the door **12015** can be rotated on the pivot **12019** to couple the microphone blocker **12017** with one or more microphones of a user device.

FIG. **121** depicts a microphone blocking assembly **12100** according to one embodiment of the invention. Some embodiments include a main housing **12105** comprising a rear entry frame **12110**, enclosure **12115**, and pivot **12120**. In some embodiments, the rear entry frame **12110** can be pivoted about the pivot **12120** to couple with a user device **10** and to seal at least one microphone of the user device **10**.

FIG. **122** depicts a microphone blocking assembly **12200** according to one embodiment of the invention. Some embodiments of the invention include a main housing **12205** comprising an enclosure **12210**, hood **12215**, base enclosure **12220**, movable microphone blocker **12225**, and control lever **12235**. In some embodiments, the movable microphone blocker **12225** can be moved by a user using the control lever **12235**.

FIGS. **123A-123C** depicts views of a microphone blocking assembly **12350** according to one embodiment of the invention. Some embodiments include a main housing **12305** comprising an enclosure **12310** base enclosure **12320** latch assembly **12350** including a microphone blocker latch **12315**, tensioner assembly **12360**, and pivot **12370**. Referring to FIG. **123B**, in some embodiments, a user can move the microphone blocker latch **12315** by rotating the pivot **12370** under tension by the tensioner assembly **12360**. FIG. **123C** shows the reverse action to cover a microphone of a user device **10**.

FIGS. **124A-124B** depicts views of a microphone blocking assembly **12400** according to one embodiment of the invention. Some embodiments include a main housing **12405** including enclosure **12420**, pivotably coupled to a base **12430** including a microphone blocker portion **12410**. In some embodiments, the base **12430** including microphone blocker portion **12410** can be rotated with respect to the enclosure **12420** about the pivot **12440** to block or unblock a microphone of a user device **10**.

FIGS. **125A-125G** show privacy/security enclosure housing cross-sections according to one embodiment of the invention. For example, FIG. **125A** shows an example embodiments of a Faraday shell **12510**. FIG. **125B** depicts a Faraday shell **12520** layer **12530** comprising a full RF layer with non-RF shielding. FIG. **125C** shows a Faraday shell **12540** including an inner layer **12550** comprising an RF layer with RF shield plastic insert. FIG. **125D** depicts a Faraday shell **12560** with layer **12570** comprising a non-RF shielding plastic with a conductive spray/mesh/cloth layer. FIG. **125E** shows a Faraday shell **12580** including a layer **12585** comprising an RF shielding plastic layer and conductive spray/mesh/cloth layer. FIG. **125F** shows a Faraday shell **12590** layer including a fingerstock **12595**. FIG. **125G**

80

depicts a Faraday layer **12598** comprising a metal injection molded RF layer (e.g., a magnesium thixo-molding).

FIGS. **126A-126C** illustrate various views of a privacy/security enclosure **12600** housing according to one embodiment of the invention. Some embodiments include base portion **12601**, shelf portion **12603**, rim **12605**, and gasket seal **12608**. Referring to FIG. **126B**, in some embodiments, the gasket seal **12608** can comprise an upper layer **12610** with tongue and groove gasket **12615**. A lower layer **12620** including groove **12640** can couple with tongue **12630** as shown to form the gasket seal **12608**.

FIGS. **127A-127D** illustrate user device insertion and positioning into a privacy/security enclosure according to one embodiment of the invention. Some embodiments include enclosure **12705** comprising removable foam blocks **12708** and at least one removable foam block **12710** forming a cavity **12720** for insertion of a user device **10**. FIG. **127B** shows a privacy/security enclosure **12750** comprising a housing **12705** including straps **12755** threaded through apertures **12760** enclosing a user device **10**. FIG. **127C** shows an enclosure frame **12775** including an adjustable clamp **12778** with adjuster **12779** for clamping a user device **10** in the frame **12775**. Further, FIG. **127D** shows a privacy/security enclosure **12785** comprising a clip **12790** for positioning a user device **10**.

FIGS. **128A-128F** illustrate cross-sectional detail views of privacy/security enclosure housing gasket seals according to one embodiment of the invention. For example, FIG. **128A** shows upper layer **12810** and lower layer **12811** with first o-ring **12812** and second o-ring **12813**. FIG. **128B** shows upper layer **12820** with lower layer **12821** and upper o-ring seal **12822** and lower o-ring seal **12823**. FIG. **128C** shows upper layer **12830**, lower layer **12831**, and o-ring seal **12832**. FIG. **128D** shows upper layer **12840**, lower layer **12841**, and o-ring seal **12842**. FIG. **128E** shows upper layer **12850**, lower layer **12851**, and o-ring seal **12852**. FIG. **128F** shows upper layer **12860**, lower layer **12861**, first o-ring seal **12862**, and second o-ring seal **12863**. FIG. **128G** shows upper layer **12871**, lower layer **12872**, first o-ring seal **12873**, and second o-ring seal **12874**. FIG. **128H** shows upper layer **12880**, lower layer **12881**, first tongue **12882**, second tongue **12883**, and second groove **12884**, and first groove **12885**. Any of the gasket seals shown in FIGS. **128A-128H** can be used in any of the privacy/security enclosures disclosed herein.

Some embodiments of the invention include a charging interface comprising at least one microcontroller that can determine the power that can be drawn by a power source into which the interface is plugged. Some embodiments of the charging interface include logic regarding the sequence and priority of charging masking technology as well as an enclosed device and any other desired accessories.

In some embodiments, the privacy/security enclosure can comprise a rigid, structurally self-supporting chamber that can be opened and closed by a user. Further, the chamber can be formed of a material which attenuates RF radiation emitted to or from any RF antennas or transceivers positioned inside the privacy/security enclosure.

In some embodiments, the privacy/security enclosure can comprise one or more separable and/or moveable portions. For example, some embodiments include a privacy/security enclosure comprising a lower portion (i.e. a base portion) and an upper portion (i.e., a lid portion). In some embodiments, the privacy/security enclosure can comprise a Faraday cage configured to attenuate, or at least partially block, reception or transmission of RF radiation. In some embodiments, the Faraday cage includes and/or is formed by the

81

one or more RF gaskets. In some embodiments of the invention, the RF gasket can attenuate (i.e. reduce in signal strength) an RF signal. In some embodiments, the RF gasket can attenuate a portion of an RF signal while still disrupting effective communication. In some embodiments, the RF gasket can attenuate or at least partially block RF radiation from entering or exiting a privacy/security enclosure to which it is coupled. In some embodiments, this can provide bandwidth selectable pass-through capabilities.

In some embodiments, at least a portion of the RF gasket can be formed of a material which at least partially attenuates RF radiation emitted from one or more mobile or stationary communication devices. In some embodiments, the RF gasket can be formed of a material including at least a portion that substantially attenuates RF. In some embodiments, at least a portion of the RF gasket can at least partially attenuate RF radiation emitted from outside of the privacy/security enclosure. In some embodiments, at least a portion of the RF gasket can at least partially attenuate RF radiation emitted from within the privacy/security enclosure.

Referring to FIG. 129, illustrating a perspective view of a privacy/security enclosure 12900 including a partial cut-away interior view, of some embodiments of the invention. In some embodiments of the invention, the privacy/security enclosure 12900 can comprise an upper portion 12910 that can be coupled to the base portion 12920 to at least partially enclose a user device. Further, the upper portion 12910 and base portion 12920 can be at least partially uncoupled and/or separated to enable a user to access the privacy/security enclosure 12900 (e.g., to insert or remove one or more user devices). Further, FIG. 130 illustrates an interior view from line 2 of the privacy/security enclosure of FIG. 129 according to some embodiments of the invention, and FIG. 131 illustrates a cross-sectional view of the privacy/security enclosure of FIG. 129 through cut line 3 of FIG. 130 according to at least some embodiments of the invention. As shown in FIG. 130, the RF gaskets 12930 can extend completely and/or continuously around the interface 12922. In some other embodiments of the invention, the RF gaskets 12930 can partially extend around the interface 12922.

In some embodiments, the privacy/security enclosure can include one or more RF gaskets extending around at least a portion of an interface 12922 between the upper portion 12910 and base portion 12920 of the privacy/security enclosure (e.g., such as the privacy/security enclosure 12900 or any other privacy/security enclosure disclosed herein). In some embodiments, the privacy/security enclosure can include one or more RF gaskets that can extend completely around a region of the upper and/or lower portion of the privacy/security enclosure (e.g., such as the interface 12922 between the upper portion 12910 and base portion 12920).

In some embodiments of the invention, the privacy/security enclosure 12900 can include a conventional or custom fingerstock assembly. Referring to FIG. 131 and FIG. 133 illustrating a close up cross-sectional view of the privacy/security enclosure of FIG. 129 through cut line 5 of FIG. 131, as well as FIG. 132 illustrating a fingerstock assembly in accordance with some embodiments of the invention, the privacy/security enclosure can include at least one fingerstock 13200. In some embodiments, the fingerstock assembly 13200 can comprise a plurality of fingers 13225 comprising generally C-shaped, angular and/or curved extensions or tabs extending from a base or mounting surface 13210. The fingers 13225 can comprise contact areas 13225a that can be used to couple with one or more portions of the upper and/or lower portions for the privacy/security enclosure 12900 such as the upper portion 12910 and base

82

portion 12920. For example, in some embodiments, the plurality of fingers 13225 can comprise contact areas 13225a that can be used to couple with one or more inner walls of the upper portion 12910 to provide an electromagnetic seal. The base or mounting surface 13210 and the individual fingers themselves can be flexible enough to enable the fingers 13225 to bend or pivot with respect to the base or mounting surface 13210 using force applied by a user (e.g., to enable two surfaces such as surfaces of the portions 12910, 12920 to be coupled to at least partially prevent passage of electromagnetic radiation).

In some embodiments, the fingers 13225 can be integrally formed with the base portion 12920 as shown. As discussed further below, in some other embodiments, the C-shaped curved fingers 13225 can comprise separate C-shaped curved extensions or tabs. In some embodiments, these can be coupled or mounted directly to a portion of the privacy/security enclosure 12900. In other embodiments, the fingers 13225 can be coupled or mounted to a support and coupled to at least one portion of the privacy/security enclosure 12900. For example, in some embodiments, the fingers 13225 can be coupled or mounted to an inner gasket. Further, in some embodiments, the shape of the extensions or tabs can be varied to accommodate different portions of the privacy/security enclosure 12900, and/or to provide different levels of RF attenuation and/or different levels of seal between portions of the privacy/security enclosure.

In some embodiments, more than one RF gasket can be used within a privacy/security enclosure. For example, in some embodiments, the privacy/security enclosure can include two RF gaskets positioned at an interface between an upper and lower portion of the privacy/security enclosure. In some embodiments, the RF gaskets can be positioned adjacent each other within an inner wall of a lid receiving end of the privacy/security enclosure. In some embodiments, one RF gasket can be positioned coupled to the inner wall of the lid receiving end of the privacy/security enclosure adjacent the top surface of the base, and a second RF gasket can be positioned coupled to the inner wall of the lid receiving end of the privacy/security enclosure proximate the first RF gasket and adjacent the lid receiving wall of the base gasket.

In other embodiments of the invention, the privacy/security enclosure can include three or more fingerstocks and/or a plurality of base gaskets. For example, FIG. 133 illustrates a close up cross-sectional view of the privacy/security enclosure 12900 of FIG. 129 through cut line 5 of FIG. 131 showing a dual fingerstock (comprising fingerstock 13100 and fingerstock 13150), and an RF gaskets 12930 comprising a gasket 13175 according to some embodiments of the invention. The close-up cross-sectional view shows section 12925 of the base portion 12920 and section 12915 of the upper portion 12910, with the dual fingerstocks 13100, 13150 forming a seal between the sections 12915, 12915.

In some embodiments, any of the previously mentioned RF gaskets can be capable of forming a compliant privacy seal between portions of the privacy/security enclosure (e.g., between an upper and a lower portion and/or between two halves of any of the privacy/security enclosures described herein). Further, in some embodiments, the formed seal can be capable of functioning as an environmental barrier in addition to functioning as an RF shield. In some embodiments of the invention, RF gasketing can provide the secondary benefit of minimizing the transmission of air, water,

dust and other such substances from passing into the interior of the privacy/security enclosure when the enclosure is closed.

In some embodiments, other or additional environmental or sealing gaskets can be included that are more specifically designed for this purpose. The environmental or sealing gaskets can be used with one or more RF gaskets as required. For example, as shown in at least FIGS. 131 and 133, in some embodiments, at least one base or sealing gasket 13175 can be positioned at or adjacent the interface 12922 between the sections 12915, 12925. In some embodiments, the gasket 13175 can be used with or without one or more fingerstocks (i.e., with one or both or more fingerstocks 13100, 13150).

In some embodiments, the gasket 13175 can be positioned to accommodate and couple with at least a portion of a base end of an upper portion such as a lid. For example, in some embodiments, as the upper portion 12910 is coupled with the base portion 12920, the base end of the upper portion 12910 (shown as section 12915) can slide onto or over a portion of the base portion 12920 (shown as 12950a in FIG. 133) to couple with the gasket 13175. Further, as shown, the gasket 13175 can couple with the inner surface 12910a of the upper portion 12910 as the upper portion 12910 is coupled with the base portion 12920. In some further embodiments, one or more gasket 13175 can be positioned coupled to the inner wall 12920a of the base portion 12920 adjacent or proximate to one or more gaskets 13175.

Other combinations of RF gaskets comprising single and/or multiple fingerstock 13400 and gaskets 13175 can be used. For example, FIG. 134 illustrates an example of the view of FIG. 133 including a single fingerstock 13400 and gasket 13175 according to some embodiments of the invention. As shown, some embodiments include a single gasket 13175 positioned as previously described. For example, in some embodiments, the fingerstock 13400 can be positioned generally equally spaced between the top surface 12925b of the base portion 12920 and the interface 12922. In some other embodiments, the fingerstock 13400 can be positioned proximate the top surface 12925b of the base portion 12920. In some further embodiments, the fingerstock 13400 can be positioned proximate the interface 12922.

In some embodiments of the invention, a combination of one or more grooves formed within one or more surfaces of one or more portions of the privacy/security enclosure (such as privacy/security enclosure 12900) can be used with one or more RF gaskets (e.g., such as fingerstock 13400 and gasket 13175) to provide various levels of coupling, seating, and/or sealing of the privacy/security enclosure. For example, in some embodiments, at least some portion of an upper and/or base portion of a privacy/security enclosure can comprise at least one form, cavity, or depression (i.e. forming a groove) for coupling to at least one or more RF gaskets. In some embodiments, at least one form, cavity, or depression can be formed during any of the aforementioned manufacturing processes. For example, FIG. 135 illustrates an assembly view of FIG. 133 depicting insertion of an upper portion 12918 onto the base portion 12920 (shown as section 12925) of a privacy/security enclosure. This example embodiment includes fingerstock grooves 12918a, 12918b formed within the upper portion 12918. FIG. 136 illustrates the assembled view of FIG. 135 according to some embodiments of the invention. As shown, in some embodiments, as the upper portion 12918 is coupled with the base portion 12920, the base end 12919 of the upper portion 12918 can slide onto or over an edge wall 12925a of the base portion 12920 to couple with the gasket 13620. Further, as shown, the gaskets

13610, 13615 can each couple with the fingerstock grooves 12918a, 12918b formed within the upper portion 12918.

In some embodiments, one or more fingerstocks can be used together within one or more inner gaskets to form an RF gasket or seal. Some embodiments of the invention can comprise an RF gasket assembly comprising at least two components. For example, some embodiments include an assembly of components comprising at least one fingerstock coupled to at least one gasket. For example, FIG. 137 illustrates a compound gasket assembly 13700 according to some embodiments of the invention, FIG. 138 illustrates a cross sectional view of a compound gasket assembly 13700. Further, FIG. 139 illustrates a rear view of a gasket assembly 13700 according to one embodiment of the invention, and FIG. 140 illustrates a front view of a gasket assembly 13700 according to one embodiment of the invention. As illustrated, in some embodiments, the compound gasket assembly 13700 can comprise a fingerstock 13701 coupled to one or more inner gaskets 13720.

In some embodiments, the compound gasket assembly 13700 can comprise a fingerstock 13701 comprising a series of generally C-shaped curved fingers 13710 extending from a base or mounting surface 13705. In some embodiments, the fingers 13710 can be integrally formed with the mounting surface 13705. In some other embodiments, the C-shaped curved extensions or tabs can comprise separate fingers 13710 that can be coupled to or mounted onto or over an inner gasket 13720. Further, in some embodiments, the shape and/or the spacing of each of the fingers 13710 can be varied to accommodate different portions of a privacy/security enclosure, and/or to provide different levels of RF attenuation and/or different levels of sealing between portions of the privacy/security enclosure. In some embodiments, the fingerstock 13701 can provide mechanical or physical support to the inner gasket 13720. In some further embodiments, the fingerstock 13701 can provide degradation or wear protection to the inner gasket 13720. For example, in some embodiments, when used to provide one or more RF and/or environmental seals between surfaces and/or portions of a privacy/security enclosure, the use of a fingerstock 13701 at least partially enveloping the inner gasket 13720 can prevent wear and extend the life of the inner gasket 13720.

FIG. 141 illustrates an example of the view of FIG. 133 including dual fingerstocks of FIG. 138 (shown as gasket assembly 14150, 14160) and base gasket 14170 according to some embodiments of the invention. As shown, in some embodiments, the privacy/security enclosure portion 14100 can include two RF gaskets (formed by gasket assembly 14150, 14160) positioned at an interface 14105 formed between an upper and lower portions 14110, 14120 of the privacy/security enclosure). In this example embodiment, the mounting surfaces 14150a, 14160a of the fingerstocks of gasket assemblies 14150, 14160 can be coupled to the inner surface 14115 of the upper portion 14110, and the fingers 14155, 14165 of the gasket assemblies 14150, 14160 can extend away from portion 14110, coupling with the surface 14120a of the base portion 14120. In some other embodiments of the invention, the gasket assemblies 14150, 14160 can be rotated by 180°. For example, FIG. 142 illustrates an example of the view of FIG. 133 including gasket assemblies 14150, 14160. As shown, the mounting surfaces 14150a, 14160a of the fingerstocks of gasket assemblies 14150, 14160 can be coupled to the surface 14120a of the base portion 14120, and the fingers 14155, 14165 can extend towards the inner surface 14115 of the upper portion 14110.

In some embodiments, a privacy/security enclosure can be sealed without a base gasket. For example, FIG. 143 illustrates an example of a view 14300 of FIG. 133 including dual fingerstocks of FIG. 138 (shown as gasket assemblies 14150, 14160) according to some embodiments of the invention, and FIG. 145 illustrates an example of a view 14500 of FIG. 133 including a single gasket assemblies 14150 of FIG. 138 according to some embodiments of the invention. In this example embodiment, the mounting surfaces 14150a, 14160a can be positioned and coupled as described for FIG. 141. Further, FIG. 144 illustrates an example of the view 14400 of FIG. 133 including gasket assemblies 14150, 14160 of FIG. 138 according to some embodiments of the invention, and FIG. 146 illustrates an example of view 14600 of FIG. 133 including a single gasket assembly 14150 of FIG. 138 according to some embodiments of the invention. As shown, in this example embodiment, the mounting surfaces 14150a, can be positioned and coupled as described for FIG. 142.

In some embodiments, one or more fingerstocks can be used together within one or more inner gaskets to form an RF gasket or seal. For example, FIG. 147 illustrates a compound gasket assembly 14700 according to some embodiments of the invention, FIG. 148 illustrates a cross sectional view of a compound gasket assembly 14700. Further, FIG. 149 illustrates a rear view of a gasket assembly 14700 according to one embodiment of the invention, and FIG. 150 illustrates a front view of a gasket assembly 14700 according to one embodiment of the invention. As illustrated, in some embodiments, the compound gasket assembly 14700 can comprise a fingerstock 14701 coupled to one or more inner gaskets 14720. In some embodiments, the compound gasket assembly 14700 can comprise a fingerstock 14701 comprising a series of generally C-shaped curved fingers 14710 extending from a base or mounting surface 14705. In some embodiments, the fingers 14710 can be integrally formed with the mounting surface 14705. In some other embodiments, the C-shaped curved extensions or tabs can comprise separate fingers 14710 that can be coupled to or mounted onto or over an inner gasket 14720. Further, in some embodiments, the shape and/or the spacing of each of the fingers 14710 can be varied to accommodate different portions of a privacy/security enclosure, and/or to provide different levels of RF attenuation and/or different levels of sealing between portions of the privacy/security enclosure. In some embodiments, the fingerstock 14701 can provide mechanical or physical support to the inner gasket 14720. In some further embodiments, the fingerstock 14701 can provide degradation or wear protection to the inner gasket 14720. For example, in some embodiments, when used to provide one or more RF and/or environmental seals between surfaces and/or portions of a privacy/security enclosure, the use of a fingerstock 14701 at least partially enveloping the inner gasket 14720 can prevent wear and extend the life of the inner gasket 14720.

FIG. 151 illustrates an example of the view of FIG. 133 including a gasket assemblies 14700 of FIG. 148 (shown as gasket assemblies 15150, 15160) and base gasket 15170 according to some embodiments of the invention. As shown, in some embodiments, the privacy/security enclosure portion 15100 can include two RF gaskets (formed by gasket assemblies 15150, 15160 positioned at an interface 15105 formed between an upper and lower portions 15110, 15120 of the privacy/security enclosure). In this example embodiment, the mounting surfaces 15150a, 15160a of the fingerstocks of gasket assemblies 15150, 15160 can be coupled to the inner surface 15115 of the upper portion 15110, and the

fingers 15155, 15165 of the gasket assemblies 15150, 15160 can extend away from portion 15110, coupling with the surface 15120a of the base portion 15120. The gasket assemblies 15150, 15160 can be rotated by 180°. For example, FIG. 152 illustrates an example of the view of FIG. 133 including gasket assemblies 15150, 15160. As shown, the mounting surfaces 15150a, 15160a of the fingerstocks of gasket assemblies 15150, 15160 can be coupled to the surface 15120a of the base portion 15120, and the fingers 15155, 15165 can extend towards the inner surface 15115 of the upper portion 15110.

As described earlier with respect to the example embodiments of FIGS. 143-144 and 145-146, in some embodiments, the privacy/security enclosure can be sealed without a base gasket. In some embodiments, a privacy/security enclosure can be sealed without a base gasket. For example, FIG. 153 illustrates an example of a view 15300 of FIG. 133 including a dual fingerstocks of FIG. 148 (shown as gasket assemblies 15150, 15160) according to some embodiments of the invention, and FIG. 155 illustrates an example of a view 15500 of FIG. 133 including a single gasket assemblies 15150 of FIG. 148 according to some embodiments of the invention. In this example embodiment, the mounting surfaces 15150a, 15160a can be positioned and coupled as described for FIG. 151. Further, FIG. 154 illustrates an example of the view 15400 of FIG. 133 including gasket assemblies 15150, 15160 of FIG. 148 according to some embodiments of the invention, and FIG. 156 illustrates an example of view 15600 of FIG. 133 including a single gasket assembly 15150 of FIG. 148 according to some embodiments of the invention. As shown, in this example embodiment, the mounting surfaces 15150a, can be positioned and coupled as described for FIG. 152.

In some embodiments, at least a portion of any of the RF gaskets described herein can comprise a metal or a metal alloy. In some embodiments, at least a portion of any of the RF gaskets described herein can comprise copper or a copper alloy. In some other embodiments, at least a portion of any of the RF gaskets described herein can comprise iron or steel. In some embodiments, at least a portion of any of the RF gaskets described herein can comprise nickel or a nickel alloy (e.g., a nickel-copper alloy), or an alloy of copper and tin. In some embodiments, at least a portion of any of the RF gaskets described herein can comprise aluminum, magnesium, or mixtures or alloys thereof.

In some embodiments, at least a portion of any of the RF gaskets described herein can comprise a polymer. For example, in some embodiments, at least a portion of any of the RF gaskets described herein can comprise one or more homopolymers, one or more copolymers, or mixtures thereof. In some embodiments, the polymer matrix can comprise an elastomeric polymer such as rubber or silicone. In some embodiments, the polymer can comprise a solid rubber or silicone. Other embodiments can include a polymer comprising a sponge rubber or silicone. In some embodiments, the polymer can comprise a butyl rubber, silicone rubber, a fluorosilicone, chloroprene rubber, nitrile rubber, or combinations thereof.

In some embodiments, at least a portion of any of the RF gaskets described herein can comprise an elastomer that is cut or machined to size. In some other embodiments, at least a portion of the RF gasket can comprise an elastomer that is molded (injection molding or thermoforming, transfer molding, insert molding) and/or cured to a specified shape. In some other embodiments, the RF gasket can be formed by

other conventional manufacturing processes such as extrusion, die-cutting, laser cutting, or printed using a three dimensional printer, etc.

In some embodiments, at least a portion of any of the RF gaskets described herein can comprise a polymer-based matrix material including a dispersed secondary material. For example, some embodiments include an RF gasket comprising one or more polymers infused with conductive elements, conductive compounds, and/or conductive mixtures. Further, in some embodiments, at least a portion of any of the RF gaskets described herein can comprise a polymer-based matrix material including metal filaments dispersed in a matrix to form a polymer composite material. In some other embodiments, at least a portion of any of the RF gaskets described herein can comprise a carbon fiber-filled matrix material including metal filaments dispersed in a matrix to form a carbon fiber composite material. In some embodiments, the polymer can include one or more homopolymers, one or more copolymers, or mixtures thereof. In some embodiments, the polymer matrix can comprise a butyl rubber, silicone rubber, a fluorosilicone, chloroprene rubber, nitrile rubber, or combinations thereof, and the secondary phase can include at least one dispersed conductor. In some embodiments, the conductor can comprise a metal or a carbon-based conductor. In some embodiments, the metal can comprise copper, iron, aluminum, silver, nickel, copper-silver alloy, or combinations thereof.

In some other embodiments, materials useful in one or more embodiments of the invention include a layer of material comprising a carbon fiber-based matrix material including metal filaments dispersed in a matrix to form a carbon fiber composite material. In some embodiments, the carbon fiber matrix can comprise at least one homopolymer and/or copolymer, and can include at least one ceramic, and/or at least one polymer-ceramic mixture. In some embodiments, the metal filaments can comprise nickel filaments. In some further embodiments, the metal filaments can include copper filaments, brass filaments, stainless steel filaments or combinations thereof.

In some embodiments, when used in combination with one or more RF shield layers (coated, embedded, or attached to any portion of the privacy/security enclosure) the combination of the privacy seal formed by the one or more RF gaskets described here and/or one or more additional RF shield layers can form a Faraday cage. In some embodiments, the Faraday cage can substantially attenuate or at least partially block RF transmission into and/or out of the privacy/security enclosure. In some embodiments, the Faraday cage attenuates RF transmission to a level of at least 120 dB.

In some embodiments, more than one type of RF gasket can be used. In some embodiments, any of the RF gaskets described herein can be optimized for a specific function (either to at least partially block or attenuate RF, and/or at least partially block or attenuate sound, and/or at least partially block or attenuate light, and/or at least partially block or attenuate moisture, etc.) However, any one RF gasket can function to attenuate or at least partially block a combination of RF, sound, light, etc. For example, in some embodiments, one or more RF gaskets can function to attenuate RF, and one or more additional RF gaskets can function to attenuate sound, and one or more further RF gaskets can function as an environmental barrier. Moreover, in some embodiments, one or more of the RF gaskets are larger or smaller than one or more other RF gaskets.

In some embodiments, any of the fingerstock described herein (including any fingerstocks forming any of the com-

pound gasket assemblies described herein) can comprise a pitch of about 0.06 inches and a slot diameter of about 0.02 inches. Further, the base height ("B") can be about 0.09 inches. The number of fingers can be 200, although this number can be increased or decreased based on the architecture of the privacy/security enclosure. In some further embodiments, any of the gaskets described herein can include an outer diameter ("A") of about 0.06 inches or 0.062 inches, and an inner diameter ("B") of about 0.02 to about 0.035 inches. Further, in some other embodiments, the outer diameter ("A") of the gasket can be about 0.09 inches, with an inner diameter ("B") of about 0.06 inches. In some embodiments, the inner and outer diameters can be greater or less than as described above.

In some embodiments, any of the fingerstocks described herein can comprise fingerstocks supplied by Parker Chometrics, Woburn, Mass. (<http://www.chometrics.com/contact/index.html>). Some embodiments include fingerstocks with part numbers 81-C14-XXX-YDZZZZ and/or 81-C15-XXXX-YDZZZZ. In some further embodiments, any of the fingerstocks described herein can comprise one or more stacked or coupled fingerstocks. In some embodiments, the fingerstock can be represented as two stacked fingerstocks comprising fingerstocks with part numbers 81-C07-XXXX-YDZZZZ available from Parker Chometrics mentioned above. In some embodiments, the contact areas of any of the fingers of the fingerstocks described herein can be used to couple with one or more portions of the upper and/or base portions of any of the privacy/security enclosures described herein.

In some embodiments, the fingers of any of the fingerstocks described herein can be integrally formed with the base or mounting surface, and the fingers and mounting surfaces can be coupled or mounted directly to any portion of any interface or sealing surfaces within any of the privacy/security enclosures described herein.

In some embodiments, the fingerstock can be formed by etching a metal substrate and forming the extensions or tabs, and/or any portion of the mounting base of the fingerstock. For example, FIGS. 157A-C and FIGS. 158A-158C illustrate custom fingerstocks according to some embodiments of the invention, any one of which can be formed by conventional etching and/or forming methods.

FIG. 157A illustrates a custom etched fingerstock plate 15700 with a clip 15713 including a bend line 15702, and a tab form 15704 that can form a clip 15713 when formed (shown in FIG. 157B). The etched plate 15701 can include an upper etched finger 15705 and a lower etched finger 15707. FIG. 157B illustrates a formed fingerstock array 15710 comprising an end surface 15712, upper finger 15714, and lower finger 15716. In some embodiments, the custom fingerstock can include a clip (shown in FIG. 157C). In some embodiments, the clip can extend from the base or mounting surface in a generally opposite direction from the extensions or tabs. The form clip 15713 is shown in FIG. 157C, including tab 15720 extending from the end surface 15712.

FIG. 158A-C illustrate custom fingerstocks according to some embodiments of the invention. FIG. 158A illustrates a custom etched fingerstock plate 15800. This example embodiments does not include the clip 15713. As shown, the etched plate 15802 can include upper etched finger 15805 and lower etched finger 15807. FIG. 158B illustrates a formed fingerstock array 15810. The array 15810 can comprise a formed array plate 15812, with an upper finger 15814 and lower finger 15816 extending from the plate 15812 (shown in FIG. 158C).

FIG. 159A-159C illustrates custom fingerstocks integrated with a privacy/security enclosure 15900 according to some embodiments of the invention. In some embodiments, an RF gasket comprising a compound gasket assembly including one or more of the aforementioned fingerstocks can be used to couple and/or seal a privacy/security enclosure. In other embodiments, the RF gasket can comprise custom fingerstocks without a gasket. FIG. 159A illustrates a cross-sectional view of a privacy/security enclosure 15900 shown in FIG. 159C. A close up of the RF gasket 15950 showing wall 15915 with inner surface 15915a is shown in FIG. 159B. For example, in some embodiments, at least one RF gasket 15950 can be positioned coupled to, adjacent to, or proximate to an inner surface 15915a of an upper portion 15910 of the privacy/security enclosure 15900. For example, in some embodiments, an RF gasket 15950 can be positioned coupled to the inner surface 15915a (see FIGS. 159A and 159B). Further, in some embodiments, at least one RF gasket 15950 can be positioned coupled to the inner surface 15915a of the upper portion 15910 of the privacy/security enclosure 15900 so that the fingers 15960, 15965 are positioned within the inner region 15905 privacy/security enclosure 15900, and the mounting surface 15927 coupled to the at least one RF gasket 15950 and inner surface 15915a. Further, in some embodiments, the at least one RF gasket 15950 including a clip 15955a (shown in FIG. 159B) can be further coupled to the upper portion 15910 by at least partially extending over and/or around at least a portion of the end surface 15916 of the upper portion 15910.

FIG. 160 illustrates RF attenuation behavior of various embodiments of the invention. As illustrated, the use of one or more compound gasket assemblies can attenuate RF when used with a privacy/security enclosure including one or more of the embodiments described herein. As shown, the greater attenuation can be provided with embodiments comprising dual compound gasket assemblies with and without a base gasket.

FIG. 160 illustrates RF attenuation behavior of various embodiments of the invention. The attenuation plot 16000 shows attenuation versus frequency for RF gasket configuration 16100 (data plot 16101), RF gasket configuration 16200 (data plot 16201), RF gasket configuration 16300 (data plot 16301), RF gasket configuration 16350 data plot 16351, RF gasket configuration 16400 data plot 16401, RF gasket configuration 16500 (data plot 16501).

In some embodiments of the invention, the privacy/security enclosure can comprise a case formed from at least one housing assembly. In some embodiments, the housing assembly can comprise a single monolithic element or can be formed from a plurality of sub-assemblies and/or components. In some embodiments, at least one of the plurality of sub-assemblies and/or components can be movable with respect to another portion, assembly, or sub-assembly of the housing assembly. In some embodiments, the housing assembly can include an enclosure for a user device. In some embodiments, the enclosure can couple directly to a user device such as a smart phone. In some further embodiments, at least one of the plurality of sub-assemblies and/or components can be rotatable, and/or or pivotable with respect to another portion, assembly, or sub-assembly of the housing assembly.

Referring to at least FIGS. 161A-162C, in some embodiments of the invention, the housing assembly 16110 including the case 16115 of the privacy/security enclosure 16100 can include at least one chiseled, carved, and/or angular face or surface. For example, in some embodiments, two or more chiseled, carved, and/or angular faces can be coupled to at

least one other surface with an edge (such as edges 16113, 16117). In some embodiments, the surface or edge can comprise a hard or substantially abrupt edge surface (providing a chiseled-off appearance or look). In some other embodiments, the edge can comprise a soft or substantially curved or rounded edge surface. In some further embodiments, the two or more chiseled, carved, and/or angular faces can form a portion of the housing assembly providing a chiseled-off appearance and/or an armored and/or robust appearance. In some embodiments, the chiseled-off appearance, and/or an armored and/or robust appearance can extend to the base 16130. Further, in some embodiments, an access edge 16120 can include a chiseled-off appearance, and/or an armored and/or robust appearance.

Referring to at least FIGS. 163A-163C, in some embodiments of the invention, the housing assembly 16205 including the cover 16210, and/or the base 16215, and/or the hood 16220 can include at least one sliced, carved, and/or angular face or surface. For example, in some embodiments, two or more sliced, carved, and/or angular faces can be coupled to at least one other surface with an edge such as edges 16211, 16213. In some embodiments, the surface or edge can comprise a hard or substantially abrupt edge surface (providing a sliced-off appearance). In some other embodiments, the edge can comprise a soft or substantially curved or rounded edge surface. In some further embodiments, the two or more sliced, carved, and/or angular faces can form a portion of the housing assembly providing a sliced-off appearance.

Referring to at least FIGS. 164A-164C, in some embodiments of the invention, the housing assembly 16405 including the cover 16415 coupled to the chassis or carrier 15410, can include at least one sliced, carved, and/or angular face or surface. For example, in some embodiments, two or more sliced, carved, and/or angular faces can be coupled to at least one other surface with an edge such as edges 16412, 16213. In some embodiments, the surface or edge can comprise a hard or substantially abrupt edge surface (providing a sliced-off appearance). In some other embodiments, the edge can comprise a soft or substantially curved or rounded edge surface. In some further embodiments, the two or more sliced, carved, and/or angular faces can form a portion of the housing assembly 16405 providing a sliced-off appearance. In some embodiments of the invention, the housing assembly 16405 can include at least one curved or angular face or surface and/or sub-assembly 16425 substantially monolithically and/or seamlessly coupled to another portion of the housing assembly 16410. For example, in some embodiments, two or more curved or angular faces or surfaces and/or sub-assemblies can be substantially monolithically and/or seamlessly coupled to at least one other surface. In some embodiments, the at least one curved or angular face or surface and/or sub-assembly can comprise a hard or substantially abrupt edge surface (providing a sliced-off appearance or look). In some other embodiments, the at least one curved or angular face or surface and/or sub-assembly edge can comprise a soft or substantially curved or rounded edge surface. In some further embodiments, the two or more curved or angular faces or surfaces and/or sub-assemblies can form a portion of the housing assembly 16410 providing a monolithic or substantially seamless appearance.

Referring to at least FIGS. 165A-166C depicting a privacy/security enclosure 16500, 16600, in some embodiments of the invention, the housing assemblies 16505, 16605 can include at least one curved or rounded face, surface, edge and/or sub-assembly. Some embodiments of the invention can include a privacy/security enclosure

16500, 16600 comprising housing assemblies **16505, 16605** with at least one curved or rounded face, surface, edge and/or sub-assembly substantially coupled to at least one other curved or rounded face, surface, edge and/or sub-assembly substantially. For example, in some embodiments, any portion of the enclosures **16510, 16610** and/or covers **16515, 16615** can include curved or rounded faces or surfaces and/or sub-assemblies that can be substantially monolithically and/or seamlessly coupled to at least one other curved or rounded faces or surfaces and/or sub-assemblies including for example the base portions **16520, 16620**. Further, in reference to at least privacy/security enclosure **16500** the housing assembly **16505** can comprise at least one movable, slidable, removable, or replaceable portion. For example, in some embodiments, at least a portion of the housing assembly **16505** can comprise a section, portion and/or component that can be moved, slid, removed, rotated or pivoted, latched or unlatched from, or with respect to, other portions of the privacy/security enclosure. Further, in some embodiments, the privacy/security enclosure can comprise at least one removable or replaceable section, portion, or component that can be removed, slid, latched or unlatched from the privacy/security enclosure after moving, sliding, removing, rotating, or pivoting at least a portion of the housing assembly with respect to other portions of the housing assembly. For example, the privacy/security enclosure **16500** including an housing assembly **16505** with enclosure **16110** including lower portion **16540** and moveable hood portion **16530**, the portions **16530, 16540** can include curved or rounded faces or surfaces and/or sub-assemblies that can be substantially monolithically and/or seamlessly coupled to at least one other curved or rounded faces or surfaces and/or sub-assemblies (including for example the base portion **16520**). In some embodiments, the at least one curved or rounded face or surface and/or sub-assembly can comprise a soft or substantially rounded or curved edge surface (providing a smooth, rounded, or soft geometric appearance or look).

In some embodiments of the invention, the privacy/security enclosure can include a housing assembly that can comprise at least one splined surface. For example, in some embodiments, any of the privacy/security enclosures **16100, 16200, 16300, 16400, 16500, 16600** can comprise two or more splined surfaces or faces can be coupled to at least one other surface and/or splined surface or face. In some embodiments, the at least one splined surface can comprise a hard or substantially abrupt edge surface (providing a splined-off appearance or look). In some other embodiments, the at least one splined surface can comprise a soft or substantially curved or rounded edge surface. In some embodiments, the two or more splined surfaces can form a portion of the housing assembly, providing a splined appearance.

Referring to at least FIGS. **167A-167C**, in some embodiments of the invention, the privacy/security enclosure **16700** can include a housing assembly **16705** that can comprise at least one layered, wrapped, and/or coupled surface or structure. For example, in some embodiments, the housing assembly **16705** can comprise a chassis **16710** and/or cover **16715** and/or surface **16718**, and/or base **16720** can include at least one layered, wrapped, and/or coupled surface or structure can be coupled to at least one other one layered, wrapped, and/or coupled surface or structure. In some embodiments, the at least one layered, wrapped, and/or coupled surface or structure can comprise a hard or substantially abrupt edge surface (providing a chiseled, carved, sliced, and/or splined-off appearance or look). In some other

embodiments, the at least one layered, wrapped, and/or coupled surface or structure can comprise a soft or substantially curved or rounded edge surface. In some embodiments, two or more one layered, wrapped, and/or coupled surfaces or structures can form a portion of the housing assembly providing a layered, wrapped, and/or multiple parts or assembly coupled appearance.

In some embodiments of the invention, the housing assembly of a privacy/security enclosure can comprise at least one moveable, slidable, and/or latching portion that can engage or disengage with at least a portion of the housing assembly and/or a user device when placed within the privacy/security enclosure. For example, in some embodiments, at least a portion of the housing assembly can comprise a section, portion and/or component that can be moved, slid, rotated, pivoted, latched, or unlatched from or with respect to other portions of the privacy/security enclosure. Further, in some embodiments of the invention, the at least one moveable, slidable, and/or latching portion can engage or disengage with at least a portion of the housing assembly to enable insertion or removal of a user device such as a smart phone, tablet, computer or other such device with one or more microphones and/or camera(s) and/or RF transceiver(s) and/or other sensor(s). In some embodiments, the at least one moveable, slidable, and/or latching portion can be positioned proximate or adjacent one end of the privacy/security enclosure. In some embodiments, the housing assembly can comprise at least two moveable, slidable, and/or latching portions. In some embodiments, the at least two moveable, slidable, and/or latching portions can be positioned proximate each end of the privacy/security enclosure. In some embodiments, the housing assembly can comprise at least one moveable, slidable, and/or latching portion that can engage or disengage with at least a portion of the housing assembly and/or a user device when placed within the privacy/security enclosure that covers one side of the user device only.

FIGS. **168A-168C** illustrate perspective views of various embodiments of a privacy/security enclosure **16800** including separable components that can be coupled by sliding one component (e.g., a component for housing a user device) into another component such as a case or cover. For example, housing assembly **16805** illustrates an enclosure **16810** including hood **16812**, base **16820**, and a removable cover **16815** (FIG. **168C** showing an assembly view for insertion of the enclosure **16810** into the case or cover **16815**).

Referring to at least FIGS. **169A** and **169B** illustrating privacy/security enclosure **16900**, FIGS. **170A-170B** illustrating privacy/security enclosure **17000**, FIGS. **171A-171B** illustrating privacy/security enclosure **17100** and FIGS. **172A-172B** illustrating privacy/security enclosure **17200**, in some embodiments of the invention, the housing assembly can at least partially house or couple to a user interface and/or an indicator such as an LED, or other conventional illumination device, port, or other connector.

FIGS. **169A-169B** illustrate perspective views of various embodiments of a privacy/security enclosure **16900**. In some embodiments, the privacy/security enclosure **16900** can comprise a housing assembly **16905** including an enclosure **16910**, hood **16912**, cover or case **16915**, and base **16920**. In some embodiments, the base **16920** can include a user interface **16925**. In some embodiments, the user interface **16925** can display an operation of the privacy/security enclosure **16900** and/or a function of any enclosed device. Similarly, FIGS. **170A-170B** illustrate perspective views of various embodiments of a privacy/security enclosure **17000**.

In some embodiments, the privacy/security enclosure **17000** can comprise a housing assembly **17005** including an enclosure **17010**, hood **17012**, cover or case **17015**, and base **17020**. In some embodiments, the base **17020** can include a user interface **17030**. In some embodiments, the user interface **17030** can display an operation of the privacy/security enclosure **17000** and/or a function of any enclosed device.

As described earlier, some embodiments of the invention include a privacy/security enclosure that can comprise a housing assembly including at least one moveable, slidable, and/or latching portion or section. Further, in some embodiments of the invention, a privacy/security enclosure can comprise a housing assembly including at least one moveable, slidable, and/or latching portion with at least one user interface and/or an indicator (within either the movable or static portions of the privacy/security enclosure). In some embodiments, the at least one moveable, slidable, and/or latching portion can be positioned at one end of the privacy/security enclosure, and the at least one user interface and/or an indicator can be positioned adjacent or proximate the other end of the privacy/security enclosure. Further, in some embodiments, the at least one moveable, slidable, and/or latching portion can engage or disengage with at least a portion of the housing assembly and/or a user device when placed within or removed from the privacy/security enclosure. In some embodiments, an action such as movement of the at least one moveable, slidable, and/or latching portion can substantially coincide with and/or cause an action or operation of the user interface and/or an indicator. For example, in some embodiments, when the at least one moveable, slidable, and/or latching portion is moved (e.g., to prepare for insertion or removal of a user device), at least a portion of the user interface and/or the indicator providing an indication (e.g., such as lighting or illumination or the user interface) can change state (e.g., such as light or illuminate and/or display colors, text, or graphics). In some embodiments, at least a portion of the user interface and/or the indicator can provide an indication when opening. In other embodiments, at least a portion of the user interface and/or the indicator can provide an indication when closing.

For example, further referring to FIGS. **171A-171B**, in some embodiments, the privacy/security enclosure **17100** can comprise a housing assembly **17105** including an enclosure **17110**, hood **17112**, cover or case **17115**, and base **17120**. In some embodiments, the base **17120** can include a user interface **17130** (shown positioned at an end **17111** of the enclosure **17110**). In some embodiments, the user interface **17130** can display an operation of the privacy/security enclosure **17100** and/or a function of any enclosed device.

In some embodiments of the invention, a user interface of any of the privacy/security enclosures described herein can include at least one user-accessible function. For example, in some embodiments, a user action of the at least one user-accessible function of the user interface can change a status or actuate a function of the privacy/security enclosure, change a status or actuate a function of the user interface, and/or change a status or actuate a function of at least one user device covered, held or cradled with the privacy/security enclosure. For example, in some embodiments of the invention, the user interface can comprise at least one button capable of enabling a user to power-on or power-off the privacy/security enclosure. For example, in some embodiments, the user can press and hold the button for a specified period of time to power-on the privacy/security enclosure. As an example embodiment, the user can press and hold the button for a short period of time to control the power of the privacy/security enclosure.

In some embodiments, an action by the user of one or more functions of any of the privacy/security enclosures described here through the user interface can change a display or illumination status of the user interface of the privacy/security enclosure. For example, in some embodiments, the action of powering on or off of the privacy/security enclosure by the user using the user interface can be accompanied by a change of display or illumination of the user interface. Some embodiments of the invention include a user interface that comprises an LED that can change illumination status based on the user's interaction with the user interface. For example, in some embodiments, upon turning on the privacy/security enclosure, an LED lamp can illuminate. In some embodiments, the LED can be placed behind a lens. Further, in some embodiments, other user actions such as pressing the button for a short period can change the indicator response. Further, in some embodiments, the user can use the button to power-down the privacy/security enclosure (e.g., by pressing the button for a specified, short (up to several seconds) period of time. In some embodiments, the user interface can comprise an audible interface. For example, in some embodiments, the user interface, or other coupled portion of the privacy/security enclosure can emit one or more sounds based at least in part on a change in status of the privacy/security enclosure, a user initiated action (such as any of the user actions previously described), and/or a change in status or function of at least one user device that is at least partially enclosed by or otherwise coupled to the privacy/security enclosure. In some embodiments, the user interface can comprise capacitive or toggle-style buttons.

In some embodiments, the indicating status of the user interface can be based at least in part on a status or position of at least one moveable portion of the privacy/security enclosure. For example, referring specifically to FIGS. **171C-171D**, illustrate user interface **17155** and uses of user interfaces **17155** of a privacy/security enclosure **17150** comprising enclosure **17151**, in some embodiments, when the at least one moveable portion of the privacy/security enclosure **17150** (e.g., a hood **17152** is shown in the example embodiment) is moved by a user (e.g., from a closed position shown in FIG. **171D** to an open or partially open position shown in FIG. **171C**), the indicating status **17155a** of the user interface **17155** can change.

Further examples of privacy/security enclosures including one or more of the above described functions including user interfaces (e.g., such as a beacon) and other functions and alerts of an operational status or state are shown in FIGS. **172A-172C**, and **173-187**. For example, FIGS. **172A-172C** show detailed perspective views of various embodiments of a privacy/security enclosure **17200** according to some embodiments of the invention. In some embodiments, the privacy/security enclosure **17200** can comprise an enclosure **17210** including a hood **17250** and a base **17220**. In some embodiments, a cover or case **17215** can be coupled to the enclosure **17210**. Further, FIGS. **173-175** show detailed perspective views of various embodiments of a privacy/security enclosure **17400** according to some embodiments of the invention. In some embodiments, the privacy/security enclosure **17400** can comprise an enclosure **17410** including a hood **17450** and a base **17420**. In some embodiments, a cover or case **17415** can be coupled to the enclosure **17410**. Further, FIGS. **176-178** show detailed perspective views of various embodiments of a privacy/security enclosure **17600** according to some embodiments of the invention. In some embodiments, the privacy/security enclosure **17600** can comprise an enclosure **17610** including a hood **17650** and a

base **17620**. In some embodiments, a cover or case **17615** can be coupled to the enclosure **17610**. FIGS. **179-181** show detailed perspective views of various embodiments of a privacy/security enclosure **17900** according to some embodiments of the invention. In some embodiments, the privacy/security enclosure **17900** can comprise an enclosure **17910** including a hood **17950** and a base **17920**. In some embodiments, a cover or case **17915** can be coupled to the enclosure **17910**.

FIGS. **182-184** show detailed perspective views of various embodiments of a privacy/security enclosure **18200** according to some embodiments of the invention. In some embodiments, the privacy/security enclosure **18200** can comprise an enclosure **18210** including a hood **18250** and a base **18220**. In some embodiments, a cover or case **18215** can be coupled to the enclosure **18210**. FIGS. **185-187** show detailed perspective views of various embodiments of a privacy/security enclosure **18500** according to some embodiments of the invention. In some embodiments, the privacy/security enclosure **18500** can comprise an enclosure **18510** including a hood **18550** and a base **18520**. In some embodiments, a cover or case **18515** can be coupled to the enclosure **18510**.

Referring to one or more of the privacy/security enclosures **17200**, **17400**, **17600**, **17600**, **17900**, **18200**, and **18500** described above, in some embodiments, when the at least one moveable portion of the privacy/security enclosure (e.g., such as a hood) is moved by a user (e.g., from a closed position to an open or partially open position), the indicating status of the user interface of the hood of the privacy/security enclosure or other portion of the privacy/security enclosure, or both can provide an indicating status. In some other embodiments of the invention, at least some portion of the interior region of the privacy/security enclosure can illuminate and/or can be illuminated upon an action or change of status of the privacy/security enclosure. For example, in some embodiments, when the hood is raised, the interior region of the privacy/security enclosure can illuminate and/or can be illuminated. In some embodiments, the illumination of the interior can be indicative of the unprotected status of any user device within the privacy/security enclosure.

In some other embodiments of the invention, movement of the hood can change a status of the privacy/security enclosure. For example, in some embodiments, when the hood is raised (i.e., when the privacy/security enclosure is opened) the privacy/security enclosure can move to a power off state. In some embodiments, a user can access a button on the user interface of the privacy/security enclosure to power-on the privacy/security enclosure (e.g., by pressing a button on the user interface for a specified, short period of time such as a period between about 0.5 to about 3 seconds).

In some embodiments of the invention, a user can access a battery status using the user interface. For example, in some embodiments of the invention, a user can access a "poll" button on the user interface to ascertain the charge status of the battery of the privacy/security enclosure. In some embodiments, the privacy/security enclosure can display a battery status at pre-determined intervals. Further, in some embodiments, when the battery is being charged, successive LED indicators can illuminate based on the charge status of the battery.

In some embodiments, the privacy/security enclosure can comprise at least one icon display. For example, in some embodiments, the privacy/security enclosure can comprise at least one user interface configured as an icon display and/or configured to display at least one icon. Referring to

FIGS. **188-190D** illustrating icon displays of a privacy/security enclosure in accordance with some embodiments of the invention, in some embodiments, the icon display can comprise one or more audio function-related icons. For example, in some embodiments, the icon can comprise one or more microphone enabled and/or audio-protected icons. Further, in some embodiments, the icons can comprise combined audio and battery and/or charge indicator icons.

FIG. **188** illustrates icon displays of a privacy/security enclosure in accordance with some embodiments of the invention. Some icons can be illuminated, marked, and/or animated (e.g., flashed on and off or color cycled) depending on a status of one or more functions of at least one of the privacy/security enclosures described herein. Icons include indicators of the status of one or more microphones and audio protection characteristics. For example, some embodiments include at least one microphone enabled icon **18810**, audio protected icon **18815**, microphone enabled icon **18820**, audio protected icon **18825**, microphone enabled icon **18830**, audio protected icon **18835**, microphone enabled icon **18840**, and audio protected icon **18845**. Any of the privacy/security enclosures disclosed herein can utilize icons **18810**, **18815**, **18820**, **18825**, **18830**, **18835**, **18840**, and **18845**.

FIG. **189** illustrates icon displays of a privacy/security enclosure in accordance with some embodiments of the invention. Some icons can be illuminated, marked, and/or animated (e.g., flashed on and off or color cycled) depending on a status of one or more functions of at least one of the privacy/security enclosures described herein. Icons include indicators of microphone status, audio protection (including microphone enabled icon **18910**), audio protected icon **18915**, microphone enabled icon **18920**, audio protected icon **18925**, microphone enabled icon **18930**, and audio protected icon **18935**. Any of the privacy/security enclosures disclosed herein can utilize icons **18910**, **18915**, **18920**, **18925**, **18930**, **18935**.

FIGS. **190A-190D** illustrates icon displays of a privacy/security enclosure in accordance with some embodiments of the invention. Some icons can be illuminated, marked, and/or animated (e.g., flashed on and off or color cycled) depending on a status of one or more functions of at least one of the privacy/security enclosures described herein. Icons include indicators of battery charge or status, microphone status, audio protection. For example, referring to FIG. **190A**, some embodiments include charged and microphone-enabled icon **19010**, half-charged and microphone enabled icon **19020**, and half-charged and audio-protected icon **19030**. Any of the privacy/security enclosures disclosed herein can utilize icons **19010**, **19020**, **19030**. Further, referring to FIG. **190B**, some embodiments include audio-protected icon **19040**, microphone-enabled icon **19045**, and battery charge icon **19050**. Any of the privacy/security enclosures disclosed herein can utilize icons **19040**, **19045**, **19050**.

Further, referring to FIG. **190C**, some embodiments include microphone enabled icon **19060**, audio-protected icon **19065**, microphone-enabled icon **19070**, and audio-protected icon **19075**. Any of the privacy/security enclosures disclosed herein can utilize icons **19060**, **19065**, **19070**, **19075**. Further, referring to FIG. **190D**, some embodiments include microphone-enabled icon **19080**, audio-protected icon **19085**, audio protect on icon **19087** (pulsing when on), and battery low indicator icon **19089**. Any of the privacy/security enclosures disclosed herein can utilize icons, **19080**, **19085**, **19087**, **19089**.

Further details of the structure, assembly, and operating functions of the privacy/security enclosure are described related to FIGS. 191A-205F. Referring to at least FIGS. 191A-191F illustrating an overview of a privacy/security enclosure 19100 in accordance with some embodiments of the invention, in some embodiments of the invention, the privacy/security enclosure 19100 can comprise a chassis 19110 that includes a base 19120 that can hold electronics and a user interface. In some embodiments, the back 19110a of the chassis 19110 can hold a rechargeable, user or non-user accessible battery. In some embodiments, at least a portion of the base 19120 can form part of an RF attenuation cage (e.g., a Faraday cage). In some embodiments, when assembled, a cover 19115 completes the RF cage. In some embodiments, the top portion of the chassis (hood 19112) can lower onto or over the top of an enclosed device (shown generically as device 10) such as a smart phone, tablet, computer or other such device with one or more microphones and/or camera(s) and/or RF transceiver(s) and/or other sensor(s). In some embodiments, the chassis 19110 can couple to an enclosure 19105 positioned and formed to support a user's device 10. In some embodiments, the hood 19112 can be moved from a lower position (FIGS. 191B-191C) to a raised position (FIGS. 191D-191F). In some embodiments, the user can raise and lower the hood to facilitate insertion and removal of a user device into the privacy/security enclosure 19100. In some embodiments, the movement of the hood 19112 can change a function or status of the privacy/security enclosure 19100 as described earlier.

In some embodiments, the privacy/security enclosure 19100 and/or any privacy/security enclosure disclosed herein can prevent or reduce the ability of an authorized or unauthorized listener from using the microphone or other sensors, from detecting the presence of speech, or, if the presence of speech can be detected, reducing or eliminating the intelligibility of such speech. In some embodiments, when set to a obfuscation and/or randomness mode, the privacy/security enclosure can randomly broadcast to provide protection even if no one is speaking, thereby diminishing the ability of an authorized or unauthorized listener of detecting when there is actual speech by a user using the system.

In some embodiments, for the device(s) protected by the privacy/security enclosure, including at least one of the privacy/security enclosures disclosed here, lowering a hood or hood equivalent portion or other mechanism, the hood can seal one to all of the microphones (e.g. front, rear, bottom etc.) device(s), and can cover one to all of the cameras (e.g. front, rear etc.), and engage masking sound(s) to be received by the sensor(s) of the protected device(s). In some embodiments, the sealing/unsealing, covering/uncovering and/or activation/deactivation for any up to all of the sensors of the protected device(s) can occur with a single movement or action of the hood or other desired structure (e.g. raising or lowering) or other portion of the privacy/security enclosure, while in others it can require one or more movements and/or actions. In some embodiments, the movement/action described can be manually actuated, while in others the movement/action can be partially or fully electro-mechanically actuated.

In some embodiments, the ability to protect against different types of sensors in different physical locations on the protected device(s) in one or more motions/action can be accomplished by physical or electrical linkages between the portions of the enclosure providing the protection against each and/or every sensor. In some embodiments, the pri-

vacuity/security enclosure will include sensors to determine if and where any protected devices reside within the enclosure and to determine the state (e.g. raised or lowered) of specific protective assemblies, thereby allowing coordination of protection.

In some embodiments of the invention, the mechanisms that provide protection to a user's device, including protections against audio, video, RF transmit/receive capability and/or other sensors (i.e. gyroscope, accelerometers and/or any other sensor that is part of the enclosed device(s) etc.) can be integrated into the core structure of the privacy/security enclosure. In some embodiments, such mechanisms can be activated or deactivated with a conventional slide, button, switch and/or other such physical and/or electro-mechanical feature. In some embodiments, the feature can activate/deactivate the protection for one or more microphones, cameras, RF antennas or RF transmit/receive functionality for the enclosed device(s) in a single actuation, action, motion, and/or interaction. In other embodiments of the invention, such a feature can require two or more actuations, action, motion, and/or interactions (i.e. button press, switch slide, etc.). In some embodiments, the two or more actuations, actions, motions, and/or interactions can comprise two or more individual sequential or parallel single actuations, actions, motions, and/or interactions.

In some embodiments of the invention, with the hood down, all or most of the enclosed device(s) functions that do not include secured sensors can be available. In some further embodiments, with the hood raised, all or most of the enclosed device(s) functions can be available. In some embodiments, a button can be used to the masking audio sound turn on and off. In some embodiments, one LED can indicate a masking sound, and another can indicate a battery status, while yet another could indicate other functions such as maintenance requirements and/or feature indications/activations. In other embodiments, the indications/status of the previously mentioned functions could be combined into one or more LEDs. In some embodiments, the case and enclosed device(s) are charged through a micro-USB or other such charging port.

In some embodiments, any of the privacy/security enclosures described herein can include the circuit layout shown in FIG. 192. FIG. 192 illustrates a circuit system layout 19200 that can be used in any of the privacy/security enclosures described herein. As illustrated, the circuit system layout 19200 can comprise a RF case half section 19210, base circuitry and connections 19201, case half connections 19228 including cover 19230, hood 19240, and miscellaneous external connections 19203. In some embodiments, the circuit system layout 19200 can comprise an interface board 19202, main board 19270 with optical communication 19204, case battery 19224, and Lightning™ connector 19226. Connections can comprise charging socket 19206, USB connector 19208, power plug 19209, power socket 19212, i/o features 19214. Visual indicators or masking functions can comprise masking LED 19216, and battery capacitor LED 19218. Other components include foot speaker 19232, hood/phone switch 19260, and pass-through filter 19280. In some embodiments, the pass-through filter 19280 can allow the transmission of specific frequencies, while filtering and/or attenuating others. In some further embodiments, the pass-through filter 19280 can allow the passage of a physical wire through the surface of the Faraday cage, while not materially degrading the RF attenuation capabilities of the Faraday cage. Further, in some embodiments, the boards 19202, 19270 can be coupled using at least one optical communication link 19204, configured to com-

municate in such a way that does not materially degrade the RF attenuation of the Faraday cage through which the communication is passing. In some embodiments, a hood **19240** and/or enclosed device detection switch (**19260**) can be coupled to the main board **19270**. Further, in some embodiments, the hood **19240** and/or a bottom, foot and/or other portions of the privacy/security enclosure (e.g., components **19201**, **19210**, **19230**) can comprise one or more sound generators (e.g., speakers). Further, some embodiments include the battery **19224** coupled to the main board **19270** and/or a Lightning™ connector **19226**, USB, micro-USB, and/or other type of power connector coupled to the main board **19270**. In some embodiments of the invention, the interface board **19202** is coupled to a charging socket **19206**, and input/output features such as a masking LED **19216**, a battery capacitor capacity LED **19218**, and an on/off button **19222**. In some embodiments, the charging socket **19206** can be coupled to a USB connector **19208** and/or a wall charger **19212**.

As described earlier and illustrated in FIGS. **171C-171D**, in some embodiments, the indicating status of the user interface can be based at least in part on a status or position of at least one moveable portion of the privacy/security enclosure. FIG. **193** illustrates an operational state diagram of a privacy/security enclosure (represented as privacy/security enclosure **19300**) with a phone present in accordance with some embodiments of the invention.

For example, the privacy/security enclosure **19300** can include a chassis **19310** with an upper portion **19312**, base **19320**, a hood **19350**, and an attached outer housing or case **19315**. In some embodiments, operation of the privacy/security enclosure **19300**, movement of the hood **19350**, opening of the case **19315** (e.g., such as that defined by any of the symbols **19311**) can define a state **19311**, and include a status of the case **19315** (status **19314**), phone acoustics (**19316**), masking status (**19318**), and user device presence (**19319**). In some embodiments, the operational parameters can be defined as **19370**, **19375**, **19380**, **19385**, or **19390** as shown. For example, in some embodiments, a state **19312** comprising “closed off” can be representative of a closed privacy/security enclosure, sealed acoustics, and masking off (**19370**). In this instance, the privacy/security enclosure **19300** can comprise a microphone sealed indicating symbol turned on.

In some embodiments, a “closed on” state **19312** can comprise a case closed, phone acoustics sealed, and masking fully on (shown as **19375**). In this instance, the privacy/security enclosure **19300** can comprise two indicating symbols turned on including a microphones sealed indicator and a masking playing indicator. In some embodiments of the invention, the privacy/security enclosure can comprise an open free state **19312** comprising an open case, unsealed phone acoustics, and masking off (shown as **19380**). In this instance, the privacy/security enclosure can comprise no indicating symbols turned on indicating masking silent and microphones unsealed. In some further embodiments, the privacy/security enclosure can comprise an open off state **19312**, comprising a case open, phone acoustic sealed, and masking off (shown as **19385**). In this instance, the privacy/security enclosure **19300** can comprise an indicating symbol turned on comprising a microphones sealed indicator. In some other embodiments, the privacy/security enclosure can comprise an open on state **19312**, comprising a case open, phone acoustic sealed, and masking full on (shown as **19390**). In this instance, the privacy/security enclosure can

comprise two indicating symbols turned on including a microphones sealed indicator and a masking playing indicator.

FIG. **194** illustrates a state cycle diagram of a privacy/security enclosure in accordance with some embodiments of the invention. In some embodiments, the state cycles can be represented as phone in/out interactions, power on/off interactions, cover on/off interactions, and hood up/down interactions, where solid lines represent a require pathway and a dashed line represents an optional path per hood memory. FIG. **194** illustrates a state cycle diagram **19400** of a privacy/security enclosure in accordance with some embodiments of the invention. In some embodiments, the state cycle diagram **19400** can apply to any of the privacy/security enclosures disclosed herein. The state cycle diagram **19400** **19440**. In some embodiments, operational state **19440** can be indicated by icons **19446** based on interactions **19448**, and parameters **19450**.

FIGS. **195A-195B** illustrates partial interior perspective views of a privacy/security enclosure **19500** in accordance with some embodiments of the invention. In some embodiments, portions of the privacy/security enclosure **19500** can be completely enclosed by separate and unattached other portions of the privacy/security enclosure (including for example base **19520** as coupled to the chassis **19505**, with the combined enclosure providing different and/or increased levels of audio, video, RF and/or other types of sensor, drop, environmental or other types of protection.

Further internal structures, components and assembly can be seen in FIGS. **196-198D**. For example, FIG. **196** illustrates a partial cut-away view of a privacy/security enclosure in accordance with some embodiments of the invention. Some embodiments include a cover Faraday assembly **19615**, a base assembly **19620** with Faraday assembly **19630**, and a DC pass-through assembly (shown in FIG. **197B** as **19770**), all supported in a privacy/security enclosure **19605**.

In some embodiments of the invention, any RF gasket or seal (shown as **19610**) of the privacy/security enclosure (e.g., forming the Faraday cage) can include a conventional or custom fingerstock or any fingerstock or component gasket assembly described earlier. In some embodiments, at least a portion of the fingerstock can comprise a metal or a metal alloy. In some embodiments, at least a portion of the fingerstock can comprise copper or a copper alloy. In some other embodiments, at least a portion of the fingerstock can comprise iron or steel. In some embodiments, at least a portion of the fingerstock can comprise nickel or a nickel alloy (e.g., a nickel-copper alloy), or an alloy of copper and tin. In some embodiments, at least a portion of the fingerstock can comprise aluminum, magnesium, or mixtures or alloys thereof. In some embodiments, the fingerstock can comprise beryllium copper (“BeCu”) that can electrically couple the cover to the base, and when closing the case. In some embodiments, the fingerstock can comprise a base metal (e.g., such as nickel) with varying thicknesses of plated metals, including, but not limited to gold, palladium nickel, and titanium blend plating options. Some embodiments of the invention can include one or multiple rows of fingerstock brazed soldered, welded, bonded with conductive adhesive, or otherwise conductively bonded into the cover assembly. In some embodiments, in each row of fingerstocks, a hollow or solid circular profile of extruded conductive elastomer can be used. In some embodiments, the bearing surface on the base can be nickel-plated for conductivity and surface hardness.

Some embodiments include openings in the RF cage that do not materially compromise RF attenuation performance. Some embodiments include a DC pass-through assembly **19770** that allows DC power to pass between boards on either side of the cage. In some embodiments, one or more holes or windowed ports can allow light to pass to enable optical communication between boards (such as the main board and the interface board). Some embodiments include a RF pass-through for one or more frequency bands, while continuing to attenuate other frequency bands. In some embodiments, base assembly **19620** and/or Faraday assembly **19630** can include an RF pass-through switch, which allows physical interaction/linking between inner and outer portions of the Faraday cage or privacy/security enclosure, without materially degrading RF protection/attenuation.

FIGS. **197A-197B** illustrates a close-up view of the partial cut-away view in FIG. **196** in accordance with some embodiments of the invention. As illustrated, in some embodiments, the cap **19749** can comprise machined aluminum, and the cover body **19750** can comprise extruded and machined aluminum. In some embodiments of the invention, the privacy/security enclosure can comprise inner and/or outer bezels (**19752**, **19754**) comprising machined aluminum, and one or more inner and/or outer fingerstock (**19756**, **19757**) such as a BeCu fingerstock or other such fingerstock or other RF gasket. In some embodiments, the inner and/or outer fingerstock (**19756**, **19757**) and/or interface can include a stepped landing. In some embodiments of the invention, a stepped fingerstock interface can reduce the sliding distance that would be experienced by the leading row of the fingerstock. In some embodiments, reducing the sliding distance can both reduce the wear on the fingerstock, and reduce the wear on the fingerstock landing area (i.e., the rim). In some embodiments, the stepped profile can equalize the sliding distance experienced by the inner, outer or other such rows of fingerstock.

In some embodiments, the cap **19749**, the cover body **19750**, the inner and outer bezels (**19752**, **19754**), and the inner and outer fingerstocks (**19756**, **19757**) shown as **19764** can be coupled together (e.g., using welding, brazing, or other conventional joining methods). Further, some embodiments also include a Faraday rim **19762** and Faraday pan **19766**. In some embodiments, the Faraday rim **19762** and Faraday pan **19766** can be coupled together (e.g., using welding, brazing, or other conventional joining method). In some embodiments, the Faraday rim **19762** and Faraday pan **19766** can comprise aluminum. In some embodiments, the Faraday rim **19762** can comprise machined aluminum, and the Faraday pan **19766** can comprise deep drawn aluminum. In some embodiments, the DC pass-through assembly **19770** can comprise brass, aluminum, magnesium or a blended metal alloy assembly. Further, some embodiments include optical communication holes or ports **19621**. In some embodiments, the DC pass-through assembly **19770** can be coupled to the base **19620** (shown as **19727**) by soldering.

As described earlier, in some embodiments, acoustic security/protection can be achieved through audio masking. The audio masking noise can be emitted from the privacy/security enclosure proximate or adjacent the expected location of a microphone of an enclosed device, and/or in the general vicinity of the device. In some embodiments, assemblies for masking noise can include one or more assemblies configured to emit noise for pickup up by front, rear, and/or bottom or any other microphones of an enclosed/protected device. For example, FIGS. **198A-198D** illustrate partial interior views of portions of a privacy/security enclosure in accordance with some embodiments of the invention show-

ing masking module assemblies comprising at least one speaker driver, coupling, and seal. Further, some embodiments include assemblies to mask a bottom microphone including a push-rod, bottom masking module (comprising a speaker driver, caliper, and seal), and a caliper boot.

FIGS. **198A-198D** illustrates partial interior views of portions of a privacy/security enclosure including the base **19620** described above. In some embodiments of the invention, the privacy/security enclosure can include a plurality of sub-assemblies that can each be assembled individually before being assembled together to form the privacy/security enclosure. In some embodiments, the major sub-assemblies can comprise a cover assembly that can form an outer cover, at least partially enclosing a chassis assembly. In some embodiments, the chassis assembly can comprise the hood assembly (shown as **19812**) and a base **19620**. Further, in some embodiments, the base **19620** can comprise a Faraday base assembly **19630** as described earlier.

In some embodiments, the hood assembly **19812** can comprise a hood housing **19814** including a left and right hood shroud. In some embodiments, the hood assembly **19812** can include a hood clamp that can be used to seal and unseal to the front and back microphones. Consequently, when the hood assembly **19812** or other such mechanism is raised and lowered, the rubbing/sliding/interaction of the sealing surface against the mating surface on/of the protected device(s) can be minimized or reduced thereby enabling a higher cycle count of hood assembly **19812** raises/lowers, reducing or mitigating wear of the gasket/seals). In some embodiments, when the hood assembly **19812** is lowered, tension or compression forces can cause the hood assembly to spring away from the surface of the enclosed device (similar to a binder clip in reverse) and as the hood assembly **19812** is raised, the seals lift. In some embodiments, when the hood assembly **19812** is lowered, ramps can compress the hood clip and force the seals against the microphone with the correct amount of compression to deliver the designed audio protection.

Some embodiments include a different mechanism for the bottom or other microphone(s), the sealing/unsealing of which can be coordinated with the single motion of raising and lowering the hood, where the two or more mechanisms are coupled so that they function together. In some embodiments, the seal to the bottom or other microphone(s) can include mechanisms that reduce the rubbing/sliding/physical interaction between the sealing path and the mating surface when the mechanism is engaged/disengaged, reducing wear and increasing cycle life for such mechanisms.

Some further embodiments include the design of sealing paths to various sensors on the protected device in order to enhance or improve the effectiveness, efficiency and/or usability of protection. In some embodiments, the sealed or partially sealed path/channel from sound generators (e.g. speakers or drivers) can increase the amount of acoustical energy reaching the microphone(s) of the protected devices, reducing power requirements and/or allowing the use of smaller and/or less powerful drivers/speakers when compared to the acoustical power that would be required to deliver an equivalent level of protection in an open or non-sealed/non partially sealed environment. In some embodiments, the sealed or partially sealed path/channel from sound generators (e.g. speakers or drivers) reduces and/or attenuates the amount of masking signal(s) reaching outside of the path/channel, thereby reducing the detectability and/or obtrusiveness of such signal to the outside environment. In some embodiments, the sealed or partially sealed path/channel from sound generators (e.g. speakers or

drivers) reduces and/or attenuates outside signals/sounds/audio content from reaching the protected device(s)' microphone(s) and/or sensors, providing some level of protection and/or reducing the level of masking signal(s) required to deliver an equivalent level of protection when compared to an open or non-sealed/non partially sealed environment.

In some embodiments of the invention, the source and/or seed for random and/or other audio, actuator or other such masking signal(s) can be electrical components (such as a diode and/or the thermal noise of a resistor). In some embodiments of the invention, such seed/source can be amplified in order to reach a desired level of protection. In some embodiments of the invention, the seed, amplified and/or unamplified, can be filtered and/or sculpted to a more desired noise profile for the audio or other such masking signal (e.g. blue, pink, gray, white and/or other such profile) which can provide desired characteristics for one or more specific purposes, including, but not limited to lower power consumption and/or more effective masking for a similar/related level of protection against certain types of audio information (e.g. human speech and/or other types of audio information) when compared to other profiles. In some embodiments of the invention, less obtrusive and/or noticeable noise profiles can be created by lowering the frequency components/content above certain frequency levels (e.g. varying and/or different frequency levels typically ranging anywhere from between 300 Hz to 3 kHz) when compared to noise profiles that haven't been filtered/sculpted and/or modified for such purposes. In some embodiments of the invention, the seed can be used as the seed for encryption key(s) and/or for generating the encryption key(s) for voice, data, video and/or other types of encryption implemented and/or supported by the privacy/security enclosure itself and/or by the hardware and/or software of device(s) protected by the privacy/security enclosure.

In some embodiments of the invention, a single and/or multiple audio masking signals (random, pseudo-random, deterministic or other) can be used as the source for protection against one or more microphones and/or other sensors. In some embodiments of the invention, separate and/or distinct audio masking signals (random, pseudo-random, deterministic and/or other) can be used as the source for protection against one or more microphones and/or other sensors, including some embodiments where separate, dedicated audio masking signals can exist for each microphone of any device(s) protected by the privacy/security enclosure. In some embodiments of the invention, separate and/or distinct random audio masking signals can be used for each microphone on a device(s) protected by the privacy/security enclosure, reducing the likelihood and/or ability of an authorized and/or unauthorized listener subtracting and/or otherwise using one signal against another in order to extract and/or process and/or otherwise attempt to recover protected audio content. In some embodiments of the invention, the audio masking signal can be a combination of different types of filtered or sculpted noise profiles and/or can be a result of cycling through a variety of different noise signals.

In some embodiments of the invention, the thermal noise of a resistor can be amplified as the seed of a random acoustic noise source. In other embodiments, other electrical components such as diodes could also serve as the base generator. In some embodiments, the naturally broad noise can be filtered or sculpted to a custom "Pink" profile closely matching the spectral content of human voice. For example, FIG. 206 illustrates a frequency profile 20610 of pink noise in accordance with some embodiments of the invention, and FIG. 207 illustrates a frequency profile 20710 of human

voice in accordance with some embodiments of the invention. In some embodiments, this method can provide a number of advantages including that the thermal noise is truly random and secure (i.e., it cannot be cracked). Further, the custom pink profile can use the least amount of power to optimally mask voice. Furthermore, in some embodiments, the pink noise can create the least obtrusive masking signal due to its relatively muted components above about 500 Hz.

In some further embodiments, an independent noise generation circuit can be used for each microphone on an enclosed device(s). If only one source was used for multiple microphones, it could be possible to record the noise on a microphone that was less open to the voice signal (or via some other means of recording), and use that noise to cancel the noise detected by another microphone, increasing the likelihood of recovery of protected audio content.

Some embodiments can include speaker(s)/driver(s) with no or reduced rear port(s) or opening(s). In some embodiments, since rear ports are common in speakers/drivers to help tune the fidelity of the speaker/driver, but thus provide a path for external sound to modulate the speaker/driver cone which in turn can couple to the protected microphone(s), serving to reduce masking effectiveness, the privacy/security enclosure can use speakers/drivers with no ports and/or can close, block, seal, reduce, or otherwise obstruct ports in drivers/speakers that have them.

Some further embodiments include one or more apertures (e.g., holes or slots) in the base portion of the case to allow more sound to reach the bottom microphone (or other microphone(s) accessible via such apertures in any other portions of the privacy/security enclosure) such microphone(s) are uncovered. In some embodiments, the apertures can also allow sound from the speaker(s) accessible by such apertures to more effectively be heard. In some embodiments, this can provide the user with a good user experience if they are using their enclosed device(s) in speakerphone mode or with some other function that uses the bottom or other such speaker. As described earlier, the hood assembly can also include a speaker assembly including speaker drivers, driver mounts, and microphone seals. In some embodiments, the shrouds can comprise DuPont™ Delrin® acetal homopolymer resin and the hood housing can comprise aluminum. In some embodiments, the driver mounts can comprise an acrylonitrile butadiene styrene ("ABS") polymer. Some embodiments of the invention include microphone seals comprising a foam material (e.g., such as a polymer foam).

Some embodiments include a cover assembly. In some embodiments, a cover spring can comprise stainless steel. In some embodiments, the cover sleeve can comprise polyethylene. In some embodiments, the environmental seal can comprise an ethylene propylene diene terpolymer, and the cover outer bezel can comprise an ABS-type polymer.

FIGS. 199A-201E illustrate exterior views of a privacy/security enclosure in accordance with some embodiments of the invention. Some embodiments can include various configurations, branding placements, at least one layer forming the exterior of the privacy/security enclosure that can comprise at least one exterior surface material composition, and/or texture or finish.

FIGS. 199A-199E illustrates exterior views of a privacy/security enclosure 19900 in accordance with some embodiments of the invention. The privacy/security enclosure 19900 can comprise housing assembly 19905, enclosure 19910, a removable case or cover 19915, base 19920, and hood 19930. Further, FIGS. 200A-200D illustrates exterior views of a privacy/security enclosure 20000 in accordance

105

with some embodiments of the invention. The privacy/security enclosure **19900** can comprise housing assembly **20005**, enclosure **20010**, a removable case or cover **20015**, and base **20020**. Referring to FIG. **200A**, in some embodiments, the base **20020** can include a pass-through button with hole (shown as **20025**) to a main LED. Further, referring to FIG. **200D**, on the reverse side of the privacy/security enclosure **20000**, the base **20020** can include a hole **20027** to pass through LED indications or other optical information.

FIGS. **201A-201E** illustrates exterior views of a privacy/security enclosure **20100** in accordance with some embodiments of the invention. The privacy/security enclosure **20100** can comprise housing assembly **20105**, enclosure **20110**, a removable case or cover **20115**, base **20120**, and hood **20130**. FIG. **201A** shows a front view, FIG. **201B** shows a side view, FIG. **201C** shows a front view with case or cover **20115** removed, FIG. **201D** shows a side view of the view of FIG. **201C**, and FIG. **201E** shows a rear view.

In some embodiments, the privacy/security enclosure can comprise a housing assembly that can include at least one logo (e.g., name, entity, and/or company emblems, representations, and/or descriptions), shown as **20142**. In some embodiments of the invention, the privacy/security enclosure can include a logo **20142** on any side or face, edge or other portion of the privacy/security enclosure **20100**. In some embodiments, the privacy/security enclosure **20100** includes at least one logo **20142** positioned on a moveable portion of the privacy/security enclosure (e.g., such as the hood **20130**). In some embodiments, the logos **20142** can be embossed, engraved, pressed, etched, printed, or formed by any suitable conventional method provided they do not compromise the shielding effectiveness of the privacy/security enclosure. In some embodiments, the lower cover **20144** can comprise a different color, material, or texture than the other portion of the case or cover **20115**. For example, in some embodiments, the lower cover **20144** can comprise a medium gray anodized bead blast look. Some embodiments include a base trim **20148**. In some embodiments, a button and/or LED **20150** can be integrated with the base **20120**. In some embodiments, the button and/or LED can comprise a logo **20142**.

In some embodiments of the invention, at least a portion of the housing assembly comprises a conductive material. In some embodiments, at least a portion of the outer surface of the housing assembly includes a conductive material. In some embodiments, the conductive material is positioned coupled with a non-conductive portion of the housing assembly. In some embodiments, the housing assembly includes regions of conductive and non-conductive materials that are substantially seamlessly coupled. In some embodiments of the invention, at least a portion of the exterior surface of the housing assembly can comprise an aluminum type surface finish, a brushed finish, a satin finish, an anodized finish, and/or a texturing finish. In some embodiments, the outer surface can comprise at least one of a polymer, metal, or natural material such as wood or leather, or mixtures thereof. In some embodiments, the housing assembly can include at least one exterior trim component forming an exterior surface of the privacy/security enclosure. In some embodiments, the exterior trim can comprise a polymer, metal, wood, leather, or mixtures thereof. In some embodiments, any portion of the exterior can comprise any color or combination of colors. In some embodiments, a portion of the housing assembly can comprise at least one aperture. In some embodiments, the at least one aperture can be aligned with at least a portion of a user interface. In some

106

embodiments, the at least one aperture can be aligned with at least a portion of the privacy/security enclosure comprising an indicator such as an LED.

In some embodiments of the invention, by making the core portion of the privacy case only audio/video protective (and optionally protective for some other sensors), all of the RF protection can be positioned in a separate device and/or enclosure. In some embodiments, this can result in a reduction in the size, weight, and cost of the device. In some embodiments, different sizes of Faraday covers or enclosures can be used to accommodate multiple types and sizes of enclosed device(s) cases (e.g., with some Faraday cases or privacy/security enclosures being capable of handling an Apple® iPhone 6+, a Samsung Galaxy® 6, and other large phone or other device models while a medium case would handle audio/video/other sensor protection enclosures for mid-size or other grouping of phones or other device(s) (e.g. tablets, laptops etc.). Galaxy® is a registered trademark of Samsung Electronics.

In some embodiments of the invention, the privacy/security enclosure can comprise a removable Faraday enclosure. For example, some embodiments include a Faraday enclosure that can be added or removed from the privacy/security enclosure as a separate module. In some embodiments, the Faraday enclosure can comprise of two or more parts that can or may not be physically linked/attached to each other. In some embodiments, the use of one or more compression or other type of RF gaskets can be used to enhance the level of RF attenuation provided by the device.

In some embodiments of the invention, there is no need for RF shielding and/or gasketing for the inner pod (which can provide audio and/or video and/or other sensor protection, but not native RF attenuation/protection.) In some embodiments, such a non-RF protective/privacy case can have a pass-through port to allow access to the headphone jack or other ports of the enclosed device. In some embodiments, both RF and non-RF protective, native or pass-through button and/or switch access to the enclosed device's buttons/switches/controls can be provided. In some embodiments, the Faraday bottom can include passive controls and indicators, and electronics for optional pass-through charging or controlling of the interior device's functions, and/or access/visibility to the interior device's LED's or other such status indicators. Some embodiments include LED pin-hole pass through that can be aligned with passive buttons as described earlier.

FIG. **202A** illustrates a privacy/security enclosure **20200** including removable Faraday enclosure **20250** in accordance with some embodiments of the invention. FIG. **202B** a removable Faraday enclosure **20250** shown in FIG. **202A** in accordance with some embodiments of the invention. As shown in FIGS. **202A-202B**, some embodiments include a Faraday top (the housing assembly **20205** including enclosure **20210** and case or cover **20215** comprising a passive shell that can be coupled to a Faraday bottom (the Faraday enclosure **20250**). Referring to FIG. **202B**, in some embodiments, the Faraday enclosure **20250** can comprise passive controls and indicators **20255** including, but not limited to LED pin-hole pass-through, and one or more passive buttons. Further, FIG. **203** depicts an assembly view of the privacy/security enclosure **20200** including removable Faraday enclosure **20250** in accordance with some embodiments of the invention.

FIGS. **204A-204C**, and **205A-205F** illustrate a privacy/security enclosures including removable Faraday enclosures and privacy/security enclosures that can be used with removable Faraday enclosures in accordance with some

embodiments of the invention. For example, FIG. 204A illustrate a privacy/security enclosure 2410 including a removable Faraday enclosure 20415. Further, FIG. 204B shows a privacy/security enclosure 20420 with enclosure 20421, and base Faraday enclosure 20425. Further, FIG. 204C shows a privacy/security enclosure 20430 including enclosure 20431 with attached base Faraday enclosure 20435. Other alternative embodiments of privacy/security enclosures are shown in FIGS. 205A-205F including privacy/security enclosure 20500 including enclosure 20510 and case or cover 20515, hood 20512 (shown in FIGS. 205B and 205C), and Faraday base 20520. Further, FIGS. 205D-205F shows privacy/security enclosure 20550 including enclosure 20555 and case or cover 20560, and hood 20557 (shown in FIG. 205E in a lowered position, and FIG. 205C in a raised position).

Some embodiments of the invention include charge sharing. Some embodiments include a button or switch that is externally accessible or accessible through an aperture (e.g., by inserting the end of a paper clip) that when actuated can enable a dump charge of the privacy case battery to the user's device. For example, in some embodiments, a fixed percentage (e.g., from about 10% to about 20%) of the charge can be transferred. Some embodiments can also include an emergency override that can transfer substantially all remaining charge from the battery).

Some embodiments of the invention can include hardware and software control features to enable battery conservation. For example, some embodiments include a dim LED mode to indicate protection is active while not being distracting to the user in certain environments (e.g., such as during the night in a bedroom or in a darker environment such as a movie theater, etc.) Further, some embodiments include a bright LED mode to enable uses to know if their device is protected while in bright environments (e.g., such as outside on a sunny day or in some other such brightly lit environment.) Further, some embodiments enable the user cycle between various brightness modes (e.g., bright and dim modes, or other modes). Moreover, some embodiments include a status check feature where the user can either press a button to see a bright LED (for some portion of time) to provide an indication that they are being protected, and where the brightness level subsides to a lower level soon after. In some instances, this can happen by default including at any time after the LED state is changed and/or after audio protection is turned on. For example, if a user wakes up in the morning and wants to change from dim mode to a brighter mode, the user can press the button and the LED goes to 90% power for 10 seconds, then subsides to 25% power (which can be more visible than the dim mode, while not excessively draining the battery and reducing the length of time the privacy case can provide audio protection).

In some embodiments, various components include tamper-proof and/or tamper prevention mechanisms. For example, in some embodiments, portions of any of the housing assemblies and enclosures of any of the privacy/security enclosures illustrated in FIGS. 1-205F can include one or more tamper-proof prevention mechanisms. In some further embodiments, internal components such as PCB assemblies can include tamper prevention mechanisms. In some embodiments, the tamper prevention mechanisms can include one way tabs. In some further embodiments, the tamper prevention mechanism can include a protective layer or material.

In some embodiments of the invention, the privacy/security enclosure can protect against one or more gesture sensors and/or emitters. For example, in some embodiments,

the privacy/security enclosure can protect against or reduce the effectiveness of a radar sensor/emitting assembly (e.g., such as a broad beam radar sensor) to measure Doppler image, IQ and spectrogram for use in gesture control of any enclosed device(s).

Some embodiments of the invention can utilize methods to optimize battery performance and longevity. Further, some embodiments can include a battery management profile. For example, some embodiments include a battery management profile that can resist the urge to "fully" charge the battery. In some embodiments, by doing this, the battery capacity fall-off exhibited by LiION cells can be reduced such that the battery can retain its required capacity through more charge cycles. In some embodiments, as disclosed in <http://batteryuniversity.com/>, in terms of longevity, the optimal charge voltage is 3.92 volts per cell. Battery experts believe that this threshold eliminates all voltage-related stresses, and going lower may not gain further benefits but induce other symptoms. Also disclosed is the following table that summarizes the capacity as a function of charge levels. All values are estimated.

TABLE 1

capacity as a function of charge levels (from <http://batteryuniversity.com/>)

Charge level (V/cell)	Discharge cycles	Capacity at full charge
[4.30]	[150-250]	~[114%]
4.20	300-500	~100%
4.10	600-1,000	~86%
4.00	1,200-2,000	~72%
3.92	2,400-4,000	~58%

Table 4: Discharge cycles and capacity as a function of charge voltage limit. Every 0.10 V drop below 4.20 V/cell doubles the cycle but holds less capacity. Raising the voltage above 4.20 V/cell would shorten the life. Guideline: Every 70 mV reduction in charge voltage keeps 10% of usable capacity vacant.

In some embodiments, the any privacy/security enclosure described herein and shown in at least FIGS. 208-265B herein can be mounted or attached to a user's device. In some embodiments, the user's device can comprise a display device such as a computer monitor or display, a smart display or television, or other audio-visual device. The user's device can also include an integrated display and computer. For example, in some embodiments, the display can include components of a computer so that the display functions as a computer. As used herein, the "display", "display device", or "display monitor" can include example embodiments where the display is coupled to a computer and/or integrated with a computer. The user can position the privacy/security enclosure at least partially based on the structure of the user's device, and any structures, components, or devices that a user wishes to cover or otherwise make privatize (i.e., to privatize). As used herein, the terms privatize or make private are intended to describe making substantially completely private or at least partially private. In some embodiments of the invention, the privacy/security enclosure can be used to privatize a computer or display device that includes a camera and/or microphone. The user can modify the position of the privacy/security enclosure based on the location of the number and location of the structures, components, or devices that a user wishes to privatize.

In some embodiments, any privacy/security enclosure described herein and shown in at least FIGS. 208-265B can include a portion or section that can be moved by sliding,

raising or lowering, pivoting or rotating, or flipping with respect to another portion or section of the privacy/security enclosure to adjust the level of privacy of the device. In some embodiments, the privacy level of the privacy/security enclosure can be changed by sliding, raising or lowering, pivoting or rotating, or flipping at least a portion of the privacy/security enclosure with respect to another portion of the privacy/security enclosure. For example, in some embodiments, by sliding, raising or lowering, pivoting or rotating, or flipping a portion or section of the privacy/security enclosure, at least one sensor (such as a camera and/or microphone) can be uncovered and revealed. In some embodiments, the sliding, raising or lowering, pivoting or rotating, or flipping can be enabled by one or more slides, hinges, grooves, tracks, springs, and/or other conventional mechanisms. For example, in some embodiments, the privacy/security enclosure can comprise at least one portion that can be coupled to another portion by at least one hinge. In some embodiments, the privacy level of the privacy/security enclosure can be changed by pivoting or rotating at least a portion of the privacy/security enclosure with respect to another portion of the privacy/security enclosure using the at least one hinge.

In some embodiments, in a slide-closed position, any privacy/security enclosure described herein and shown in at least FIGS. 208-265B can privatize the underlying device. In some embodiments, the privacy level of the privacy/security enclosure can be changed by sliding at least a portion of the privacy/security enclosure with respect to another portion of the privacy/security enclosure. For example, in some embodiments, by sliding a portion or section of the privacy/security enclosure, as the slidable portion or section of the privacy/security enclosure is slid away from an underlying aperture of a fixed portion of the privacy/security enclosure, the interior of the privacy/security enclosure can be revealed to a user, and potentially at least one sensor (such as a camera and/or microphone) can be uncovered and revealed. In some embodiments, the sliding can be enabled by one or more guides or tracks. As described earlier in some other embodiments, the interior of the privacy/security enclosure can be color-coded to alert a user to a security threat that might be posed when the privacy/security enclosure is at least partially slid open. In some embodiments, the user can use the slidable portion or section of the privacy/security enclosure to uncover one sensor versus the other (for example when a user prefers to use their computer's microphone to dial into a conference call, but not participate in a video portion. Alternatively, in other circumstances, the user may want to use their video display to show something to other people during a teleconference call, but they may have dialed into the conference call on a land line, and prefer not to use the computer's microphone. In other circumstances, the user may want all sensors to be uncovered (e.g., during a FaceTime® or Skype® call on a computer where both the camera and microphone will be used simultaneously). FaceTime® is a registered trademark of Apple, Inc. SKYPE®, is a registered trademark of Microsoft Corporation.

In some embodiments, the interior of any privacy/security enclosure described herein and shown in at least FIGS. 208-265B can be color-coded to alert a user to a security threat that might be posed when the privacy/security enclosure is at least partially open. For example, in some embodiments, the interior can be colored red. In other embodiments, the interior can be colored yellow, blue, or magenta. In some embodiments, the interior can include switchable illumination to alert the user to at least partial lack of privacy.

Referring to FIG. 208, illustrating a front view of a computer or display monitor, in some embodiments, a mounted privacy/security enclosure 20800 can be coupled to the computer or display monitor (shown as user's device 11). In some embodiments, the privacy/security enclosure can be mounted to any portion of the user's device 11. For example, in some embodiments, a user can position the privacy/security enclosure 20800 shown in FIG. 208 to any portion of the computer or display monitor shown in this example embodiment. In some embodiments, the user can use the privacy/security enclosure 20800 to cover more than one portion, component or device of the user's device 11. In some further embodiments, the user can use more than one privacy/security enclosure 20800 to privatize the user's device 11.

In some embodiments of the invention, the privacy/security enclosure 20800 can be optionally configured to increase or reduce a level of privacy of a user's device 11. In some embodiments, this can be accomplished simply by positioning or repositioning the privacy/security enclosure 20800. In other embodiments, this can be accomplished by moving and/or adjusting a portion of the privacy/security enclosure 20800. For example, in some embodiments, the privacy/security enclosure 20800 can comprise a main housing 20810 including a movable portion, section, or hood 20850, and a couple or integrated moveable portion, section, window, door or shutter (shown as 20820). In some embodiments, a privacy/security enclosure including a main housing 20810 and hood 20850 can be coupled to a computer and/or display. The main housing 20810 can remain stationary during operation, and the hood 20850 can move relative to the computer and/or display in order to seal and un-seal against the microphones of the user's device. For example, FIG. 209 illustrates a close up view of the privacy/security enclosure 20800 of FIG. 208 in accordance with some embodiments of the invention. In some embodiments, the hood 20850 of the privacy/security enclosure 20800 can be moved with respect to another portion or section of the privacy/security enclosure 20800 (e.g., with respect to the main housing 20810 or other coupled component) to adjust the coverage (and therefore the privacy level) of the privacy/security enclosure 20800 mounted or coupled to the user's device 11 (e.g., a computer or display monitor as shown in the example embodiment of FIG. 208.) In some embodiments, the privacy/security enclosure 20800 can also be used with other user devices such as laptops, tablets and devices that contain cameras, microphones or other such sensors.

In some embodiments, the level of privatization can be partial in that some components or devices of the user's device 11 can remain non-private and others are private. For example, in some embodiments, a hood 20850 of the privacy/security enclosure 20800 can be moved with respect to another portion or section of the privacy/security enclosure to cover and make private a webcam but leave open a microphone. For example, FIG. 210 illustrates a close up front perspective view of a privacy/security enclosure 20800 in a covered and protected configuration 20802 in accordance with some embodiments of the invention. In the configuration 20802, the hood 20850 is lowered into the main housing 20810. Conversely, FIG. 211 illustrates a close up front perspective view of a privacy/security enclosure 20800 in an uncovered and unprotected configuration 20804 in accordance with some embodiments of the invention. This example embodiment shows the hood 20850 in a raised position.

111

In some embodiments, the main housing **20810** can contain one or more PCBs, electronics components, and at least one battery such as a Li-Ion battery for at least partially powering the privacy/security enclosure, one or more springs, and one or more latches, etc. In some embodiments, the user's device can be attached by snapping it into the mounting plate. In some embodiments, the mounting plate includes a release lever that can allow the device to be removed from the mounting plate. In some embodiments, this lever can also act as a spring to hold the device in place when it is attached.

In some embodiments of the invention, the hood **20850** can contain at least one sealing mechanism, one or more PCBs, and/or one or more LEDs, etc. In some embodiments, the hood **20850** can be positioned in two positions (e.g., down and up). In some embodiments, when the hood **20850** is down, it can be fully seated into the main housing **20810**, and any rubber seals can be in contact with the areas around the microphones to provide audio sealing. In some embodiments, when the hood **20850** is up, the seals may not be in contact with the computer and/or display, and hence the microphones can provide audio functionality.

In some embodiments, the hood **20850** or other moveable and/or upper portion can include a texture or pattern. In other embodiments, other portions of the main housing **20810** can include a texture or pattern. In some further embodiments, the hood **20850** or other movable upper portion can include an outer surface comprising a glossy surface. In some embodiments, other portions of the main housing **20810** can include a glossy outer surface. In some other embodiments, the movable upper portion can include an outer surface comprising a matte surface. In some embodiments, other portions of the main housing **20810** can include a matte outer surface.

Some embodiments include one or more mechanisms for moving and/or closing portions of the privacy/security enclosure (e.g., a lower portion or base portion and an upper portion or lid or hood **20850**). For example, in some embodiments, when a user applies a force to the lid or hood **20850**, the privacy/security enclosure **20810** can be closed. In some embodiments, by pulling on the lid or hood **20850**, the privacy/security enclosure **20810** can be opened. In other embodiments, the user can push a closed lid or hood **20850** to open or release it from the main housing **20810**. In some other embodiments, the user can push the hood **20850** down to lower it, and can push a button to raise the hood **20850** (uncovering one or more microphones). In some embodiments, the button can be on the top of the privacy/security enclosure, the front of the privacy/security enclosure, or somewhere else on the device.

In some embodiments of the invention, the mechanisms that provide protection, including protections against audio, video, and/or other sensors (i.e. gyroscope, accelerometers and/or any other sensor that is part of the enclosed/protected device(s) etc.) can be integrated into the core structure of the privacy/security enclosure (i.e. not require the described hood **20850** mechanism). In some embodiments, such mechanisms can be activated/deactivated with a slide, button, switch and/or other such physical and/or electro-mechanical feature, which feature can activate/deactivate the protection for zero, one or more microphone(s), camera(s) or other sensors for the enclosed device(s) in a single action/motion/interaction, while in other embodiments of the invention, such a feature can require two or more actions/motions/interactions (i.e. button press, switch slide, etc.).

Some embodiments include one or more springs to help raise the hood **20850** up from the down position. Different

112

types of springs with different spring rates and different dampening mechanisms can be used to give varying levels of tension and different mechanical feedback to the user for raising and lowering the hood **20850**. In some embodiments, different types of material can also be used to change the sound the user hears when the hood **20850** raises or lowers. In some other embodiments, the privacy/security enclosure can include at least one latch that can be used to couple with the hood **20850** as it is lowered to the base. In some embodiments, a catch mechanism can be used with the latch. In some embodiments, the latch can be released from the catch using a release button. An embodiment including a latch is discussed further below in relation to FIG. **217C**.

In some embodiments, the hood **20850** can include a push-pull action to open and close the hood **20850** with the main housing **20810**. For example, in some embodiments, the hood **20850** can be pushed down by the user to translate one or more seal mechanisms from the open unsealed state to the closed sealed state. Further, in some embodiments, one or more internal latches can retain the hood **20850** in the closed position to maintain pressure on the seals. Some embodiments include internal rods that are mounted in the stationary main housing **20810**, and guides in the hood **20850** couple with the rods to enable the rods to slide smoothly in the correct positions. In some embodiments, dual, triple or quadruple rods and corresponding guides can be used.

In some embodiments, the hood **20850** can be pulled up by the user to release the seals and move the hood **20850** to the open position. In some further embodiments, the retaining latch can be overpowered by the force of the user pulling up, and the hood **20850** can be moved until it reaches a peak position. In some embodiments, when released from the user's finger or hand, the hood **20850** can be maintained in the upright position by the retaining latch. Some further embodiments include the addition of at least one spring to provide a spring-assisted motion to the hood **20850**.

In some embodiments of the invention, the user can perform a similar action to close the hood **20850** (i.e., by pushing down on the hood **20850**). In some embodiments, one or more conventional internal latches can be installed. In some embodiments, the latch can couple onto the hood **20850**, and when the full distance of the stroke is achieved, the user can release the hood **20850**, and the hood **20850** can be retained in the sealed position. In some embodiments, the latch can require an over travel of about 1-2 millimeters. In this instance, after reaching the fully depressed position and being released, the latch can allow the hood **20850** to return a couple of millimeters on the upward stroke before the mechanical lock can fully engage into a final position.

In some embodiments, in order to release the hood **20850** to the upright position, the user can again push down on the hood **20850** from the top. This movement actuates the latch and releases the hood **20850**, and the hood **20850** can then move upward into a fully open position. In some embodiments, the system can be spring loaded to provide an upward spring force on the hood **20850**, driving the hood **20850** into the upright open position when it is released.

In some embodiments of the invention, the hood **20850** can be pushed down from the top to mechanically latch in place in a final sealed position. In some embodiments, an internal custom-made latch can be positioned in the main housing **20810** to retain the hood **20850**. In some embodiments, over-travel is not required in this system. In some embodiments, in order to release the hood **20850**, a push-button can be positioned on the front of the device. In some embodiments, a user can push this button move the latch

113

from the retaining feature and spring loaded hood **20850** lifts to an open position. In some embodiments, the release of the latch can be actuated from a button on the side, or front, or back, or top of the device. In some embodiments, a lever or pull-button, or other conventional actuator can be used in place of the button.

In some embodiments, the hood **20850** can be moved using an electronic and/or electro-mechanical assembly. For example, in some embodiments, the hood **20850** can be translated using a solenoid or small motor. In some embodiments, these systems can involve the user pushing a button (on the device, or remote to the device, either tethered or wireless) that can actuate the motor/solenoid. This would translate the hood **20850** from the open to the closed position, or vice-versa. The button could be protected with an additional security layer, such as a PIN entry keypad, or fingerprint sensor, or other.

In some embodiments, the privacy/security enclosure **20800** can utilize various sub-assemblies and components that attach to and/or mechanically interact with the computer and/or display. For example, some embodiments of the invention include one or more mounting plates. For example, some embodiments include a molded plastic plate that can be aligned relative to the top, rear and/or other such microphones on the computer and/or display, and can be attached to the rear surface with an adhesive tape. Some embodiments include a v-notch in the center of the top portion of the plate that indicates where a specific microphone should be in relation to the plate. Some further embodiments include one or more upper alignment tabs (e.g., one on each side) of the mounting plate that can hang over the top edge of the computer and/or display to position the mounting plate vertically on the computer and/or display. Further, some embodiments include various features, detents, holes, etc., on the mounting plate that interact with the sealing mechanisms of the device. Some embodiments include a plurality of tabs on the mounting plate that act as features to guide and retain the device when it is mounted to the mounting plate. In some further embodiments, an adhesive foam tape can be positioned under the mounting plate to enable a mechanical attachment to the computer and/or display, while providing a substantially sealed audio coupling between the housing of the computer and/or display and the mounting plate. Substantially sealed as used herein means providing a seal sufficient to enable the privacy/security enclosure to minimize and/or reduce eavesdropping or the effectiveness of eavesdropping on or listening to communications. Gaskets can also be used to help improve the sealing characteristics as well.

Embodiments of the invention include various sealing element geometries (e.g., flat, conical, round, o-ring, molded, etc.), and with various durometer values, and within various rubber materials (EPDM, polyurethane, etc.) In some embodiments, the sealing element can be attached to the computer and/or display with adhesive tape. In other embodiments, the sealing element can be attached to the hood **20850**, and configured to couple to the computer and/or display when translated up and/or down. Perfect seals are impossible to create in these applications, of course, but seals suitable for the purposes of these embodiments are readily created using the disclosed structures. Accordingly, the term "seal" as used herein is not limited to a complete or perfect seal, but instead a seal that is sufficient to provide desired reduction or attenuation.

In some embodiments of the invention, the hood **20850** can house or integrate one or more speakers and PCB with the noise generators, an LED "on" light, and other electronic

114

components. In some embodiments, each of the speakers can be embedded in a molded sealing element that can act to partially seal out ambient noise from the speaker chamber. In some embodiments, when this sealing element is in intimate contact with the computer and/or display and/or the mounting plate, the speaker can be partially isolated from the ambient noise, and a small column of air can be trapped between the microphone and the speaker. In this instance, when the speakers are turned on, the microphones can primarily sense the noise that is being generated by the device. In some embodiments, the sealing element, the sealing surface on the mounting plate, the seal between the mounting plate and the computer and/or display, and the locking force provided by the retaining features/latches/spring of the system can be factors in providing an adequate seal to the microphones.

In some embodiments of the invention, the upper microphone sealing mechanism can operate by applying downward force from the hood **20850**, through the sealing element, to the surface of the computer and/or display around the top microphone. In some embodiments, the compression force can be retained by the internal latch of the system.

Some embodiments of the invention include a lever seal. For example, some embodiments include a spring loaded lever that would normally pull the sealing element of the rear speaker to an upright, or open position. In some embodiments, when the hood **20850** is closed, the lever can be rotated into the closed position to provide the sealing force on the sealing element, where the lever or something coupled to the lever contacts a feature of the mounting plate as it reaches the sealing position. In some embodiments, the spring force, the lever geometry and actuating feature geometry can function together to provide the timing and effectiveness of the seal. Further, in some embodiments, the system can be reversed, so that the lever can be spring loaded to be normally closed, and an actuating feature on the mounting plate can move the lever as the hood **20850** is raised to the open position.

Some embodiments include a piston seal. In some embodiments, a spring loaded carrier can house the sealing element. In some embodiments, the spring loaded mechanism can force the sealing element down normal to the mounting plate. In some embodiments, the carrier can include multiple contact pins that serve to space the sealing element at a distance from the mounting plate. In some embodiments, this can ensure that when the hood **20850** is anywhere other than the final sealing location, the pins can lift the sealing element up off the mounting plate, and thus the microphones can offer normal functionality. In some embodiments, there are detent features in the mounting plate corresponding to the pins that allow the carrier to move down into the final sealed position when the hood **20850** is in the closed position. Therefore, in some embodiments, the rear sealing element can be in intimate contact with the mounting plate in the closed position, and the rear microphone can be sealed from ambient noise.

Some further embodiments include one or more sealing paths to various sensors on the protected device in order to enhance or improve the effectiveness, efficiency and/or usability of protection. In some embodiments, the sealed or partially sealed path/channel from sound generators (e.g. speakers or drivers) can increase the amount of acoustical energy reaching the microphone(s) of the protected devices, reducing power requirements and/or allowing the use of smaller and/or less powerful drivers/speakers when compared to the acoustical power that would be required to deliver an equivalent level of protection in an open or

non-sealed/non partially sealed environment. In some embodiments, the sealed or partially sealed path/channel from sound generators (e.g. speakers or drivers) can reduce and/or attenuate the amount of masking signal(s) reaching outside of the path/channel, thereby reducing the detectability and/or obtrusiveness of such signal to the outside environment. In some embodiments, the sealed or partially sealed path/channel from sound generators (e.g. speakers or drivers) can reduce and/or attenuate outside signals/sounds reaching the protected device(s) microphone(s) and/or sensors, providing some level of protection and/or also reducing the level of masking signal(s) required to deliver an equivalent level of protection in an open or non-sealed/non partially sealed environment.

In some embodiments of the invention, the source and/or seed for random audio masking signal(s) can be electrical components such as a diode and/or the thermal noise of a resistor. In some embodiments of the invention, such random noise seed/source can be amplified in order to reach a desired level of protection. In some embodiments of the invention, the noise seed, amplified and/or unamplified, can be filtered and/or sculpted to a more desired noise profile for the audio masking signal (e.g. blue, pink, gray, white and/or other such profile) which can provide desired characteristics for one or more specific purposes, including, but not limited to lower power consumption and/or more effective masking for a similar/related level of protection against certain types of audio information (e.g. human speech and/or other types of audio information) when compared to other noise profiles. In some embodiments of the invention, less obtrusive and/or noticeable noise profiles can be created by lowering the frequency components/content above certain frequency levels (e.g. varying and/or different frequency levels typically ranging anywhere from between 300 Hz to 3 kHz) when compared to noise profiles that haven't been filtered/sculpted and/or modified for such purposes. In some embodiments of the invention, the random seed can be used as the seed for being and/or generating encryption keys for voice, data, video and/or other types of encryption implemented or supported by the privacy/security enclosure itself and/or the hardware and/or software of device(s) protected by the privacy/security enclosure.

In some embodiments of the invention, a single and/or multiple audio masking signals (random, pseudo-random, deterministic or other) can be used as the source for protection against one or more microphones and/or other sensors. In some embodiments of the invention, separate and/or distinct audio masking signals (random, pseudo-random, deterministic and/or other) can be used as the source for protection against one or more microphones and/or other sensors, including some embodiments where separate, dedicated audio masking signals can exist for each microphone of any device(s) protected by the privacy/security enclosure. In some embodiments of the invention, separate and/or distinct random audio masking signals can be used for each for each microphone on a device(s) protected by the privacy/security enclosure, reducing the likelihood and/or ability of an authorized and/or unauthorized listener from subtracting and/or otherwise using one signal against another in order to extract and/or process and/or otherwise attempt to recover protected audio content. In some embodiments of the invention, the audio masking signal(s) can be a combination of different types of filtered/sculpted noise profiles or they can be a result from cycling through a variety of different noise signals.

In some embodiments of the invention, the volume and/or power level of some and/or all audio masking signals can be

varied, with resulting effects such as the increase and/or decrease in the level of audio masking effectiveness in masking signal detectability, etc. In some embodiments of the invention, the variation in audio masking signal power can be performed without user interaction/input while in other embodiments of the invention the user can control such variation with buttons, knobs, dials, sliders, software and/or other user input/output/interaction mechanisms.

In some embodiments of the invention, the hood **20850** and/or the main housing **20810** can contain a sensor system (such as a sensor coupled to a controller) that interacts to determine if the hood **20850** is at least partially open or in a sealed position. For example, in some embodiments, a magnet can be attached to the main housing **20810**, and a Hall-effect sensor can be coupled to the hood **20850**. In some embodiments of the invention, when the hood **20850** is closed, the magnet can be sensed by the Hall-effect sensor, and the system can determine that the hood **20850** is in the closed position. In some embodiments, this event can cause the system to turn on or off and/or activate and/or deactivate the noise speaker(s). In some embodiments, when the hood **20850** moves from the closed position, the system (using the Hall-effect sensor) can sense the absence of the magnet, and the system can turn off. In some embodiments, this can be done with a reed sensor in place of a Hall-effect sensor, or with a mechanical switch actuated when the hood **20850** moves. In some embodiments, by sensing when the hood **20850** is in the closed position, the user interface can be simplified because there is no "on-off" switch. Moreover, it ensures that the system is turned on when the hood **20850** is in position, so the user is prevented from forgetting to turn the audio masking on.

In some embodiments, the privacy/security enclosure can include an alternative hood **20850** sensor that allows to the user to determine when the hood **20850** is in the raised versus lowered position. In some embodiments, the hood sensor can be used by a control system to automatically turn off any current audio masking signal when the hood **20850** is raised, and automatically turn the signal back on when the hood **20850** is lowered).

In some embodiments of the invention, the hood **20850** can provide enhanced audio when it is raised. For example, in some embodiments, any cavities created when the hood **20850** is raised can be shaped or curved to modify and/or enhance the amount and/or quality of sound that reaches the microphone(s) when the hood **20850** is raised. In some embodiments, well-known sound enhancing shapes can be provided in the hood **20850**. In some embodiments of the invention, where multiple cavities are created when the hood **20850** or other portion of the invention is moved, the creation and/or shape of the cavities can be used to enhance noise reduction/cancellation and/or echo cancellation technologies using the various uncovered microphones.

In some embodiments of the invention, the privacy/security enclosure can include one or more gesture sensors and/or emitters. For example, in some embodiments, the privacy/security enclosure can include a radar sensor/emitting assembly (e.g., such as a broad beam radar sensor) to measure Doppler image, IQ and spectrogram for use in gesture control of the privacy/security enclosure and/or any user device contained within the privacy/security enclosure.

FIGS. **212A-212C** illustrate an internal architecture view of a privacy/security enclosure **21200** in accordance with some embodiments of the invention. In some embodiments, the privacy/security enclosure **21200** and other example embodiments including privacy/security enclosures shown in FIGS. **213A-265B** can include any of the features and

117

functions described above, including those described for privacy/security enclosure **20800** in the preceding paragraphs. In some embodiments of the invention, the privacy/security enclosure **21200** can include a main housing **21210** enclosing various operation components of the privacy/security enclosure. In some embodiments, the privacy/security enclosure **21200** can comprise a main housing **21210** and a moveable hood **21250**. In some embodiments, the privacy/security enclosure **21200** can include a webcam **21220**. In other embodiments, the privacy/security enclosure **21200** can include an aperture providing adjustable access to a webcam of a user's device **11**. In some embodiments, the privacy/security enclosure **21200** can include at least one PCB and electronics component **21230**, at least one battery (such as battery **21235** comprising a 450 mAh Li-ion battery, and a battery **21240** such as a 600 mAh Li-ion battery) for at least partially powering the privacy/security enclosure. In some embodiments, the main housing **21210** can include at least one movable portion (e.g., hood **21250**) for covering a component or device such as a webcam and/or a microphone. Further, in some embodiments, the privacy/security enclosure **21200** can include integrated speakers **21245** configured to emit sound. In some further embodiments, the privacy/security enclosure **21200** can include integrated microphones **21248** configured to sense sound.

FIGS. **213A-213B** illustrate front and rear perspective views of a privacy/security enclosure **21300** in accordance with some embodiments of the invention. In some embodiments, the privacy/security enclosure **21300** can comprise at least one universal mount **21318** for coupling the privacy/security enclosure to a user device. In some embodiments, the at least one universal mount **21318** can comprise a VHB mount clip, slide on, snap-on, and/or a magnetic mount. In some other embodiments, the privacy/security enclosure can include a custom mount specific to one or more computers or computer displays. For example, some embodiments include one or more custom components for coupling to various surfaces or edges of the computer or computer display.

In some embodiments, the privacy/security enclosure **21300** can comprise a main housing **21310** that comprises or includes the at least one universal mount **21318**. Further, the main housing **21310** can include a coupled camera shutter **21320** and a camera shutter button **21325** for operating the camera shutter **21320**. The privacy/security enclosure **21300** can also include at least one visual indicator of operation such as one or more LED indicators **21330**, along with an LED dimmer button **21335**. The hood **21350** can comprise a microphone seal **21340** that can be used to seal with the inner region **21342** of the main housing **21310**. Further, in some embodiments, the hood **21350** can be operational to form a microphone seal engagement using finger grip, button release and push-down, and/or pen style push and release. Data, power, or other connectivity can be accomplished through cable management **21345** (e.g. a USB cable management).

Some further embodiments can include alternative embodiments of cable management. For example, in some embodiments, the privacy/security enclosure can include USB cable management comprising magnetic control management, and/or color coded management, and/or at least one visual cue. FIGS. **265A-265B** illustrate rear perspective views of computer or display mounted privacy/security enclosure **26500** including hood **26550** with cable management **26570** in accordance with some embodiments of the invention. In some embodiments, cable power and/or communication cables can be routed away from the privacy/

118

security enclosure to a USB and/or power connection in various adjustable directions using a wire routing coupler(s) coupled to the computer or display.

In some embodiments, some portion of the privacy/security enclosure can include an alignment marking or notch. In some embodiments, the marking or notch can assist the user to position the cover or mount to a specific location. Some embodiments can also include an aperture that can be aligned with and/or placed over one or more microphones of the device (e.g., such as a top and/or rear facing microphone).

In some further embodiments, the privacy/security enclosure can include one or more mounting tabs that can be used for attachment to a computer and/or display. Some embodiments can include moveable release mechanisms to enable attachment or release of the privacy/security enclosure. In some embodiments, the mounting bracket or feature can include mechanical structures and/or mating, sealing and/or other such materials that aid in the creation of a sealed path/channel between any speaker(s) of the privacy/security enclosure and microphone(s) of the protected device(s).

In some embodiments, the privacy/security enclosure can include at least one microphone seal. Some embodiments include a microphone seal that comprises a vertical slide. In some further embodiments, the microphone seal can comprise a flip, pivot, or rotating seal that can flip, pivot, or rotate from the main body of the privacy/security enclosure to provide effective sealing that is durable over a larger number of sealing and unsealing cycles than many conventional sliding seals.

In some embodiments, engagement of the microphone seal can be accomplished using a finger grip. In some further embodiments, a user can engage the microphone seal using a button release and combined push down. Some further embodiments can comprise a pen-style push and release (e.g., such a conventional spring-loaded push down and release mechanism used in a conventional pen).

Some embodiments include LED indicators. Some embodiments can include one or more logos and/or brand images, including logos and/or brand images that comprise LED indicators. Some embodiments include a light pipe as at least a portion of an indicator. In some embodiments, the privacy/security enclosure can include a light pipe to allow ambient light through the privacy/security enclosure so that the automated screen brightness function of the enclosed user device (if it has one) continues to function even though at least a portion of the privacy/security enclosure is at least partially covering the user's device. In some embodiments, the privacy/security enclosure can comprise an LED dimmer button. In some embodiments, the button can comprise a capacitive touch button, a round button, or a square button.

As described earlier, in some embodiments, the privacy/security enclosure can be configurable or reconfigurable to adjust the level of privacy. In some embodiments, the privacy/security enclosure can include a removable portion or section that can be added or removed with respect to another portion or section of the privacy/security enclosure to adjust the level of privacy of the device. In some other embodiments, the privacy/security enclosure can include a movable portion or section that can be moved with respect to another portion or section of the privacy/security enclosure to adjust the level of privacy of the device.

Some embodiments of the invention can comprise at least one surface provided with an adhesive (e.g., such as an adhesive tape) to couple the privacy/security enclosure to a surface of the user's device. In some embodiments, other conventional attachment mechanisms can be used including,

119

but not limited to clips, guides or sliders, snap-on mounts, magnetic mounts, and Velcro® mounts. For example, in some embodiments, the privacy/security enclosure can be coupled to a computer and/or display using double-sided adhesive. FIG. 214 depicts a reconfiguration of a mounted privacy/security enclosure and includes an adhesively mounted portion 21420. The privacy/security enclosure 21400 can comprise a main housing 21410 that can be attached to the mounting portion 21420 (e.g., using adhesive 21425). Once mounted, the privacy/security enclosure 21400 can be move, slid, repositioned on the mounted portion 21420. Further, the privacy/security enclosure 21400 can be positioned on the mounted portion 21420 to align the aperture 21415 with the hood 21450. Power and/or data can be fed and/or managed through cable management 21430.

In some embodiments, the privacy level of the privacy/security enclosure 21400 can be modified by sliding the slidable main housing 21410 so that the aperture 21452 of the main housing 21400 and aperture 21415 at least partially overlap. In other embodiments, the privacy level of the privacy/security enclosure 21400 can be increased by sliding the slidable main housing 21410 so that the aperture 21452 of the main housing 21410 and aperture 21415 do not overlap.

FIG. 215 depicts a reconfiguration of a mounted privacy/security enclosure in accordance with another embodiment of the invention. The privacy/security enclosure 21500 includes main housing 21510, and a mounting portion 21520 with aperture 21515. Using the adhesive 21525, the mounting portion 21520 can be coupled to the user's device 11. Once mounted, the privacy/security enclosure 21500 repositioned on the mounted portion 21520. Further, the privacy/security enclosure 21500 can be positioned on the mounted portion 21520 to align the aperture 21515 with the hood 21550. Power and/or data can be fed and/or managed through cable management 21530. In some embodiments, the privacy level of the privacy/security enclosure 21500 can be modified by positioning the slidable main housing 21510 so that the aperture 21552 of the main housing 21500 and aperture 21515 at least partially overlap. In other embodiments, the privacy level of the privacy/security enclosure 21500 can be increased by positioning the main housing 21510 so that the aperture 21552 of the main housing 21510 and aperture 21515 do not overlap.

In some embodiments of the invention, the privacy/security enclosure can include a movable portion or section that can be moved by rotating or pivoting with respect to another portion or section of the privacy/security enclosure to adjust the level of privacy of the device. For example, FIG. 216 illustrates architecture views of a privacy/security enclosure in accordance with some embodiments of the invention.

FIG. 216 illustrates architecture views of a privacy/security enclosure 21600 in accordance with some embodiments of the invention. In some embodiments, the mounting portions 21425, 21525 can comprise the enclosure 21600. In some embodiments, the privacy/security enclosure 21600 can comprise a main body 21649 that can comprise a front surface 21647 and a rear surface 21645 folded from a surface 21640 defined between edges 21615. Initially the privacy/security enclosure 21600 can be formed or assembled as shown in FIG. 16 by folding about hinges 21603a, 21603b (thus forming edges 21615 and the surface 21640). The privacy/security enclosure 21600 can also comprise at least one aperture including, but not limited to, a webcam alignment aperture 21630 and a microphone alignment aperture 21620.

120

In some embodiments of the invention, a section or portion of the privacy/security enclosure can be raised or lowered to alter the privacy level of the privacy/security enclosure. Various seals can be engaged and disengaged during this process including seals to microphones, speakers, sensors and optical capture devices. For example, FIGS. 217A-217C illustrates views of a privacy/security enclosure 21700 in accordance with some embodiments of the invention, and FIGS. 218A-218C illustrates views of a privacy/security enclosure 21800 in accordance with some further embodiments of the invention.

FIG. 217A shows the privacy/security enclosure 21700 including main housing 21710 and movable hood 21750. In some embodiments, in a lowered position (shown in FIG. 217B), the privacy/security enclosure 21700 can privatize the underlying device. In some embodiments, one or more rubber seals 21715 can be coupled to one or more microphones 21717. Further, in some embodiments, the main housing 21710 can include at least one sound tube 21719 coupled to at least one speaker 21721. FIG. 2171C shows the privacy/security enclosure 21700 with hood 21750 raised, and depicts sound 21752a, 21752b directed to microphones 21717a, 21717b open to the sound. In some embodiments of the invention, the privacy/security enclosure 21800 can comprise a latch to enable the hood 21750 of the privacy/security enclosure 21700 to be decoupled from the unmoved portion (main housing 21710) of the privacy/security enclosure 21700. In some embodiments, as the hood 21750 of the privacy/security enclosure is moved away from the main housing 21710, the interior of the privacy/security enclosure can be revealed to a user. When lowered, the latch that retains the hood 21750 in place. For example, referring to FIG. 217C, in some embodiments, a latch 21713 can be coupled to the main housing 21700 positioned to couple to the hood 21750 when the hood 21750 is lowered into the main housing 21710.

FIGS. 218A-218C illustrates views of a privacy/security enclosure in accordance with some embodiments of the invention. FIG. 218A shows the privacy/security enclosure 21800 including main housing 21810 and movable hood 21850. In some embodiments, in a raised position (shown in FIG. 218B), the privacy/security enclosure 21800 can privatize the underlying device. In some embodiments, one or more rubber seals 21815 can be coupled to one or more microphones 21817. Further, in some embodiments, the main housing 21810 can include at least one sound tube 21819 coupled to at least one speaker 21821. FIG. 2171C shows the privacy/security enclosure 21800 with hood 21750 lowered, and depicts sound 21852a, 21782b directed to microphones 21817a, 21817b open to the sound. In some embodiments, hinge 21723 can be coupled to the main housing 21800 and the hood 21850 positioned to enable the hood 21750 to be lowered and raised by rotating about the hinge 21723.

In some embodiments of the invention, any of the privacy/security enclosures shown and described in FIGS. 208-265B can suppress or attenuate sound to reduce the ease and/or effectiveness of eavesdropping. In some embodiments, one or more o-rings or gaskets can be used to attenuate or partially block sound. In some embodiments, the cover can include sound dampening layers/materials. Some embodiments of the invention have at least a portion of the privacy/security enclosure formed of a material at least partially attenuating sound emitted from inside the privacy/security enclosure. In some other embodiments, at least a portion of the privacy/security enclosure is formed of a

material partially or substantially attenuating sound emitted from outside of the privacy/security enclosure.

In some further embodiments, any of the privacy/security enclosures shown and described in FIGS. **208-265B** can partially block and/or damp the signals reaching audio sensors and/or microphones within the user's device. For example, in some embodiments, the privacy/security enclosure can include audio blocking/reducing/confusing capabilities so that typical conversation-level audio outside the privacy/security enclosure will be partially or substantially unintelligible or indiscernible by the enclosed device's microphone. Some embodiments of the invention can include one or more microphone attachment and/or sealing mechanisms. In some embodiments, a physical element of the privacy/security enclosure architecture can be placed against the surface of the device at location at or near where the microphones that are being protected are located. In some embodiments, this physical element can comprise a seal or gasket that minimizes the passage of sound.

Some embodiments of the invention include active sound masking. Some embodiments of the invention include a noise delivery system that takes the masking signal generated by one or more speakers within the privacy/security enclosure and delivers it to one or more of the various microphones that can be covered and/or protected by the privacy/security enclosure. In some embodiments, any of the privacy/security enclosures shown and described in FIGS. **208-265B** can play one or more masking signals to muffle, overwhelm, confuse or mask sounds being picked up by one or more microphones of the user device. Further, some embodiments of the invention include listen and respond capabilities. Some embodiments enable the privacy/security enclosure to use one or more microphones to listen to the environment and play one or more masking signals when sound is detected. Some embodiments include a privacy/security enclosure that comprises one or more microphones that are band limited to specific frequencies that are associated with voice. In this instance, the microphones have a lowered noise floor that is below the threshold of microphones in the enclosed user device.

For example, in some embodiments, the privacy/security enclosure can comprise one microphone in the middle of the low frequency of the common voice frequency band and another in the middle of the medium frequency voice band. In some embodiments, using a deep noise floor, the presence of speech can be detected (while not capturing the voice content) while ensuring privacy/security enclosure protection is activated. Some embodiments include a random masking signal. In some embodiments, one or more speakers can be used to cover one or more microphones to create a separate random, pseudo-random or other type of noise source and separate speaker for each microphone in a protected device. Some embodiments of the invention include specialized speaker and/or speaker driver selection. Some embodiments include a privacy/security enclosure that can produce one or more specific waveforms to mask human speech. Moreover, some embodiments include speakers that can produce the desired waveforms with relatively low power consumption. For example, some waveforms can be produced with power consumption less than 850 uA. In some embodiments, the privacy/security enclosure can change and/or delay a starting time for the masking signal. For example, in some embodiments, the privacy/security enclosure includes a control system that enables the system and/or the user to select and vary the amount of time between speech detection and masking signal activation.

In some embodiments, any of the privacy/security enclosures shown and described in FIGS. **208-265B** can change the masking signal tail time. For example, after speech ceases, the control system can stop the transmission of the masking signal substantially immediately. In some further embodiments, after speech ceases, the control system can include a transmission of the masking signal that comprises a tail (i.e. a transmission for a certain period of time after speech ceases). In some embodiments, this can minimize obtrusiveness as testing indicates that a constant start/stop is more obtrusive than continuous transmission. In some embodiments, tuning the tail can allow substantially continuous broadcast through the normal starts and stops and pauses that are a part of human conversation. Further, in some other embodiments, the volume of the masking signal can be varying. In some embodiments, the control system or the user can vary the volume of the masking signal based on the volume of the detected sound (e.g. such as a human voice).

In some embodiments of the invention, any of the privacy/security enclosures shown and described in FIGS. **208-265B** can include an obfuscation and/or randomness setting. In some embodiments, for a variety of reasons, the privacy/security enclosure can prevent or reduce the ability of an authorized and/or unauthorized listener from detecting the presence of speech, or, if the presence of speech can be detected, reducing or eliminating the intelligibility of such speech. In some embodiments, in the obfuscation and/or randomness mode, the privacy/security enclosure can randomly broadcast to provide protection even if no one is speaking, thereby diminishing the ability of an authorized and/or unauthorized listener of detecting when there is actual speech by a user using the system. Some embodiments of the invention include an always on mode. In this instance, the privacy/security enclosure includes active audio masking that is always on. In this mode, the privacy/security enclosure can broadcast at least one masking/obfuscation signal(s) as long as there is power to the device or enough charge in one or more batteries (if included) to power the transmission of such signal(s).

In some embodiments of the invention, a section or portion of the privacy/security enclosure can be slid or moved to alter the privacy level of the privacy/security enclosure. For example, FIG. **219** illustrates an operational view of a privacy/security enclosure **21900** in accordance with some embodiments of the invention. The privacy/security enclosure **21900** can comprise a main housing **21910** mountable to a user device **11**. Part of the housing **21900** includes a moveable portion or hood **21950** that can be moved away from the housing wall **21912** to lower a privacy level, or can be coupled to the housing wall **21912** to raise or set a privacy level. In some embodiments, surfaces **21915** and/or **21955** can be color coded and/or illuminated to warn or caution a user of a non-private configuration or a lower privacy setting.

As described earlier with respect to privacy/security enclosure **20800**, some embodiments can include an integrated moveable portion, section, window, door or shutter. Further example embodiments of privacy/security enclosures with various shutter and shutter actuation methods are shown in FIGS. **220-226**. For example, FIG. **220** illustrates an operational view of a privacy/security enclosure **22000** in accordance with some further embodiments of the invention. Some embodiments of the invention include a privacy/security enclosure **22000** comprising a main housing **22010** including a coupled hood **22050**. The main housing **22010** can include a shutter aperture **22020** and an actuatable shutter

123

22030. Further, the shutter **22030** can be actuated by a user using an integrated shutter actuator **22040**. In some embodiments, the shutter **22030** can be manually or automatically actuated. For example, in some embodiments, a user can close the shutter **22030** by sliding the slider insert **22040**. When closed, the shutter **22030** can be opened by moving the slider insert **22040** in the reverse direction.

In some embodiments of the invention, regions of the privacy/security enclosure that can be used for user interaction (e.g., various surfaces that can be used to grip or move a portion of the privacy/security enclosure) can include tabs or raised areas (e.g., ramps etc.) that can enable the user to more easily move the portion of the device that needs to be moved, and also to provide a cue as to where and how they should actuate such a mechanism. Some embodiments include textured surfaces or materials/coatings that make such surfaces less slippery to the user.

FIG. **221** illustrates an operational view of a privacy/security enclosure **22100** in accordance with some embodiments of the invention. Some embodiments of the invention include a privacy/security enclosure **22100** comprising a main housing **22110** including a coupled hood **22150**. The main housing **22110** can include a shutter aperture **22120** and an actuable shutter **22130**. Further, the shutter **22130** can be actuated by a user using an integrated shutter grip surface **22140**. In some embodiments, the shutter **22130** can be manually or automatically actuated. For example, in some embodiments, a user can close the shutter **22130** by pushing the shutter **22130** aided by the grip surface **22140**. When closed, the shutter **22130** can be opened by moving the slider insert **22140** in the reverse direction. In some embodiments, the grip surface **22140** can comprise an uneven or textured surface. In some further embodiments, the grip surface **22140** can comprise at least one notch or at least one extension.

In some embodiments, a user can activate a portion of the privacy/security enclosure to privatize the underlying device. In some embodiments, the privacy level of the privacy/security enclosure can be changed by opening at least a portion of the privacy/security enclosure (such as a shutter) with respect to another portion of the privacy/security enclosure. In some embodiments, the privacy/security enclosure can comprise a button-activated aperture such as a shutter. In some embodiments, the camera shutter can comprise an iris. In some embodiments, the camera shutter can comprise a horizontal shutter. In some further embodiments, the camera shutter can comprise a vertical shutter.

In some embodiments of the invention, the privacy/security enclosure can comprise a camera shutter operating mechanism. For example, in some embodiments, the camera shutter can comprise a push-button mechanism. In some further embodiments, the camera shutter can comprise a slider, such as a slide positioned in one or more guides. For example, in reference to FIG. **222** illustrating an operational view of a privacy/security enclosure **22200** in accordance with some further embodiments of the invention, in some embodiments, by activating a button positioned on the fixed body of the privacy/security enclosure, at least a portion or section of the privacy/security enclosure can be opened or slid away from an underlying aperture of a fixed portion of the privacy/security enclosure. At this stage, the interior of the privacy/security enclosure can be revealed to a user, and potentially at least one sensor (such as a camera and/or microphone) can be uncovered and revealed. In some embodiments, the interior of the privacy/security enclosure can be color-coded to alert a user to a security threat that

124

might be posed when the privacy/security enclosure includes a shutter that is at least partially slid open.

Some embodiments of the invention include a privacy/security enclosure **22200** comprising a main housing **22210** including a coupled hood **22250**. The main housing **22210** can include a shutter aperture **22220** and an actuable shutter **22230**. Further, the shutter **22230** can be actuated by a user using an integrated shutter actuator button **22240**. In some embodiments, the shutter **22230** can be manually or automatically actuated. For example, in some embodiments, a user can close the shutter **22230** by actuating the shutter actuator button **22240**. When closed, the shutter **22230** can be opened by actuating the shutter actuator button **22240**.

Referring to FIG. **223**, illustrating an operational view of a privacy/security enclosure **22300** in accordance with some embodiments of the invention, in some embodiments, a user can close an open shutter by sliding the shutter to a closed position. Some embodiments of the invention include a privacy/security enclosure **22300** comprising a main housing **22310** including a coupled hood **22350**. The main housing **22310** can include a shutter aperture **22320** and an actuable shutter **22330**. Further, the shutter **22330** can be actuated by a user using an integrated shutter actuator button **22340**. In some embodiments, the shutter **22330** can be manually actuated after actuation of the button **22340**. For example, in some embodiments, a user can close the shutter **22330** by actuating the shutter actuator button **22340**, and pushing the shutter **22340** towards the button **22340**. When closed, the shutter **22330** can be opened by actuating the shutter actuator button **22340**. The shutter can then either automatically open, or the user can pull or push-open the shutter **22330**.

Referring to FIG. **224**, illustrating an operational view of a privacy/security enclosure in accordance with some further embodiments of the invention, in some embodiments, the button can be positioned on the sliding shutter. Some embodiments of the invention include a privacy/security enclosure **22400** comprising a main housing **22410** including a coupled hood **22450**. The main housing **22410** can include a shutter aperture **22420** and an actuable shutter **22430**. Further, the shutter **22430** can be actuated by a user using an integrated shutter actuator button **22440** that is positioned on the shutter **22430**. In some embodiments, the shutter **22430** can be manually or automatically actuated. For example, in some embodiments, a user can close the shutter **22430** by actuating the shutter actuator button **22440**. When closed, the shutter **22430** can be opened by actuating the shutter actuator button **22440**. In either case, actuation of the button **22440** can release the shutter **22430** for movement manually or automatically (e.g., using a conventional spring actuation or motor).

Referring to FIGS. **225** and **226**, in some embodiments of the invention, the privacy/security enclosure can include one or more logos and/or brand images. In some embodiments, the privacy logos and/or brand images can comprise an LED dimmer button. In some embodiments, the button can comprise a capacitive touch button.

Referring to FIG. **225**, some embodiments of the invention include a privacy/security enclosure **22500** comprising a main housing **22510** including a coupled hood **22550**. The main housing **22510** can include a shutter aperture **22520** and an actuable shutter **22530**. Further, the shutter **22530** can be actuated by a user using an integrated slider **22540**. In some embodiments, the shutter **22530** can be manually or automatically actuated. When closed, the shutter **22530** can be opened by moving the slider integrated slider **22540** in

the reverse direction. In some embodiments, the main housing **22510** can comprise an LED dimmer, and/or a backlit logo (shown as **22548**).

Referring to FIG. **226**, some embodiments of the invention include a privacy/security enclosure **22600** comprising a main housing **22610** including a coupled hood **22650**. The main housing **22610** can include a shutter aperture **22620** and an actuable shutter **22630**. Further, the shutter **22630** can be actuated by a user using an integrated shutter actuator button **22640**. In some embodiments, the shutter **22630** can be manually or automatically actuated. For example, in some embodiments, a user can close the shutter **22630** by actuating the shutter actuator button **22640**. When closed, the shutter **22630** can be opened by actuating the shutter actuator button **22640**. In some embodiments, the main housing **22510** can comprise an LED dimmer, and/or a backlit logo (shown as **22648**).

In some embodiments of the invention, the privacy/security enclosure can include at least one external connector such as a USB or micro-USB connector. In some embodiments, the external connector can include a coupled lead such a USB or micro-USB lead. In some embodiments, the coupled lead can provide power to the privacy/security enclosure. In some embodiments, a USB wall charger can be used to couple to the USB to provide power to the privacy/security enclosure.

In some embodiments, the external connector and/or external lead can be positioned adjacent one end of the privacy/security enclosure. In other embodiments, the external connector and/or external lead can be positioned between the ends of the privacy/security enclosure. In some embodiments of the invention, the external connector and/or external lead can be positioned at the rear of the privacy/security enclosure. For example, FIG. **227** illustrates a rear view of a privacy/security enclosure **227** comprising a main housing **22710** in accordance with some embodiments of the invention. In some embodiments, the external connector **22735** and/or external lead can include a color accent **22745**. Further, FIG. **228** illustrates a rear view of a privacy/security enclosure **22800** comprising main housing **22810** in accordance with some embodiments of the invention, and shows the external connector **22830** and/or external lead can include a color accent **22845**. In some further embodiments, the external connector and/or external lead **22735**, **22845** can include internal illumination.

Some embodiments comprise an internally powered privacy/security enclosure. For example, FIG. **229** illustrates a front view of a privacy/security enclosure **22900** in accordance with some embodiments of the invention, and FIG. **230** illustrates a side view of a privacy/security enclosure **22900** in accordance with some embodiments of the invention. In some embodiments, the privacy/security enclosure **22900** can comprise a main housing **22910** that can include a main section **22911** housing electronics **22930** and at least one battery **22935**, and a secondary section including an upper portion **22920** including at least one extension or flange **22915**. In some embodiments, the upper portion **22920** can house at least one speaker **22960**. During use, a user can clip the extension or flange **22915** over and/or around a device to be privatized, and position the privacy/security enclosure **22900** to at least partially align the at least one speaker **22960** with at least one microphone of the user's device.

In some embodiments, a privacy/security enclosure can include at least one speaker mounted in the main section of the main housing and positioned proximate the inner surface of the main portion of the main housing, and at least one

speaker mounted in the upper portion of the main housing, and positioned proximate the inner surface of the upper portion. For example, FIG. **231** illustrates a side view of a privacy/security enclosure **23100** in accordance with some embodiments of the invention. In some embodiments, the privacy/security enclosure **23100** can comprise a main housing **23110** that can include a main section **23111** housing and a secondary section including an upper portion **23120** including at least one extension or flange **23122**. In some embodiments, the upper portion **22920** can house at least one speaker **23165** coupled to a seal **23175**, and the main section **23111** can include at least one speaker **23160** coupled to a seal **23170**. During use, a user can clip the extension or flange **23122** over a device to be privatized, and position the privacy/security enclosure **23100** to at least partially align the at least one speaker **23165**, **23160** with at least one microphone of the user's device and seal at least one of the seals **23175**, **23170**.

FIGS. **232A-245C** illustrate various views of privacy/security enclosures in accordance with some embodiments of the invention. In some embodiments, in addition to or in place of the color coded interior of the privacy/security enclosure alerting to a potential non-privacy, the privacy/security enclosure can include one or more active visual indications of potential non-privacy. Further, referring to at least FIGS. **232A-234C**, and **236A-236C** in some embodiments, a movable portion or shutter of an extension or flange can be positioned in a frame. For example, FIGS. **232A-232C** illustrate views of a privacy/security enclosure showing an embodiment including a webcam LED. FIG. **232A** shows a front perspective view, FIG. **232B** shows a rear perspective view, and FIG. **232C** shows a front view. As illustrated, the privacy/security enclosure **23200** can comprise a main housing **23210** with an extendable hood **23250**. At least one logo **23212**, **23260** can be positioned on the main housing including a logo **23212** positioned on the main section, and logo **23260** positioned on the secondary section **23215**. The privacy/security enclosure **23200** can include a shutter aperture **23225** including slidable shutter **23220**. In some embodiments, the slidable shutter **23220** includes an LED lightpipe **23222** that can be configured to block at least one camera of the user's device. In some embodiments, the webcam LED assembly **23222** can illuminate based on the position of the movable cover, the shutter, or both. Further, as also shown in FIGS. **233A-236C**, in some embodiments, LED assembly **23222** can include an LED light-pipe that can be positioned to block a camera of the user's device.

In reference to FIGS. **233A-233C**, some embodiments include a privacy/security enclosure **23300** comprising a main housing **23310** including a main section **23320**, and secondary section **23325**, and hood **23350**. In some embodiments, raising the hood **23350** can expose a color accent warning **23330**. The shutter **23335** can include an LED assembly and/or LED lightpipe **23337**. Further, in some embodiments, the main housing **23310** can include at least one backlit capacitive touch control **23352**. Further, FIGS. **234A-234C** illustrate perspective views of a privacy/security enclosure **23400** comprising a main housing **23410** including a main section **23415** and secondary section **23420**, and hood **23450**. In some embodiments, raising the hood **23450** can expose a color accent warning **23430**. The shutter **23420** can be positioned within the frame **23455**, and can include an LED assembly and/or LED lightpipe **23425**. Further, in some embodiments, the main housing **23410** can include at least one backlit jewel button **23452**.

In some further embodiments, one or more lightpipes can be used to enable a user to view at least a portion of the

display or other structure of the user's device. For example, in some embodiments, a lightpipe can include an optical pass-through function to enable the LED signal of the underlying device to pass-through to the user. For example, if the user's device has display or LED that is lit (e.g., indicating that the device's camera is recording), even though a portion of the privacy device can actually be covering or partially obstructing such LED.

Referring to FIGS. 235A-235C, some embodiments include a privacy/security enclosure 23500 can comprise a main housing 23510 including a main section 23520, and secondary section 23525, and hood 23550. In some embodiments, raising the hood 23550 can expose a microphone opening 23535 and a color accent warning 23530. The shutter 23560 can include an LED assembly and/or LED lightpipe 23565 in some embodiments. Further, in some embodiments, the hood 23550 can include at least one backlit capacitive touch control 23552.

FIGS. 236A-236C illustrate perspective views of a privacy/security enclosure 23600 in accordance with some embodiments of the invention. Some embodiments include a privacy/security enclosure 23600 comprising a main housing 23610 including a main section 23615, secondary section 23625, and hood 23650. In some embodiments, raising the hood 23650 can expose a color accent warning 23635. The shutter 23645 can include a webcam LED assembly 23670 and/or LED lightpipe 23660. Further, in some embodiments, the main housing 23610 can include at least one backlit capacitive touch control 23695 and/or at least one illuminated or non-illuminated logo 23690. The frame 23622 can form part of the secondary section 23625, supporting the shutter 23645.

FIGS. 237A-237C illustrate perspective views of a privacy/security enclosure 23700 in accordance with some embodiments of the invention. In some embodiments, the privacy/security enclosure 23700 can comprise a main housing 23710 including a hood 23750, shutter aperture 23720 and a shutter slider 23730. In some embodiments, the privacy/security enclosure 23700 can comprise a main housing 23710 that includes at least one glossy surface. For example, in some embodiments, an end portion 23710a of the privacy/security enclosure 23700 can comprise a glossy outer surface. In other embodiments, the privacy/security enclosure 23700 can comprise an outer surface that includes at least one non-glossy or matte surface 23710b.

In some further embodiments, the privacy/security enclosure 23700 can comprise an outer surface that includes at least one patterned or textured outer surface. In some embodiments, raising the hood 23750 can expose a color accent warning. Further, in some embodiments, the main housing 23710 can include at least one capacitive touch control 23712. In some embodiments, the main housing 23710 can include one or more logos 23711. Further, in some embodiments, a micro-USB connector can be coupled into the main housing 23710.

Referring to FIGS. 238A-238D, illustrating perspective views of a privacy/security enclosure 23800 in accordance with some embodiments of the invention, in some embodiments, a movable portion (such as the angled microphone seal 23880) of the privacy/security enclosure 23800 can comprise a capacitive touch button 23805. In some embodiments, a user can touch the capacitive touch button 23805 to extend the movable portion 23880 from the main housing 23810 to open the privacy/security enclosure 23800 (i.e. the movable portion 23880 can rise to open). In some embodiments, a shutter slider 23830 can be integrated into the main housing 23810. Further, as illustrated, the privacy/security

enclosure 23800 can include an internal color warning accent 23885. When closed, the angled microphone seal 23880 can include deflection points 23801, 23802 to deflect and/or absorb audio or visual information. Further, in some embodiments, the main housing 23810 can include and/or at least one illuminated or non-illuminated logo 23840.

FIGS. 239A-239C illustrate perspective views of a privacy/security enclosure 23900 in accordance with some embodiments of the invention. In some embodiments, the privacy/security enclosure 23900 can include a shutter 23935 that can be flipped by rotating or pivoting with respect to the main housing 23910 of the privacy/security enclosure 23900 to adjust the level of privacy of the user's device 11. For example, in some embodiments, by rotating or pivoting the shutter 23935 of the privacy/security enclosure 23900, at least one sensor (such as a camera and/or microphone 23930) can be uncovered and revealed. In some embodiments, the rotation or pivoting can be enabled by one or more hinges 23925 and/or other conventional mechanisms. In some embodiments, the interior of the privacy/security enclosure (e.g., such as an inner surface 23935a of the shutter 23935, shutter aperture 23922 or surface 23923) can be color-coded to alert a user to a security threat that might be posed when the privacy/security enclosure 23900 is at least partially open. Further, in some embodiments, the shutter 23935 can include a warning notification comprising a text warning 23935b. Further, in some embodiments, the privacy/security enclosure 23900 can include a hood 23950 of the privacy/security enclosure 23900 can comprise a capacitive touch button 23955.

The example embodiments of FIGS. 239A-239C illustrate a shutter 23935 that can be flipped by rotating or pivoting left or right, with an axis of rotation generally parallel with the end of the privacy/security enclosure 23900. In some embodiments, a privacy/security enclosure can include a shutter that can be flipped by rotating or pivoting left or right, with an axis of rotation generally perpendicular to the end of the privacy/security enclosure. For example, FIG. 240A-240C illustrates perspective views of a privacy/security enclosure in accordance with some further embodiments of the invention showing the portion or section that can be flipped by rotating or pivoting up or down with an axis of rotation generally parallel with the upper and lower surfaces of the privacy/security enclosure.

FIG. 240A-240C illustrates perspective views of a privacy/security enclosure 24000 in accordance with some embodiments of the invention. In some embodiments, the privacy/security enclosure 24000 can include a shutter 24035 that can be flipped by rotating or pivoting with respect to the main housing 24010 of the privacy/security enclosure 24000 to adjust the level of privacy of the user's device 11. For example, in some embodiments, by rotating or pivoting the shutter 24035 of the privacy/security enclosure 24000, at least one sensor (such as a camera and/or microphone 24030) can be uncovered and revealed. In some embodiments, the rotation or pivoting can be enabled by one or more hinges 24025 and/or other conventional mechanism. In some embodiments, the interior of the privacy/security enclosure (e.g., such as an inner surface 24035a of the shutter 24035, shutter aperture 24022 or surface 24023) can be color-coded to alert a user to a security threat that might be posed when the privacy/security enclosure 24000 is at least partially open. Further, in some embodiments, the shutter 24035 can include a warning notification comprising a text warning 24035b. Further, in some embodiments, the privacy/security enclosure 24000 can include a hood 24050

of the privacy/security enclosure **24000** can comprise a capacitive touch button **24055**.

Referring to FIG. **241A-241C**, illustrating perspective views of a privacy/security enclosure **24100** in accordance with some embodiments of the invention, in some embodiments, the front face **24115** of the privacy/security enclosure **24100** can comprise at least one shutter slider **24140**. In some embodiments, the shutter slider **24140** can comprise a color accent **24140a**. In some embodiments, the privacy/security enclosure **24100** can comprise an external connector and lead **24170** that include a color accent **24175**. In some embodiments, the color accents of the shutter slide and the connector and lead can be matched. The privacy/security enclosure **24100** can comprise a main housing **24110** including a hood **24150**, and shutter aperture **24120**. In some embodiments, raising the hood **24150** can expose a color accent warning. Further, in some embodiments, the main housing **24110** can include at least one capacitive touch control or logo **24155**. In some embodiments, the main housing **24110** can include one or more logos.

Referring to FIGS. **242A-242C**, illustrating perspective views of a privacy/security enclosure **24200**, in some embodiments, the hood **24250** can include at least one textured surface **24255**. In some embodiments, the hood **24250** can include a capacitive touch button including an LED indicator **24212**. Further, in some embodiments, the front facing surface **24251** of the hood **24250** can comprise a textured surface **24214** (such as textured touch points). The privacy/security enclosure **24200** can also include a shutter **24235** positioned in a shutter aperture **24220** in the main housing **24210**. In some embodiments, the shutter **24235** can comprise a vertical shutter. Further, in some embodiments, the shutter **24235** can include a colored or textured surface **24235a**. In some embodiments, the privacy/security enclosure **24200** can comprise an external connector and lead **24270**. In some embodiments, the lead **24270** can include a color accent.

In some embodiments of the invention, the shutter of a privacy/security enclosure can be moved by a user using an extension or slider at one end of the privacy/security enclosure. For example, referring to FIGS. **243A-243D** and **244A-244C**, in some embodiments, the extension or slider can extend from a side of one end of the privacy/security enclosure. In some embodiments, the extension or slider can be moved upwards or downwards (i.e., generally along an axis parallel with the end of the privacy/security enclosure) to move the shutter upwards or downwards respectively. For example, FIG. **243A-243D** illustrates perspective views of a privacy/security enclosure **24300** in accordance with some embodiments of the invention. In some embodiments, the privacy/security enclosure **24300** can comprise a main housing **24310** including a primary portion **24312** coupled to an end of an upper portion **24314**. A secondary portion **24315** of the main housing **24310** can couple to an opposite end of the upper portion **24314**. The privacy/security enclosure **24300** can include an extendible hood **24350** that can extend out from the upper portion **24314** of the main housing **24310**. In some embodiments, the privacy/security enclosure **24300** can include a shutter aperture **24320** positioned in the secondary portion **24315**. A shutter **24330** can be positioned within the aperture **24320**. Further, in some embodiments, a shutter slide **24340** can be positioned extending from a side of the main housing **24310**, and can be configured to enable a user to move the shutter **24330** by moving the slide **24340** away from or towards the upper portion **24314** of the main housing **24310**.

Further, FIG. **244A-244C** illustrates perspective views of a privacy/security enclosure **24400** in accordance with some embodiments of the invention. In some embodiments, the privacy/security enclosure **24400** can comprise a main housing **24410** including a primary portion **24413** coupled to an end of an upper portion **24414**. A secondary portion **24415** of the main housing **24410** can couple to an opposite end of the upper portion **24414**. The privacy/security enclosure **24400** can include an extendible hood **24450** that can extend out from the upper portion **24414** of the main housing **24410**. In some embodiments, the privacy/security enclosure **24400** can include a shutter aperture **24420** positioned in the secondary portion **24415**. A shutter **24430** can be positioned within the aperture **24420**. Further, in some embodiments, a shutter slide **24440** can be positioned extending from a side of the main housing **24410**, and can be configured to enable a user to move the shutter **24430** by moving the slide **24440** away from or towards the upper portion **24414** of the main housing **24410**. Further, in some embodiments, the upper portion **24414** and/or the hood **24450** can include a capacitive touch switch **24412**. In some embodiments, the switch **24412** can be configured to raise and/or lower the hood **24450**.

Referring to FIGS. **245A-245C**, illustrating perspective views of a privacy/security enclosure **24500** comprising a main housing **24500**, and including a shutter aperture **24520** and integrated shutter **24530**. In accordance with some embodiments of the invention, the privacy/security enclosure **24550** can include at least one LED indicator **24515**. In some embodiments, the indicator **24515** can traverse around at least a portion of the main housing **24510**. In some embodiments, the privacy/security enclosure **24515** can comprise at least one LED indicator **24515** that can extend around the privacy/security enclosure **24500** extending from an upper surface **24552** to a lower surface **24512** on both sides of the privacy/security enclosure **24500**. In some embodiments, the LED indicator **24515** can extend around a push button release **24665** positioned on the upper surface **24552** of the main housing **24510**. In some embodiments, the at least one LED indicator **24515** can comprise a color that is substantially the same as the color accent of a coupled extension and lead **24580**. Further, the color of the interior surface **24570** of the privacy/security enclosure **24500** can comprise a privacy alert color that matches the accent color. Further, in some embodiments, the privacy/security enclosure **24500** can include a capacitive touch arm **24545** positioned on a front face portion **24517** of the main housing **24510**. In some embodiments of the invention, the use of the LED indicator(s) such LED indicator **24515** and others described herein can include indicating that certain types of privacy protection are active (i.e. the active audio masking signal is being transmitted), the battery status (if a battery is included) and maintenance or alert signals of different types. The LED indicators could also be decorative in nature.

In some embodiments, the main housing can be customized. For example, FIG. **246A-246D** illustrates perspective views of a privacy/security enclosure **24600** and accent covers **24612**, **24614** in accordance with some embodiments of the invention showing at least one customizable component. In some embodiments, the main housing **24610** of the privacy/security enclosure **24600** can comprise an outer face plate **24611** that can be customized (e.g., customized by a user or purchaser of the privacy/security enclosure). For example, in some embodiments, the outer face plate **24611** shown positioned on the main housing **24610** of the privacy/security enclosure **24600** can be customized to be replaced with or coupled to a glossy face plate **24612** (FIG. **246B**) or

131

a textured faceplate **24614** (FIG. **246C**). In some further embodiments, the outer face plate **24611** can comprise a matt, textured, or patterned face plate. In some embodiments, the outer face plate **24611** can be positioned adjacent or proximate the aperture **24620**. In some embodiments, the outer face plate **24611** can include an aperture generally matched in size and geometry to the aperture **24620**. In some embodiments, the outer face plate **24611** can be positioned adjacent or proximate the hood **24650**. In some embodiments, the outer face plate **24611** can be positioned at least partially around the hood **24650**.

In some embodiments, the privacy/security enclosure can be mounted to a surface by coupling to an adapter. In some embodiments, the adapter can be configured specifically for a user device (such as a 21" or 27" computer or display). In some embodiment, the adapter can be coupled to the user device using one or more adhesive strips. In some embodiments, after coupling the adapter to the user device, the privacy/security enclosure can be mounted to the user device by coupling the privacy/security enclosure with the adapter. In some other embodiments, the privacy/security enclosure can be mounted to the adapter, and the privacy/security enclosure with adapter can be mounted to the user device. In some embodiments, a gasket can be used in addition to the adapter to improve the seal between the surface and the cover and/or adapter. For example, FIG. **247** illustrates a privacy/security enclosure mounting assembly view in accordance with some embodiments of the invention. In some embodiments, the privacy/security enclosure **24700** can be assembled and attached to the user device **11** using either one of adapters **24718**, **24720**. For example, in some embodiments, the adapter **24718** can be coupled to the inner surface **24711** of the main housing **24710** of the privacy/security enclosure **24700**. Alternatively, in some embodiments, the adapter **24720** can be coupled to the inner surface **24711** of the main housing **24710** of the privacy/security enclosure **24700** as determined by the size and/or geometry of the user's device **11**. In some embodiments, to mount the privacy/security enclosure **24700** including either of the attached adapters **24718**, **24725**, the privacy/security enclosure **24700** can be hung over an edge and/or top of the device **11** placing the primary portion **24715** of the main housing over or against one side or portion of the device **11** and the secondary portion **24717** of the main housing over another side or portion of the device **11**. In some embodiments, the privacy/security enclosure **24700** and adapters **24718**, **24725** can be adapted, shaped, and sized to be used with a 21" diagonal display or a 27" diagonal display.

In some embodiments, the privacy/security enclosure embodiments **24800** can be mounted to a user device. For example, FIG. **248** illustrates a front perspective view of a privacy/security enclosure **24800** in accordance with some embodiments of the invention, and FIG. **249** illustrates a rear perspective view of the privacy/security enclosure **24800** of FIG. **248** mounted to a computer or display (user device **11**) in accordance with some embodiments of the invention. The privacy/security enclosure **24800** can comprise a main housing **24810** including secondary portion **24815** including a shutter **24830**. The secondary portion **24815** can be mounted over the device **11** on one side, and the main section **24811** can be mounted over an opposite side of the device **11**. Power and/or data can be coupled to the privacy/security enclosure **24800** through the connector **24870** on the side of the device **11** opposite the secondary portion **24815** as shown. Further, FIG. **250** illustrates a front perspective view of a privacy/security enclosure **25000** in accordance with some embodiments of the invention, and FIG. **251** illustrates

132

a rear perspective view of the privacy/security enclosure **25000** of FIG. **250** mounted to a computer or display device in accordance with some embodiments of the invention. The privacy/security enclosure **25000** can comprise a main housing **25010** including secondary portion **25015** including a shutter **25030**. The secondary portion **25015** can be mounted over the device **11** on one side, and the main section **25011** can be mounted over an opposite side of the device **11**. Power and/or data can be coupled to the privacy/security enclosure **25000** through the connector **25070** on the side of the device **11** opposite the secondary section **25015** as shown.

In some embodiments, the privacy/security enclosure embodiments **25200** can be mounted to a user device. For example, FIG. **252** illustrates a front perspective view of a privacy/security enclosure **25200** in accordance with some embodiments of the invention, and FIG. **249** illustrates a rear perspective view of the privacy/security enclosure **25200** of FIG. **252** mounted to a computer or display (user device **11**) in accordance with some embodiments of the invention. The privacy/security enclosure **25200** can comprise a main housing **25210** including secondary portion **25215** including a shutter **25230**. The secondary portion **25215** can be mounted over the device **11** on one side, and the main section **25211** can be mounted over an opposite side of the device **11**. Power and/or data can be coupled to the privacy/security enclosure **25200** through the connector **25270** on the side of the device **11** opposite the secondary section **25215** as shown.

Further, FIG. **254** illustrates a front perspective view of a privacy/security enclosure **25400** in accordance with some embodiments of the invention, and FIG. **251** illustrates a rear perspective view of the privacy/security enclosure **25400** of FIG. **254** mounted to a computer or display device in accordance with some embodiments of the invention. The privacy/security enclosure **25400** can comprise a main housing **25410** including secondary portion **25415** including a shutter **25430**. The secondary portion **25415** can be mounted over the device **11** on one side, and the main section **25411** can be mounted over an opposite side of the device **11**. Power and/or data can be coupled to the privacy/security enclosure **25400** through the connector **25470** on the side of the device **11** opposite the secondary section **25415** as shown. In some embodiments, the privacy/security enclosure **25200** can comprise at least one logo and/or at least one button or capacitive control or arm. For example, in some embodiments, the privacy/security enclosure **25200** can comprise a at least one button or capacitive control or arm **25275** and/or at least one logo **25285**. Further, in some embodiments, the privacy/security enclosure **25400** can comprise a at least one button or capacitive control or arm **25475** and/or at least one logo **25485**.

Further, FIGS. **256-258** illustrate views of a privacy/security enclosure **25600** in accordance with some embodiments of the invention. The privacy/security enclosure **25600** can comprise a main housing **25610** including secondary portion **25615** including a shutter **25630**. The secondary portion **25615** can be mounted over the device **11** on one side (shown in FIG. **256**), and the main section **25611** can be mounted over an opposite side of the device **11** (shown in perspective view in FIG. **257**, and in side view in FIG. **258**). Power and/or data can be coupled to the privacy/security enclosure **25600** on the side of the device **11** opposite the secondary section **25615**. In some embodiments, the privacy/security enclosure **25600** can comprise at least one logo **25657** and/or at least one button or capacitive control or arm **25655**. Further, in some embodiments, the

133

privacy/security enclosure **25600** can comprise a at least one button or capacitive control **25610** for actuation of the shutter **25630**. The partial inner view of FIG. **258** depicts an internal actuator assembly. In some embodiments, the actuator assembly can comprise an internal release assembly **25690** including at least one internal release mechanism configured to enable the hood **25650** to be raised and lowered within the main housing **25610**. For example, the inner view shown in FIG. **257** shows internal release mechanisms **25691**, **25692**. Example internal release mechanisms suitable for internal release mechanisms **25691**, **25692** for use in any of the privacy/security enclosure embodiments disclosed herein are also shown in FIGS. **259**, **259A**, **259B**, **260**, **260A**, **260B**, **261**, **261A**. Some embodiments include one or more push-rods that can be actuated by a user to operate a release catch, seal, or other conventional latching mechanism. Some embodiments include a combination of at least one push or pull rods and a slidable latch, catch, or conventional holding or sealing mechanism. For example, some embodiments can utilize a push latch or panel access mechanism from GBK-UK (e.g., such as push latch—small reference code **41002**).

FIGS. **259**, **259A**, **259B**, **260**, **260A**, **260B**, **261**, **261A** illustrates internal release mechanisms in accordance with some embodiments of the invention. For example, some embodiments include at least one release rod **25910** coupled to at least one control spring **25912**. In some embodiments, a latch **25930** (shown in perspective in FIG. **259B**) can control release and capture of the at least one release rod **25910**. Some embodiments also include one or more seals (shown in FIGS. **259A**, **260A**, and **261A**). For example some embodiments include a seal **25960**, **26010**, **26110**. In some further embodiments, a release rod **25910** can be used in conjunction with a tension spring **26120** to provide a push and pull type action to raising and lowering of a hood of a privacy/security enclosure.

FIGS. **262-263** illustrate rear perspective views of computer or display mounted privacy/security enclosures in accordance with some embodiments of the invention. In some embodiments, the privacy/security enclosure **26200** can be mounted on a user device **11** including connector and lead **26210**. Referring to FIGS. **264A-264B** illustrating rear perspective views of privacy/security enclosures **26400**, **26401**, including textures **26430**, **26455**, in some embodiments, connector and lead **26470** (used in either of the privacy/security enclosures **26400**, **26401**) can comprise any of the leads and/or connectors described herein.

FIG. **266** illustrates a front perspective view of a privacy/security enclosure **26600** according to some embodiments of the invention. The privacy/security enclosure **26600** can comprise a main housing **26610** including a coupled hood cover assembly **26615** and an enclosure **26605**. In some embodiments, the privacy/security enclosure **26600** can also include a base assembly **26620** that can comprise a Faraday base as described in preceding embodiments. Further, in some embodiments, the hood cover assembly **26615** can include a reversible cover **26620a**. In some embodiments, the privacy/security enclosure **26600** can include one or more surface facets **26625** extending at least a partial length of the privacy/security enclosure. In some embodiments, the facets **26625** can be formed in the hood cover assembly **26615** and/or in the base assembly **26620**. For example, as shown in FIG. **266**, the hood cover assembly **26615** and base assembly **26620** can include facets **26626**, **26621**. In this example embodiment, the geometry of the facets **26626** of the hood cover assembly can complement the facets **26621** of the base assembly thereby providing a seamless outer

134

structure extending the length and width of the privacy/security enclosure. In some embodiments, the facets **26625** can extend to the outer edge surfaces of the hood cover assembly and/or the base assembly. In some embodiments, the geometry of the facets **26626** of the hood cover assembly and/or the facets **26621** of the base assembly can complement facets on the outer edge surfaces (such as outer edge surfaces **26617b**), thereby providing a seamless outer structure extending the length and width of the privacy/security enclosure including the outer edge surfaces. In some embodiments, the hood cover assembly **26615** and/or the base assembly **26620** can comprise one or more product logos, markings, signs, or graphics (e.g., such as logo **26670** show on the hood cover assembly **26615**).

In some embodiments of the invention, a hood cover or enclosure/cover **26615a** can be coupled with an internal case or device in multiple orientations, including, but not limited to, a 180 degree or reversible orientation. In some embodiments, features of the internal case or enclosed/covered device can be accessible, visible or be able to be activated or deactivated, tuned, adjusted, or changed via various devices and/or assemblies, including, but not limited to light pipes, buttons, switches, controls, transparent, translucent or otherwise light, texture and/or touch sensitive/passing materials and/or surfaces.

In some further embodiments of the invention, the passing of sensor information, data communication via wired or wireless technologies and/or other types of energy or information transfer can be allowed in at least one direction to or from, through or to the inside and outside of the privacy/security enclosure **26600**. For example, in some embodiments, a port or mechanism for data transfer can be included to allow power passing and/or charging of batteries. Further, ports or mechanisms to pass other forms of energy such as sound, light, pressure, heat and others can be included. In some embodiments of the invention, any information or energy passing to/from or through any cover or enclosure of the privacy/security enclosure **26600** can be modified, changed, obfuscated, amplified, attenuated or blocked for a particular purpose. For example, in some embodiments of the invention, a port or other mechanism can be included such that sensors (including, but not limited to barometric, echo location/sonar, motion, heat, light, RF, video or sound sensors) can operate within the cover or enclosure.

In other embodiments of the invention, the port or other mechanism can be sealable/closable to a full or partial percentage to content/information passing through the port, another mechanism or the cover or enclosure itself can be modified or changed by features or functions built into or around the cover or enclosure, making it either easier or more difficult for the sensor or impacted capability to operate or to record/capture information as compared to the absence of such port, mechanism, seal, repeater, amplification, modification, masking, obfuscation or other capability. For example, FIG. **266** shows an embodiment of a hood cover with a pass-through button **26680** that allows LED or other optical signaling/feedback information to pass through the hood cover, while simultaneously providing a button by which a user can activate, deactivate or otherwise tune audio masking/jamming or other capabilities of the internal case or device. In some embodiments of the invention, the capabilities described can be asymmetrically provided in the cover or enclosure. For example, FIG. **266** depicts a transfer button and LED pass-through capability (shown as **26680**) on one side of a reversible cover **26620a**. In some embodiments, a user can select or vary functionality by choosing the

135

desired orientation of the cover or enclosure (i.e., the reverse side of the cover **26620a** is devoid of the pass-through button **26680**).

Some embodiments can include an enclosure that can be at least partially opened or closed by a user, and/or can include a portion that can be moved, adjusted, opened or closed by a user to adjust a level of privacy/security. In some embodiments, at least a portion of the housing assembly can be moved with respect to another portion of the housing assembly, or can comprise one or more separable and/or moveable portions. For example, FIG. **267** illustrates a front perspective view of the privacy/security enclosure **26600** with a hood or cover portion with a hood cover assembly **26615** removed according to some embodiments of the invention. With the hood cover assembly **26615** removed, a base assembly **26625** including a Faraday base assembly **26627** can be seen at the base end of the enclosure, and a hood assembly **26630** can be seen at the other end of the enclosure **26625**. All of these components and assemblies can be coupled to form the housing assembly **26701**. The structure including enclosure **26605** shown in FIG. **267** can form a cradle or enclosure for one or more user devices (such as a user device **10**). In some embodiments, the inner surface **26607** of the cradle or enclosure **26606** of the enclosure **26605** can include a patterned surface **26609**. Further, in some embodiments, the inner surface **26607** can comprise one or more product logos, markings, signs, or graphics **26611**.

The structure shown in FIG. **268** illustrates an exploded assembly view **26801** of portions of the privacy/security enclosure **26600** in accordance with some embodiments of the invention. In some embodiments, various structural, functional, and aesthetic components can be assembled and coupled to form at least a portion of the housing assembly **26701**, including for example, the hood cover assembly **26615**, a base assembly **26625** including a Faraday base assembly **26627**, and a hood assembly **26630**. In no particular order of importance, embodiments of the housing assembly **26701** can include a variety of components and sub-assemblies including a hood arm **26810**, hood mask **26823**, hood arm lid **26825**, hood cap **26827**, slider **26829**, hood spring **26821**, and hood clamp **26816**. Some embodiments of the invention can include various electrical and electronic components, in addition to various structures and materials for housing and/or protecting the components. For example, some embodiments include a phone detect switch **26818**, a speaker flex board **26918**, speaker drivers **26814**, and acoustic seals **26812**.

Some embodiments include structures forming or housing a Faraday cage (including, without limitation, the Faraday base assembly **26627** shown in FIG. **267**). For example, FIG. **269** illustrates components of the Faraday base assembly **26627** including, but not limited to, a lower portion comprising a Faraday pan **26915**, and an upper portion forming a Faraday rim **26910**. The Faraday pan **26915** and Faraday rim **26910** can be coupled to form part of the base assembly **26625** illustrated in FIG. **267**. In some embodiments, a DC pass-through assembly **26920** can be housed within the base assembly **26625**. In this instance, the DC pass-through assembly **26920** can be coupled to the Faraday pan **26915** and/or coupled to the Faraday rim **26915**.

Further components of the base assembly **26625** can be seen in FIG. **270**, illustrating an exploded assembly view of portions of the base assembly **26625** in accordance with some embodiments of the invention. For example, in some embodiments of the invention, the Faraday base assembly **27010** can be coupled to a housing sub-assembly forming an

136

end portion of the privacy/security enclosure **26600** (or other privacy/security enclosure described herein). For example, in some embodiments, the Faraday base assembly **27010** can be coupled to a removable main base **27025**. The main base **27025** can form a structurally supporting portion of the housing assembly **26701**, while also forming a portion of the coupled hood cover assembly **26615** and an enclosure **26605** of the privacy/security enclosure **26600**. In some embodiments of the invention, various functional components can be coupled and/or integrated to the Faraday base assembly **27010** and/or the main base **27025**, when the Faraday base assembly **27010** is coupled to the main base **27025**. For example, some embodiments include an interface board **27015**.

In some further embodiments, one or more components can extend through the main base **27025**. For example, in some embodiments, a control button assembly **27020** can be positioned in the main base **27025**, including a portion (i.e., a button **27021**) that extends through an aperture **27026** in the main base **27025** to enable access and control of at least one function of the privacy/security enclosure **26600** by the user. Other embodiments can include one or more light-pipe assemblies **27030** positioned within the main base **27025** to enable optical transfer.

The main board assembly with the base assembly can also be seen in FIG. **271**, illustrating an exploded assembly view **27101** of portions of the privacy/security enclosure **26600** in accordance with some embodiments of the invention. In no particular order of importance or function, the exploded assembly view **27101** can include assembly of components and sub-assemblies comprising enclosure **27105**, hood assembly **27107**, detent wear inserts **27109**, battery wear sheet **27111**, and miscellaneous screws and screw covers or other fasteners **27113**. Further, some components include battery **27117**, battery door **27119**, base assembly **27121**, and main board **27123**. Further, other components coupled to the main board **27123** include an Apple Lightning™ connector pivot **27115** and lower acoustic seal **27125**. The assembly of the base assembly **27121** with the aforementioned hood assembly **26630** can be seen in the example embodiments. Lightning™ is a registered trademark of Apple, Inc. of Cupertino, Calif.

Some embodiments can include various Faraday cage related structures and/or shell or cover components. For example, FIG. **272** illustrates an exploded assembly view **27201** of portions of the privacy/security enclosure **26600** in accordance with some embodiments of the invention. In some embodiments, the privacy/security enclosure **26600** can include a Faraday tube or canister **27207** and/or a Faraday cover assembly **27209**, and outer shell **27205**. In some embodiments, the privacy/security enclosure **26600** can include the Faraday tube or canister **27027** and/or the outer shell **27205** coupled to the metal bezel **27211**. In some embodiments, wear strips **27221** can be assembled into the privacy/security enclosure **26600** to prevent or limit wear caused by movable portions or sections of the privacy/security enclosure **26600**. Further, some embodiments include one or more conductive o-rings **27215** and one or more fingerstock **27213** coupled between the metal bezel **27211** and the main base (**27025** shown in FIG. **270**). Some embodiments also include various components to cover or protect the privacy/security enclosure including a cover bumper **27219** and/or an environmental seal **27217**. Some embodiments include one or more detents to enable one or more components (e.g., such as outer shell **27205**) to be added or removed while creating an audible sound and/or vibration that appears satisfying to a user.

137

Many modern mobile phones have the ability to measure acceleration in the x, y, and z axis (e.g., using an accelerometer), and have the ability to measure rotational velocity around the x, y, and z axis (e.g., using a gyroscope). In some embodiments, it is possible to convert measurements from accelerometer and gyroscope outputs to signals that capture the human voice. For example, in the case of a user's mobile phone contained within an enclosure resting on a table, acoustic energy from user's conversation can be captured by the table and can be coupled to the mobile phone via the enclosure. A major coupling mechanism in this example, depending on the source of the audio content, can be the accelerometer z axis, where the z axis is defined as perpendicular to the surface of the mobile phone and the table.

Some embodiments of the invention include systems and methods for obscuration or elimination of the detection of human voice using any sensor within a mobile communication device. For example, such obscuration can prevent or disrupt the ability of a sensor such as an accelerometer and gyroscope to detect the presence of a human voice, discriminate the gender of a spoken human voice, and/or understand the content and meaning spoken by a human voice (i.e., the recorded communication is not intelligible.)

FIGS. 273-276 illustrate perspective views of privacy/security enclosures including mechanical isolation structures and functions in accordance with some embodiments of the invention. Referring to FIG. 273, some embodiments include an assembly 27300 that can include mechanical isolation of the mobile phone from the enclosure. In some embodiments, the mobile phone (user device 10) can be isolated from the enclosure 27310 using one or more suspension elements 27320. In some embodiments, the suspension elements 27320 can be mounted at both the top and bottom interfaces, and/or at both ends. In some embodiments, the suspension elements 27320 can be mounted at least one interface and/or at one end of the enclosure 27310. In some embodiments, one or more suspension elements 27320 can comprise any compliant and/or sprung material including a spring or other material that can provide vibration damping.

Referring to FIG. 274, some embodiments can include mechanical isolation of the enclosure from the external environment. For example, in some embodiments, using one or more suspension elements 27410, the enclosure 27400 can be mechanically isolated from the external environment (when placed on a surface 27405 while containing a user device 10 as shown). Some embodiments include suspension elements 27410 mounted at both the top and bottom interfaces, and at both ends of the enclosure 27400. In some further embodiments, the suspension elements 27410 can be mounted at one interface and/or at one end of the enclosure 27400.

Referring to FIG. 275, some embodiments include mechanical isolation of the enclosure 27510 from the case 27500. In some embodiments, the enclosure 27510 is mechanically isolated from the case 27500 when placed within the case 27500, and the user device 10 is contained within the enclosure 27510. Some embodiments include suspension elements 27520 mounted at both the top and bottom interfaces, and at both ends of the enclosure 27510. In some further embodiments, the suspension elements 27520 can be mounted at one interface and/or at one end of the enclosure 27520.

Referring to FIG. 276, in some embodiments, the case 27600 can be mechanically isolated from the external environment (placed on a surface while containing the enclosure 27510 containing the user device 10). Suspension elements

138

27520 can isolate the enclosure 27510 from the case 27600, while suspension elements 27614 and/or 27612 can isolate the case 27600 and the enclosure 27510 from an external surface.

Some embodiments include integrated vibrators or actuators. For example, FIG. 277 illustrates an end view of a privacy/security enclosure 27700 including broadband vibration in accordance with some embodiments of the invention. Some embodiments include a system for creating broadband vibration at the surface (or other portion) of a user device 10 positioned within the enclosure 27705 for use as a mask or obscuration of audio reception or passage of vibrations caused by audio or the human voice. In some embodiments, an actuator 27710 can be electronically driven using a broadband signal to provide the broadband vibration described above. Further, some embodiments include signal spectral output that is matched or otherwise tailored to mask audio frequencies of interest.

Some embodiments of the invention include integrated vibrators or actuators designed to mask, reduce, confuse, trick, send false or misleading information or prevent the ability of gyroscopes, accelerometers or other sensors to provide movement and/or location information. For example, in some cases, given a known or approximated starting location, even in the absence of location tracking capabilities provided by cellular triangulation, GPS capabilities, WiFi, beacon or other technologies, gyroscopes, accelerometers or other such sensors can be able to provide general or specific movement information such that when an ending location is known or approximated, movements between the starting and ending location can be determined, either roughly or specifically. Some embodiments of the invention can use signals such as pulsed, random, pseudo-random, deterministic, broadband, tuned and/or otherwise tailored signals to drive vibrators and/or actuators in such a way that masks, confuses, misleads, reduces or prevents the ability of sensors to determine movement and/or location information. Such vibrators and/or actuators can be coupled to the user device 10 in conventional ways or as described above. Some embodiments of the invention can use the motion of the enclosed user device 10 or of the enclosure itself as an input/variable used in determining the signal driving the vibrators/actuators.

In some embodiments, a sensor can be used to measure vibrational energy at the surface of the user device 10, and an actuator is used to create a compensating vibration at the surface of the user device 10. In some embodiments of the invention, a processing element can receive signals from a sensor. In some embodiments, the processing element sends a drive signal to an actuator to indicate that the sensed vibrations are compensated within the audio bandwidth. In this instance, the resulting vibration at the surface of the phone is changed, reduced or practically eliminated. In some embodiments, the sensing and actuating elements can be the same (e.g. piezoelectric drive/piezoelectric sensing). In some other embodiments, the sensing and actuating elements can be different. For example, FIG. 278 illustrates an end view of a privacy/security enclosure 27800 including active vibration cancellation in accordance with some embodiments of the invention. In some embodiments, the privacy/security enclosure 27800 can comprise a system 27850 configured for active vibration cancelling that can be used to reduce, change or eliminate vibration at the surface of a user device 10. For example, some embodiments include an enclosure 27805 with a system 27850 comprising at least one actuator 27810 and at least one sensor 27830

coupled with close loop processing control of the at least one actuator **27810** based at least in part on a signal from sensor **27830**.

Some embodiments can include controlled light transfer and/or collection. For example, FIG. **279** illustrates an internal cross-sectional view of a privacy/security enclosure **27900** with a light pipe **27910**. In some embodiments, a light pipe **27910** can be placed directly above a conventional ambient light sensor. In some embodiments, a light pipe **27910** can be proximate a speaker slot **27920**. Referring to FIG. **280** shows an example assembly of shells parts **28020** and spring parts **28010**, and light pipes **28005** with minimal space and tight assembly tolerances. FIGS. **281-282**, and **283-284** illustrate light pipe structures (**28100**, **28200**, **28300**, **28400**) arranged in a periscope-like configuration (light transfer element **28201** coupled to light transfer element **28203** coupled to light transfer element **28205**) for use in light transmission within a privacy/security enclosure in accordance with some embodiments of the invention. In some embodiments of the invention, the placement and collecting area of the ambient light gathering portion of the light pipe can be placed in order to minimize visibility of the light pipe by users of the privacy/security enclosure. In other embodiments of the invention, the collecting surface area and the reflecting and/or transit surface areas and/or volumes can be designed, engineered and/or optimized such that light sensors of protected devices can operate as if they were not being blocked, or so that the light provided to them via the light pipe only results in a reduction of 10%-30%. In this instance, users of the privacy/security enclosure can be minimally aware or unaware that the native light sensor(s) of protected devices are covered by the privacy/security enclosure.

Referring to FIGS. **285A-285E**, in some embodiments of the invention, the privacy/security enclosure can include an adjustable aperture for use in covering and uncovering a portion of the user's device while attached or coupled to the user's device. For example, in some embodiments, the user's device can include at least one window. In some embodiments, the window can be slid open and closed to uncover or cover a portion of the user's device (e.g., such as a camera or other sensor). In some embodiments, the window can be attached or clipped on. In some embodiments, the window can comprise a compliant material that can be folded or wrapped (e.g., such as a flap or curtain). In some embodiments of the invention, devices such as mobile communication and computing devices including cellular phones, smart phones, computer laptops and tablets etc., desktop computers, gaming consoles, wearable devices such as smart watches and Google Glass® can be rendered at least partially private using one or more of the disclosed privacy/security enclosures. For example, embodiment **28505** illustrated in FIG. **285B** shows an adhesively attachable shutter **28507**. Further, for example, embodiment **28505** illustrated in FIG. **285A** shows a sliding shutter **28510**. Further, for example, embodiment **28520** illustrated in FIG. **285C** shows a flappable shutter **28530**. Further, the embodiment **28540** illustrated in FIG. **285D** shows a magnetic coupling and a foldable shutter **28550**. Further, for example, embodiment **28560** illustrated in FIG. **285E** depicts a clip-on shutter.

In some embodiments, the privacy/security enclosure can comprise a structure that accommodates a user using the privacy/security enclosure as a sleeve to protect or make private one or more user devices. In some embodiments, the privacy/security enclosure can be wrapped, attached, secured, or otherwise coupled to the user's device. For

example, FIG. **286** illustrates a privacy/security enclosure including a Faraday sleeve **28600** in accordance with some embodiments of the invention. In some embodiments, an enclosure **28610** can be inserted into the Faraday sleeve **28600** to enhance the privacy of the user's device. In some further embodiments, the privacy/security enclosure can be coupled to the user's device using a conventional adhesive. In other embodiments, the attached, secured, or otherwise coupled device can be coupled to the user's device using any suitable conventional device, component or materials including, but not limited to a "snap-on" assembly, Velcro, clip, screw, magnet, or combination thereof. Further, referring to FIGS. **287A-287B**, illustrating privacy/security enclosures for use with device cases, in some embodiments of the invention, the privacy/security enclosure can be clipped around portions of the case or housing of a user's device (e.g., such as a laptop case or shell). In some embodiments, the privacy/security enclosure can include one or more separate portions clipped to the user's device. Alternatively, in some embodiments, the user can attach more than one privacy/security enclosure to various areas of the user's device. For example, FIGS. **287A-287B** illustrate privacy/security enclosures **28700**, **28710** for use with device cases and user devices **15** in accordance with some embodiments of the invention. In some embodiments, the privacy/security enclosure **28700**, **28710** can wrap and/or attach to the user device **15**.

In some embodiments, the privacy/security enclosure can communicate to the user's device though this connection and/or receive power from this connection. In some embodiments, the privacy/security enclosure can control one or more components of the user's device through the device's USB, micro-USB or other port and/or while coupled to the device's USB, micro-USB or other port. In some embodiments, the privacy/security enclosure can physically cover or electronically control one or more sensors of the user's device including, but not limited to, a camera or microphone.

In some embodiments of the invention, the privacy/security enclosure can couple to a USB, micro-USB or other port/connector of a user's device. For example, FIG. **288** illustrates a USB-powered active portion **28805** of a privacy/security enclosure **28800** in accordance with some embodiments of the invention. In some embodiments, the portion **28805** can be coupled to the USB port **15a** of a device **15** to alter the privacy level of the device **15**.

In some embodiments, the privacy/security enclosure can be configured with one or more device tethers. For example, FIGS. **289A-289C** illustrate a tethered privacy/security enclosure **28900** in accordance with some embodiments of the invention. For example, referring to FIGS. **289A-289B**, in some embodiments, the privacy/security enclosure **28900** can include an elevated stand **28910**. Further, in some embodiments, a tethered enclosure **28930** can be coupled to the privacy/security enclosure **28900**. Further, referring to FIG. **289C**, in some embodiments, the privacy/security device **28955** can be coupled to the user's device **15** and be tethered to the user's device **15**. In some embodiments, the privacy/security enclosure **28950** can be coupled to the user's device **15** and be tethered to the privacy/security device **28955**. FIG. **296** also illustrates embodiments of a tethered privacy/security enclosure illustrating a tethered privacy/security enclosure **29600** coupled to a user's device **15** comprising a laptop with coupled keyboard.

FIG. **290** illustrates an ultrasonic clip-on privacy/security enclosure **29000** in accordance with some embodiments of the invention. For example, in some embodiments, one or

more privacy/security enclosures **29000** can be configured to attach, clip, or otherwise couple to a user's device **15**. In some embodiments, the privacy/security enclosure **29000**, attached, clipped or otherwise coupled to a user device **15** can include an ultrasonic "tapper" **29010** (e.g., such as an ultrasonic and/or vibratory emitter). In some embodiments, the ultrasonic "tapper" **29010** can be integrated into a privacy/security enclosure **29000** to enable the privacy/security enclosure **29000** to transfer ultrasonic energy to at least a portion of the user's device **15** (e.g., such as a microphone).

In some embodiments of the invention, the privacy/security enclosure can be configured to create at least a partial vacuum in at least a portion of the user's device **15**. For example, FIG. **291** illustrates a vacuum seal over microphone in accordance with some embodiments of the invention. In some embodiments, the privacy/security enclosure **29100** can draw air out of the privacy/security enclosure **29100** to form at least a partial vacuum in the user's device **15**. In some embodiments, the formation of at least a partial vacuum within or adjacent to microphone of the user's device can partially attenuate, suppress or prevent the transmission of sound to the microphone.

In some embodiments of the invention, the privacy/security enclosure can comprise a system or method for redirecting or channeling fan exhaust air within the user's device over or to a microphone of the user's device **15**. For example, FIG. **292** illustrates internal air flow acoustic muffling **29200** in accordance with some embodiments of the invention. In some embodiments, any privacy/security enclosure disclosed herein can comprise a channel fluidly coupling one or more exhaust fans of the user's device and one or more microphones of the user's device. In some embodiments, the air flow does not overwhelm the microphones rendering them unresponsive to any inputs. Instead, in these embodiments of the invention, the air flow can render the output of the microphones useless or less useful for determining speech content while still allowing some response by the microphones to the user's speech. Many other embodiments of the invention provide this same benefit without rendering sensors, microphones, or speakers completely or virtually completely unresponsive. These approaches can significantly reduce energy consumption and ambient noise compared to prior art devices.

In some embodiments, the geometry and structure of the privacy/security enclosure can be adjusted to complement the size, shape, or form factor of the user's device. In some embodiments, the privacy/security enclosure can include a structure capable of at least partially housing and enclosing a laptop or computer tablet. For example, FIGS. **293A-293B** illustrate perspective views of a privacy/security enclosures **29300**, **29350** and method of use in accordance with some embodiments of the invention. In some embodiments, the privacy/security enclosure **29300** can comprise a sleeve-type structure **23950** (similar to that described earlier with respect to FIG. **286**). In other embodiments, the privacy/security enclosure can comprise a clam-shell type structure **29300**.

In some embodiments of the invention, the privacy/security enclosure can comprise a docking station type configuration. In some embodiments, a user device **10** (or **15**) can be docked into an aperture of the privacy/security enclosure or the privacy/security enclosure can be wrapped or folded around the user device to dock or secure the device. For example, FIGS. **294A-294B** illustrate a privacy/security enclosure **29400** for docked devices in accordance with some embodiments of the invention. In some embodi-

ments, while docked (e.g., by sealing the user's device with portion **29420**), the user can adjust the privacy/security level of the privacy/security enclosure **29400** using one or more moveable elements (i.e. such as a moveable shutter, section, window or lever **29410**). In other embodiments, while docked, the user can adjust the privacy/security level of the privacy/security enclosure using one or more buttons or controls on the privacy/security enclosure, or using a remote control.

Alternative privacy/security enclosure structures are shown in FIGS. **295A-295D**, illustrating privacy/security enclosures for partial cases in accordance with some embodiments of the invention. In some embodiments, the user's device **10** can be docked or coupled to a holder, display case, frame or partial frame, cover (such as an elastomeric cover **29500**), or shell or partial shell structure. Similarly, any of these example embodiments can include options for privacy/security adjustment including any of the moveable options described above. In some embodiments, the cover **29500** can include a coupled connector such as Lightning™ connector **29510**. Further, some embodiments include an attached section **29550** (FIG. **295C**). In some embodiments, attached section **29550** can include a slidable window **29555**. Further, referring to FIG. **29570**, some embodiments include attachable section **29570** (FIG. **295D**). In some embodiments, attached section **29570** can include a slidable window **29575**.

Some embodiments of the invention include a privacy/security enclosure configured to emit noise. For example, FIG. **297** illustrates a privacy/security enclosure **29700** comprising a noise emitter in accordance with some embodiments of the invention. In some embodiments, the privacy/security enclosure **29700** or a component of a privacy/security enclosure **29700** can comprise a noise emitter configured to be coupled to at least one input or output port or connector such as head-phone jack, firmware port, USB or micro-USB port, etc. (shown as **29710**).

In some embodiments of the invention, the privacy/security enclosure can be configured as an added cover or enclosure to cover or cover of a user's device. For example, FIG. **298** illustrates a cover add-on privacy/security enclosure **29800** in accordance with some embodiments of the invention. In some embodiments, the privacy/security enclosure **29800** can be configured with more than one cover **29810**. For example, some embodiments include a standard cover **29820** and an additional cover **29830**. In some embodiments, the additional cover **29830** can comprise a metal cover. In some embodiments, the additional cover **29830** can include one or more privacy/security protection devices including, but not limited to, at least one active protection device **29840**.

In some embodiments, the privacy/security enclosure can include a privacy/security enclosure configured to alter the privacy/security of a commercial gaming or gaming peripheral. For example, FIGS. **299A-299D** illustrate privacy/security enclosures for a Microsoft Kinect™ system (device **20**) in accordance with some embodiments of the invention. In some embodiments, the privacy/security enclosure can include a sheath or sleeve portion that can be slid or positioned over a region of the Microsoft Kinect™ system, including for example a camera, IR, and/or motion sensor. For example, some embodiments of privacy/security enclosure **29900** can comprise an assembly including a main housing **29910** and integrated shutter **29925**. As shown in the assembly view of FIG. **299A**, in some embodiments, the privacy/security enclosure **29900** can be slid over the device **20** to enable a user to adjust the privacy of the device **20**.

In some embodiments, the privacy/security enclosure for a Microsoft Kinect™ system or similar gaming system or gaming peripheral can comprise one or more foldable or articulating covers. For example, FIGS. 300A-300B illustrate a fold-down cover or flap 30010 30060 privacy/security enclosure for a Microsoft Kinect™ system in accordance with some embodiments of the invention. The example embodiment as shown includes a moveable cover or flap portion coupled to a flange (30015 shown in FIG. 300A) or hinge assembly (shown in FIG. 300B) coupled or mounted to the Microsoft Kinect™ system. In some embodiments, the cover or flap 30010, 30060 can be rotated or flipped by a user to cover or uncover at least a portion of the Microsoft Kinect™ system. In some embodiments, the cover or flap 30010, 30060 can include an acoustic absorbing or dampening material (shown as 30011 in FIG. 300A and 30012 in FIG. 300B) that can be used to cover one or more microphones of the Microsoft Kinect™ system. For example, in some embodiments, an acoustic absorbing or dampening material can be applied along one edge or surface of the cover or flap and positioned to couple to the microphones when the cover or flap is closed against the Microsoft Kinect™ system.

In some embodiments, the privacy/security enclosure can include privacy/security adjustment options for optical and IR sensing and audio functions of the Microsoft Kinect™. For example, FIG. 301 illustrates a remote cover privacy/security enclosure 30100 for a Microsoft Kinect™ system in accordance with some embodiments of the invention. In some embodiments, the privacy/security enclosure 30100 can include a configurable cover slide 30105 in addition to a configurable sound bar 30110. In some embodiments, the cover slide 30105 can include a slidable window 30107 to enable the user to alter the privacy/security level of the Microsoft Kinect™. In some embodiments, the sound bar 30110 can comprise a foldable sound protection bar that can be folded over one or more audio functions of the Microsoft Kinect™ (including a microphone and/or a speaker).

In some further embodiments, the privacy/security enclosure can comprise a recess in a box enclosure. For example, FIGS. 302A-302B illustrate an elevator recess cover privacy/security enclosure 30200 for a Microsoft Kinect™ system in accordance with some embodiments of the invention. In some embodiments, the Microsoft Kinect™ system can be elevated up and out of the privacy/security enclosure 30200 or lowered and enclosed within the privacy/security enclosure.

In some embodiments, the privacy/security enclosure can include an attachable cover comprising a sound dampening material. FIG. 303 illustrates an attachable cover privacy/security enclosure 30310 for a Microsoft Kinect™ system in accordance with some embodiments of the invention. In some embodiments, the cover 30310 can include integrated active and/or passive privacy/security features, and one or more status indicators. For example, in some embodiments, the cover 30310 can include a noise emitter 30305 to provide additional sound masking or muffling capability. Further, in some embodiments, the cover can include a battery indicator or other status indicator 30315.

In some embodiments of the invention, the actuation of privacy/security features, the movement of any or all covers, flaps, sheaths, sleeves, shields or any other moveable portion of the enclosure can be accomplished via electro-mechanical assemblies or devices. In some embodiments of the invention, the triggering or activation of any powered protection features, such as the electro-mechanical movement of a cover, shield, sleeve or any other moveable portion of the

enclosure, the turning on, off or increase/decrease in the volume or level of protective features such as audio masking, the modification of some aspect of the user interface such as the brightness of LED's or other such feature can occur via switches, buttons or other physical interface on the enclosure, or via one or more remote-controlled, wired or wireless interface device. In some embodiments of the invention, the controls of the privacy/security enclosure can be triggered by voice or sound activation, motion or other such interface.

In some embodiments, the privacy/security enclosure can comprise a privacy/security device configured to operate as a power controller and/or circuit breaker between the Microsoft Kinect™ system and one or more gaming systems. In some embodiments, a user can use a wired or wireless controller of a coupled gaming system to control the privacy/security device (e.g., to enable or disable power and/or connectivity between the Microsoft Kinect™ system and one or more gaming systems).

For example, in some embodiments of the invention, the privacy/security enclosure can control the power, connectivity, or at least one function of the Microsoft Kinect™ system. As just one example, FIG. 304 illustrates an interruption privacy/security device 30400 in accordance with some embodiments of the invention. In some embodiments, a remote transmitter or transceiver 30405 can activate or control the privacy/security device 30400. In some further embodiments of the invention, the privacy/security enclosure 30400 can comprise a privacy/security device configured to operate as a power controller and/or circuit breaker and/or MAC (media access control) address changer for any powered electronic device, including but not limited to devices such as cable modems, routers, switches, video cameras, computers, servers, laptops, electric panels, any network connected devices or internet of things enabled devices and others.

In some embodiments of the invention, the privacy/security enclosure can comprise a cylinder or roll-cover type assembly. For example, FIGS. 305A-305B illustrate a Faraday cylinder privacy/security enclosure 30500 in accordance with some embodiments of the invention. In some embodiments, the privacy/security enclosure 30500 can comprise a generally cylindrical-shaped housing 30505 including at least one movable cover portion 30510. In some embodiments, the at least one movable cover portion 30510 can be rolled back to expose at least a portion of the Microsoft Kinect™ system. Further, in some embodiments, the cover can be rolled down to a closed position to cover the Microsoft Kinect™ system to form or couple with a Faraday cage system.

Referring to FIG. 306, some embodiments include a privacy/security enclosure 30600 including optical blinding in accordance with some embodiments of the invention. In some embodiments, one or more LED's or other conventional light and/or IR sources 30620 can be integrated into a portion 30610 of a housing 30605 of the privacy/security enclosure 30600 and used to blind, confuse, white-out, or otherwise distort or impair an input to one or more optical sensors and/or control circuitry of the Microsoft Kinect™ system, any other system containing a camera or video recording device or any other cameras or video recording device of any type, in any shape or form. In some embodiments, at least one of the light or IR sources can be positioned within a moveable flap or cover.

In some embodiments of the invention, multiple distortion, confusion or masking light sources can be coordinated to reduce or eliminate the ability of optical sensors to

perform their intended function. In other embodiments of the invention, software or hardware based recognition technologies can be used on inbound images and/or data received by camera(s) integrated into the privacy/security enclosure to recognize and/or identify external cameras and optical sensors such that masking, confusing or distorting signals can be targeted towards such identified devices. In some embodiments of the invention, the privacy/security enclosure can be mounted on or within vehicles. In other embodiments of the invention, the privacy/security enclosure can be integrated with or take the shape of wearable devices such as hats, clothing, glasses or some other such form of easily portable or moveable device that can be carried by the user in some or many of their day to day activities.

FIG. 307 illustrates a Microsoft Kinect™ system audio interference system in accordance with some embodiments of the invention. In some embodiments, the privacy/security enclosure 30700 can comprise a frequency turbulence generator configured to attenuate, overlap, mask or distort an audio signal reaching the Microsoft Kinect™ system.

In some embodiments of the invention, the privacy/security enclosure can comprise a removable adhesive cover or sticker configured to at least partially absorb, reflect, or otherwise prevent transmission of optical or IR radiation. For example, FIG. 308 illustrates an IR sticker privacy/security system 30800 in accordance with some embodiments of the invention. In some embodiments, a cover or sticker 30820 can be peeled from a stock sheet 30810 including a plurality of covers or stickers 30815 and positioned over one or more sensors, emitters, or cameras of the Microsoft Kinect™ system. In some embodiments, the covers or stickers 30815 can include a peel-tab 30825 to facilitate removal and handling from the stock sheet 30810.

FIGS. 309A-309B illustrate manually operated privacy/security enclosures 30900, 30950 in accordance with some embodiments of the invention. In some embodiments of the invention, the privacy/security enclosure 30925 can comprise one or more mechanical mechanisms for adjusting or moving a portion of the privacy/security enclosure in order to alter the privacy/security of a coupled user device (device 15). For example, in some embodiments, the privacy/security enclosure 30900 can comprise a mechanical thumb-wheel or gear 30925 that can be rotated to adjust to move a cover or shutter 30930 over one or more sensors of the user's device. Alternatively, in some other embodiments, the adjustment or movement of a portion of the privacy/security enclosure in order to alter the privacy/security of a coupled user device can be automated or semi-automated. Referring to FIG. 309A, in some embodiments, a user can touch the top 30960 of an upper housing portion 30955 of the privacy/security enclosure to activate a cover 30980 that slides down. In other embodiments, the cover 30980 can slide across or diagonally.

In some embodiments, the operation and privacy/security of a remote control device can be altered using a privacy/security enclosure. For example, FIGS. 310A-310B illustrate privacy/security protection of a remote control in accordance with some embodiments of the invention. In some embodiments, the privacy/security enclosure 31000 can enclose the remote (shown as device 17) and operate to alter the privacy/security of the device 17 as described for any enclosed user device described earlier.

In some embodiments, one or more functions of the privacy/security enclosure can be operated using a remote control transceiver. For example, FIGS. 311A-311B illustrate a remote controlled cover privacy/security enclosure

31100 in accordance with some embodiments of the invention. In some embodiments, a user can use a remote control (such as a device 17) to operate the privacy/security enclosure and alter the privacy/security features of the privacy/security enclosure 31100 using an attached controller 31105. In some embodiments, the user can remotely open and/or close a cover, flap, or shutter to alter the privacy/security level of the user's device 15. As shown in FIG. 311B, the privacy/security enclosure 31100 can include a shutter 31125, a status LED 31107, audio masking 31109, and a power connector 31111. FIG. 31150 illustrates an alternative embodiment of the privacy/security enclosure 31100.

In some embodiments of the invention, the privacy/security enclosure can include smart glass or filter. For example, FIG. 312 illustrates a smart glass privacy/security enclosure 31200 in accordance with some embodiments of the invention. In some embodiments, a portion 31205 of the privacy/security enclosure can include a smart glass or filter 31225 that is switchable between one or more levels of transparency. For example, in some embodiments, when a user wishes to increase the privacy/security setting of the privacy/security enclosure 31200, the user can activate the smart glass or filter 31225 to induce opacity within the smart glass or filter 31225 to optically block or obscure light transmission. In some embodiments, a user can operate the transmission characteristics of the smart glass or filter 31225 using a remote control.

In some embodiments, the privacy/security enclosure can include a power or battery control function. For example, FIG. 313 illustrates an on-off remote battery circuit breaker 31300 in accordance with some embodiments of the invention. In some embodiments, using a remote function 31303, a user can control power from a battery 31305 (i.e., turn-on or turn-off power from the battery).

Some embodiments can include automobile privacy protection. For example, some embodiments include a privacy/security enclosure that can act as a switch or circuit breaker controlling the ability of one or more of a vehicle's communication systems to operate. For example, some embodiments of the invention can address the well-publicized remote hacking of a popular manufacturer's vehicle, wherein the brakes, acceleration and other functions of the car were able to be remotely controlled by the hacker. In some embodiments of the invention, the privacy/security enclosure can restrict, filter or cut off access to one or more of the vehicles external communication capabilities, minimizing, reducing, making more difficult or eliminating the ability of a remote actor to control one or more of the vehicle's functions. In other embodiments of the invention, the privacy/security enclosure, actuated either manually by the user or by software in the event of one or more trigger conditions, can restrict, filter or cut off access of one or more portions of a vehicle's systems from one or more others. For example, in some embodiments of the invention, the privacy/security enclosure can cut-off, minimize, filter or restrict access from a vehicle's entertainment system or other such system to provide protective capability in the event that the system is faulty, has been hacked and/or had its software, firmware or hardware added to, modified, deleted or replaced, or had new software, firmware or hardware installed, maliciously or otherwise. In some embodiments of the invention, the privacy/security enclosure can restrict, minimize, filter or eliminate access of one or more portions or sub-portions (e.g. not the entire vehicle control system, but rather the braking system or not the entire braking system, but rather portion of the braking system) of one or more of the vehicles systems to one or

147

more other portions or sub-portions of one or more other systems or to one or more shared networks, buses or other such communication facilities. For example, some embodiments of the privacy/security enclosure can provide more nuanced filtering, reduction or elimination of connectivity such that certain critical, non-faulty or non-hacked capabilities maintain connectivity while other, less critical, faulty or hacked portions of the system have their connectivity reduced, filtered or cut-off. In some embodiments of the invention, the privacy/security enclosure can allow or trigger the connection to or activation of backup vehicle control or other such systems. In other embodiments of the invention, the privacy/security enclosure can allow the ability to access, source or reload one or more backup, redundant, or protected software/code sources for one or more vehicle systems. Some embodiments of the privacy/security enclosure can reduce or eliminate the ability of one or more vehicle systems from being able to access other systems and/or from accessing any remote network or communication capability. For example, some embodiments of the privacy/security enclosure can reduce, eliminate or filter the access of systems that control vehicle operation (e.g., brakes, steering, acceleration, gauges, windshield wipers etc.) from systems such as vehicular entertainment systems or cellular or other forms of remote communication, such that while auto manufacturers or other parties can no longer be able to remotely access sensor data from such systems, hackers can no longer be able to remotely access such systems either.

Some embodiments include automobile privacy/security enclosures configured to function at least as described above. For example, FIGS. 314-317A illustrate automobile privacy/security enclosures in accordance with some embodiments of the invention. In some embodiments, using one or more of the privacy/security enclosures 31400, 31500, 31600, 31650 depicted, the privacy/security level of a communication system within an automobile (user device 30) can be changed. Some embodiments include a privacy/security enclosure 31400 installed adjacent to a microphone within or adjacent to a headliner of an automobile or within or adjacent to wherever a microphone can be found within an automobile, truck or other moving vehicle. In this example embodiment, the privacy/security enclosure 31400 can comprise a controller 31405 including a user control 31425 configured to control or engage audio masking. In other embodiments, the privacy/security enclosure 31500, 31600 can be installed adjacent to the automobiles dashboard or steering wheel. In some further embodiments, the privacy/security enclosure 31650 can be installed in an engine compartment and/or coupled to a vehicle's audio and/or communication electronics. In some embodiments, a vehicle's key or key-fob (device 35) can be used to activate or control the automobile's privacy/security enclosure 31400, 31500, 31600, 31650. In other embodiments, the automobile's privacy/security enclosure 31400, 31500, 31600, 31650 can be operated via a cellular connection. In other embodiments, automobile's privacy/security enclosure 31400, 31500, 31600, 31650 can be operated from a control or switch within the vehicle. In some further embodiments, automobile's privacy/security enclosure 31400, 31500, 31600, 31650 can be operated and/or monitored through an internet connection.

FIG. 317B illustrates a privacy/security system 31700 in accordance with some embodiments of the invention. In some embodiments of the invention, the privacy/security system 31700 can include a privacy/security system 31701 that can be activated by a user to control one or more

148

electrical, mechanical, and/or electromechanical systems of the vehicle. A discussion of specific electrical, mechanical, and/or electromechanical systems of the vehicle that can be controlled by embodiments of the privacy/security system 31700 are shown and described in FIGS. 317C and 317D illustrating mechanical, electrical, and electromechanical systems of a vehicle that can be controlled by the privacy/security system of FIG. 317B. In some embodiments, the privacy/security system 31701 can control at least one electrical, mechanical, and/or electromechanical systems of a user's vehicle. Further, in some embodiments, the privacy/security system 31701 can enable a switch to a backup system for control of at least one electrical, mechanical, and/or electromechanical systems of a user's vehicle. For example, some embodiments include a privacy/security system 31702 that is protected by a Faraday cage.

In some embodiments, the privacy/security systems 31701, 31702 can enable a user to select and control and/or disconnect existing sensors or inputs to a vehicle's control system (shown as system control 31715). In some embodiments, the privacy/security systems 31701, 31702 can enable a user to select and control existing sensors or inputs to a vehicle's control system (shown as system control 31715). In some embodiments, the privacy/security systems 31701, 31702 can enable a user to select and control and/or disconnect existing outputs from a vehicle's control system (shown as system control 31710). Further, in some embodiments, the privacy/security systems 31701, 31702 can activate/connect one or more backup systems, including blocking access to non-critical systems or those that provide a route for malware (e.g., such as entertainment systems, voice/data communications, remote keyless entry systems, etc. In some embodiments, the privacy/security system 31702 can include backup control systems that comprise protected non-networked systems with no remote access, and base configurations not capable of being modified without physically interaction with the systems. In some embodiments, the various mechanical, electrical, and electromechanical systems that can be protected and controlled includes, but is not limited to, night vision systems, a heads-up display, driver alertness monitoring, instrument cluster, accident recorder, event data recorder, auto-dimming mirror, interior lighting, active cabin noise suppression, voice/data communications, cabin environmental controls, dedicated short-range communication systems (dsrc), entertainment systems, battery management, lane correction systems, electronic toll collection systems, digital turn signals, navigation systems, security system, active exhaust noise suppression, active suspension, hill-hold control, regenerative braking, antilock braking, tire pressure monitoring, parking system, electronic stability control, active yaw control, seat control position, transmission control, lane departure warning, blindspot detection, remote keyless entry, onboard diagnostics, active vibration control, cylinder deactivation, idle stop/start, electronic valve timing, electronic throttle control, electric power steering, automatic braking, adaptive cruise control, adaptive front lighting, airbag deployment, engine control, parental controls, and windshield wiper control

In reference to FIGS. 317C and 317D illustrating mechanical, electrical, and electromechanical systems of a vehicle that can be controlled by the privacy/security system of FIG. 317B, the average new car has dozens of computers that control everything from the airbags and brakes to the lights and entertainment system. The engine control module (ECM) is the most powerful (and expensive) microcontroller in the vehicle. Engine control modules determine where to

set the throttle, how much fuel to inject into the cylinders, and when to fire the spark plugs. In many vehicles this controller also regulates the electric power distribution, provides the on-board diagnostics, and communicates with a number of other automotive systems to share information it obtains from various sensors. The engine control modules take data from a wide variety of analog sensors, digitize this information, and use it to calculate the proper engine settings. The results of these calculations are converted to actuator settings, and both digital and analog outputs from the module are used to operate these actuators.

Although cars did not have engine control modules for the first 80-90 years after the gasoline engine was invented, cars today would not be able to meet modern fuel efficiency and emissions requirements without them. Improvements in engine control algorithms, data collection, and data communication continue to be a major reason that cars are more efficient and less polluting with each new model year. Some vehicles allow the driver to make trade-offs between power and fuel economy by simply activating a switch that causes the ECM to run different engine control subroutines. There are also various programmable ECMs that are available to give car enthusiasts a great deal of control over how their engine will perform in various situations.

Today's ECMs generally employ 32-bit microcontrollers with a few megabytes of memory clocked at speeds between 32 MHz and 100 MHz. They generally communicate with other electronic modules using one or more CAN bus interfaces. In cases where the engine control function and the transmission control function are combined in the same module, the module is generally referred to as a powertrain control module (PCM). Various sensors that can be controlled include the pedal position sensor, throttle valve position sensor, engine oil temperature sensor, oxygen sensor, induction air temperature sensor, EGR sensor, oil pressure sensor, fuel level sensor, wheel speed sensor, torque sensor, knock sensor, air flow sensor, crankshaft position sensor, camshaft position sensor, manifold absolute pressure sensor, coolant temperature sensor. Other systems that can be controlled directly or indirectly include actuators, fuel injectors, spark plugs, EGR valve, fuel tank venting, cooling fan, starter motor, throttle position motor, check engine light, and data communications.

Power steering systems supplement the torque that the driver applies to the steering wheel. Traditional power steering systems are hydraulic systems, but electric power steering (EPS) is becoming much more common. EPS eliminates many HPS components such as the pump, hoses, fluid, drive belt, and pulley. For this reason, electric steering systems tend to be smaller and lighter than hydraulic systems. EPS systems have variable power assist, which provides more assistance at lower vehicle speeds and less assistance at higher speeds. They do not require any significant power to operate when no steering assistance is required. For this reason, they are more energy efficient than hydraulic systems. The EPS electronic control unit (ECU) calculates the assisting power needed based on the torque being applied to the steering wheel by the driver, the steering wheel position and the vehicle's speed. The EPS motor rotates a steering gear with an applied force that reduces the torque required from the driver. There are four forms of EPS based on the position of the assist motor. They are the column assist type (C-EPS), the pinion assist type (P-EPS), the direct drive type (D-EPS) and the rack assist type (R-EPS). The C-EPS type has a power assist unit, torque sensor, and controller all connected to the steering column. In the P-EPS system, the power assist unit is connected to

the steering gear's pinion shaft. This type of system works well in small cars. The D-EPS system has low inertia and friction because the steering gear and assist unit are a single unit. The R-EPS type has the assist unit connected to the steering gear. R-EPS systems can be used on mid- to full-sized vehicles due to their relatively low inertia from high reduction gear ratios. Unlike a hydraulic power steering system that continuously drives a hydraulic pump, the efficiency advantage of an EPS system is that it powers the EPS motor only when necessary. This results in reduced vehicle fuel consumption compared to the same vehicle with an HPS system. These systems can be tuned by simply modifying the software controlling the ECU. This provides a unique and cost effective opportunity to adjust the steering "feel" to suit the automotive model class. An additional advantage of EPS is its ability to compensate for one-sided forces such as a flat tire. It is also capable of steering in emergency maneuvers in conjunction with the electronic stability control.

In current-day systems, there is always a mechanical connection between the steering wheel and the steering gear. For safety reasons, it is important that a failure in the electronics never result in a situation where the motor prevents the driver from steering the vehicle. EPS systems incorporate fail-safe mechanisms that disconnect power from the motor in the event that a problem with the ECU is detected. The next step in electronic steering is to remove the mechanical linkage to the steering wheel and convert to pure electronically controlled steering, which is referred to as steer-by-wire. This functions by transmitting digital signals to one or more remote electric motors instead of a rack and pinion assembly, which in-turn steers the vehicle. While it has been used in electric forklifts and some tractors, as well as a handful of concept cars. In the event that a problem is detected with the electronic controls, a clutch engages to restore the driver's mechanical control. As with throttle control systems, it is likely that steer-by-wire will become the standard once the electronic controls prove to be safer and more reliable than the current hybrid systems. Any of the above mentioned vehicle control system can be access, selected, controlled, and protected using the privacy/security systems **31701, 31702**.

Referring to FIGS. **318A-321**, in some embodiments, the privacy/security enclosure can be integrated with and/or used with travel accessories. Any of the embodiments as shown and described in FIGS. **318** to **321** can include materials, structures, and fabrication methods as described for privacy/security enclosures shown in the preceding figures. Any of the materials, structures, and fabrication methods can be scaled to any of the structures that are generally larger in size that those described for enclosing single devices such as mobile phones and sensors of portable devices. For example, FIGS. **318A-318C** illustrate a protective suitcase privacy/security system **31800** in accordance with some embodiments of the invention. FIGS. **319A-319B** illustrate another protective suitcase privacy/security system **31900** in accordance with some embodiments of the invention. Further, FIG. **320** illustrates a Faraday cage in bag privacy/security system **32000** in accordance with some embodiments of the invention, and FIG. **321** illustrates a Faraday sleeve privacy/security system **32100** in accordance with some embodiments of the invention. Referring to FIG. **318**, in some embodiments, the privacy/security enclosure **31800** can form a travel briefcase **31805** capable of housing multiple user devices including mobile phones, laptop computers, computer tablets, etc. Referring to FIGS. **319A-319B**, in some embodiments, the privacy/security enclosure

151

31900 can form a rolling luggage structure **31905** attached to luggage **31910**. In some embodiments, the rolling luggage **31910** including the privacy/security enclosure **31900** can include an access door or lid **31912** and one or more lockable and removable enclosures **31925**. In some embodiments, one or more of the lockable and removable enclosures **31925** can be locked using a lock key **31930**.

In some further embodiments, the privacy/security enclosure **32000** can comprise a back-pack structure. For example, referring to FIG. **320**, in some embodiments, a privacy/security enclosure **32000** can comprise a backpack structure **32005** can include a secure hard inner case **32007** and an outer soft or compliant case **32010**.

Referring to FIG. **321**, in some embodiments, the privacy/security enclosure **32100** can comprise a personal travel sleeve cover **32105**. In some further embodiments, the sleeve cover **32105** can comprise a sealable opening **32110** to enable a user to insert and seal a device.

Some embodiments of the invention can be designed to integrate with common consumer household or office products such as jackets or other forms of clothing, purses, handbags, backpacks and briefcases, chairs, couches, kitchen counters, car consoles, seats, dashboards or doors, tables, desks, drawers and/or bed stands/night tables amongst others. In some embodiments of the invention, the privacy/security enclosure can be integrated in such a way that it is not visible to an outside observer. Some embodiments can be integrated into purses and other aforementioned products such that the privacy/security enclosure appears to be integrated into the surface of the product or so that when the purse or other such product is opened, the user can have access to the privacy/security enclosure into which they can place their phone, tablet or other electronic device, in any case at which point that once the privacy/security enclosure is engaged, it can then provide on or more of the protective masking, obfuscation, minimizing, jamming, blocking and/or other privacy/security features via the systems and methods described herein.

Some embodiments include box or cabinet type privacy/security enclosures. For example, FIG. **322** illustrates a lockbox privacy/security enclosure **32200** in accordance with some embodiments of the invention. In some embodiments, privacy/security enclosure **32200** can comprise a housing **32205** including a coupled cover **32210** enabling access to at least one slot **32215**. In some embodiments, the privacy/security enclosure **32200** can include feet **32225** for IMV protection.

FIG. **323** illustrates a safe-type privacy/security enclosure in accordance with some embodiments of the invention. In some embodiments, the privacy/security enclosure **32300** can include a housing **32305** mounted on a support **32325**. In some embodiments, an access door **32310** can enable a user to access slots **32315** for storage of the user's device(s).

FIG. **324** illustrates a tackle box privacy/security enclosure **32400** in accordance with some embodiments of the invention, and FIG. **325** illustrates a letter box privacy/security enclosure **32500** in accordance with some embodiments of the invention. In some embodiments, the privacy/security enclosure **32400** can comprise a housing **32405**, and access doors or flaps **32410**, **32415** enabling a user to access one or more slots **32430**. The privacy/security enclosure **32400** can also include an upper tray **32435** including additional slots **32437** for storage of additional user devices. Referring to FIG. **325**, in some embodiments, the privacy/security enclosure **32500** can comprise housing **32505** including a coupled access door or flap **32510** enabling a user to access at least one storage slot **32515**. In some

152

embodiments, one or more user devices can be enclosed and stored within one or more holders, drawers, slots, or compartments of the privacy/security enclosures shown in FIGS. **322-325**.

Some embodiments include privacy/security enclosure specific to office or executive spaces. For example, FIG. **326** illustrates a roundabout cage-type privacy/security enclosure **32600** in accordance with some embodiments of the invention, and FIG. **327** illustrates a built-in type privacy/security enclosure **32700** in accordance with some embodiments of the invention. In some embodiments, the privacy/security enclosure **32600** can comprise a carousel-type structure **32607** including a housing **32605** one or more slots **32615**, and an actuation top **32610**. The slots **32615** can be configured to accept and store a plurality of user devices after the structure **32607** is raised from the lower portion **32606** of the housing **32605**. In some embodiments, structure **32607** can be raised by pressing the actuation top **32610**. Further, in some embodiments, structure **32607** can be lowered into the lower portion **32606** of the housing **32605** by depressing the top **32610**. In some embodiments, privacy/security enclosure **32600** can be integrated into a desk or other type of furniture or decoration of a room (e.g., such as a boardroom).

Some embodiments include a privacy/security enclosure integrated into a desk or other type of furniture or decoration of a room (e.g., such as a boardroom). For example, FIG. **327** illustrates a built-in type privacy/security enclosure **32700**. In accordance with some embodiments of the invention, privacy/security enclosure **32700** can comprise a housing **32705** integrated into a desk or other type of furniture or decoration of a room (e.g., such as a boardroom). The housing **32705** can enclose a slot **32710** into which a user can store one or more device. A door **32715** can be used to close the privacy/security enclosure **32700**.

In some embodiments of the invention, using any of the privacy/security enclosures disclosed here, remote or wireless access to internal electronics such as chips, microprocessors, microcontrollers, memory, storage, PCB boards and other such electronic components, devices or assemblies can be prevented, thereby decreasing the likelihood or ease by which the invention can be hacked, accessed or controlled remotely. In some embodiments of the invention, the use of microprocessors, microcontrollers or other electronic components that have features such as one-time write, read restrictions, that encrypt, lock or otherwise secure or obfuscate their software, firmware or other command/configuration information can be used to prevent or increase the difficulty of hacking, modifying or changing the intended operation and/or functionality of the invention. In some embodiments of the invention, direct, remote, RF, wired or wireless access to electronic component can be prevented or made more difficult by the use of Faraday cages, by the omission of RF transceivers or other connecting or networking capabilities, by the elimination, exclusion or reduction of functionality of internal or external ports that might provide access to electronic components, by the clipping, removal or otherwise destroying or tampering with some or all pins or pathways that can allow software or firmware updates, by soldering, gluing, covering with a foreign material or other technique to make it difficult to remove or change chips, PCB boards or electronic components, or by the combination of some or all of these and other techniques. In some embodiments of the invention, with the potential of increasing the cost or ability to diagnose, repair, replace or reuse some or all of the components, the ability or ease by which some embodiments of the invention can be opened and/or

internal components or features can be accessed can be reduced or made more difficult through the use of techniques such as one way connectors, tabs or other such features, the use of ultrasonic welding or other such manufacturing techniques or the obfuscation or hiding of assembly features, any or all of which capabilities can provide for the destruction or degradation of the embodiment's operation or performance or can result in a user being more readily aware that an attempt (successful or unsuccessful) has been made to open or tamper with the embodiment and/or its features or capabilities.

In some embodiments of the invention, any of the privacy/security enclosures disclosed herein can act as a security token for the user to use as part of an authentication or login process with a website, network, computer or other device or facility desiring such a level of authenticated access. For example, in some embodiments of the invention, when a user wants to login to a secure website, device, software, network or facility, a code can be generated by the privacy/security device/enclosure that is required to be provide in order to login or access the desired website, device, software, network or facility. In other embodiments of the invention, communication to or from the enclosed device can be monitored and/or passed, verified, changed, blocked or redirected based on criteria, rules or algorithms either pre-loaded or downloaded (and occasionally or periodically updated if or when desired) on the privacy/security enclosure. In yet other embodiments of the invention, data, voice or video traffic can be encrypted or decrypted by the privacy/security enclosure prior to transmission or on receipt or at some other such time as fits within the desired security profile.

In some embodiments of the invention, one or more microphones can be used to detect and/or capture audio content reaching the privacy/security enclosure, which audio content can then be repeated or replayed, with or without a delay, on one or more speakers/audio drivers included in the enclosure. In some embodiments of the invention, full or partially sealed pathways can be provided from each of one or more speakers/audio drivers to one more or all of the microphone or microphones within an enclosed device or devices. In some embodiments of the invention, sealed pathways may not be used and repeated or replayed sound can be broadcast to the interior or exterior of the enclosure, uncontained by such pathways/seals.

In some embodiments, installation of the privacy/security enclosure can include installation to the user's device so that external audio energy from the external environment is reduced, attenuated or changed. In some embodiments, the installation can include techniques including various conventional seals and sound isolating techniques. In some embodiments, the protected device(s)' microphone(s) can be partially or fully isolated from external audio excitation using compressive materials used to form a seal. Novel structures or baffles or tortuous paths can be used in some embodiments to help reduce or eliminate external audio energy from reaching the protected device(s)' microphone(s).

In some embodiments of the invention, one or more seals can remain in position while in other embodiments of the invention one or more seals can be moveable, sealing and unsealing at different points in time. In some embodiments of the invention, the ability to seal and/or unseal and/or the ability to play/direct masking noise or changed/manipulated/processed audio content to one or more microphones of enclosed devices can be available on a microphone by microphone basis. In other embodiments, it can be available

for combinations or all microphones together. In some embodiments of the invention, different audio content (e.g., pass-through, noise, modified, processed, manipulated or otherwise changed content) can be played for different microphones at the same time, while in other embodiments of the invention, similar or the same content can be played at the same time. In some embodiments of the invention, a conventional mechanical or electro-mechanical mechanism can be used to apply one or more seals to its mated surface. In some embodiments of the invention, differing compression levels can be used for one or more seals, even if applied by a conventional mechanism, in order to more effectively deliver the desired functionality (e.g., audio masking, delivering audio content, reduced obtrusiveness, external audio attenuation etc.)

In some embodiments of the invention, seals and/or sealed pathways/channels can be used to more effectively deliver audio content to one or more microphones of enclosed device in order to attenuate broadcast audio content and/or to attenuate external audio content. In some embodiments of the invention, the seals can comprise neoprene or other compliant material. As illustrated in FIGS. 328A-328F, showing seals 32810, 32820, 32830, 32840, 32850, and 32860, in some embodiments of the invention, the seals 32810, 32820, 32830, 32840, 32850, and 32860 can be shaped to optimize acoustical coupling to a targeted microphone. This can be achieved by taking into account various factors including, but not limited to, the space available for the seal, the surface material, texture and form of an interface to which the seal can mate, the acoustical path by which the targeted microphone detects audio content (e.g., a hole or pattern of holes in the phone behind which the targeted microphone is mounted, attached or coupled etc.), and the level of sealing required to meet the desired level of attenuation. As further illustrated in FIGS. 328A-328F, in some embodiments of the invention the seal(s) can have a cut-out surrounded by varying thickness and shape of wall in order to meet the goals previously described. In other embodiments of the invention, the seal(s) can have a series of concentric or non-concentric/asymmetric chambers to meet the previously described goals.

In some embodiments of the invention, the audio content captured by the privacy/security enclosure's microphone(s) can be blocked, attenuated, amplified, changed, obfuscated, distorted, filtered, replaced or otherwise modified at, before or during the time it is captured, played, broadcast or transmitted, if it is played, broadcast or transmitted at all by the one or more speakers/audio drivers included in the enclosure.

In some embodiments of the invention, the audio content from the one or more microphones may not be transmitted or replayed/rebroadcast by the one or more speakers/audio drivers in the enclosure, but rather one or more masking signals can be broadcast by the one or more speakers/audio drivers in the system, with one such effect being that it can be more difficult to determine audio content other than the masking signal(s) from recordings or content captured by one or more microphones in any device or devices protected by the privacy/security enclosure. In some embodiments of the invention, the masking signal can be deterministic, while in others it can be truly random or pseudo-random, and in one or more of these examples, the frequency of the masking/jamming signal(s) can be tuned or filtered to a profile such as white, blue, pink, gray or some other such noise or frequency profile as described herein.

In some embodiments of the invention, the user can activate, deactivate, tune or change the level, volume, power

or capabilities of the electronic audio repeating and/or masking/jamming capability through the use of switches, buttons or other such physical interface included in or with the enclosure, while in other embodiments of the invention, such features or capabilities can be activated, deactivated, tuned or changed by movements, motion, remote control(s) such as RF, infrared, or other wired or wireless technology or sound such as a spoken keyword or phrase. In some embodiments of the invention, the use of electronic audio repeating, manipulation and/or jamming, masking, attenuating or blocking can provide features or capabilities beyond just audio protection, but can include features such as amplification, audio enhancement, noise or echo canceling, audio mixing and other forms of audio manipulation to name a few.

In some embodiments of the invention, the privacy/security enclosure can be designed such that if power is lost, audio content can no longer be clearly rebroadcast/transferred to the desired microphone, but rather physical characteristics of the enclosure such as sealed pathways and others can result in a noticeable difference in audio quality, detectable by an average listener. For example, in some embodiments of the invention, if a user desires protection of the enclosure and a hacker or other party accidentally or intentionally eliminates power, and/or plugs, blocks or degrades one or more speakers/audio drivers, damages one or more seals or other physical aspects of the enclosure, or otherwise degrades the enclosure's audio jamming/masking/protective capability, the user can detect the reduction or elimination of protection during an audio call with another party. The other party can identify a change to the enclosure's protection because the audio clarity of the conversation can be degraded or different when compared to the audio quality provided when the enclosure is operating correctly. Such degradation or other audio clarity change can be accomplished using proprietary techniques described herein or a variety of techniques well-known to one of ordinary skill in the art.

In some embodiments of the invention, microphone(s) included with the enclosure can be placed such that they are directional can be of higher or lower quality than microphone(s) in the protected device(s). Alternatively, they can include capabilities or features that increase or decrease audio performance when compared to that provided by the enclosed or protected device(s) native microphone(s). In other embodiments of the invention, the transfer function of recorded and replayed audio content can be changed, can be different, or can be optimized for performance in different environments, settings or conditions, for different times of day or for different/varying speakers (e.g. male, female, young, old, loud or soft-spoken individuals, accents etc.). In other embodiments of the invention, the transfer function of recorded and replayed audio content can be changed, distorted, replaced, translated or otherwise modified for various purposes including, but not limited to, protection, communication, fun, novelty or performance.

In some embodiments of the invention, when the privacy/security enclosure's protection is activated, the embedded microphone(s) are disabled or are otherwise prevented from delivering any usable detected, captured or recorded audio content. In some embodiments, this can be achieved by techniques such as eliminating power or turning off/deactivating, disregarding any content detected or captured, physically or electronically disconnecting or blocking any path(s) to any associated speaker/audio driver, or by other conventional methods.

In some embodiments of the invention, the use of electronic audio repeating, manipulation and/or jamming, masking, attenuating or blocking can result in benefits such as reduced cost to design and manufacture, reduced assembly complexity, reduction or elimination of moving parts, increased cycle life, durability, repeatability and control, reduced size/weight and other such benefits when compared to purely mechanical methods of attenuating, blocking or jamming/masking audio content or applying such capabilities to microphone(s) contained by protected device(s).

Some embodiments of the invention can integrate and connect with software running on enclosed or other device(s), communicating via wired or wireless connections. For example, in some embodiments of the invention, a connection to an enclosed smartphone via wireless or wired connection to a data port can allow interaction with a mobile app to provide any of numerous functions, including private or secured messaging and communications, secure token capabilities, monitoring and manipulation or protection of data and data transmissions etc. In some embodiments of the invention, one or more totally dedicated and independent set of mechanical and electrical/electronic components (e.g., microprocessors, microcontrollers, memory, storage etc.) and/or pathways between such electrical/electronic and/or mechanical components can exist to provide a certain set of features, functions and/or interactions. In some embodiments of the invention, the existence of such isolated and dedicated components and pathways can eliminate, minimize or reduce the risk or ability of accidental or intentional manipulation, reduction or elimination of one set of features or capabilities by any individual, software or hardware interacting with, accessing or using another.

In some embodiments, the privacy/security enclosure can mount directly or through a clamping interface. In some embodiments, the privacy/security enclosure can be positioned on the user's device so that the internal microphones are covered and sealed from the external audio environment. In some embodiments, privacy/security enclosure can include microphone transducers to sense the external audio environment and electronics to process captured sound as needed. The device can also be used with laptops, tablets and devices that contain cameras, microphones or other such sensors). In some embodiments, the extension of privacy/security can comprise isolating audio and/or video from the user's device. In some embodiments, the level of privatization can be partial in that some components or devices of a user's device remain non-private and others are private. For example, in some embodiments, a movable portion or section of the privacy/security enclosure can be moved with respect to another portion or section of the privacy/security enclosure to cover and make private a webcam but leave open a microphone.

In some embodiments, removing power from the privacy/security enclosure can turn off the capture and/or rebroadcast of audio content, resulting in a detectable change on the quality, fidelity, volume, clarity or other such sound characteristic when engaging in phone calls or any other microphone application, with such change providing an additional level of security on the system operation as the change can indicate the loss of power, intentional or otherwise.

In some embodiments, plugging, disabling, damaging, changing or blocking a privacy/security enclosure's speaker(s) or broadcast pathway can reduce, attenuate or even effectively eliminate the protected device(s)' audio capture, effectively disabling or impacting audio applications of a protected device(s). In some embodiments, damaging or changing a privacy/security enclosure seal can

cause a noticeable audible anomaly by introducing a separate and time-different input to the user's device microphone (e.g., an echo).

In some embodiments, the privacy/security enclosure can provide an option for using a forward or other directionally directed microphone(s) for better audio coupling as compared to the microphone(s) native to the protected device(s). Further, in some embodiments, the privacy/security enclosure electronics can be used to optimally shape the microphone/speaker transfer function. In some embodiments, the electronic privacy/security enclosure device can be more slender than a manually controlled privacy/security device and can be mechanically coupled to the protected device.

FIGS. 329 and 331-344 show some embodiments of the invention including privacy/security enclosures for providing protection for a desktop computer. For example, some embodiments include a privacy/security enclosure 32900, 33200, 33600, 33610, 34300 that can be used to increase the privacy/security of a user when using or in the presence of a user device. In some embodiments, the privacy/security enclosure can comprise a housing assembly that can comprise a rigid, structurally self-supporting chamber that can be attached, mounted, or otherwise coupled to a user's device.

Referring to FIG. 329, illustrating privacy/security enclosure, in some embodiments, the privacy/security enclosure 32900 can also include devices for generating noise and directing the output to encapsulated speakers. Further, in some embodiments, switching between feeding the speakers with noise and external audio is accomplished with a single button press (control switch 32925). For example, the privacy/security enclosure 32900 can comprise a main housing 32905 including a primary portion 32907 and a coupled secondary portion 32909. An upper portion 32911 can include microphone 32915 and a speaker 32920. The primary portion 32907 can include a microphone 32916 and speaker 32922. The control switch 32925 can be positioned in the upper portion 32911, and a power connector 32930 can extend into the end 32908.

Some embodiments of the invention include methods to determine the functional status of the privacy/security enclosure. In some embodiments, an application running on a user's computer or other protected device can connect to the protected device's microphone output(s) and measure the signal level(s). In some embodiments, the amplifier to the privacy/security enclosure speaker(s) can be turned off (via a user interface element) so that no sound is emitted by the privacy/security enclosure speaker(s). The protected device's application can "listen" to the output of the device's microphone(s) while outputting audio through the device's speaker. In some embodiments, if the signal measured by the device's microphone is below a predetermined threshold, the mechanical seal of the privacy/security enclosure is properly blocking external audio from the device's microphone(s). The user can be alerted to proper isolation by the device's application.

In some further embodiments, a second and/or third or more microphone(s) can be installed inside the privacy/security enclosure. If the privacy/security enclosure is properly sealed, the extra microphone outputs can be compared to a predetermined threshold within the privacy/security enclosure electronics. In some embodiments, if this threshold is not exceeded, the privacy/security enclosure is determined to be properly sealed. In some further embodiments, the output from the extra microphone(s) can be altered by an electronic filter or signal processing algorithm within the privacy/security enclosure electronics so that the audio signal(s) from the extra microphone(s) can be optimized

versus the predetermined threshold used for determining the effectiveness of the mechanical isolation seal. Some other embodiments can include the privacy/security microphone(s) sampling the external environment as a trigger for determining when to sample the threshold comparison described above.

Referring to FIG. 330 illustrates a schematic of a privacy/security system 33000 in accordance with some embodiments of the invention, and FIG. 331 illustrates a system schematic 33001 of a privacy/security system 33000 in accordance with some embodiments of the invention. In some embodiments, privacy/security enclosure 33000 can comprise privacy/security enclosure 33001 including a microphone 33020 coupled to electronics 33010. A speaker 33030 can be coupled to the electronics and be configured to interface with a computer 33005. The computer 33005 can comprise an application 33050 coupled to a speaker driver 33060 that is coupled to a speaker 33070, and can be coupled to a microphone software driver 33040 coupled to a computer microphone 33045. In some embodiments, the privacy/security enclosure 33001 can include an extra microphone 33075 as shown in FIG. 331.

FIGS. 332-344 illustrates views of privacy/security enclosures showing portions of the internal structure including a movable portion or section of the privacy/security enclosure can be moved with respect to another portion or section of the privacy/security enclosure to adjust the coverage (and therefore the privacy/security level) of the privacy/security enclosure mounted or coupled to the user's device (e.g., a computer or display monitor as shown in the example embodiment of FIG. 329). The example embodiments of the invention include some cross-sectional and partial views including various latching mechanisms and structures that are configured to enable a user to control movement of a portion of the privacy/security enclosure that can affect the level of privacy and security the device provides to a user. For example, FIGS. 332-335 illustrate cross-sectional views of a privacy/security enclosure 33200 incorporating internal assemblies to enable a user to open a hood 33210 using a "push down" action in accordance with some embodiments of the invention. A user-actuated latch mechanism 33217 is shown extending within the housing 33205 of the privacy/security enclosure 33200. In some embodiments, the latch mechanism 33217 includes a coupled tab or button 33212 that extends outward from an aperture 33211 in the front face 33215 of the housing 33205 of the privacy/security enclosure 33200, and a latch arm 33228 with a catch element 33232 coupled to a pivot 33225 and configured to couple with a spring-assisted strut 33230 for extending or retracting a hood 33210 of the privacy/security enclosure 33200. The user can initiate movement of the hood 33210 by pressing the button 33212. The spring-assist (with spring 33240 shown in FIG. 333) can enable the hood 33210 to be extended with little or no interaction by the user. In other embodiments, the spring 33240 can assist the user extending the hood 33210. The return of the button 33212 can be assisted by the spring 33218.

Another example embodiment is shown in FIGS. 336-342 illustrating cross-sectional views of a privacy/security enclosure 33600 incorporating internal assemblies to enable a user to open a hood 33210 using a "push up" action in accordance with some embodiments of the invention. The alternate embodiment includes a latching mechanism 33617 operating the hood 33610 extended out or away from the housing 33605 that can be controlled by pulling or pushing the tab or button 33612 upwards (i.e., toward the top surface 33606 of the hood 33610). In this configuration, the tab or

button release spring **33608** is located in the upper portion **33607** of the housing **33605**, and positioned to be compressed when a user applies force to the tab or button **33612** by moving the tab or button **33612** towards the upper portion **33607** of the hood **33610**. A return action can be assisted by spring **33608**. In this instance, the latch arm **33618** rotates in a clock-wise direction about the pivot **33625**, rather than in an anti-clockwise direction shown for the embodiment in FIGS. **332-335** described above. The latch arm **33618** of the user-actuated latch mechanism **33217** is shown extending within the front face **33615** of the housing **33205** of the privacy/security enclosure **33600**. In some embodiments, the coupled tab or button **33612** extends outward from an aperture **33611** in the front face **33615** of the housing **33605** of the privacy/security enclosure **33600**, and a latch arm **33628** with a catch element **33632** coupled to a pivot **33625** and configured to couple with a spring-assisted strut **33630** for extending or retracting a hood **33610** of the privacy/security enclosure **33600**. The user can initiate movement of the hood **33610** by pulling the button **33612** upwards towards the top surface **33606** of the housing **33610**. The spring-assist (with spring **33640**) can enable the hood **33610** to be extended with little or no interaction by the user. In other embodiments, the spring **33640** can assist the user extending the hood **33610**.

FIGS. **338-342** illustrates a cross-sectional views of a privacy/security enclosure **33600** including opening hood stage **33601**, locked hood stage **33602**, latch release stage **33603**, latch return stage **33604a**, and re-latch stage **33604b**. The stage **33601** shows a latch mechanism **33617** in a stayed position. The stage **33602** shows the hood **33610** lowered and locked. The stage **33603** shows the hood **33610** releasing following pull up of the button **33612**. The stage **33604a** shows the hood **33610** raised, and the latch **33618** return. The stage **33604b** shows the button **33612** push down to relatch with a lead-in on the latch foot (shown as **33630**).

FIGS. **343** and **344** illustrate perspective views of a privacy/security enclosure **34300** including adjustable shutter **34330** and showing the tab or button **34355** extending from the front face **34310** of the housing **34505**, with the hood **34350** in the closed position (FIG. **343**) and the open position (FIG. **344**). In some embodiments, a user can apply pressure to the tab or button **34355** to at least partially rotate the latch arm of the latch mechanism about a pivot point described above. This action can cause the latch arm to disengage or move (assisted by the spring) to cause the hood **34350** to move outward from the housing **34305**. In some embodiments, the actions described can be reversed by a user applying force to the top surface **34352** of the hood **34350** to force the hood **34350** inward towards the housing **34305**, compressing the spring, and causing the latch arm to latch to a spring-assisted actuator.

In some embodiments, any protected device's microphone(s) can be mechanically isolated to some extent from external audio sources via a mechanical seal, and a small speaker (e.g., such as a hearing aid speaker) can be placed inside the mechanical seal, tightly coupled to the protected device's microphone(s). In some embodiments, speaker drive electronics can be used to send an audio signal to each privacy/security enclosure speaker. Further, in some embodiments, the driver circuit can be used to send a pink, white or other noise signal to the speakers. In some embodiments, this noise signal can be enabled and the microphone is disabled when the user selects to block/reduce audio by masking some or all of any remaining external audio not blocked by mechanical seals from reaching the protected device's microphone or microphones.

In some embodiments of the invention, one or more microphones in the privacy/security enclosure can be exposed to the external environment. In some embodiments, these microphones can be enabled when the user chooses to allow the protected device's microphone(s) to listen to the external environment. In some embodiments, when enabled, the signal from the privacy/security microphone is amplified such that it can drive the speaker or speakers described above.

In some embodiments of the invention, the output signal from the microphone can be electronically filtered by frequency to either enhance or equalize the frequency response of the system when played through one or more speakers as described above. In some embodiments, the enhancement or equalization can compensate for the frequency response of the speaker. In one embodiment, this compensation can cancel out speaker resonance so that overall system frequency response from microphone input to speaker output is equalized as closely as possible to a generally flat spectrum or some other such desired profile within a certain frequency range. In some embodiments of the invention, output from microphone(s) and/or outputs from signal filtering or other form of change/manipulation to the output of a microphone(s) can be de-amplified before being sent to a speaker for broadcast in order improve the quality of the audio picked up by the targeted microphone. Playing the speaker at low volume can facilitate the ability of a closely coupled microphone(s) to get a good signal and not overwhelm, saturate or otherwise negatively impact the quality of such detected/recorded signal.

In some embodiments, power to the privacy/security enclosure can be provided using a USB cord from the privacy/security enclosure connected to an AC/DC USB power block at an AC outlet and to a USB power compatible input on privacy/security enclosure. Alternatively, the privacy/security enclosure can be powered via a USB port on the computer or associated device (or via a standalone USB power block). In some embodiments, plugging in the USB cable can automatically turn on the unit. Alternatively, the unit can be turned on or latched on via a pushbutton.

Some further embodiments include a disposable lithium coin cell used to power the privacy/security enclosure. In some embodiments, a rechargeable battery can be used to power the privacy/security enclosure. In some embodiments, this battery can be of any standard rechargeable battery type. In some embodiments, a single-celled lithium ion battery can be used. Further, a USB cable can be used to provide charging power to the privacy/security enclosure.

Some embodiments of the invention include privacy/security enclosures that enable DC power pass-through while maintaining a highly functional Faraday cage. For example, FIG. **345** illustrates a circuit diagram **34500** for a DC pass-through in accordance with some embodiments of the invention. In some embodiments, the ferrite bead **34520** can comprise a 200 MHz 0.236 length ferrite bead, such as part number FB43-226-RC (e.g., shown at <http://www.digikey.com/product-detail/en/FB43-226-RC/M8700-ND/775239>). Further, in some embodiments, the filter **34510** can comprise a 50000 PF C type filter, such as manufacturer part number 4300-014LF (e.g., shown at <http://www.digikey.com/product-search/en?vendor=0&keywords=4300-014lf>). FIG. **346** illustrates a front view of a DC pass-through assembly **34600** implementing the circuit **34500** of FIG. **345** in accordance with some embodiments of the invention, and FIG. **347** illustrates a rear view of the DC pass-through assembly **34600** of FIG. **346** in accordance with some embodiments of the invention.

In some embodiments of the invention, the capacitors of the circuit as shown are a short circuit to high frequencies such as frequencies above about 1 MHz, and the inductors (the ferrite beads) are high impedance to those high frequencies. Consequently, in some embodiments, the high frequencies have a low impedance path to the case and high impedance to pass through. Moreover, the chambered design as shown (similar to forming two small Faraday cages) can protect the wires from picking up RF radiation, while the direct current flow has a low impedance through (i.e., when powering a device) and a high impedance to the case.

In some embodiments, the privacy/security enclosure can enable charging of one or more batteries within the privacy/security enclosure with a functioning Faraday cage. Further, some embodiments also enable charging of batteries of one or more enclosed devices within the privacy/security enclosure or enclosure. Moreover, in some embodiments, charging of one or more batteries in the privacy/security enclosure and one or more batteries of at least one enclosed device can occur substantially at the same time. In some embodiments, the privacy/security enclosure can comprise one or more charging conductors or wires that pass through the Faraday cage of the privacy/security enclosure for purposes such as charging or communicating. While charging, the Faraday cage remains functional (i.e., the conductor or wire pass-through does not significantly alter the protection/attenuation provided by the Faraday cage relative to the targeted level of attenuation/protection). Further, in some embodiments, the privacy/security enclosure or enclosure can comprise at least one charging conductor or wire that passes through the Faraday cage that do not require a user to connect and disconnect separate leads on the inside and/or outside of the privacy/security enclosure.

Some embodiments include a system and method for alerting the user that the coin cell needs to be replaced or that a battery needs to be recharged. For example, in some embodiments, alerting the user to replace the coin cell can include a blinking red LED. The illumination of the LED can be modified to conserve battery power (e.g., the blink on time can be short and the blink repetition rate can be slow to conserve the remaining battery power when the system is in the low battery state.)

In some embodiments of the invention, the privacy/security enclosure can interact with hardware and/or software components of the device to block, attenuate, reduce, confuse, distort, transform, encrypt, delete, amplify, increase, add or append to, remove, change, mask or otherwise impact or modify energy levels, settings and/or data or information residing on or being sent to or from the protected or enclosed device(s). For example, in some embodiments of the invention, power can be drained from one or more of the enclosure's batteries periodically by sharing or transferring to or from one or more batteries that are part of enclosed or protected device(s) and/or batteries within the enclosed device(s). In some embodiments, the power transfer, drainage or extraction can occur at varying rates and/or at different power levels to prevent or confuse identification or fingerprinting of the protected device(s) via its battery charge levels, rate of discharge, or other battery related statistic or information. In some other embodiments of the invention, gyroscopes, accelerometers, or any other sensor can be similarly protected via features or capabilities of the privacy/security enclosure by itself or in conjunction with the protected device(s) and/or hardware or software that is a part of or is working with the protected or enclosed device(s).

In some embodiments of the invention, when the privacy/security enclosure has more than one device enclosed, differential protection can be provided based on the location or type of enclosed device and/or protection can be provided between enclosed devices. For example, in some embodiments of the invention, a "high security" portion of the enclosure can be provided while other portions of the enclosure provide a lower level of privacy/security. Other embodiments of the invention can include multiple internal chambers, partitions or sections, each with some or all of the protective features of the others. Some further embodiments of the invention can include protection between the chambers, partitions or sections, with Faraday cages attenuating RF access between one or more sections being just one non-limiting example.

FIG. 348 illustrates secure/private communication between user devices (devices 34810, 34860) secured and protected within respective privacy/security enclosures 34811, 34861 in accordance with some embodiments of the invention. In some embodiments, the device 34810 can be in use by a first user 34850 and the device 34860 can be in use by the second user 34855. In some other embodiments, the devices 34810, 34860 can be used by one or both users 34850, 34855. In some embodiments, the privacy/security enclosure 34811 can be used by a first user 34850 and the privacy/security enclosure 34861 can be used by a second user 34855.

In some embodiments, the privacy/security enclosure 34811 can enable a first user 34850 to use or access the device 34810, and the privacy/security enclosure 34861 can enable a second user 34855 to use or access the device 34860. Further, in some embodiments, the privacy/security enclosure 34811 can enable a second user 34855 to use or access the device 34810, and the privacy/security enclosure 34861 can enable a first user 34855 to use or access the device 34860.

In some embodiments of the invention, the device 34810 and/or the device 34860 can comprise a mobile communication device such as a phone or smart phone. In other embodiments, the device 34810 and/or device 34860 can comprise a computer tablet, laptop, PDA, and/or a wearable computer and/or communication device.

In some embodiments of the invention, the devices 34810, 34860 can be the same device and/or the same brand or manufacturer (e.g., both devices 34810, 34860 can be a smart phone and/or both devices 34810, 34860 can be the same make and model of smart phone). In other embodiments, the devices 34810, 34860 can be different types of brands and/or devices (e.g., one of the devices 34810, 34860 can comprise a smart phone, and one of the devices 34810, 34860 can comprise a laptop). In some embodiments, devices 34810, 34860 can comprise at least one microphone for sensing sound and at least one sound generator (e.g., such as a speaker) for generating sound. The devices 34810, 34860 can also include associated circuitry and/or drivers for generating and transmitting a signal based at least in part on signals received by their respective microphones. Further, the devices 34810, 34860 can also include associated circuitry and/or drivers that can generate sound through their respective speakers based at least in part on a signal from their associated circuitry.

In some embodiments of the invention, one or more microphones of protected devices 34810, 34860 can be covered and/or partially or substantially fully sealed by embodiments of the privacy/security enclosure 34811, 34861 described herein. Further, in some embodiments of the invention, the privacy/security enclosures 34811, 34861

can include one or more speakers and drivers that can be coupled to one or more of the protected device's microphones. Further, the one or more speakers and drivers can form part of the protective system of the privacy/security enclosures **34811**, **34861** for various purposes, including playing modified or unmodified voice and data content among others. For example, in some embodiments, the privacy/security enclosure **34811** can comprise at least one speaker **34819** and associated driver, and the privacy/security enclosure **34861** can comprise at least one speaker **34887** and associated driver.

In some embodiments of the invention, one or more microphones can be included as part of the protective system. Further, in some embodiments, one or more microphone(s) can be logically and/or physically coupled and/or associated to one or more of the microphones and/or speakers/drivers that are part of a protected device. For example, in some embodiments, the privacy/security enclosure **34811** can comprise microphones **34813**, **34832**, and the privacy/security enclosure **34861** can comprise microphones **34870**, **34883**. In some embodiments of the invention, audio content can be captured by any of the privacy/security enclosures **34811**, **34861**, and can be amplified, modified, changed, encrypted, tuned, filtered, processed or otherwise manipulated prior to being sent, transferred or transmitted to one or more speakers/drivers of the privacy/security enclosures **34811**, **34861**. For example, in some embodiments, the privacy/security enclosures **34811**, **34861** can include hardware and/or software to capture an audio content and/or signal and to encode and/or decode a signal.

In some embodiments, sound, such as a user's voice, can be encoded or decoded. For example, in reference to the privacy/security enclosure **34811**, in some embodiments, the microphone **34813** can be coupled to a circuit **34817**, and the microphone **34832** can be coupled to a circuit **34834**. In some embodiments, the circuit **34817** can comprise an encoder. Further, in some embodiments, the circuit **34834** can comprise a decoder. Further, in reference to the privacy/security enclosure **34861**, in some embodiments, the microphone **34870** can be coupled to a circuit **34872**, and the microphone **34883** can be coupled to a circuit **34885**. In some embodiments, the circuit **34872** can comprise an encoder. Further, in some embodiments, the circuit **34885** can comprise a decoder.

In some embodiments, vocal and/or sound communication from a first user **34850** can be encoded by the privacy/security enclosures **34811** and the vocal and/or sound communication from a second user **34855** can be encoded by the privacy/security enclosures **34861**. Further, in some embodiments, vocal and/or sound communication from a first user **34850** can be decoded by the privacy/security enclosure **34861**, and the vocal and/or sound communication from a second user **34855** can be decoded by the privacy/security enclosure **34811**. In some embodiments, audio content can be captured by at least one of the devices **34810**, **34861**, and can be processed and/or transmitted based at least in part on one or more encryption seeds or keys. For example, in some embodiments, sound can be picked up by at least one of the devices **34810**, **34861**, processed into a signal, wirelessly transmitted as an encoded signal to at least one of the devices **34810**, **34861**, processed into a signal, and processed by decoding into audio content by at least one of the devices **34810**, **34861**. In other embodiments, the sound can be picked up by at least one of the devices **34810**, **34861**, processed into a signal and transmitted by direct or wired connection as an encoded signal to at least one of the devices **34810**, **34861**.

Referring to the privacy/security enclosure **34811**, in some embodiments, the microphone **34813** can pick up or sense sound from a first user **34850**. A signal from the microphone **34813** can pass through circuit **34817**, and circuit **34817** can process the signal and pass a signal to speaker **34819**. In some embodiments, the signal from the microphone **34813** can be processed by the circuit **34817** to an encoded signal, and the encoded signal can be passed to speaker **34819**. The speaker **34819** can produce a sound based on the encoded signal. Based at least in part on the positional relationship between the device **34810** and the speaker **34819**, in some embodiments, the sound produced by the speaker **34819** can be picked up or sensed by a microphone of the device **34810**. The device **34810** can transmit a signal or receive a signal. For example, the device can transmit a signal **34821** or receive a transmitted signal **34830**. In some embodiments, the transmitted signal **34821** can be based on the encoded signal passed to speaker **34819** and picked up by a microphone of the device **34810**.

Referring to device **34860** and the privacy/security enclosure **34861**, in some embodiments, the received signal **34880** can comprise or can be based at least in part on the transmitted signal **34821**. In some embodiments, the received signal **34880** can be processed by the device **34860** and transmitted as sound through a speaker of the device **34860**. In some embodiments, sound emitted by the device **34860**, based at least in part on the received signal **34880**, can be picked up or sensed by the microphone **34883** of the privacy/security enclosure **34861**. In some embodiments of the invention, a signal from the microphone **34883** based at least in part on the received signal **34880** can be broadcast as sound from the speaker **34887**. In some embodiments, a second user **34855** can receive the sound.

Referring to the privacy/security enclosure **34861**, in some embodiments, the microphone **34870** can pick up or sense sound from a second user **34855**. A signal from the microphone **34870** can pass through circuit **34872**, and circuit **34872** can process the signal by encoding and pass a signal to speaker **34873**. In some embodiments, the signal from the microphone **34870** can be processed by the circuit **34872** to an encoded signal, and the encoded signal can be passed to speaker **34873**. The speaker **34873** can produce a sound based on the encoded signal. Based at least in part on the positional relationship between the device **34860** and the speaker **34873**, in some embodiments, the sound produced by the speaker **34873** can be picked up or sensed by a microphone of the device **34860**. The device **34860** can transmit a signal or receive a signal. For example, the device **34860** can transmit a signal **34875** or receive a transmitted signal **34880**. In some embodiments, the transmitted signal **34875** can be based on the encoded signal passed to speaker **34873** and picked up by a microphone of the device **34860**.

Referring to device **34810** and the privacy/security enclosure **34811**, in some embodiments, the received signal **34830** can comprise or can be based at least in part the transmitted signal **34875**. In some embodiments, the received signal **34830** can be processed by the device **34810** and transmitted as sound through a speaker of the device **34810**. In some embodiments, sound emitted by the device **34860**, based at least in part on the received signal **34880**, can be picked up or sensed by the microphone **34832** of the privacy/security enclosure **34810**. In some embodiments of the invention, a signal from the microphone **34832** based at least in part on the received signal **34830** can be broadcast as sound from the speaker **34836** after being decoded by circuit **34834**. In some embodiments, a first user **34850** can receive the sound.

In some embodiments of the invention, the encoding and decoding by any one of the circuits **34817**, **34834**, **34872**, **34885** can be performed using encryption seeds or keys. In some embodiments, the encryption seeds or keys can be generated by a random or by a pseudo-random number generator. In some further embodiments of the invention, one or more encryption seeds or keys can be generated from noise that is read, measured and/or captured from one or more electrical or electronic components within the privacy/security enclosure **34811**, **34861**. Some embodiments can provide truly random key generation, thereby enhancing security.

In some embodiments of the invention, various sounds and/or different types of noise can be broadcast, played or directed via or outside of any sealed path that may or may not exist to one or more of the protected device's microphone(s). For example, in some embodiments of the invention, a masking signal can be used that comprises a deterministic, random, pseudo-random, white, gray, blue, pink, filtered, and/or shaped signal etc. In some embodiments, the frequency of the masking signal can be tuned or filtered to a white, blue, pink, gray or some other such noise or frequency profile as described herein.

In some embodiments of the invention, the source and/or seed for random and/or other audio, actuator or other such masking signal(s) can be electrical components (such as a diode and/or the thermal noise of a resistor). In some embodiments of the invention, the protective system can provide the seed or key for encryption or processing systems running on or with a protected device. In some embodiments, the key can be provided by any number of communication pathways between the protective system and the protected device, including wired (data and power ports and jacks etc.) and wireless communication capabilities (WiFi, Bluetooth, NFC/RFID, etc.) In some embodiments of the invention, the use of an external (to a protected device) seed or key, can serve to enhance the security of voice or data communications of the protected device, including communication methods such as SMS, texting, chatting, web browsing, file transmission, and any other such communication. In some embodiments of the invention, companion software to the protective system can provide such basic, secure communication capability, including secure messaging, chatting, browsing picture and video viewing and/or sharing etc.

In some embodiments of the invention, the seed or source can be amplified in order to reach a desired level of protection. In some embodiments of the invention, the seed, amplified and/or unamplified, can be filtered and/or sculpted to a more desired noise profile for the audio or other such masking signal (e.g. a blue, pink, gray, white and/or other such profile as described above) which can provide desired characteristics for one or more specific purposes, including, but not limited to lower power consumption and/or more effective masking for a similar/related level of protection against certain types of audio information (e.g. human speech and/or other types of audio information) when compared to other profiles.

In some embodiments of the invention, less obtrusive and/or noticeable noise profiles can be created by lowering the frequency components/content above certain frequency levels (e.g. varying and/or different frequency levels typically ranging anywhere from between 300 Hz to 3 kHz) when compared to noise profiles that haven't been filtered/sculpted and/or modified for such purposes. In some embodiments of the invention, the seed can be used as the seed for encryption key(s) and/or for generating the encryption

key(s) for voice, data, video and/or other types of encryption implemented and/or supported by the privacy/security enclosure **34811**, **34861** itself and/or by the hardware and/or software of device(s) protected by the privacy/security enclosures **34811**, **34861**.

In some embodiments of the invention, separate and/or distinct random audio masking signals can be used for each for each microphone on a device(s) protected by a privacy/security enclosure **34811**, **34861**, reducing the likelihood and/or ability of an authorized and/or unauthorized listener from subtracting and/or otherwise using one signal against another in order to extract and/or process and/or otherwise attempt to recover protected audio content. In some embodiments of the invention, the audio masking signal(s) can be a combination of different types of filtered/sculpted noise profiles or they can be a result of cycling through a variety of different noise signals.

In some embodiments of the invention, modified audio content (as described above including filtered, amplified, encrypted, tuned, processed etc., audio content) can be broadcast to one or more microphones of a protected device (e.g., devices **34810**, **34860**) while an aforementioned sound/noise signal can be concurrently played/broadcast/transmitted to one or more other microphones, with benefits of such an approach including, amongst other benefits, the ability to jam, mask or impede the ability of one or more microphones to detect or record audio content before or during the time that it is being modified/changed/encrypted/processed into a more secure format.

In some embodiments of the invention, the transmission and/or broadcast of modified audio content can be correlated with the spoken voice of a user or users of the protective system. In some embodiments of the invention, the aforementioned noise signals can be transmitted during times when there is no detected spoken audio content by the user or users of the protective system. In other embodiments, such transmissions can occur partially or solely when certain types of external audio content are detected. In some embodiments of the invention, the feature enabling the transmission of modified audio content can be activated and/or deactivated via a physical interaction with the user of the protective system while in other embodiments it can be contextually or automatically activated and/or deactivated.

In some embodiments of the invention, the attempted activation of the modified audio content feature can trigger a discovery and/or handshake and/or session establishment process with another protective system, such that secure communication between the systems can occur. In some embodiments of the invention, the handshake can occur over a data communication link and/or a voice and/or a video communication link.

In some embodiments of the invention, the receipt of modified audio content by one or more of the microphone(s) in the protective system can result in the transmission and/or rebroadcast of such content for playing, processing and/or decryption, which such further modified or simply passed audio content can then be played, broadcast or otherwise delivered to one or more users of the protective system. In some embodiments of the invention, when such content is being played/broadcast for a user or users of the protective system, concurrent transmission of sound/noise signals can be occurring to one or more of the microphones that are a part of a protected device.

In some embodiments of the invention, while protection is activated, one or more microphones that are part of a protected device (such as either of devices **34810**, **34860**)

167

can be substantially continuously or semi-continuously jammed other than when protected audio content is transmitted to such a microphone.

In some embodiments of the invention, some or all audio content that is detected by any microphone of any one or both of the privacy/security enclosures **34811**, **34861** and can be subsequently played by a speaker/driver of the privacy/security enclosures **34811**, **34861** can be processed to enhance audio quality, fidelity, power or other characteristic through techniques such as filtering, amplification, noise reduction, echo cancellation and/or any other signal or audio optimization/processing technique. In some embodiments of the invention, the same audio content can be played on one or more speakers/drivers that are part of privacy/security enclosures **34811**, **34861** for concurrent delivery to one or more microphones that are a part of the privacy/security enclosures **34811**, **34861** and/or such that audio is available in different locations and/or with different characteristics/qualities in and around the privacy/security enclosures **34811**, **34861**.

In some embodiments of the invention, physical and/or automated volume controls can be used for within or as part of the protective system. In other embodiments of the invention, controls can be provided for selecting and/or tuning/changing the type or types of audio processing, encryption, distortion or modification that are possible for audio content.

In some embodiments of the invention, the end result of the processing, encryption, or change/modification to audio content can result in the creation of a data transmission between protected devices. In some embodiments, the transmission can occur via RF communication capabilities that are part of the protective system itself, or via the data transmission capabilities of a protected device(s). In some embodiments of the invention, communication with a protected device can occur via hard wired/physically networked/connected channels to a protected device including connections to data or power ports/jacks and other such means of physically accessing a protected device. In some embodiments of the invention, software running on a protected device can coordinate with or provide integral or supplemental functions to those provided by the protective system.

It will be appreciated by those skilled in the art that while the invention has been described above in connection with particular embodiments and examples, the invention is not necessarily so limited, and that numerous other embodiments, examples, uses, modifications and departures from the embodiments, examples and uses are intended to be encompassed by the claims attached hereto. The entire disclosure of each patent and publication cited herein is incorporated by reference, as if each such patent or publication were individually incorporated by reference herein. Various features and advantages of the invention are set forth in the following claims.

The invention claimed is:

1. A privacy/security apparatus for a portable communication device comprising:

- a housing assembly configured to at least partially attenuate at least one of sound energy, acoustic energy, electromagnetic energy including light, optical and infrared (IR) energy, and radio frequency (RF) radiation from passing through the housing assembly, the housing assembly comprising:
- a Faraday cage comprising two or more portions;
- at least one protective shell forming at least one aperture, the at least one aperture configured and arranged to at

168

least partially enclose the portable communication device, wherein the at least one protective shell comprises at least a portion of the Faraday cage enabling at least a portion of the portable communication device to be positioned on or adjacent the Faraday cage;

at least one seal coupled or integrated with the at least one protective shell; and

a hood assembly integral or coupled to the housing assembly, the hood assembly reversibly slidable or extendible from the at least one protective shell from a closed position to one of an open position and a position between the closed and open positions; and

a controller coupled to at least one speaker or noise generator, the controller configured and arranged to enable generation of acoustic jamming noise from the at least one speaker or noise generator based at least in part on at least one user-selectable privacy setting and the position of the hood assembly with respect to a portable communication device positioned in the housing assembly, wherein at least a portion of the acoustic jamming noise is received by one or more microphones of the portable communication device when at least partially positioned in the at least one protective shell; and

wherein the controller is configured and arranged to automatically turn off the acoustic jamming noise when the hood assembly is not in a closed position, and to automatically turn the acoustic jamming noise on when the controller is activated and the hood assembly is in a closed position at least partially enclosing a portable communication device.

2. The privacy/security apparatus of claim 1, wherein the housing assembly includes an articulating assembly configured and arranged to articulate a portion of the housing assembly to one or more positions to enable a user to insert or enclose and remove the portable communication device.

3. The privacy/security apparatus of claim 1, wherein the housing assembly includes a sliding assembly configured and arranged to slide a portion of the housing assembly to one or more positions to enable a user to insert, enclose or remove the portable communication device.

4. The privacy/security apparatus of claim 1, wherein the at least one speaker is coupled to the at least one seal and an active acoustic jamming system activated by the controller.

5. The privacy/security apparatus of claim 1, wherein the housing assembly is configured and arranged to be movable between an open and a closed position to enable a user to insert or enclose and remove the portable communication device.

6. The privacy/security apparatus of claim 1, wherein the housing assembly comprises a sheath.

7. The privacy/security apparatus of claim 1, wherein the housing assembly comprises a base assembly, the base assembly including a Faraday base assembly forming at least one of the portions of the Faraday cage.

8. The privacy/security apparatus of claim 1, wherein the at least one seal comprises an environmental seal.

9. The privacy/security apparatus of claim 1, wherein the at least one seal comprises an RF attenuation or absorbing seal.

10. The privacy/security apparatus of claim 1, wherein the at least one seal comprises at least one of a magnetic seal, an electromagnetic seal, an acoustic attenuation seal, and an optical seal.

11. The privacy/security apparatus of claim 1, wherein the at least one seal comprises a fingerstock element.

169

12. The privacy/security apparatus of claim 11, wherein the at least one seal includes at least one elastomeric element positioned adjacent to the fingerstock.

13. The privacy/security apparatus of claim 12, wherein the at least one elastomeric element is positioned within at least a portion of the fingerstock.

14. The privacy/security apparatus of claim 1, wherein the housing assembly includes at least one port configured to couple with the portable communication device.

15. The privacy/security apparatus of claim 14, wherein the at least one port comprises at least one of a sound transfer port, an RF transfer port, a data transfer port, a power transfer port, and an optical port.

16. The privacy/security apparatus of claim 1, wherein the at least one protective shell includes a decorative layer or region.

17. The privacy/security apparatus of claim 16, wherein the decorative layer or region comprises at least one of a patterned surface, a window, a display, an emblem, and a logo.

18. The privacy/security apparatus of claim 1, wherein based on a user manipulation of a button or input device and hood assembly position, the controller is configured and arranged to modulate at least one privacy/security setting.

19. The privacy/security apparatus of claim 18, wherein the at least one privacy/security setting is configured and arranged to alter the magnitude of energy reaching the portable communication device through the housing assembly.

20. The privacy/security apparatus of claim 19, wherein the energy comprises at least one of sound energy, RF energy, electrical energy, electromagnetic energy, optical energy, and IR energy.

21. The privacy/security apparatus of claim 1, wherein the housing assembly includes at least one microphone.

22. The privacy/security apparatus of claim 1, wherein the at least one seal is configured and arranged to couple with at least one of a microphone, a speaker, a camera, a display, a sensor, and an RF antenna of the portable communication device.

23. The privacy/security apparatus of claim 1, wherein the housing assembly includes at least one direct current (DC) pass-through configured and arranged to pass direct current through the Faraday cage.

24. The privacy/security apparatus of claim 1, wherein the housing assembly includes an onboard power supply.

170

25. The privacy/security apparatus of claim 1, wherein the hood assembly is configured and arranged to enable and disable one or more microphones and cameras of the portable communication device from receiving unjammed or unblocked audio and light energy in a single motion.

26. The privacy/security apparatus of claim 1, wherein the hood assembly is configured and arranged to reversibly apply at least one audio jammer to reversibly enable and disable at least one microphone of the portable communication device from receiving unjammed audio energy.

27. The privacy/security apparatus of claim 1, wherein the hood assembly is configured and arranged to reversibly apply at least one element to reversibly cover and uncover at least one camera of the portable communication device.

28. The privacy/security apparatus of claim 1, wherein the at least one seal comprises a seal configured and arranged to cover at least one microphone of the portable communication device irrespective of the position or movement of the hood assembly on the housing assembly.

29. The privacy/security apparatus of claim 1, further comprising at least one microphone configured and arranged to receive sounds emanating from outside of the protective shell;

an encoding capability coupled to the at least one microphone, the encoding capability configured and arranged to receive and encode a signal from the at least one microphone; and

at least one speaker coupled to the encoding capability, the at least one speaker configured and arranged to produce sound based at least in part on a receipt of one or more encoded signals from the encoding capability.

30. The privacy/security apparatus of claim 29, further comprising

at least one microphone configured and arranged to receive sounds emanating from inside of the protective shell;

a decoding capability coupled to the at least one microphone, the decoding capability configured and arranged to receive and decode a signal from the at least one microphone; and

at least one speaker coupled to the decoding capability, the at least one speaker configured and arranged to produce sound based on a receipt of a decoded signal from the decoding capability.

* * * * *